


2020 ▶ 2021


General Catalogue




SUMITOMO

CARBIDE - CBN - DIAMOND


PERFORMANCE CUTTING TOOLS

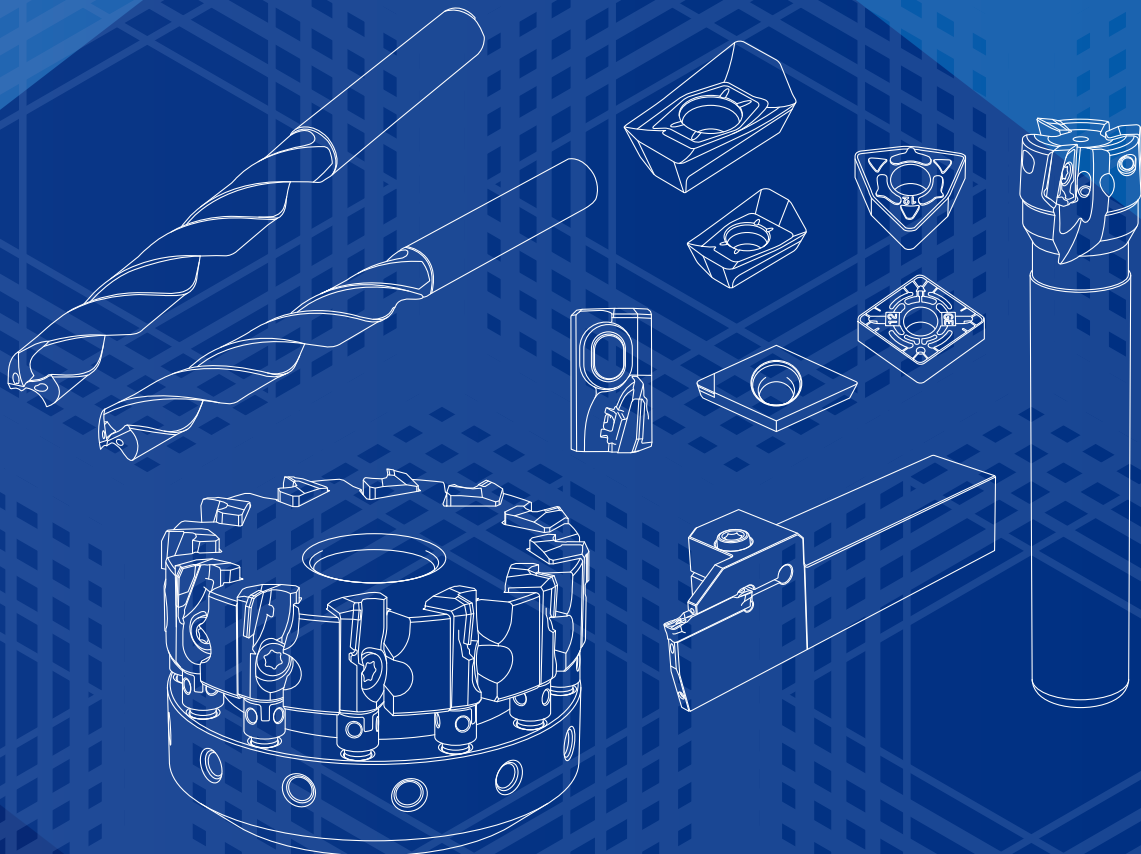




A

Insert Selection




B

Grades



C

Negative & Positive Inserts






D

External Holders




E

Boring Bars




F

Parting-Off
Grooving
Threading
Holders





G

Milling
Cutters




H

Indexable
Endmills




J

Solid
Carbide
Endmills





K

Multi-Drills



L

SumiBoron
SumiDia



M


CBN/PCD
Inserts &
Tools





N P


Guidance
Spare Parts
Index


Contents


	Insert Selection	A1 –
---	-------------------------	-------------


	Grades	B1 –
---	---------------	-------------


	Inserts Negative Type	C1 –
---	---------------------------------	-------------

	Inserts Positive Type	C61 –
--	---------------------------------	--------------


	External Holders	D1 –
---	-------------------------	-------------


	Boring Bars	E1 –
---	--------------------	-------------


	Grooving Holders Parting-Off Holders	F1 –
---	---	-------------


	Threading Holders	F51 –
--	--------------------------	--------------


Negative / Positive


	80° Diamond Type	C18	C61
---	-------------------------	------------	------------


	55° Diamond Type	C27	C68
---	-------------------------	------------	------------

	Round Type		C72
---	-------------------	--	------------

	Square Type	C35	C73
---	--------------------	------------	------------


	60° Triangular Type	C44	C78
---	----------------------------	------------	------------

	35° Diamond Type	C53	C88
---	-------------------------	------------	------------

	80° Trigon Type	C56	C92
---	------------------------	------------	------------

	CBN Inserts	M1 –
---	--------------------	-------------


	PCD Inserts	M1 –
---	--------------------	-------------


	Guidance	N1 –
--	-----------------	-------------


 **Milling Cutters** G1-


 **Multi-Drills** K1-


 **Milling Cutters** G53-
High Feed / Special Purpose Cutters

 **SumiBoron** L1-
CBN Grades


 **Indexable Endmills** H1-


 **SumiDia** L24-
PCD Grades

 **Endmills** J1-
Coated Solid Types

 **CBN / PCD** M1-
Inserts and Tools

 **Endmills** J34-
Uncoated Solid Types

 **Spare Parts** P1-

 **Index** P9-

Dimension symbols are compliant with ISO13399

The following table shows ISO13399-compliant dimension symbols. Contents corresponding to the sample symbols/notations are shown below. Tool shape diagrams and stock charts use the symbols and notation examples from the table below.


(1) Inserts (For Turning / For Milling)

Symbol	Description
AN	Clearance angle major
APMX	Depth of cut maximum
BS	Wiper edge length
CDX	Cutting depth maximum
CHW	Corner chamfer width
CW	Cutting width
D1	Fixing hole diameter
DMIN	Minimum bore diameter
IC	Inscribed circle diameter
INSL	Insert length
L	Cutting edge length
PDX	Profile distance ex
PDY	Profile distance ey
PNA	Profile included angle
RE	Corner radius
RER	Right side corner radius
REL	Left side corner radius
S	Insert thickness
W1	Insert width
WF	Functional width


(2) Tool Holders For Turning

Symbol	Description
APMX	Depth of cut maximum
B	Shank width
BD	Body diameter
CDX	Cutting depth maximum
CRKS	Connection retention knob thread size
DC	Cutting diameter
DCB	Connection bore diameter
DCON	Connection diameter
DCSFMS	Contact surface diameter machine side
DMIN	Minimum bore diameter
DMM	Shank diameter
DN	Neck diameter
GAMF	Rake angle radial
GAMP	Rake angle axial
H	Shank height
HBH	Head bottom offset height
HBKL	Head back offset length
HBKW	Head back offset width
HBL	Head bottom offset length
HF	Functional height
KDP	Groove depth
KWW	Keyway width
LF	Functional length
LH	Head length
LHD	Head length
LS	Shank length
LSCX	Clamping length maximum
LU	Usable length
LUX	Usable length maximum
WF	Functional width

(Turning Insert Example)



(Grooving Insert Example)



(External Holder Example)


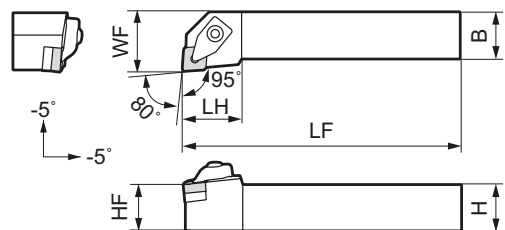


Figure shows right-handed tool.

(Grooving Tool Holder Example)

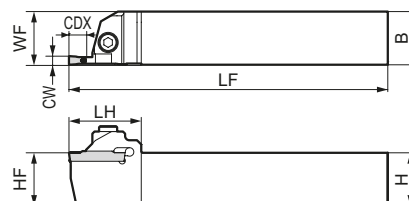


Notes: The symbols in the above table are compliant with ISO13399 and do not include symbols unique to our company. As symbols under review are not included, these may change over time.


(3) Cutters / Indexable Endmills

Symbol	Description
APMX	Depth Of Cut Maximum
BD	Body Diameter
BDX	Body Diameter Maximum
CBDP	Connection Bore Depth
CRKS	Connection Retention Knob Thread Size
CW	Cutting Width
DBC	Connection Bore Diameter
DC	Cutting Diameter
DCB	Clamping Diameter, Nominal, on Workpiece Side
DCON	Connection Diameter
DCSFMS	Contact Surface Diameter Machine Side
DCX	Cutting Diameter Maximum
DMM	Shank Diameter
DN	Neck Diameter
H	Shank Height
KDP	Groove Depth
KWW	Keyway Width
LBX	Body Length Maximum
LF	Functional Length
LH	Head Length
LS	Shank Length
LU	Usable Length
OAL	Overall Length
RMPX	Maximum Ramping Angle
THUB	Hub Thickness


(Shell Type Example)



(Shank Type Example)

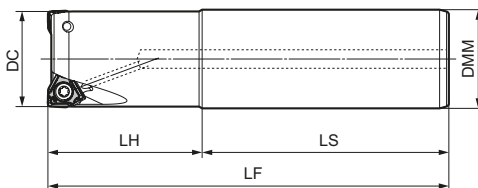

(Modular Type Example)

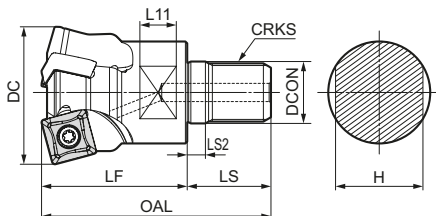


(4) Endmills

Symbol	Description
APMX	Depth Of Cut Maximum
CHW	Corner Chamfer Width
DC	Cutting Diameter
DMM	Shank Diameter
DN	Neck Diameter
LF	Functional Length
LFS	Functional Length Secondary
LU	Usable Length
RE	Corner Radius


(5) Drills / Reamers

Symbol	Description
BD	Body Diameter
BDX	Body Diameter Maximum
CW	Cutting Width
DC	Cutting Diameter
DCB	Clamping Diameter, Nominal, on Workpiece Side
DCON	Connection Diameter
DCSFMS	Contact Surface Diameter Machine Side
DF	Flange Diameter
DMM	Shank Diameter
LBX	Body Length Maximum
LCF	Length Chip Flute
LF	Functional Length
LFA	A Dimension On Lf
LFS	Functional Length Secondary
LH	Head Length
LPR	Protruding Length
LS	Shank Length
LU	Usable Length
LUX	Usable Length Maximum
OAL	Overall Length
PL	Point Length
WBTHK	Web Thickness

(Endmill Example)



(Drill Example)

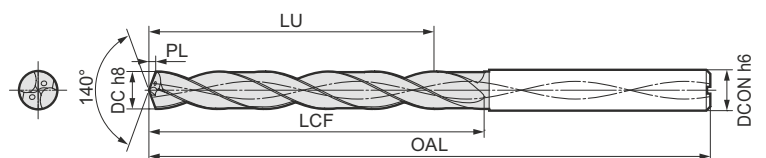

Notice

Thank you for using the Sumitomo Electric Hardmetal General Catalogue
(Sumitomo/SUMIBORON/SUMIDIA Cutting Tools Catalogue).

This catalogue presents the major items in the Sumitomo Cutting Tools product line.

The catalogue is organised as follows:

- (1) Cutting Tool Grades
- (2) Sumitomo Products
- (3) SUMIBORON, SUMIDIA Products

Ask for our brochures and pamphlets.

This catalogue is current as of January 2020.

As a result of our ongoing research, product may reflect enhancements in quality, performance and specifications not listed in this catalogue.

To order Sumitomo/SUMIBORON/SUMIDIA products, contact your nearest Sumitomo Electric Hardmetal dealer or distributor.

For inquiries or other requests, feel free to contact your nearest sales office.

Stock Marking Chart

● : Euro stock item

○ : Japan stock item

□ : Delivery on request

▲ : To be replaced by new item

□ : Made to order item

— : We cannot produce

Note:

Stocking policy may change without prior notice, please consult our sales representative for actual stock situation.

Meaning of Icons

Common



Featured for the first time in this catalogue

Grade

ISO classification of work material:



Steel



Stainless Steel



Cast Iron



Non Ferrous Alloy



Exotic Alloy



Hardened Steel

Endmill

Shape



Sharp edge



Corner with honing



Helix angle (ex.)



Radius





Ballnose

No. of teeth



Flutes

Milling Cutter

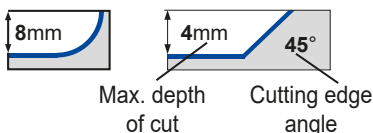

Max. depth of cut


Cutting edge angle

Insert Selection

A



A1–A20

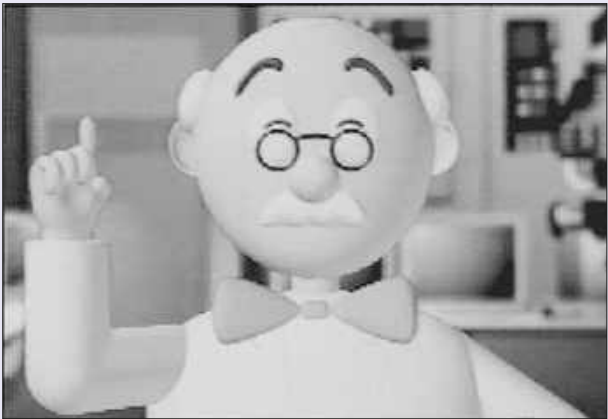

Insert Selection

Insert Selection

Sumitomo Grades (Turning) A2
Sumitomo Grades (Milling) A3

Chipbreaker and Grade Selection

Steel Turning Inserts A 4–7
Stainless Steel Turning Inserts A 8–9
Cast Iron Turning Inserts A10–11
Exotic Alloy Inserts A12–13
Hardened Steel Turning Inserts A14–15
Non-Ferrous Metal Turning Inserts A16–17
Small Product Machining A18–19

Selection of Sumitomo Grades (Turning)

Insert Selection

Work Material	P General Steel (Carbon Steel, Alloy Steel), Soft Steel					M Stainless Steel					K Cast Iron						
	Wear Resistance ← Fracture Resistance					Wear Resistance ← Fracture Resistance					Wear Resistance ← Fracture Resistance						
Classification	-	P01	P10	P20	P30	P40	-	M01	M10	M20	M30	M40	-	K01	K10	K20	K30
Coated Carbide	New AC8015P					AC6020M					New AC4010K						
	AC8025P					AC6030M					New AC4015K						
Small Product Machining	New AC8035P					AC6040M					AC420K						
	AC810P					AC610M AC630M					AC8025P						
Coated Cermet	AC820P					AC830P					AC405K						
	AC830P					AC520U AC530U					AC415K						
Cermet	AC1030U					AC1030U					AC1030U						
	T1500Z																
Carbide	T3000Z																
	T1000A					T1000A					T1000A						
Uncoated CBN	T1500A					T1500A											
	T2500A																
Coated CBN	ST10P ST20E A30										G10E						
											BN7000						
Uncoated CBN											BNS800						
											BN500						
										BNC500							

Work Material	S Exotic Alloy				H Hardened Steel				Work Material	N Non-Ferrous Metal						
	Wear Resistance ← Fracture Resistance				Wear Resistance ← Fracture Resistance					Wear Resistance ← Fracture Resist.						
Classification	-	S01	S10	S20	S30	-	H01	H10	H20	H30	-	N01	N10	N20	N30	
Coated Carbide	New AC5015S												H1			
	New AC5025S								AC503U				DA90			
Carbide	AC510U												DA150			
	AC520U												DA1000			
Coated CBN	EH510								BNC2010							
	EH520								BNC2020 BNC300							
Uncoated CBN									BNC100 BNC160							
									BNC200							
Uncoated CBN	New NCB100								BN1000							
	BN7000								BN2000				BNX20			
												BN350				
												BNX25				
								BNX10								

Work Material	Powdered Metal				
	Wear Resistance ← Fracture Resist.				
Classification	-	01	10	20	30
Coated Carbide	AC510U				
Cermet	T1000A				
Uncoated CBN	BN7500				
BN7000					


Work Material	Cemented Carbides and Hard Brittle Materials				
	Wear Resistance ← Fracture Resist.				
Classification	-	01	10	20	30
PCD	NPD10				
DA90					

Selection of Sumitomo Grades (Milling)


Work Material	P General Steel (Carbon Steel, Alloy Steel), Soft Steel						M Stainless Steel						K Cast Iron				
	Wear Resistance ← Fracture Resistance						Wear Resistance ← Fracture Resistance						Wear Resistance ← Fracture Resistance				
Classification	-	P01	P10	P20	P30	P40	-	M01	M10	M20	M30	M40	-	K01	K10	K20	K30
Coated Carbide		New ACP2000		New ACP3000				ACM100		ACM200		ACM300	New ACK2000		New ACK3000		New ACU2500
		ACP100		ACP200		ACP300		New ACU2500		ACK300		ACP300	ACK100		ACK200		ACK300
Cermet		New T2500A		T250A		T4500A		New T2500A		T250A		T4500A					
Carbide				A30N							A30N				G10E		
Uncoated CBN Coated CBN															BN7000		BNS800
Work Material	S Exotic Alloy						H Hardened Steel				N Non-Ferrous Metal						
Classification	Wear Resistance ← Fracture Resistance						Wear Resistance ← Fracture Resistance				Wear Resistance ← Fracture Resistance						
	-	S01	S10	S20	S30	S40	-	H01	H10	H20	H30	-	N01	N10	N20	N30	
Coated Carbide		ACM100		ACM200		ACM300								DL1000			
		New ACU2500		ACK300									New DL2000				
Carbide				EH520										H1		New H20	
Uncoated CBN								BN350	BN7000								
PCD														DA1000			

Main Chipbreakers

Negative Type

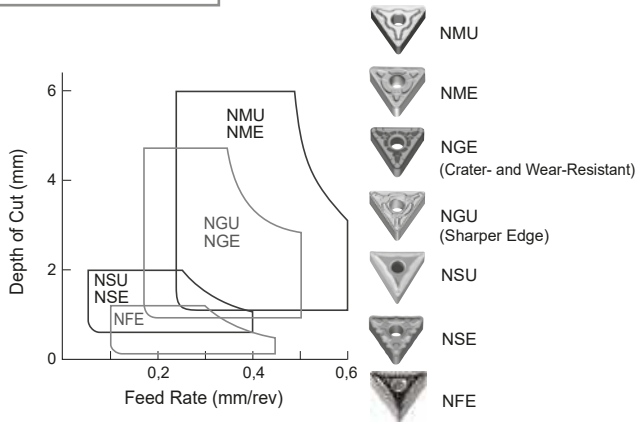


Positive Type

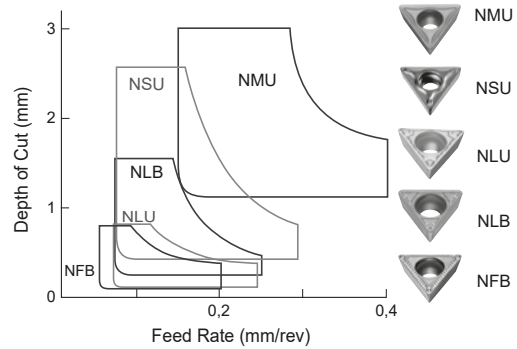


Sub-Chipbreakers

Negative Type


Chipbreakers for High-Efficiency Machining




Strong Edge Chipbreakers




Chipbreakers for Small Depths



Wiper Inserts




Chipbreakers for Heavy Cutting




Grades

Fine Finishing to Finishing

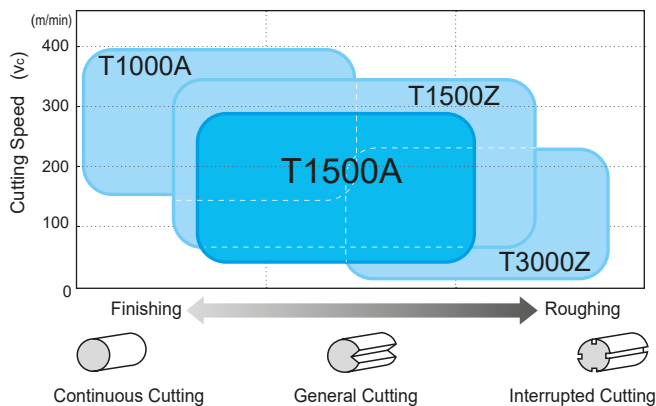


Finishing to Rough Cutting

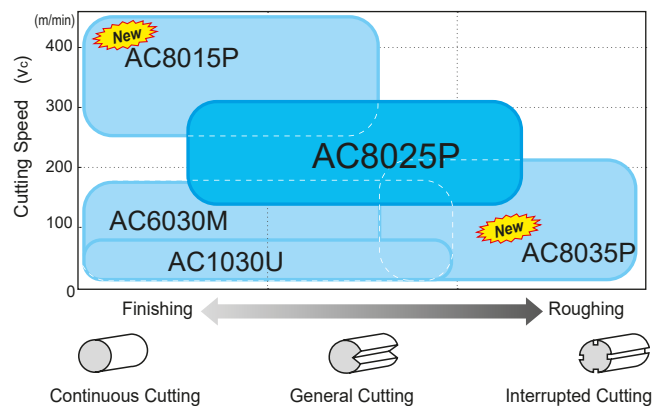

Grades T1000A / T1500A / T1500Z


- T1000A:** An uncoated cermet grade designed with wear resistance in mind that provides long tool life and excellent wear resistance in continuous finishing and profiling applications.
- T1500A:** A general purpose uncoated cermet grade that provides excellent value for money and delivers improved finished surface quality while providing good wear and fracture resistance.
- T1500Z:** Superior turning quality thanks to „Brilliant Coat“. PVD coating with excellent adhesion resistance. A general purpose coated cermet grade capable of maintaining high-quality finished surfaces while providing excellent wear resistance.



Performance


T1000A

Wear Resistance

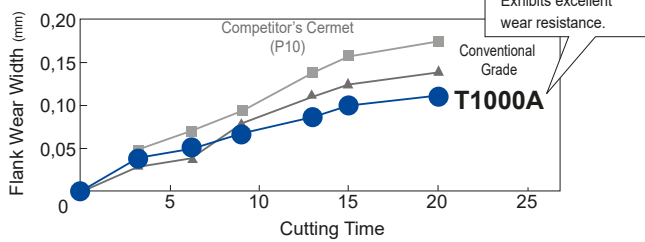

Work Material: 34CrMo4 Insert: NMG120408NSU
Cutting Conditions: $v_c=320$ m/min, $f=0,20$ mm/rev, $a_p=1,5$ mm, dry


Fracture Resistance

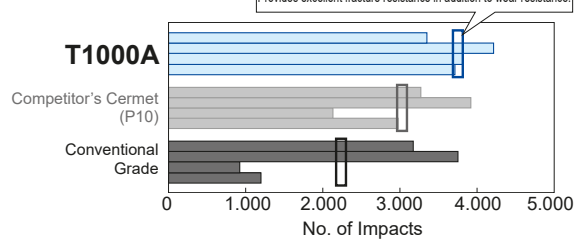

Work Material: 34CrMo4, Insert: CNMG120408NSU
Cutting Conditions: $v_c=230$ m/min, $f=0,20$ mm/rev, $a_p=1,0$ mm, wet


T1500A

Wear Resistance

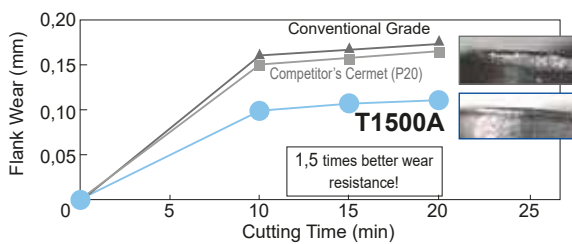

Work Material: 34CrMo4 Insert: CNMG120408NSU
Cutting Conditions: $v_c = 230$ m/min, $f = 0,20$ mm/rev, $a_p = 1,0$ mm, wet


Machined Surface Finish

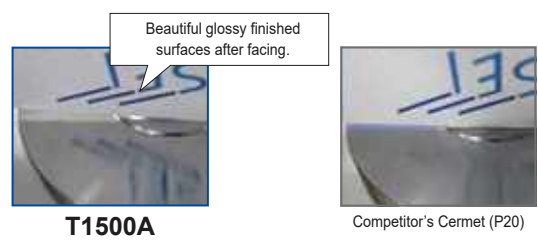

Work Material: C45, Insert: CNMG120408NLU,
Cutting Conditions: $v_c = 150$ m/min, $f = 0,12$ mm/rev, $a_p = 1,0$ mm, wet


T1500Z

Wear Resistance

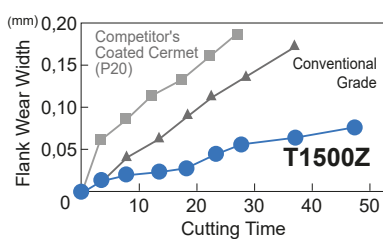

Work Material: 34CrMo: Insert: CNMG120408NSU
Cutting Conditions: $v_c=230$ m/min, $f=0,20$ mm/rev, $a_p=1,0$ mm, wet

Machined Surface Finish

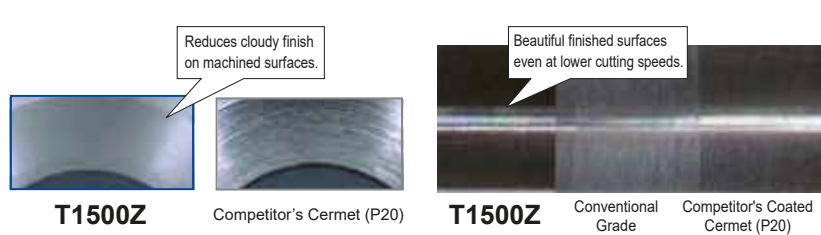

Work Material: 21NiCrMo2, Insert:DNMG150408NSU
Cutting Conditions: $v_c=150$ m/min, $f=0,20$ mm/rev, $a_p=1,0$ mm, wet

Work Material: H240LA, Insert: CNMG120408NSU
Cutting Conditions: $v_c=100$ m/min, $f=0,15$ mm/rev, $a_p=1,0$ mm, wet

Recommended Cutting Conditions

(Min. - Optimum - Max.)

Work Material	Cutting Process	Chipbreaker	Grades	Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Soft Steel	Fine Finishing	NFA / NFL	T1500Z	0,2–0,5–1,0	0,05–0,15–0,25	150–280–400
	Finishing	NLU	T3000Z	0,3–1,0–1,8	0,08–0,20–0,35	150–280–400
Alloy Steel Carbon Steel	Fine Finishing	NFA / NFL	T1500A	0,2–0,5–1,0	0,05–0,15–0,25	100–200–300
	Finishing	NSU / NSE	T1500A	0,5–1,0–2,0	0,08–0,20–0,35	100–200–300
	Medium	NGU	T1500Z	0,8–2,2–4,0	0,15–0,25–0,50	100–200–300
High Carbon Steel Carbon Steel	Fine Finishing	NFA / NFL	T1000A	0,2–0,5–1,0	0,05–0,15–0,25	50–150–250
	Finishing	NSU / NSE	T1500Z	0,5–1,0–2,0	0,08–0,20–0,35	50–150–250
	Medium	NGU	T1500Z	0,8–2,2–4,0	0,15–0,25–0,50	50–150–250

Grades

New

AC8015P / AC8025P / AC8035P / AC1030U

New

Covers a wide range of machining applications from high-speed cutting to interrupted cutting and small lathe machining.

AC8015P Development of crater damage is suppressed by controlling the orientation of the alumina crystal grains. Achieves long, stable tool life during high-speed and high feed cutting.

AC8025P The 1st recommendation grade for turning steel. Surface smoothing technology significantly suppresses adhesion of work material components. Achieves long, stable tool life with various cutting speeds and work materials.

AC8035P Tensile stress removal of the coating layer greatly improves fracture resistance. Achieves long, stable tool life during heavy interrupted cutting.


AC1030U Employs a new PVD coating and a dedicated tough carbide substrate. High-quality cutting edge grade suppresses adhesion and micro-chipping, realizing excellent machined surface quality.

Performance

AC8015P



Reduced crater damage due to chip abrasion through optimized crystal orientation in the alumina layer.

Conventional Grade

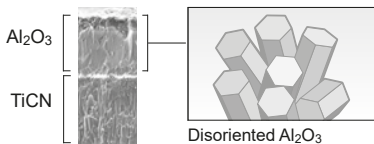

Work Material: 100Cr6, 1.3505, External continuous, Insert: CNMG120408NGU
Cutting Conditions: $v_c = 300$ m/min, $f = 0,3$ mm/rev, $a_p = 1,5$ mm, wet

AC8015P

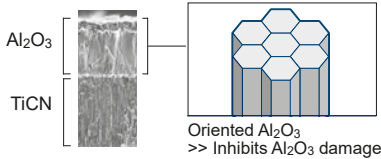

Improved crater wear resistance.

AC8025P

Improved tool surface smoothness and significantly reduced adhesion through special surface treatment.

Conventional Grade




Adhesion resistance



Work Material: 25CrMo4, 1.7218, Facing, Insert: CNMG120408NGU
Cutting Conditions: $v_c = 100-300$ m/min, $f = 0,3$ mm/rev, $a_p = 1,5$ mm, wet

AC8025P





Adhesion resistance



AC8035P



Drastically reduced tensile residual stress in coating through special surface treatment.

Conventional Grade

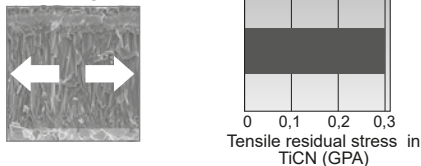

Work Material: 34CrMoS34, 1.7226, Interrupted cut, Insert: CNMG120408NGU
Cutting Conditions: $v_c = 160$ m/min, $f = 0,2-0,3$ mm/rev, $a_p = 2$ mm, dry

AC8035P

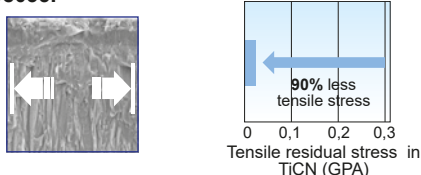























Cracks difficult to grow >>> excellent toughness



Grades and Chip breaker Selection Guide

1st Recommendation
General Purpose **AC8025P**







1st Recommendation
NGU  





	Elevated Feed Rate Area		General Purpose	Tougher Cutting Edge		
Finish– Small Depth	NFE 	 NSE 		NSU 	 NSX 	
General Purpose	NGE 		NGU 	 NUX 		
Rough– Larger Cutting Depth	NME 		NMU 	 NMX 		

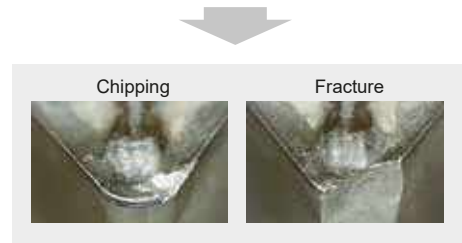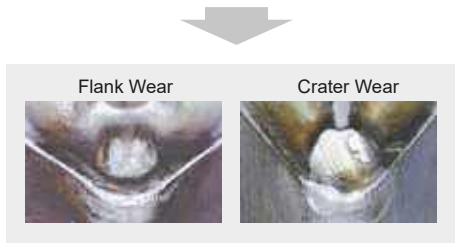

Better Wear Resistance
High Speed **AC8015P**

Better Toughness
Interrupted Cut **AC8035P**

1st Recommendation	NGU 	
Higher efficiency required	NGE 	

1st Recommendation	NGU 	
Higher stability required	NUX 	


P Recommended Cutting Conditions

(Min. - Optimum - Max.)


Work Material	Cutting Process	Chipbreaker	Grade	Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (mm/min)
Soft Steel	Fine Finishing	NFB	T1500Z	0,2–0,6–1,0	0,05–0,15–0,25	100–250–400
	Finishing	NFE	AC8015P	0,5–1,0–1,5	0,1–0,25–0,4	260–350–440
	Medium Cutting	NGU	AC8025P	1,0–2,5–4,0	0,2–0,35–0,5	200–260–320
	Roughing	NMU	AC8035P	1,5–4,0–6,0	0,3–0,45–0,6	140–180–220
Alloy Steel Carbon Steel	Fine Finishing	NFB	T1500Z	0,2–0,6–1,0	0,05–0,15–0,25	100–200–300
	Finishing	NFE	AC8015P	0,5–1,0–1,5	0,1–0,25–0,4	210–285–360
	Medium Cutting	NGU	AC5025P	1,0–2,5–4,0	0,2–0,35–0,5	150–190–230
	Roughing	NMU	AC8035P	1,5–4,0–6,0	0,3–0,45–0,6	90–135–160
High Carbon Steel Carbon Steel	Fine Finishing	NFB	T1500Z	0,2–0,6–1,0	0,05–0,15–0,25	50–150–250
	Finishing	NFE	AC8015P	0,5–1,0–1,5	0,1–0,25–0,4	170–235–300
	Medium Cutting	NGU	AC8025P	1,0–2,5–4,0	0,2–0,35–0,5	130–165–200
	Roughing	NMU	AC8035P	1,5–4,0–6,0	0,3–0,45–0,6	90–135–160

Chipbreakers


Negative Type

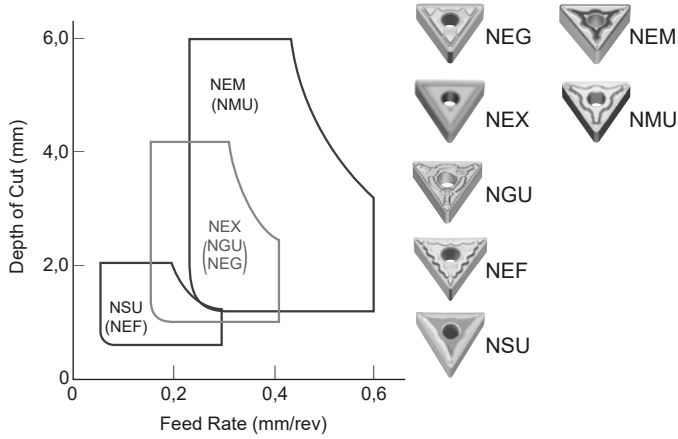

Positive Type

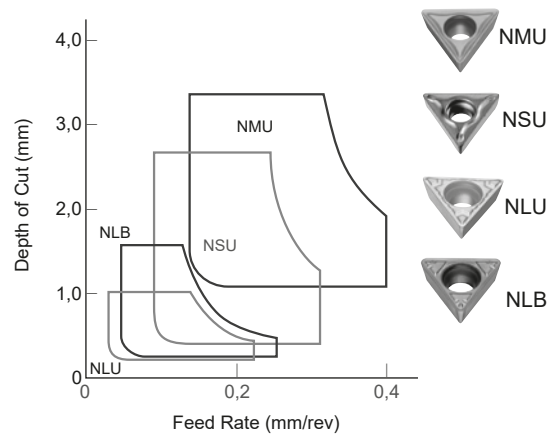

Grades

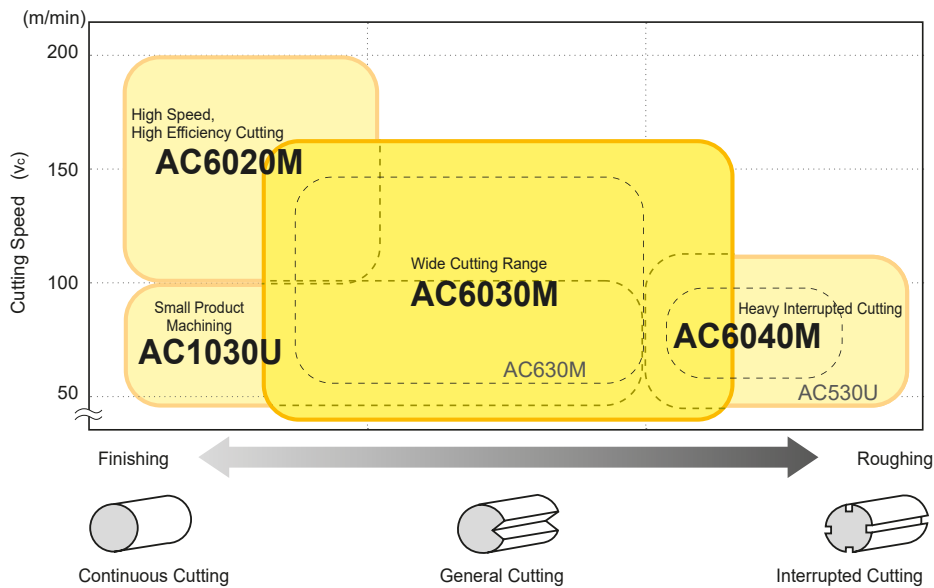

M Recommended Cutting Conditions

(Min. - Optimum - Max.)

Work Material			Cutting Range	Chipbreaker	Grade	Cutting Conditions		
						Depth of Cut a_p (mm)	Feed Rate f (mm/rev)	Cutting Speed v_c (m/min)
Cr-Based	Ferritic Materials	X6CrAl 13, X8CrNiS 18 9, X29CrS 13, X6CrMoS 17, X12CrS 13	Finishing	NEF (NSU)	AC6020M	0,5-1,5-2,0	0,05-0,15-0,25	170-230-300
			Medium	NEG · NEX · NGU	AC6030M	1,0-2,5-4,0	0,10-0,25-0,40	140-170-250
			Roughing	NEM	AC6040M	1,5-3,5-6,0	0,20-0,35-0,60	140-170-200
	Martensitic Materials	X12Cr 13, X20Cr 13, X30Cr 13, X6Cr 17, X19CrNi 17 2, X6CrNi 18 9	Finishing	NEF (NSU)	AC6020M	0,5-1,5-2,0	0,05-0,15-0,25	120-180-240
			Medium	NEG · NEX · NGU	AC6030M	1,0-2,5-4,0	0,10-0,25-0,40	100-150-200
			Roughing	NEM	AC6040M	1,5-3,5-6,0	0,20-0,35-0,60	80-130-180
Cr/Ni-Based	Austenitic Materials	X5CrNi 18 10, X2CrNi 19 11, X2CrNiMo 18 10, X4CrNiMo 17 12 2, X2CrNiMo 17 12 2, X5CrNiMo 17 13, X6CrNiTi 18 10, X7CrMo 15	Finishing	NEF (NSU)	AC6020M	0,5-1,5-2,0	0,05-0,15-0,25	120-180-240
			Medium	NEG · NEX · NGU	AC6030M	1,0-2,5-4,0	0,10-0,25-0,40	100-150-200
			Roughing	NEM	AC6040M	1,5-3,5-6,0	0,20-0,35-0,60	80-130-180
	Two-Phase (Austenite / Ferrite) Materials	X5CrNi 17 7, X2CrNi 18 9, X6CrNi 25 20, X2CrNiMoN 17 12 2, X6CrNiNb 18 10	Finishing	NEF (NSU)	AC6030M	0,5-1,5-2,0	0,05-0,15-0,25	100-145-180
			Medium	NEG · NEX · NGU	AC6030M	1,0-2,5-4,0	0,10-0,25-0,40	80-120-160
			Roughing	NEM	AC6040M	1,5-3,5-6,0	0,20-0,35-0,60	70-100-140
	Precipitation Hardening	X5CrNiCuNb 16 4, X7CrNiAl 17 7, X4CrNiMo 27 5 2, X2CrNiMoN 22 5 3, X2CrNiMoCuN 25 6 3	Finishing	NEF (NSU)	AC6030M	0,5-1,5-2,0	0,05-0,15-0,25	90-115-140
			Medium	NEG · NEX · NGU	AC6030M	1,0-2,5-4,0	0,10-0,25-0,40	70-90-110
			Roughing	NEM	AC6040M	1,5-3,5-6,0	0,20-0,35-0,60	50-80-120

Grades


AC6020M / AC6030M / AC6040M / AC1030U

- AC6020M** Employs "Absotech Platinum", a new CVD coating. The first recommended grade for continuous stainless steel machining that achieves a good balance between wear resistance and fracture resistance by combining a hardened substrate with excellent wear resistance.
- AC6030M** Employs "Absotech Platinum", a new CVD coating. The first recommended grade for general machining of stainless steel that drastically reduces the occurrence of abnormal damage, which is a problem in stainless steel machining. Achieves long and stable machining thanks to the improved coating strength and excellent adhesion.
- AC6040M** Employs "Absotech Bronze", a new PVD coating and exclusive tough carbide substrate. The first recommended grade for interrupted machining of stainless steel that drastically improves the reliability in unstable machining thanks to the excellent adhesion and peel-off resistance of the new PVD coating as well as the improved fracture resistance of the exclusive carbide substrate.
- AC1030U** Employs "Absotech Bronze", a new PVD coating with a special tough carbide substrate. Achieving excellent machined surface quality with a high-quality cutting edge that reduces adhesion and micro-chipping.

Performance


AC6020M

Continuous Cutting (Medium Speed)

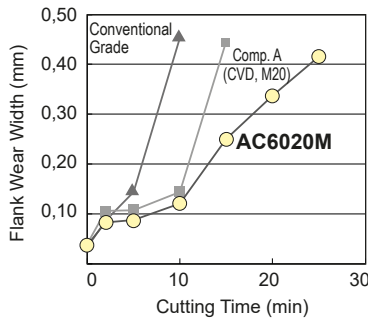

Work Material: X2CrNiMo17 13 2 Insert: CNMG 120408 NGU
Cutting Conditions: $v_c = 150$ m/min, $f = 0,3$ mm/rev, $a_p = 2,0$ mm, wet


Continuous Cutting (High Speed)

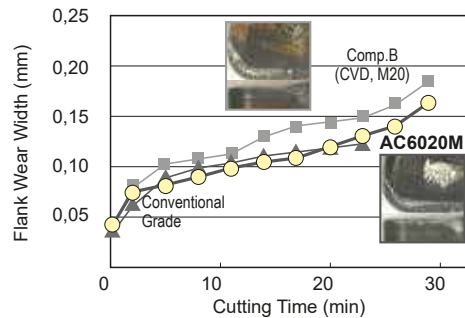

Work Material: X2CrNiMo17 13 2 Insert: CNMG 120408 NGU
Cutting Conditions: $v_c = 200$ m/min, $f = 0,3$ mm/rev, $a_p = 2,0$ mm, wet


AC6030M

Continuous Cutting

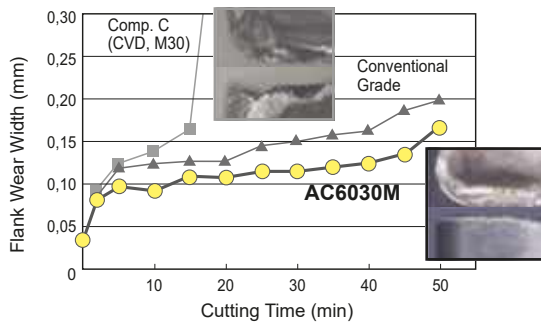

Work Material: X6CrMo17 12 2 Insert: CNMG 120408 NEX
Cutting Conditions: $v_c = 200$ m/min, $f = 0,2$ mm/rev, $a_p = 2,0$ mm, wet


Interrupted Cutting

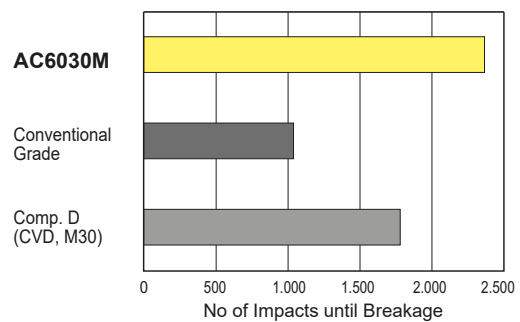

Work Material: X6CrMo17 12 2 Insert: CNMG 120408 NGU
Cutting Conditions: $v_c = 100$ m/min, $f = 0,1$ mm/rev, $a_p = 1,0$ mm, wet


AC6040M

Continuous Cutting

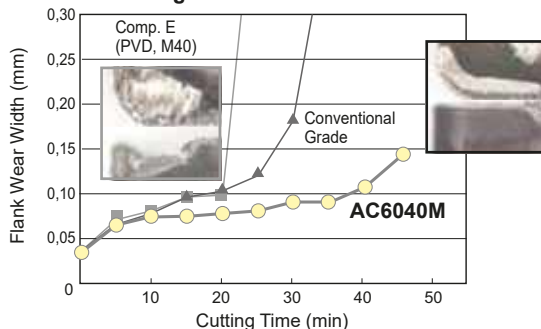

Work Material: X6CrMo17 12 2 Insert: CNMG 120408 NGU
Cutting Conditions: $v_c = 150$ m/min, $f = 0,2$ mm/rev, $a_p = 2,0$ mm, wet


Interrupted Cutting

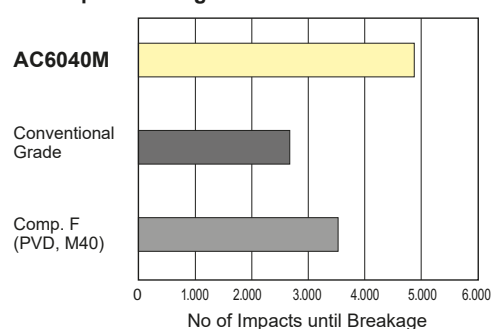


Work Material: CNMG 120408 NGU Insert: CNMG 120408 NGU
Cutting Conditions: $v_c = 230$ m/min, $f = 0,23$ mm/rev, $a_p = 0,80$ mm, dry

Chipbreakers

Negative Type

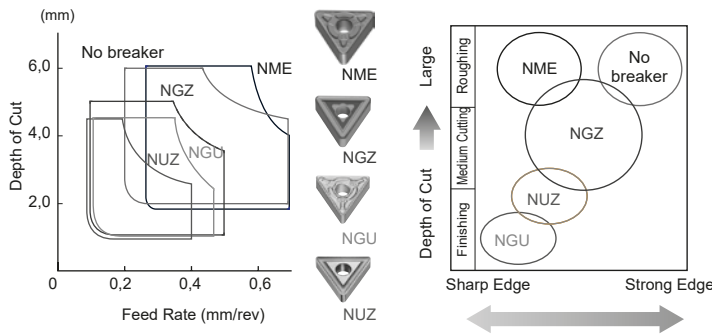


Positive Type

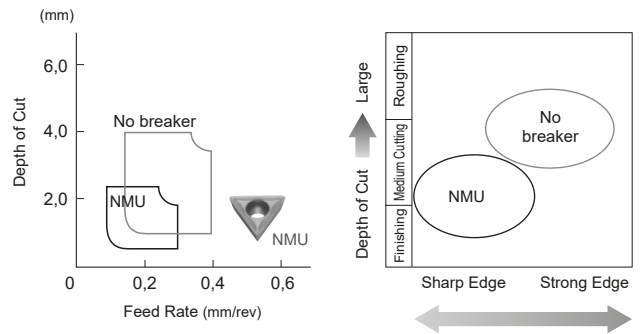


Grades

Grey Cast Iron (GG)

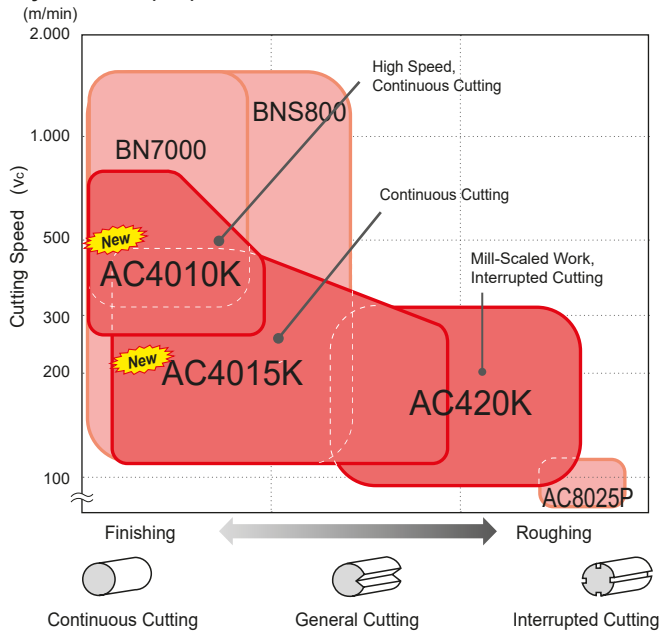

Ductile Cast Iron (GGG)

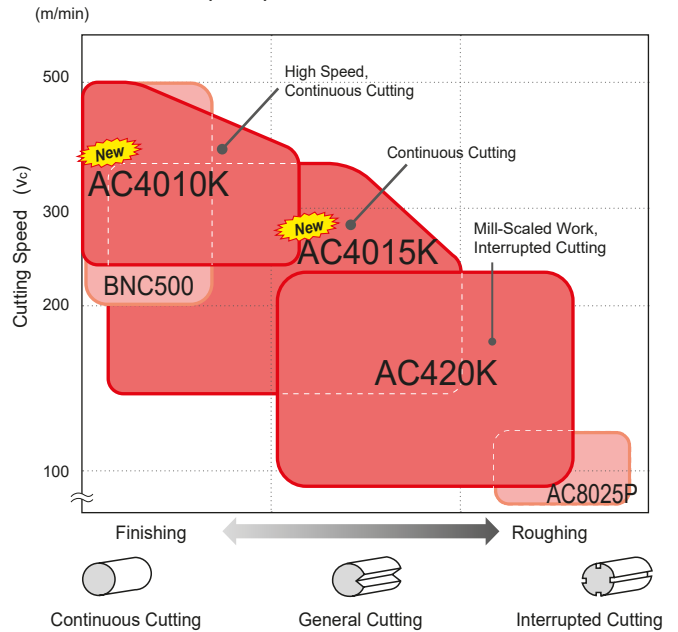

K Recommended Cutting Conditions

(Min. - Optimum - Max.)

Work Materials	Cutting Process	Grades	Cutting Conditions		
			Depth of Cut a_p (mm/rev)	Feed Rate f (mm/rev)	Cutting Speed v_c (m/min)
Gray Cast Iron (GG-25, etc.)	High Speed Cutting	BN7000	0,1-0,3-1,0	0,10-0,20-0,50	500-1.500-2.000
	Continuous - General	AC4010K	0,5-2,0-6,0	0,10-0,25-0,40	200-400-700
		AC4015K	0,5-2,0-6,0	0,10-0,30-0,50	180-300-450
		AC420K	0,5-2,0-6,0	0,10-0,30-0,60	150-200-300
Ductile Cast Iron (GGG-40.3, etc.)	High Speed Cutting	BNC500	0,1-0,2-0,5	0,10-0,20-0,40	150-350-500
	Continuous - General	AC4010K	0,5-2,0-6,0	0,10-0,25-0,40	180-300-450
		AC4015K	0,5-2,0-6,0	0,10-0,30-0,50	160-250-400
		AC420K	0,5-2,0-6,0	0,10-0,30-0,60	120-170-250
High-strength Ductile Cast Iron (GGG-70, etc.)	High Speed Cutting	BNC500	0,1-0,2-0,5	0,10-0,20-0,40	200-350-500
	Continuous - General	AC4010K	0,5-2,0-6,0	0,10-0,25-0,40	160-250-400
		AC4015K	0,5-2,0-6,0	0,10-0,30-0,50	140-200-350
		AC420K	0,5-2,0-6,0	0,10-0,30-0,60	80-150-220

Grades New **AC4010K / AC4015K / AC420K**


- AC4010K** The 1st recommended grade for machining grey cast iron. Adopts an ultra-thick new CVD coating to realise ultra-high-speed machining at $V_c = 700$ m/min.
- AC4015K** The 1st recommendation grade for ductile cast iron. New high-adhesion, high-strength CVD coating realises both wear resistance and chipping resistance.
- AC420K** Superior fracture resistance, providing excellent stability in interrupted unstable cutting and when cutting mill-scaled work.




Performance

AC4010K / AC4015K

Wear Resistance, Gray Cast Iron (GG)

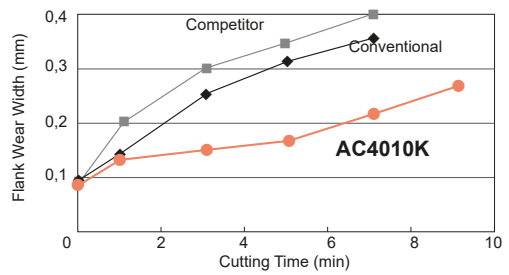

Wear Resistance, Ductile Cast Iron (GGG)


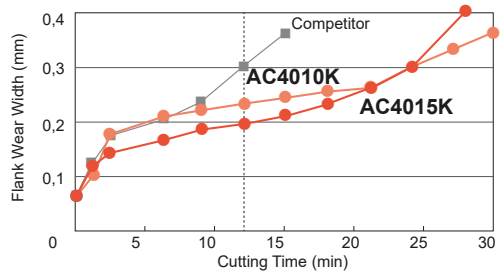


Work Material: GG-25, Continuous, Insert: CNMG120408
Cutting Conditions: $v_c = 600$ m/min, $f = 0,4$ mm/rev, $a_p = 2,0$ mm, dry



Work Material: GGG-70, Continuous, Insert: CNMG120408
Cutting Conditions: $v_c = 140$ m/min, $f = 0,3$ mm/rev, $a_p = 1,5$ mm, wet

AC4010K / AC4015K

Chipping Resistance, Gray Cast Iron (GG)

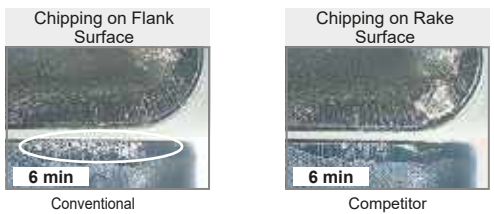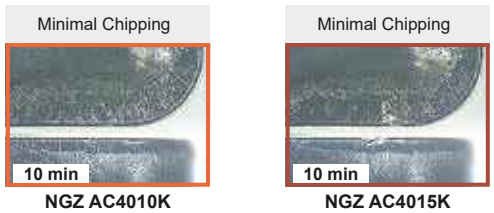

Chipping Resistance, Ductile Cast Iron (GGG)

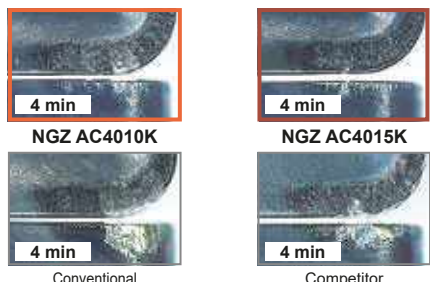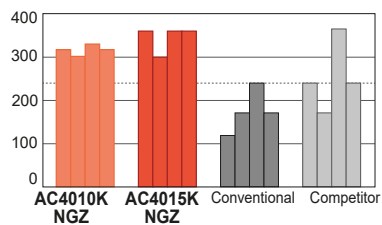


Work Material: GG-25, Interrupted, Insert: CNMG120408
Cutting Conditions: $v_c = 400$ m/min, $f = 0,3$ mm/rev, $a_p = 2,0$ mm, wet

Work Material: GGG-40.3, Interrupted, Insert: CNMG120408
Cutting Conditions: $v_c = 450$ m/min, $f = 0,3$ mm/rev, $a_p = 1,5$ mm, wet

AC420K Fracture Resistance

GGG-40.3 Grooved (Heavy Interrupted Acceleration Test)

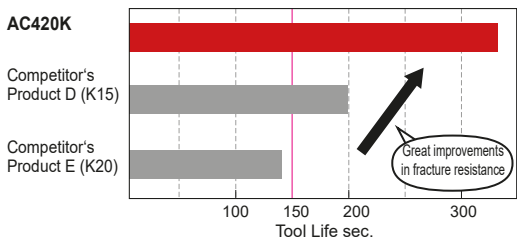


Edge Wear Comparison (After 150s)





Work Material: GGG-40.3, Toolholder: PCLNR2525-43 Insert: CNMG120408
Cutting Conditions: $v_c = 350$ m/min, $f = 0,25$ mm/rev, $a_p = 1,5$ mm, wet

Chipbreakers


Negative Type

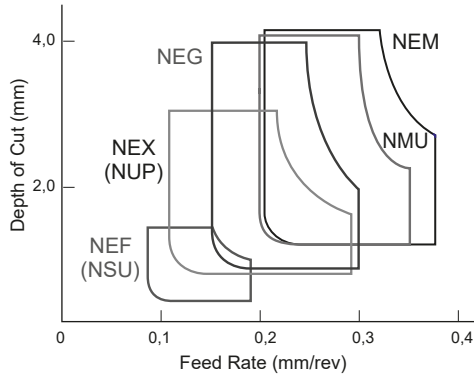

Positive Type

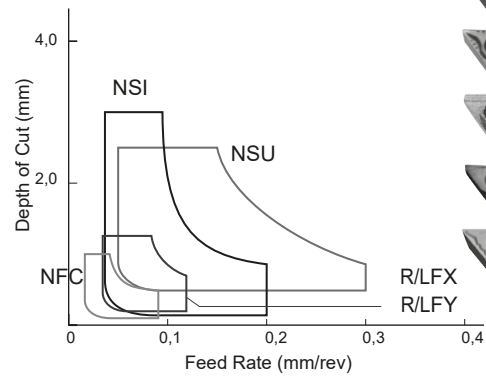

Grades

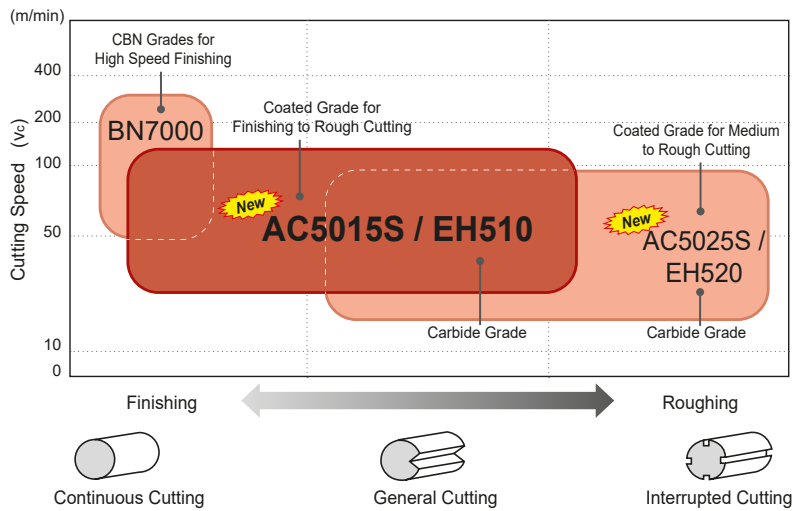

S Recommended Cutting Conditions

(Min. - Optimum - Max.)

Work Material	Cutting Process	Chipbreakers	Grades	Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Heat-Resistant Alloy	Finishing	NEF (NSU)	AC5010S AC5025S	0,2-0,5-1,5	0,10-0,12-0,20	50-70-110
	Light	NEX	AC5015S AC5025S	0,5-1,0-3,0	0,10-0,20-0,30	40-60-90
	Medium	NEG	AC5015S AC5025S	0,5-2,0-4,0	0,15-0,25-0,30	40-60-90
	Rough	NMU/NEM	AC5015S AC5025S	1,0-2,0-4,0	0,20-0,25-0,40	30-55-80
Titanium Alloy	Finishing	NEF (NSU)	EH510 (AC5015S)	0,2-0,5-1,5	0,10-0,15-0,20	50-65-80
	Light	NEX	AC5015S	0,5-1,0-2,5	0,10-0,20-0,25	40-55-70
	Medium	NEG	EH510 (AC5015S)	0,5-2,0-3,5	0,15-0,25-0,30	40-55-70
	Rough	NMU/NEM	AC5025S	1,0-2,0-3,5	0,20-0,25-0,30	30-40-50

Grades

AC5015S / **AC5025S** / **EH510** / **EH520**

PVD (Super ZX Coat) grade with excellent wear and thermal resistance.

Carbides with excellent thermal, wear, and fracture resistance for use with exotic alloys. Lineup also includes new chipbreaker design.

AC5015S The 1st recommended grade for turning exotic alloys as it realises stable tool life with high-speed, high-efficiency machining.

EH510 General purpose grade for titanium machining that features excellent wear and thermal resistance. For applications from roughing to finishing.


AC5025S High-toughness grade for realising stable tool life for interrupted cutting machining or mill-scaled work.

EH520 Tough grade for titanium machining with excellent fracture and thermal resistance. Perfect for interrupted cutting and mill-scaled work.




Performance

AC5015S

Wear Resistance

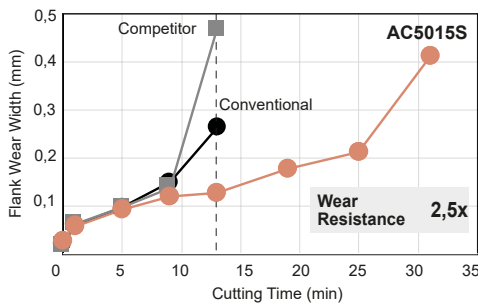

Fracture Resistance

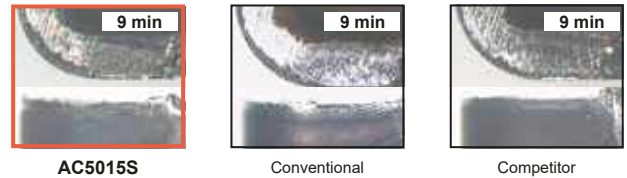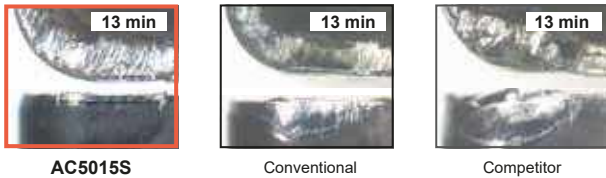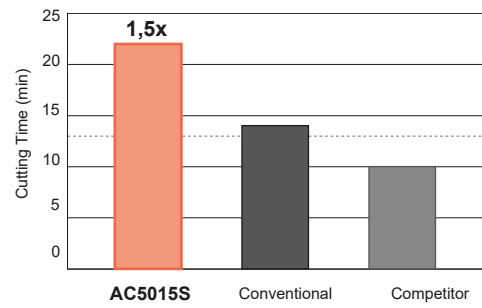


Work Material: Inconel 718 (44 HRC) Insert: CNMG120408
Cutting Conditions: $v_c = 40$ m/min, $f = 0,1$ mm/rev, $a_p = 1,5$ mm, wet




Work Material: Hastelloy (22 HRC), Insert: CNMG120408
Cutting Conditions: $v_c = 50$ m/min, $f = 0,1$ mm/rev, $a_p = 1,5$ mm, wet

AC5025S

Wear Resistance

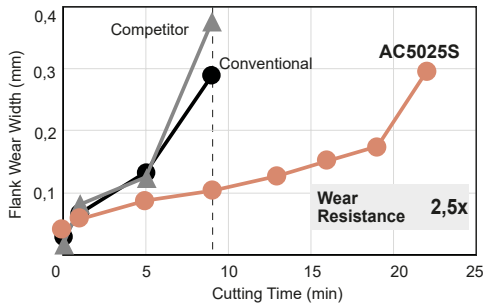

Fracture Resistance

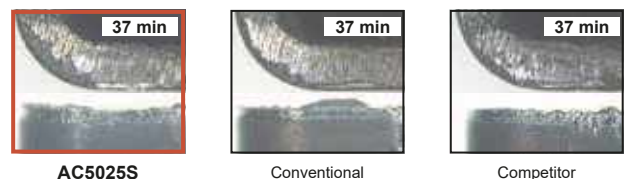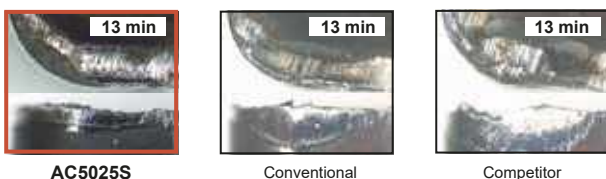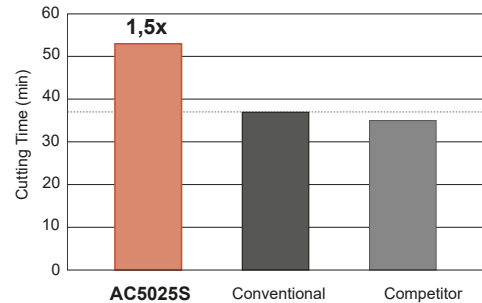


Work Material: Inconel 718 (44 HRC) Insert: CNMG120408
Cutting Conditions: $v_c = 40$ m/min, $f = 0,1$ mm/rev, $a_p = 1,5$ mm, wet

Work Material: Hastelloy (22 HRC), Insert: CNMG120408
Cutting Conditions: $v_c = 50$ m/min, $f = 0,1$ mm/rev, $a_p = 1,5$ mm, wet

Chipbreakers


NSV Type Chipbreaker: For chip control during carburized layer removal

NLV Type / NFV Type Chipbreaker: For chip control during finishing of hardened steel

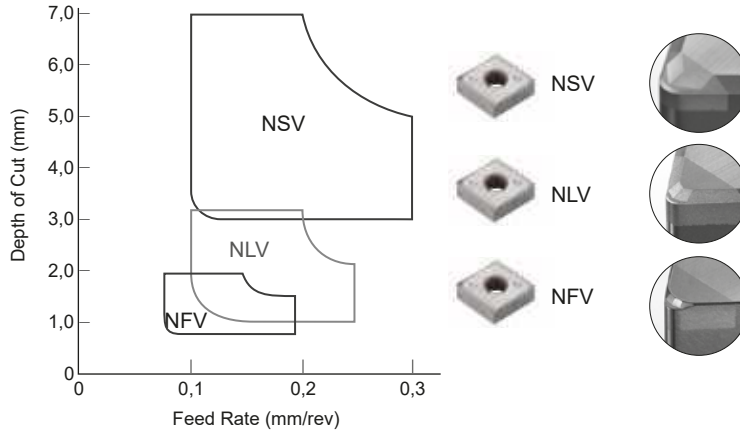


Grades

Coated SUMIBORON

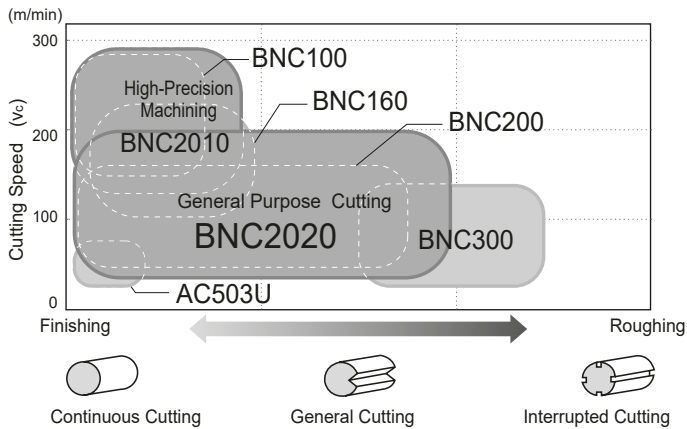

Uncoated SUMIBORON

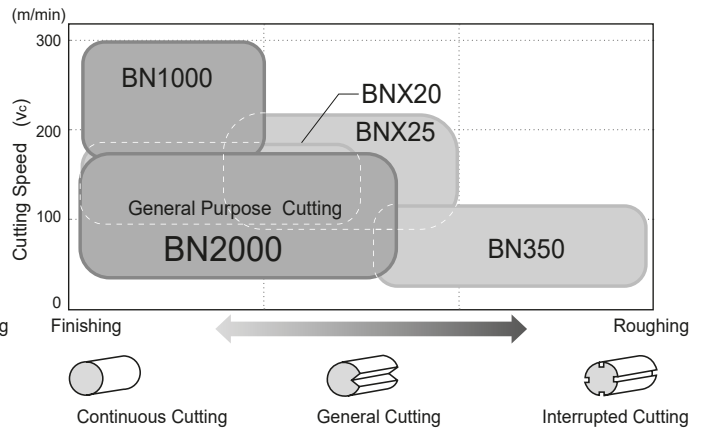

H Recommended Cutting Conditions

(Min. - Optimum - Max.)

Cutting Process	Grade	Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Continuous Cutting	BNC2010	0,03- 0,20 -0,35	0,03- 0,10 -0,20	120- 200 -300
	BNC100	0,03- 0,20 -0,30	0,03- 0,10 -0,20	120- 200 -300
	BN1000	0,03- 0,15 -0,20	0,03- 0,10 -0,15	100- 150 -300
	BNX10	0,03- 0,10 -0,20	0,03- 0,10 -0,15	120- 180 -300
	AC503U	0,03- 0,50 -1,00	0,02- 0,05 -0,10	40- 70 -100
General Turning	BNC2020	0,03- 0,30 -0,50	0,03- 0,20 -0,40	50- 130 -220
	BNC160	0,03- 0,20 -0,35	0,03- 0,10 -0,25	120- 180 -220
	BNC200	0,03- 0,30 -0,50	0,03- 0,10 -0,30	50- 130 -220
	BN2000	0,03- 0,20 -0,30	0,03- 0,10 -0,20	50- 100 -200
	BNX20	0,03- 0,20 -0,35	0,03- 0,15 -0,30	70- 130 -170
Interrupted Cutting	BNC300	0,03- 0,20 -0,30	0,03- 0,10 -0,20	50- 100 -150
	BN350	0,03- 0,20 -0,30	0,03- 0,10 -0,20	50- 100 -150
	BNX25	0,03- 0,20 -0,50	0,03- 0,15 -0,30	120- 160 -220


Grades

BNC2010 / BNC2020 / BN1000 / BN2000

- BNC2010** A grade for high-precision machining applicable for finishing requiring good surface roughness and dimensional accuracy. Provides further improved wear resistance thanks to a newly developed CBN substrate coated with a TiCN layer. Reduces flank wear and achieves excellent surface finish thanks to newly developed special stable multi-layered coating.
- BNC2020** A general-purpose grade applicable to general hardened steel machining. A newly developed tough CBN-substrate coated with a highly wear-resistant TiAlN layer. Achieves more stable machining and longer tool life by employing a highly adhesive layer for high chipping resistance.
- BN1000** For high speed machining. BN1000 provides the highest wear resistance of all uncoated SUMIBORON grades. Features improved fracture resistance while still placing a priority on wear resistance.
- BN2000** General purpose grade suitable for typical hardened steel machining applications. Provides a high degree of fracture and wear resistance.


Performance

BNC2010

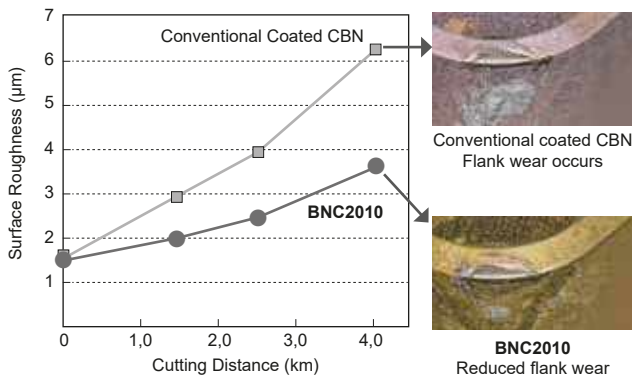

Work Material: 15CrMo5, 58-62HRC, Continuous
 Insert: DNGA 150408 NC4 (BNC2010)
 Cutting Edge Treatment: S01225
 Cutting Conditions: $v_c = 160$ m/min, $f = 0,08$ mm/rev, $a_p = 0,1$ mm, Wet


BNC2020

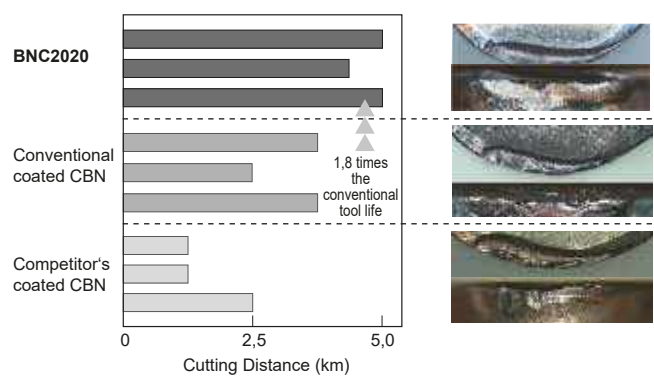


Work Material: SCM415-5V, 58-62HRC, Interrupted
 Insert: CNGA 120412 NC4 (BNC2020)
 Cutting Edge Treatment: S01225
 Cutting Conditions: $v_c = 130$ m/min, $f = 0,1$ mm/rev, $a_p = 0,6$ mm, Dry

BN1000 / BN2000

Wear Resistance (Continuous Cutting)

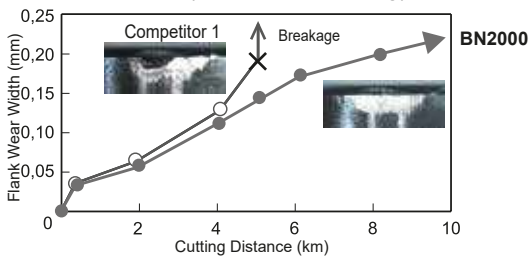


Work Material: 15CrMo5, Round Bar (58-62HRC)
 Cutting Conditions: $v_c = 100$ m/min, $f = 0,1$ mm/rev, $a_p = 0,2$ mm, Dry

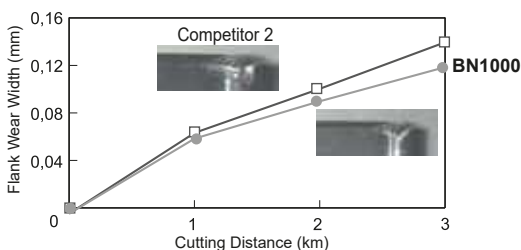

Work Material: 100Cr6, Round Bar (58-62HRC)
 Cutting Conditions: $v_c = 150$ m/min, $f = 0,1$ mm/rev, $a_p = 0,2$ mm, Dry

Chipping Resistance (Interrupted Cutting)



(Comparison based on conventional BN2000 as 100%.)

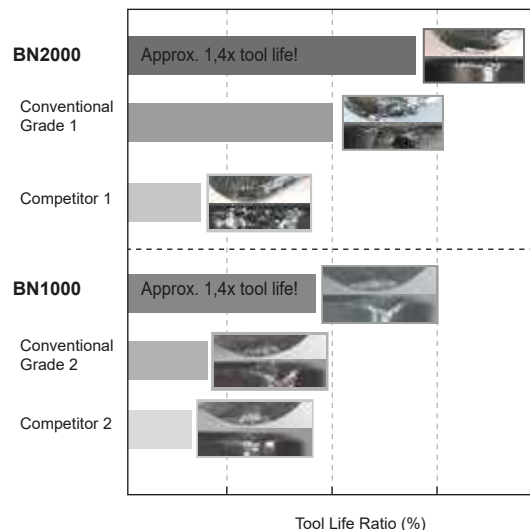


Work Material: 15CrMo5, 8V Grooved Material (58-62HRC)
 Insert: CNGA120408 NU-2
 Cutting Conditions: $v_c = 150$ m/min, $f = 0,1$ mm/rev, $a_p = 0,2$ mm, Dry

Chipbreakers

Positive Type

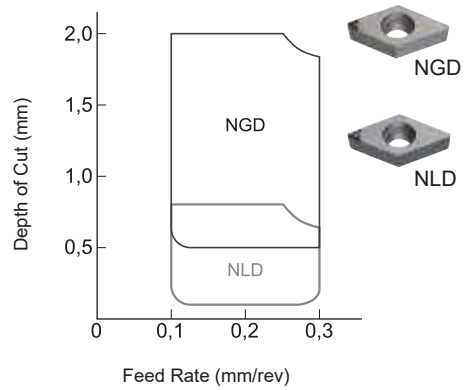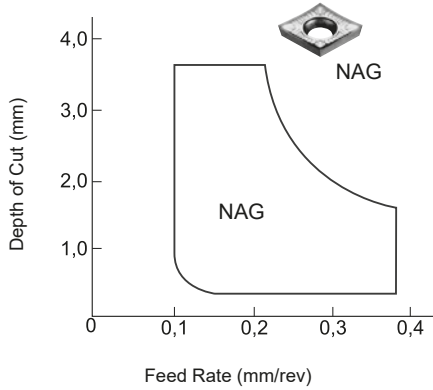

Grades

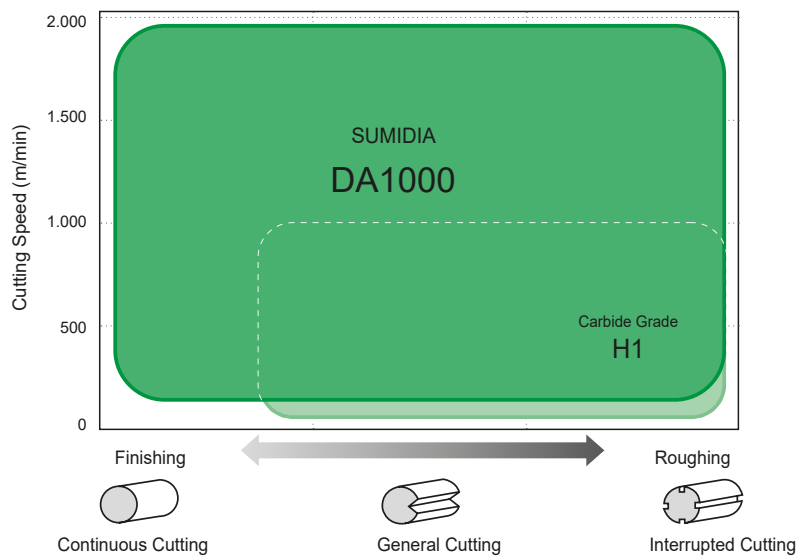

N Recommended Cutting Conditions

(Min. - Optimum - Max.)


Cutting Process	Category	Grades	Cutting Conditions		
			Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Continuous Cutting General Turning Interrupted Cutting	SUMIDIA	DA1000	0,1- 0,5 -3,0	0,05- 0,10 -0,20	-2000
	Carbide	H1	0,3- 1,0 -5,0	0,1- 0,20 -0,5	-1000

Grades


DA1000

- Ultra-high-density sintered, ultra-fine diamond particles
- Significantly improved surface roughness on machined surfaces
- World's best wear resistance and strength
- Suitable for use with all aluminium and non-ferrous alloys

DA1000 Wear Resistance

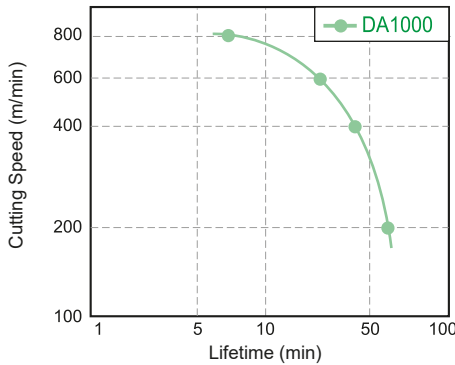


Comparison of Surface Roughness of Nose Radius Cutting Edge

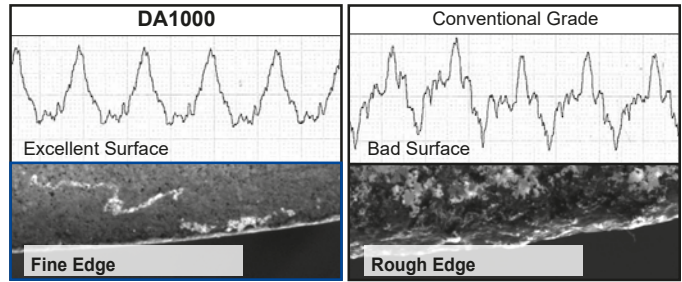


Insert: TPGW 160308
Cutting Conditions: $v_c = 1000$ m/min, $f = 0,15$ mm/rev, $a_p = 0,2$ mm, Wet

Wear Resistance in Turning Applications

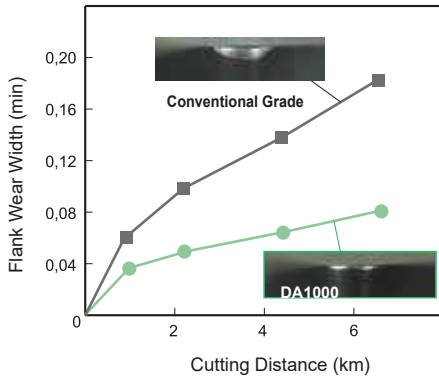

Insert: TPGN160304
Cutting Conditions: $v_c = 800$ m/min, $f = 0,12$ mm/rev, $a_p = 0,5$ mm, wet

Wear Resistance in Milling Applications

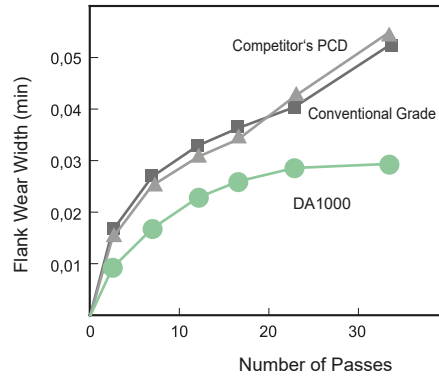


Insert: SNEW1204 ADRF-NF
Cutting Conditions: $v_c = 2000$ m/min, $f = 0,15$ mm/rev, $a_p = 3,0$ mm, wet

Application Examples

H1 + NAG Type Breakers

ADC12 Aluminium Wheel

Excellent adhesion resistance.
Longer tool life.

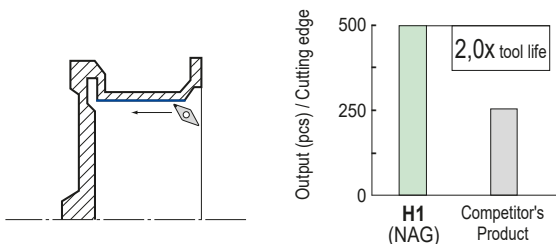


Insert: VCGT160408 NAG (H1)
Cutting Conditions: $v_c = 2000$ m/min, $f = 0,25$ mm/rev, $a_p = 2,0$ mm, wet

DA1000

Copper Alloy Bush

Stable surface roughness with no edge breakage (3,2S).
Tool life improved to 3x that of conventional models.

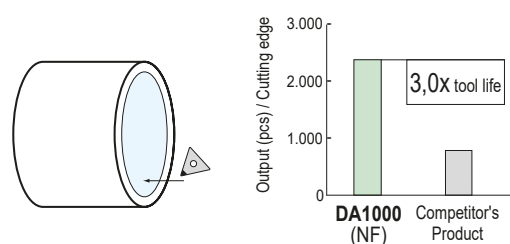

Insert: TPGN160308 NF (DA1000)
Cutting Conditions: $v_c = 300$ m/min, $f = 0,07$ mm/rev, $a_p = 0,08$ mm, wet


Grades

Category	Application Range			Work Material					
	High Precision	Finish-Light Cut	Medium Cut	P	M	K	S	H	N
				General Steel	Stainless Steel	Cast Iron	Heat Resistant Steel	Hardened Steel	Non-Ferrous Metal
Coated Carbide (PVD)	ACZ150			⊙	⊙				○
	New AC5015S			○	⊙		⊙		
	New AC5025S			○	⊙		⊙		
	AC530U			⊙	⊙	○	○		○
	AC1030U			⊙	⊙	○	○		○
Cermet/Coated Cermet	T1000A			⊙	○	⊙			○
	T1500A/T1500Z			⊙	○	○			○
Carbide	H1			○	○	○	○		⊙
	EH510			○	○	○	⊙		○
CBN (SUMIBORON)	BN1000/BN2000					⊙	○	⊙	
	BN7000							○	
SUMIDIA	DA1000								⊙


⊙ Preferred Choice ○ Suitable

Chipbreakers


M-Class Finishing to Light Cut



G-Class Chipbreaker (Groove Design)

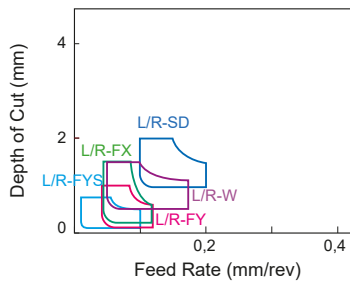


G-Class Chipbreaker (3D Design)

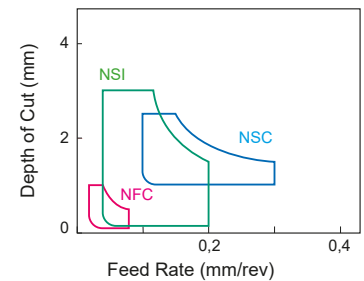

Recommended Cutting Conditions

Grade	P Free Cutting Steel		P Carbon Steel		M Stainless Steel		S Heat Resistant Steel		H Hardened Steel		N Aluminium		N Brass	
	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)
ACZ150	50-200	0,02-0,10	50-150	0,01-0,08	50-150	0,01-0,05					70-300	0,05-0,20	70-300	0,05-0,20
AC5015S	50-200	0,02-0,15	50-200	0,02-0,10	50-200	0,02-0,10	30-100	0,02-0,10					70-300	0,05-0,20
AC525S	50-200	0,02-0,15	50-200	0,02-0,10	50-200	0,02-0,10	30-100	0,02-0,10					70-300	0,05-0,20
AC530U	50-200	0,02-0,15	50-200	0,02-0,10	50-200	0,02-0,10							70-300	0,05-0,20
AC1030U	50-200	0,02-0,15	50-200	0,02-0,10	50-150	0,02-0,10							70-300	0,05-0,20
T1000A	50-200	0,02-0,15	50-200	0,02-0,10	50-150	0,02-0,10					70-300	0,05-0,20	70-300	0,05-0,20
T1500A	50-200	0,02-0,15	50-200	0,02-0,10	50-150	0,02-0,10					70-300	0,05-0,20	70-300	0,05-0,20
T1500Z	50-200	0,02-0,15	50-200	0,02-0,10	50-150	0,02-0,10					70-300	0,05-0,20	70-300	0,05-0,20
BN1000									120-300	0,03-0,15				
BN2000									50-200	0,03-0,20				
BN7000							50-200	0,05-0,20						
DA1000											70-300	0,02-0,10	70-300	0,02-0,10


Application Range

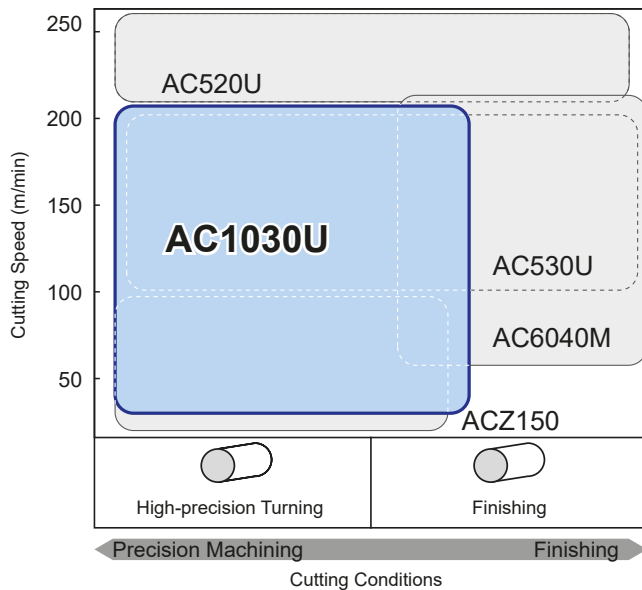

AC1030U


Employs "Absotech Bronze", a new PVD coating, with a special tough carbide substate. Achieving excellent machined surface quality with a high-quality cutting edge that reduces adhesion and micro-chipping.

AC1030U Performance

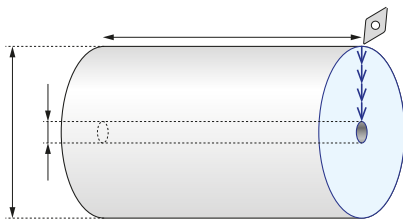


Material: X5CrNiS18-10, 1.4301
 Insert: DCGT11T302RFY (AC1030U)
 Cutting Data: $v_c=100$ m/min, $f=0,05$ mm/rev, $a_p=0,1$ mm, wet (Oil)

Wear Resistance




Roughness

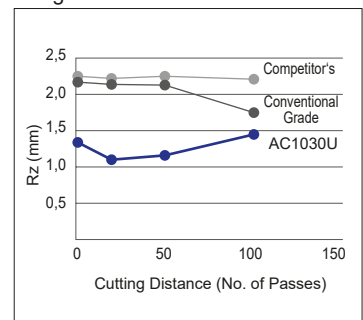


Application Examples

STKM12C-EC, Pipe

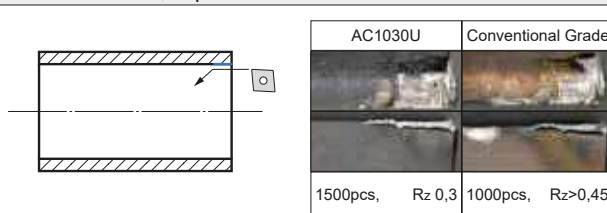


Insert: CCGT060201LFX (AC1030U)
 Cutting Data: $v_c = 196$ m/min, $f = 0,04$ mm/rev, $a_p = 0,4$ mm, wet

C45, Stator Shaft

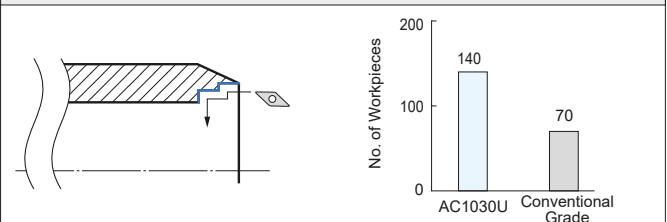


Insert: VCGT110302RFX (AC1030U)
 Cutting Data: $v_c=195$ m/min, $f = 0,12$ mm/rev, $a_p = 0,175-0,25$ mm, wet

X5CrNiS18-10, 1.4301, Valve Body

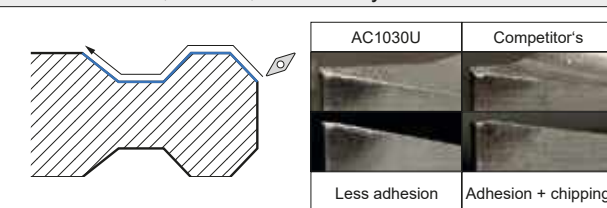

Insert: VCGT110301RFY (AC1030U)
 Cutting Data: $v_c = 31,5$ m/min, $f = 0,025$ mm/rev, $a_p = 0,2$ mm, wet

X6Cr17, Sensor Housing

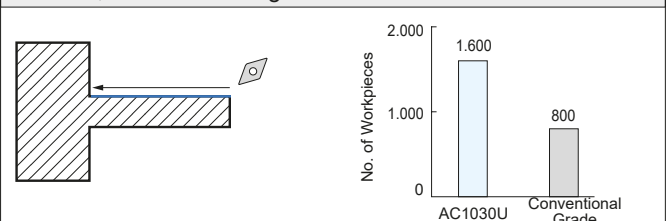

Insert: DCGT11T304M NFC (AC1030U)
 Cutting Data: $v_c = 50$ m/min, $f = 0,06$ mm/rev, $a_p = 0,2$ mm, wet

Grades

B



B1–B14



Grades

Coated Grades	Coating Series	B2
	CVD / PVD Series	B3–4
Coated and Uncoated	Cermet	B5
Uncoated Carbide	“Igetalloy”	B6
CBN Grades	“SUMIBORON”	B7–8
PCD Grades	“SUMIDIA”	B9
	“SUMIDIA” Binderless	B10
Chart	Grades Comparison Chart	B11–14

Coated Carbide


The hardmetal's coating series combines a proprietary tough cemented carbide substrate with a multi-layered coating for use in high-speed, high-efficiency applications on a wide range of work materials including steel, cast iron and exotic alloys.

Features

ABSOTECH: New coating technology that realises absolute stability.

Grades

CVD

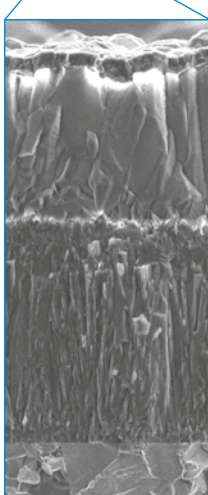


- Special Surface Treatment:** Chipping resistance and adhesion resistance are significantly improved by special surface treatment applied to suit the application.
- High Strength Alumina Layer:** Significantly improves the coating strength by controlling crystal growth direction.
- High Hardness Micro-Grain TiCN Layer:** Significantly improves the coating hardness by using a fine and uniform crystal structure.
- High Adhesion Technology:** Significantly improves adhesion strength through a smooth interface between the coating and carbide substrate.

- Suppresses abnormal damage such as chipping and adhesion. Stable machining is achieved in various situations.
- Next-level high strength and high hardness coating is achieved. Achieves long, stable tool life even in high-efficiency machining.

Applicable Grades

For steel turning	AC8015P, AC8025P, AC8035P
For stainless steel turning	AC6020M, AC6030M
For cast iron turning	AC4010K, AC4015K
For Milling	ACP2000, ACK2000

PVD

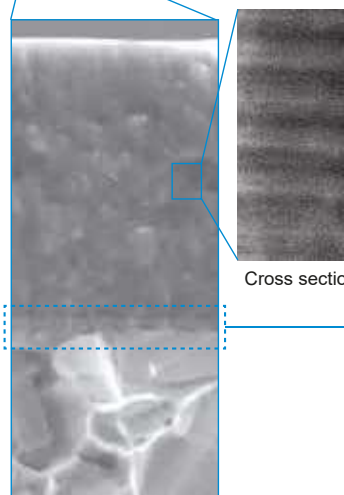

- The Proprietary Super Multi-layered Coating Structure:** Advanced nanotechnology enables nanometer-level thickness (1 nanometer is one billionth of a meter). Hardness, thermal resistance and toughness are significantly improved by alternately layering one thousand layers of super thin films.
- High Adhesion Technology:** Significantly improves adhesion strength through advanced control technology at the interface of the coating and carbide substrate.

- Optimised coating composition according to application. Achieves stable machining regardless of the work material.
- Significantly improves chipping resistance by improving coating adhesion strength. Stable machining is realised even under high load conditions.

Applicable Grades


For stainless steel turning	AC6040M
For exotic alloy turning	AC5015S, AC5025S
For small lathes	AC1030U
For Milling	AC2500, ACP3000, ACK3000

Brilliant Coat

Brilliant Coat provides excellent lubricity for higher quality machining.



- PVD coating with excellent wear resistance and lubricity.
- Suppresses reactions with work material and realises beautiful machined surfaces.

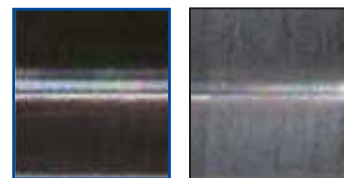

Brilliant Coat **Conventional Coating**

Work Material: STKM13A
 Insert: CNMG120408NLU
 Cutting Conditions: v_c : 100 m/min
 f_t : 0,15 mm/rev
 a_p : 1,0 mm, wet

Applicable Grades


For steel turning T1500Z

AURORA Coat (DLC : Diamond Like Carbon)

Using our proprietary PVD process technology, we have developed a hydrogen-free DLC coating that is extremely hard and smooth.



Comparison of Cutting Edge Adhesion After Cutting ADC12

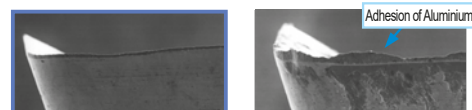

AURORA Coat **Uncoated**

Work Material : ADC12
 Cutting Conditions: v_c : 300 m/min
 f_t : 0,15 mm/t
 $a_p = a_e$: 5mm, dry

- Second only to diamond in terms of hardness, this smooth coating has a low coefficient of friction and provides excellent adhesion resistance to deliver better-quality machined surfaces.
- Can be used for high-speed, high-efficiency cutting of aluminium alloys, copper alloys, resins, and more.

Applicable Grades

For Milling DL1000, DL2000
 For Endmilling DL1000, DL1200
 For Drilling DL1300, DL1500

Characteristic Values

For Turning (CVD)

Class	Grade	Hardness (HRA)	TRS (GPa)	Coating Type	Coating Thickness (µm)	Characteristics	Old Grades
P	AC810P	91,0	2,2	Super FF Coat	18	A P10 grade with excellent wear resistance that features stability and longer tool life. Utilises a special carbide substrate with Super FF Coat for high to medium speed cutting.	AC700G
	New AC8015P	91,0	2,3	Absotech	14	For high-speed and high-efficiency machining of steel. Crystal orientation control technology is used to drastically suppress the advancement of crater wear, achieving long, stable tool life during high-speed and high-feed cutting.	AC810P
	AC820P	90,1	2,2	Super FF Coat	14	A P20 grade that features stability and longer tool life. Employs special carbide substrate and Super FF Coat to improve on P20 wear and fracture resistance.	AC2000
	AC8025P	90,1	2,3	Absotech	12	A P20 grade that drastically reduces the occurrence of abnormal damage and achieves long and stable tool life by employing a special carbide substrate and the new Absotech Platinum coating.	AC820P
	AC830P	89,4	2,6	Super FF Coat	8	Stable long-life grade employs special tough, carbide substrate and Super FF Coat. Improves on P30 grade fracture resistance and approaches P20 grade in terms of wear resistance.	AC3000
	New AC8035P	89,4	2,6	Absotech	9	For interrupted machining of steel. Coating layer tensile stress removal technology greatly improves fracture resistance and achieves long, stable tool life during heavy interrupted cutting.	AC830P
M	AC610M	91,0	2,2	Super FF Coat	5	A high efficiency M10 grade featuring improved wear resistance during stainless steel cutting. Employs special, ultra-hard substrate and thin Super FF Coat.	—
	AC6020M	90,1	2,3	Absotech	5	An M20 grade that maintains wear resistance in stainless steel machining while drastically reducing the occurrence of abnormal damage by employing a special carbide substrate and the new Absotech Platinum coating.	AC610M
	AC6030M	89,5	2,7	Absotech	5	The first recommended grade for general machining of stainless steel that drastically reduces the occurrence of abnormal damage in stainless steel machining and achieves long and stable tool life by employing a new coating: Absotech Platinum.	AC630M
	AC630M	89,5	2,7	Super FF Coat	5	A general purpose grade featuring improved wear and fracture resistance during stainless steel cutting. Utilises a special tough carbide substrate with a thin Super FF Coat.	AC304
K	AC405K	92,0	2,4	Super FF Coat	18	Employs an ultra-hard substrate and ultra-hard Super FF Coat to provide excellent resistance to wear and plastic deformation. Suitable for high-speed continuous cutting of cast iron.	AC410K
	New AC4010K	91,1	2,5	Absotech	20	1st recommended grade for turning grey cast iron. For high-speed cast iron milling. New thick coating realizes stable long tool life even with ultra-high-speed machining of grey cast iron at $v_c = 700$ m/min.	AC405K
	New AC4015K	91,1	2,5	Absotech	16	1st recommended grade for turning ductile cast iron. New high-adhesion, high-strength coating realises high wear resistance and chipping resistance for stable long tool life over a wide range of cutting conditions.	AC415K
	AC415K	91,1	2,5	Super FF Coat	18	Employs a special dedicated ultra-hard substrate that is also suitable for interrupted cutting and ultra-hard Super FF Coat to provide stability and long tool life in a wide range of processes. First recommended grade for cast iron turning.	AC410K
	AC420K	91,1	2,5	Super FF Coat	12	A new, extremely versatile grade that can be used for rough, interrupted cutting of ductile and grey cast iron. Employs special, ultra-hard carbide substrate and Super FF Coat to provide stability and long tool life.	AC700G

For Milling (CVD)

Class	Grade	Hardness (HRA)	TRS (GPa)	Coating Type	Coating Thickness (µm)	Characteristics	Old Grades
P	ACP100	89,3	3,1	Super FF Coat	6	A grade that employs a tough carbide substrate and thin-layer Super FF Coat to provide superior thermal crack and wear resistance in high-speed milling of steel.	AC230
	New ACP2000	89,5	3,2	Absotech	10	For high-speed machining of steel. Stable long tool life with high-speed machining is realized by adopting a tough carbide substrate and a new coating with excellent thermal crack resistance.	ACP100
M	ACM200	89,8	3,4	Super FF Coat	6	A grade ideal for hardened steel machining that provides excellent wear and heat resistance by employing a newly-developed ultra-hard carbide and Super FF Coat.	AC230
K	ACK100	92,0	2,4	Super FF Coat	6	A grade that employs a high-strength carbide substrate and Super FF Coat to provide excellent wear resistance in high-speed milling.	—
	ACK200	91,7	2,5	Super FF Coat	6	A grade that employs a tough carbide substrate and thin-layer Super FF Coat to provide superior thermal crack and wear resistance for high-speed milling.	AC211
	New ACK2000	91,7	3,1	Absotech	10	For high-speed cast iron milling. Stable long tool life with high-speed machining is realized by adopting a tough carbide substrate and a new coating with excellent thermal resistance.	ACK100 ACK200

Characteristic Values

For Turning (PVD)

Class	Grade	Hardness (HRA)	TRS (GPa)	Coating Type	Coating Thickness (μm)	Characteristics	Old Grades
P	T1500Z (Cermet)	92,0	2,2	Brilliant Coat*	3	Brilliant Coat* PVD coating gives excellent lubricity for higher quality machining. General-purpose coated cermet grade that can maintain high-quality machined surfaces and also gives excellent wear resistance.	T2000Z
	T3000Z (Cermet)	91,3	2,4	ZX Coat	3	An ultra-reliable coating grade with tough cermet substrate.	—
	AC530U	91,4	3,3	Super ZX Coat	3	For interrupted and general steel cutting. Utilizing the super multi-layered PVD coating of nanometre thick TiAlN and AlCrN layers, coupled with a fine-grained super tough substrate for excellent fracture resistance.	ACZ310
M	AC6040M	91,6	3,8	Absotech	3	The first recommended grade for interrupted machining of stainless steel that drastically improves the reliability in unstable machining thanks to the excellent adhesion and peel-off resistance of the new Absotech Bronze PVD coating, as well as the improved fracture resistance of the exclusive ultra-hard carbide substrate.	AC530U
	AC530U	91,4	3,3	Super ZX Coat	3	Heavy interrupted machining and stainless steel machining. Utilizing the super multi-layered PVD coating of nanometre thick TiAlN and AlCrN layers, coupled with a fine-grained super tough substrate for excellent fracture resistance.	ACZ310
S	AC510U	92,6	2,6	Super ZX Coat	3	Finishing to medium cutting of exotic alloys. Utilizing the super multi-layered PVD coating of nanometre thick TiAlN and AlCrN layers. Superior wear and heat resistance, and stable, long tool life.	EH510Z EH10Z
	AC5015S	92,7	3,2	Absotech	5	The first recommended grade for turning exotic alloy. Adopts a carbide substrate with excellent thermal resistance and a new coating with excellent wear resistance and chipping resistance, realizing stable long tool life over a wide range of cutting conditions.	AC510U
	AC520U	91,7	3,0	Super ZX Coat	3	Medium to rough cutting of exotic alloys. Utilizing the super multi-layered PVD coating of nanometre thick TiAlN and AlCrN layers. Superior wear and heat resistance, and stable, long tool life even in interrupted cutting.	EH520Z EH20Z
	AC5025S	91,8	3,6	Absotech	5	For partially interrupted to interrupted machining of exotic alloy. Adopts a carbide substrate with excellent fracture resistance and a new coating with excellent wear resistance and chipping resistance, realizing stable long tool life with unstable cutting conditions.	AC520U
H	AC503U	93,2	1,7	Super ZX Coat	3	For hardened steel. Utilizing the super multi-layered PVD coating of nanometre thick TiAlN and AlCrN layers, coupled with an ultra-hard substrate for excellent wear resistance.	—
Small Product Machining	ACZ150	91,4	3,3	ZX Coat	1	For small tools, and high-precision finishing to general finishing applications. TiN ultra-thin coating and fine-grained, super tough substrate combine to give good edge sharpness and superior cut finish.	—
	AC1030U	91,6	3,8	Absotech	2	For precision machining that supports a wide range of work materials. Employs the new "Absotech Bronze" coating with excellent adhesion and peel-off resistance to deliver excellent machined surface quality with improvements in cutting edge quality and superb stability.	—

For Milling (PVD)

Class	Grade	Hardness (HRA)	TRS (GPa)	Main Coating Components	Coating Thickness (μm)	Characteristics	Old Grades
P	ACU2500	91,6	3,8	Absotech	3	General purpose grade supporting steel, stainless steel and cast iron machining. Adopts a carbide substrate with excellent fracture resistance and wear resistance, plus a new coating with wear and chipping resistance, realizing stable long tool life with various work material grades.	—
	ACP200	89,5	3,2	Super ZX Coat	3	For general machining of general and die steel. Employs PVD coating consisting of multiple nanometre-thin layers. A general grade that achieves a good balance between fracture resistance and wear resistance when combined with an exclusive tough substrate.	ACZ330
	ACP300	89,3	3,1	Super ZX Coat	3	For interrupted machining and stainless steel machining. Employs PVD coating consisting of multiple nanometre-thin layers. Provides excellent fracture resistance when combined with an ultra-tough substrate.	ACZ350
	ACP3000	89,5	3,2	Absotech	3	1st recommended grade for milling steel. Carbide substrate with excellent thermal crack resistance, plus a new coating with excellent wear and chipping resistance, realizes stable long tool life over a wide range of cutting conditions.	ACP200 ACP300
M	ACM100	91,4	3,3	Super ZX Coat	3	A grade that provides excellent wear resistance by employing an ultra-hard fine-grained carbide and New Super ZX Coating.	ACZ310
	ACM300	89,8	3,4	Super ZX Coat	3	The first recommended grade for stainless steel machining that achieves a good balance between wear resistance and fracture resistance by employing a newly-developed ultra-hard carbide and New Super ZX Coating.	—
K	ACK300	91,4	3,3	Super ZX Coat	3	General-purpose grade with an excellent balance of wear and fracture resistance.	ACZ310
	ACK3000	91,7	3,1	Absotech	3	1st recommended grade for milling cast iron. Adopts a high thermal conductivity carbide substrate and a new coating with excellent wear and chipping resistance, realizing stable long tool life over a wide range of cast iron machining operations.	ACK300
N	DL1000	92,9	2,1	AURORA Coat (DLC Coat)	0,5	For milling non-ferrous metal, utilizing DLC coat with a low coefficient of friction and excellent adhesion resistance.	—
	DL2000	91,6	3,8	AURORA Coat (DLC Coat)	0,5	For milling non-ferrous metal, utilizing DLC coat with a low coefficient of friction and excellent adhesion resistance.	—

*There may be minor differences in the colour tone/lustre of Brilliant Coat grades due to the interference of light. Such differences have no effect on performance.

TiC / TaC (Titanium Carbide) Cermet



Various grades and expanded lineup of catalogue items meet a wide range of finishing needs.

Lineup includes wear-resistant T1000A, general purpose T1500A, general purpose coated cermet T1500Z and tough T2500A. Significantly expanded lineup of catalogue items for a wide variety of finishing applications.

Characteristics

Uncoated Cermet

T1000A High Speed Finishing Grade
High speed finishing grade with excellent wear resistance.

- Improved wear and fracture resistance.
- Solid solution hard phase reduces reaction with steel.
- Perfect for high-speed continuous finishing of steel, cast iron and powdered metal.

Uncoated Cermet

T1500A New General Purpose Grade
General purpose cermet grade that provides both wear and fracture resistance with better quality finished surfaces.

- Mixing hard phases of different functionality, grain size and compositions improves balance of wear and fracture resistance.
- Reduces adhesion of work material for beautiful finished surfaces.

Uncoated Cermet

T2500A
Tough grade with excellent fracture resistance and thermal crack resistance.

- Fine, uniform grain structure greatly improves toughness
- Improves thermal crack resistance due to the high thermal conductivity and realizes long stable tool life.

Coated Cermet

T1500Z New General Purpose Grade
General purpose coated cermet grade that employs new Brilliant Coat* PVD coating with excellent lubricity.

- Excellent wear resistance provides long tool life.
- Reduces adhesion of work material for beautiful finished surfaces.

Characteristic Values

For Turning

Class	Grade	Hardness (HRA)	TRS (GPa)	Coating Type	Coating Thickness (µm)	Characteristics	Old Grades
P	T1000A	93,3	1,8	—	—	Uncoated cermet grade with excellent wear resistance that provides good cost efficiency. Demonstrates excellent wear resistance in continuous finishing applications, and stable finishing of cast iron and sintered alloy as well as steel.	T110A
	T1500A	92,0	2,2	—	—	A general purpose grade that employs a substrate with improved balance of fracture and wear resistance to deliver superior finished surfaces in a wide variety of cutting conditions.	T1200A
	New T2500A	91,8	2,4	—	—	For interrupted machining of steel. Fine, uniform grain structure greatly improves toughness, realizing long tool life and excellent surface finish even with interrupted cutting.	—
	T1500Z	92,0	2,2	PVD Brilliant Coat*	3	Brilliant Coat's* new PVD coating gives excellent lubricity for higher quality machining. General-purpose coated cermet grade that can maintain high-quality machined surfaces and also gives excellent wear resistance.	T2000Z
	T3000Z	91,3	2,4	PVD ZX Coat	3	An ultra-reliable coated grade with tough cermet substrate.	—
K	T1000A	93,3	1,8	—	—	Exclusive uncoated cermet grade with excellent cost efficiency suitable for cast iron finishing, which requires high hardness.	T110A

For Milling

Class	Grade	Hardness (HRA)	TRS (GPa)	Coating Type	Coating Thickness (µm)	Characteristics	Old Grades
P	T1500A	92,0	2,2	—	—	A general-purpose grade that employs a substrate with an improved balance between fracture and wear resistance to deliver superior finished surfaces in a wide variety of cutting conditions.	T1200A
	T250A	91,4	2,1	—	—	Tough cermet grade with enhanced crack advancement resistance.	—
M	New T2500A	91,8	2,2	—	—	For finishing of steel and stainless steel. Fine, uniform grain structure greatly improves toughness, realizing long tool life and excellent surface finishing.	T250A
	T4500A	91,0	2,3	—	—	For finishing of steel and stainless steel. Tough grade with excellent fracture resistance and reduced thermal cracking.	—


*There may be minor differences in the colour tone/lustre of Brilliant Coat grades due to the interference of light. Such differences have no effect on performance.

WC (Tungsten Carbide) „Igetalloy“


Igetalloy carbides have a solid history and a big variety of grades to suit many different applications. They are widely used and appreciated for their superior performance.

The Igetalloy line-up consists of carbide cutting tools that are available in a variety of different structures and compositions, each differing in terms of WC grain size and containing varying amounts of CO binder and TiC, TaC, and other double carbide components. The wide selection enables excellent wear resistance and toughness with a variety of work materials and cutting conditions.


● For Steel

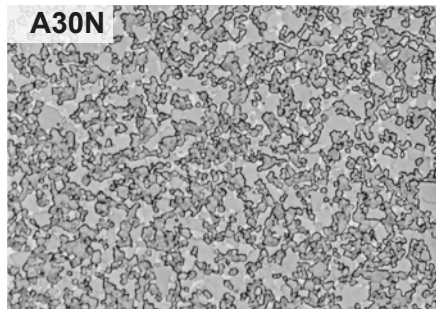

● For Stainless Steel

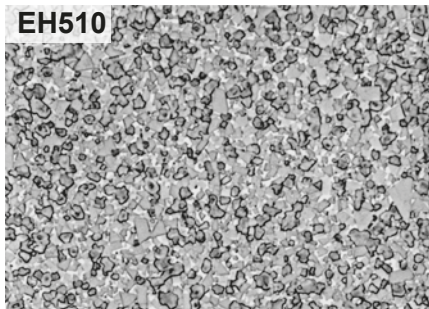

● For Cast Iron

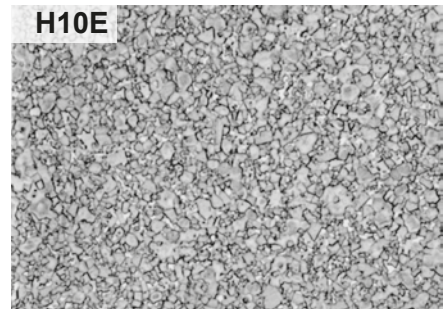

Characteristic Values

Application	Grade	Hardness (HRA)	TRS (GPa)	Young's Modulus (GPa)	Thermal Conductivity (W/m·°C)	Compressive Strength (GPa)	Linear-Thermal Expansion Coefficient (X 10 ⁻⁶ /°C)
P	ST10P	92,1	1,9	470	25	4,9	6,2
	ST20E	91,8	1,9	550	42	4,8	5,2
	A30	91,3	2,1	520	—	—	5,2
	A30N	91,2	2,2	520	—	—	—
	ST40E	90,4	2,6	—	75	—	—
M	EH510	92,6	2,6	—	—	—	—
	EH520	91,7	3,0	—	—	—	—
	A30	91,3	2,1	520	—	—	5,2
	A30N	91,0	2,4	—	—	—	—
K	BL130	94,3	2,9	—	—	—	—
	H2	93,2	1,8	600	105	6,1	4,4
	H1	92,9	2,1	650	109	6,1	4,7
	EH510	92,6	2,6	—	—	—	—
	H10E	92,3	2,0	—	67	—	—
	EH520	91,7	3,0	—	—	—	—
	G10E	91,1	2,2	620	105	5,7	—
N	H1	92,9	2,1	650	109	6,1	4,7
	New H20	91,6	3,8	—	—	—	—
S	EH510	92,6	2,6	—	—	—	—
	EH520	91,7	3,0	—	—	—	—

CBN (Cubic Boron Nitride) SUMIBORON



High hardness and heat resistance for cutting high hardness steel and hard cast iron. Long tool life with high-speed finishing of grey cast iron.

In 1977, Sumitomo Electric Hardmetal successfully developed a revolutionary CBN sintered tool - SUMIBORON. The main component in SUMIBORON is Cubic Boron Nitride with a special ceramic binder sintered under super high pressure and temperature. As compared to other conventional tool materials, CBN has higher hardness and excellent heat resistance.

With these distinct characteristics, SUMIBORON can perform machining of hardened steel, high hardness cast iron and exotic metals where previously only grinding was done. Furthermore, excellent efficiency and longer tool life can also be achieved from high speed machining of cast irons.

Characteristics

Classifications	Structure	CBN Content	Hardness (GPa)	Grades	Application	Characteristics
Purely CBN particles, firmly bonded		High	54	NCB100	Cast Iron, Titanium Alloy, Pure Titanium, Co-Cr-Alloy, Cemented Carbide, Cermet	Containing no binder, the nano-to sub-micron CBN particles have a directly bonded structure. The high hardness and thermal conductivity make it highly efficient with a long tool life when machining exotic alloys such as titanium alloys and Co-Cr alloys.
Mainly CBN grains fused together		↑ ↓	↑ ↓	BN700 BN7000 BN7500 BNS800	Carbide, Chilled cast iron, Ni-Hard cast iron, Heat-resistant alloy, Cast iron Sintered ferrous alloy	High carbon content. Structure consists of strongly fused CBN grains. Suited to cutting cast iron, heat-resistant alloy, ultra-hard alloy, and other hard materials.
Mainly CBN grains held together with a binder				BN1000, BN2000, BN350 BNX10, BNX20, BNX25 BN500, BN2010, BN2020 BNC300, BNC100, BNC160 BNC200, BNC500	Alloy steel, Case hardened steel, Carbon tool steels, Bearing steel, Die steel, Ductile cast iron	CBN grains are fused together strongly with a special ceramic binder. Strong CBN binding force gives superior wear resistance and toughness when cutting hardened steel and cast iron.

Grade Range Map

Class	Application	High-speed Cutting	Finishing – Light Cutting	Medium Cutting		Rough – Heavy Cutting	
		—	H01	H10	H20	H30	
H	Coated SUMIBORON	BNC2010		BNC2020		BNC300	
		BNC100		BNC160	BNC200		
	Uncoated SUMIBORON	BN1000		BN2000			
		BNX10		BNX20		BNX25, BN350	
		BN7500		BN7000			
		BN500*		BNC500*			
Sintered Components	Classification	—	01	10	20	30	
	Uncoated SUMIBORON	BN7500		BN7000			
		BN500*		BNC500*			
		BNX10		BNX20		BNX25, BN350	
K	Classification	—	K01	K10	K20	K30	
	Coated SUMIBORON	BNC500*		BNC500*			
		BN500		BNC500*			
	Uncoated SUMIBORON	BN7000		BNC500*			
		BN500		BNC500*			
BN7000		BNC500*					
S	Classification	—	S01	S10	S20	S30	
	Uncoated SUMIBORON	BN7000		BNC500*			
		BN500		BNC500*			
		BN7000		BNC500*			

* Dedicated for Ductile Cast Iron.

CBN (Cubic Boron Nitride)

SUMIBORON

Characteristic Values

Class	Grade	Binder	Carbon Content (%)	Grain Size (µm)	Hardness HV (GPa)	TRS (GPa)	Main Coating Components	Coating Thickness (µm)	Characteristics
H	BNC2010	TiCN	50–55	2	30–32	1,10–1,20	TiCN multi-layered	1,5	Improves the wear resistance of coating and substrate and stably achieves excellent surface roughness.
	BNC2020	TiN	70–75	5	34–36	1,20–1,30	TiAlN multi-layered	1,5	Provides long tool life in general and high-efficiency cutting thanks to tough substrate coated with a highly wear-resistant and highly adhesive layer.
	BNC100	TiN	40–45	1	29–32	1,05–1,15	TiAlN	1	Highly wear resistant coating makes this grade suited for high speed finishing.
	BNC160	TiN	60–65	3	31–33	1,10–1,20	TiAlN/TiCN	2	Stable, high precision finishing of hardened steel.
	BNC200	TiN	65–70	4	34–36	1,15–1,25	TiAlN/TiCN	2	Tough substrate with high wear resistant coating provide longer tool life.
	BNC300	TiN	60–65	1	33–35	1,15–1,25	TiAlN	2	Suited for finishing when there is a combination of continuous and interrupted cutting.
	BNX10	TiCN	40–45	3	27–31	0,80–0,90	–	–	Optimum wear resistance. Suited to continuous, high-speed cutting.
	BN1000	TiCN	40–45	1	27–31	0,90–1,00	–	–	Ultimate wear and fracture resistance. Suited to high-speed cutting.
	BNX20	TiN	55–60	3	31–33	0,95–1,10	–	–	Crater resistant grade, suitable for high efficiency cutting under high temperature conditions.
	BNX25	TiN	65–70	4	29–31	1,00–1,10	–	–	Excellent fracture resistance during high speed cutting. Suited to high speed interrupted cutting of hardened steel.
	BN2000	TiN	50–55	2	31–34	1,05–1,15	–	–	A general purpose grade for hardened steel that provides a high degree of fracture and wear resistance.
	BN350	TiN	60–65	1	33–35	1,20–1,30	–	–	High cutting edge strength. suited to heavy interrupted cutting.
Sintered Components	BN7500	Co Compound	90–95	1	41–44	1,40–1,50	–	–	Maintains optimum cutting edge sharpness. Suited for finishing of sintered alloy.
	BN700	Co Compound	90–95	2	40–43	1,20–1,30	–	–	Maintains good wear and fracture resistance in rough cutting of sintered components.
	BN7000	Co Compound	90–95	2	41–44	1,30–1,40	–	–	Improved wear and fracture resistance in rough cutting of sintered components.
K	BN700	Co Compound	90–95	2	40–43	1,20–1,30	–	–	Maintains good wear and fracture resistance in rough cutting of cast iron and exotic alloy.
	BN7000	Co Compound	90–95	2	41–44	1,30–1,40	–	–	Improved wear and fracture resistance in rough cutting of cast iron and exotic alloy.
	BNS800	Al Alloy	85–90	8	39–42	0,95–1,10	–	–	100% solid CBN structure with good thermal impact resistance.
	BNC500	TiC	60–65	4	32–34	1,00–1,10	TiAlN	2	Substrate with excellent wear resistance and coating makes this grade suited for hard-to-cut cast iron.
S	New NCB100	–	100	–0,5	51–54	1,8–1,9	–	–	Achieves high-efficiency, improved machining accuracy and long tool life in machining of exotic alloys such as titanium alloy and Co-Cr alloys.

PCD (Polycrystalline Diamond) SUMIDIA



Excellent wear resistance, longer tool life, and high-speed, high-efficiency, high-precision cutting of non-ferrous metals and non-metals.

SUMIDIA is a polycrystalline diamond material made from sintered diamond powder that was first created using our proprietary technology in 1978.

SUMIDIA's superior wear resistance achieves longer tool life, high speed, high efficiency and high precision in non-metal cutting and non-ferrous metal applications including aluminium, copper, magnesium and zinc alloys.





SUMIDIA Binderless uses nano-polycrystalline diamond for the cutting edge, demonstrating excellent wear resistance and fracture resistance.

In particular, it achieves extended tool life and machining accuracy superior to conventional polycrystalline diamond when machining hard brittle materials such as cemented carbides.

Features

Diamond particles on the order of submicrons to several dozen microns, sintered at high density.

Structure

SUMIDIA Binderless	SUMIDIA		
NPD10	DA1000	DA150	DA90
			
Diamond particles	Black areas in image are diamond particles.		

Grade Range Map

Class	Series	Finishing – Light Cutting		Medium Cutting	Rough – Heavy Cutting
Brittle Materials	Classification	01	10	20	30
	SUMIDIA Binderless	NPD10			
	SUMIDIA		DA90		
N	Classification	N01	N02	N20	N30
	SUMIDIA	DA1000			
		DA150			
		DA90			

Characteristic Values

Class	Grade	Binder	Carbon Content (%)	Grain Size (µm)	Hardness HV (GPa)	TRS (GPa)	Characteristics
Brittle Materials	NPD10	Co	100	≤0,05	120–130	≈ 3,15	100% diamond that directly binds nano-order diamond particles with high strength. Demonstrates optimum wear and fracture resistance as well as the best edge sharpness.
N	DA1000	Co	90–95	–0,5	110–120	≈ 2,60	High density sintered material made of ultra-fine diamond particles that demonstrates optimum wear and fracture resistance, and edge sharpness.
	DA150	Co	85–90	5	100–120	≈ 1,95	Sintered material made of fine diamond particles that provides a good balance of workability and wear resistance.
	DA90	Co	90–95	50	50–65	≈ 1,10	Coarse sintered diamond particles, with high diamond content for excellent wear resistance.

PCD (Polycrystalline Diamond) SUMIDIA Binderless

Grades



SUMIDIA Binderless Series uses nano-polycrystalline diamond for the cutting edge and demonstrates excellent wear and fracture resistance compared to conventional sintered diamond tools.

In particular, SUMIDIA Binderless Series allows for improvements in tool life and machining precision that go far beyond conventional diamond tools in the machining of hard brittle materials, such as carbide.

Excellent for High Precision Machining of Carbide

Nano-polycrystalline diamond with excellent wear resistance achieves high precision machining of carbide.

Maintains Superior Dimensional Tolerances Over Many Hours

Greatly reduces the number of tool replacements compared to conventional diamond tools and increases work efficiency while reducing total costs.


Suitable for Hard Brittle Material Machining

Hard brittle materials (such as ceramics) that could only be ground before can now be cut.

Characteristics

Comparison of Structure

Nano-Polycrystalline Diamond
SEM Structure




Diamond Particles
(30–50 nm)

Conventional PCD
SEM Structure




Diamond Particles
(1–10 µm)

Hardness

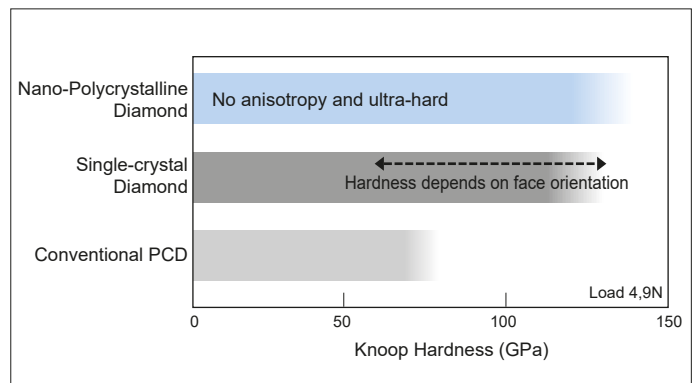


Application (Carbide Machining)

Hardness < 88HRA

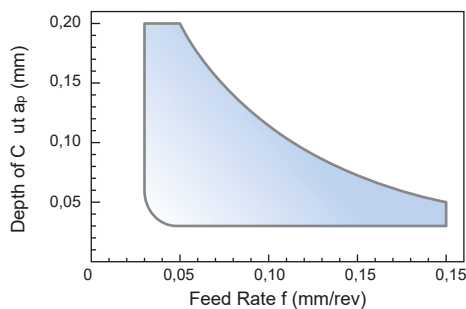

Hardness ≥ 88HRA

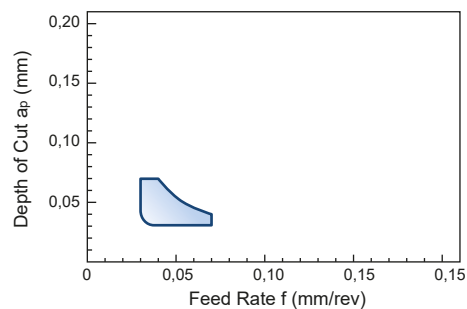

Recommended Cutting Conditions (Carbide Machining)

Coolant: Dry

Min. - Optimum - Max.

Work Material			Cutting Conditions		
Classification	Hardness (HRA)	SEH Grade	Cutting Speed v_c (m/min)	Feed Rate f (mm/rev)	Depth of Cut a_p (mm/rev)
VM VC	70 60 50	G7 G6	5–20–30	0,03– 0,10 –0,20	0,03– 0,10 –0,20
VM VC	40	G5 G2	5–15–30	0,03– 0,05 –0,07	0,03– 0,10 –0,20

Grade Comparison Chart

■ Coated Carbide (CVD)

Application	Class	Grade	Sumitomo Electric	Mitsubishi	Tungaloy	Kyocera	Mitsubishi-Hitachi	Sandvik	Kennametal	SECO Tools Japan	WALTER	ISCAR	Taegu Tec	NTK	
Turning	P	P05	AC8015P AC810P	UE6105	T9105	CA510 CA5505	HG8010	GC4305 GC4205	KCP05 KCP05B KC9105	TP0501 TP0500	WPP05S WPP05 WPP01	IC8005 IC8150 IC428	TT8105		
		P10	AC8015P AC810P	MC6015 UE6110	T9105 T9115	CA510 CA515 CA5515	HG8010	GC4305 GC4215 GC4315	KCP10 KCP10B	TP1501 TP1500	WPP10S WPP10	IC5100 IC8150 IC8250 IC9015	TT8115	CP7	
		P20	AC8025P AC820P	MC6025 UE6020	T9115 T9125	CA025P CA525	HG8025 GM8020	GC4315 GC4225 GC4325 GC1515	KCP25 KCP25B	TP2501 TP2500	WPP20S WPP20	IC8150 IC8250 IC8350 IC9015	TT5100 TT8125	CP7	
		P30	AC8035P AC830P AC6030M AC630M	MC6035 UE6035	T9125 T9135 T6130	CA025P CA525 CA530	GM25	GC2025 GC4325 GC4335 GC4235	KCP30 KCP30B	TP3500	WPP30S WPP30	IC8350 IC8025	TT7100 TT8135		
		P40	AC8035P AC830P AC6030M AC630M	UH6400	T9135 T6130	CA530 CA5535	GX30 GM8035	GC4335 GC4235 GC30	KCP40 KCP40B	TP3500		IC8350 IC8025	TT7100		
	M	S	M10 S10	AC610M AC6020M	MC7015 US905 US7020	T9115	CA6515	HS9105	GC2015 GC1515 S05F	KCM15			IC6015 IC8025 IC8150 IC8250 IC5820	TT9215	
			M20 S20	AC6020M AC6030M AC610M	MC7025 US7020	T6120 T9125	CA6525	HG8025	GC2025 GC1515	KCM25	TP2501 TP2500 TM2000		IC6015 IC6025 IC8350	TT5100 TT9225	
			M30	AC6030M AC630M AC8035P AC830P	MC7025 US735	T6130	CA6535	GM8035 GX30 GM25	GC2035 GC235	KCM35 KC9240	TP3500 TM4000		IC6025	TT9235	
			M40	AC6040M AC630M	US735				GC235 GC2035		TM4000			TT7800	
	K	K05	AC4010K AC405K	MC5005 UC5105 UC5115	T5105	CA310 CA4505 CA4010	HG3305 HX3505	GC3005 GC3205 GC3210	KCK05	TK1000 TK1001	WAK10 WKK10S	IC5005	TT7005 TT7505	CP1	
		K10	AC4010K AC4015K AC405K AC415K	MC5005 MC5015 MC5020 UC5105 UC5115	T515 T5105 T5115 T5125	CA315 CA4505 CA4515 CA4115	HX3305 HG3315 HX3515 HG8010 TH315 ATH10E	GC3005 GC3210 GC4305	KCK15	TK1000 TK1001	WAK10 WAK20 WKK10S WKK20S	IC5005 IC5010 IC5100	TT7015	CP1	
		K20	AC4015K AC415K AC420K AC425K	MC5015 UC5115 UE6110	T5125 T9125	CA320 CA4515 CA4120 CA4115	HX3315 HG3315 HG8025	GC3215 GC4325	KCK15 KCK20	TK2000 TK2001	WAK20 WAK30 WKK20S	IC5010 IC8150	TT7015		
	Milling	P	P10	ACP2000 ACP100	FH7020 F7030 MV1020	T3130 T3030			GC4220 GC4230 GC3040	KC930M KC935M	MP1500 MP2500	WKP25 WKP25S WPP35G WKP35S	IC4100 IC4050 IC520M DT7150 IC5400	TT7080 TT7515 TT9300	
			P20	ACP2000	F7030				GC2040 GC4240	KCPM20				TT7400	
			P30	ACP2000	F7030					KCPK30 KCMP30				TT7800	
M		S	M10	ACM100											
			M20	ACM200	F7030	T3130	CA6535	GX2160 AX2040	GC2040		MS2500	WKP35S		TT7800	
			M30		F7030					KC994M			IC5820	TT7800	
K		K10	ACK2000 ACK100 ACK200							KCK15			IC5100	TT7515	
		K20	ACK2000 ACK200	MV1020 MC5020 F5010 F5020	T1115	CA420M	GX2120	GC3330 GC3220 GC3225 GC3020 GC3040	KC915M KC930M KC935M	MK1500	WAK15 WKP25S	IC5100 DT7150 IC4010 IC4050 IC4100	TT6800 TT7080		

■ Coated Carbide (PVD)

Application	Class	Grade	Sumitomo Electric	Mitsubishi	Tungaloy	Kyocera	Mitsubishi-Hitachi	Sandvik	Kennametal	SECO Tools Japan	WALTER	ISCAR	Taegu Tec	NTK
Turning	P	P05	ACZ150		AH710 AH110	PR915 PR1005								
		P10	AC1030U ACZ150 AC5025S AC520U	VP15TF MS6015	AH120 AH725	PR930 PR1215 PR1225						IC807		TM1 VM4 DT4 DM4
		P20	AC1030U AC5025S AC520U AC530U	VP15TF VP20RT	AH120 AH725 AH3135	PR1225 PR1425	IP2000	GC15 GC1125	KCU25			IC807 IC808 IC810	TT9080	TM1 TM4 VM1 QM3 DM4
		P30	AC1030U AC530U	VP15TF VP20RT	AH120 AH725 SH730	PR1425 PR1525 PR1535	IP3000 CY250	GC1125				IC328 IC330 IC830 IC928	TT8020 TT8080 TT9080	QM3
		P40	AC1030U				PR660	IP3000	GC4335 GC4235				IC830	TT8020 TT8080

Grade Comparison Chart

Coated Carbide (PVD)

Application	Class	Grade	Sumitomo Electric	Mitsubishi	Tungaloy	Kyocera	Mitsubishi-Hitachi	Sandvik	Kennametal	SECO Tools Japan	WALTER	ISCAR	Taegu Tec	NTK	
Turning	M S	M10 S10	AC5015S AC5025S AC510U AC520U ACZ150	MP9005 MP9015 VP15TF VP05RT VP10RT	AH110 AH710 AH725 AH905 AH8005	PR005S PR015S PR915 PR1025 PR1215 PR1225 PR1305 PR1310	IP050S IP100S JP9105 JP9115	GC1105 GC1115	KC5510 KCU10	TS2000	WSM01 WSM10 WSM10S	IC807 IC808 IC907 IC908	TT5080 TT3010	TM1 VM1 DT4 DM4 ZM3 ST4	
		M20 S20	AC520U AC1030U AC5015S AC5025S	MP9015 MP9025 VP15TF VP20RT VP20MF UP20M	AH630 AH120 AH725 AH8015	PR015S PR915 PR930 PR1025 PR1125 PR1215 PR1225 PR1325	IP100S HS9115	GC15 GC1115 GC1125	KC5525 KCU25 KC5025	TS2500	WSM20 WSM20S	IC330 IC806 IC808 IC830 IC908 IC928	TT9080 TT9020 TT3020	DT4 DM4 ZM3 QM3 TM4 ST4	
		M30	AC5025S AC6040M AC520U AC530U AC1030U	MP7035 VP15TF VP20MF	AH630 AH645 AH725	PR1125 PR1525 PR1535		GC1125				WSM30 WSM30S	IC328 IC330 IC830 IC840 IC882	TT8020 TT8080 TT9080	QM3 TM4 DT4 DM4
		M40	AC6040M AC530U AC1030U	MP7035 VP15TF MS6015	AH645	PR1125 PR1535	GX30						IC830 IC928	TT8020 TT8080	
	K	K10	ACZ150 AC1030U AC510U	VP10RT	AH110 AH120	PR905	HX3305 HG3305 HG3315 HX3515 HG8010 TH315 ATH10E		GC15				IC810	TT6080	
		K20	ACZ150 AC1030U AC510U AC530U	VP10RT VP20RT VP15TF	AH120	PR905								TT6080	DM4 QM3
		K30	AC1030U AC530U	VP15TF VP20RT	AH110 AH120 AH725								IC830 IC908 IC910 IC928		
	Milling	P	P10	ACU2500 ACP200	VP15TF MP6120	AH120 AH725	PR930 PR1225	PN215 PN15M JP4005 JP4105 JP4115 JP4120 GX2140		KC715M	T250M T350M F25M		IC807 IC903	TT2510 TT7080	TM1 DT4 DM4
			P20	ACP3000 ACU2500 ACP200 ACP300	VP15TF VP20RT MP6120 MP6130	AH9030 AH120 AH725 AH3135	PR1525 PR1225 PR1230 PR830	JP4020 JP4120 JS4045	GC1010 GC1025		MP3000 F30M	WSM20 WSM20S	IC807 IC808 IC810 IC380 IC330	TT7080 TT9030 TT9080	TM1 TM4 DT4 DM4
			P30	ACP3000 ACU2500 ACP200 ACP300	VP15TF VP30RT MP6130	AH3035 AH3135 AH120 AH130 AH140 AH725	PR1525 PR1535 PR1230	JD4045 JS4060 JX1045 JX1060 CY150 CY250 PTH30E	GC1030 GC1130 GC2030	KC725M KC730M KC735M KC7140 KCU40	MM4500 F40M	WSM35 WSP45 WSP45S	IC328 IC330 IC380 IC830 IC928	TT8080 TT8020	DM4 TM4 ZM3
P40			ACP3000 ACU2500 ACP300	VP30RT	AH140		JS4060 JM4160 PTH40H						IC830	TT8020 TT8080	
M		M10 S10	ACM100 ACU2500 ACK300 ACP300	MP9120 VP15TF VP10RT	AH110 AH120 AH330 AH725	PR1025 PR1225	JX1020 CY9020 JP4020 JP4120 PN08M PN215	GC1025 GC1030 GC1130	KC522M				IC807 IC808 IC903 IC907 IC908		TM1 DT4 DM4 ZM3
		M20	ACM300 ACU2500 ACP300	MP7130 MP9120 MP9130 UP20M VP15TF VP20RT	AH120 AH130 AH725 AH3135 AH6030	PR1025 PR1225 PR1525	JP4120 JS1025 JX1015 CY150 CY15		KC730M KC525M	F25M F30M T350M	WSM35 WSM35S WXM35	IC330 IC808 IC830 IC840 IC882 IC908 IC928	TT9080 TT9030	DT4 DM4 ZM3	
		M30	ACM300	MP7130 MP7140 MP9130 VP15TF	AH130 AH140 AH330 AH725 AH3135	PR1525 PR1535	JX045 JM4160 PTH30E	GC2030 GC1040	KC725M KC7140 KCU40	F30M F40M MM4500	WSM35 WSM35S WXM35	IC328 IC330 IC830 IC840 IC882	TT8020 TT8080 TT9080	DT4 DM4 ZM3	
		M40	ACM300	MP7140 VP15TF VP30RT	AH140	PR1535	GX30 JM4160 PTH40H						IC830 IC928	TT8020 TT8080	
K		K05	ACK3000		AH110		TH303 TH308 ATH80D								
		K10	ACK3000 ACU2500		AH110 AH120	PR905 PR1210							IC810	TT6080 TT7080	
	K20	ACK3000 ACU2500 ACK300	VP20RT VP15TF	AH120 AH9030	PR905 PR1210 PR1510	JP4020 JP4120 PTH13S	K15W K20D K20W		MK3000 T150M	WKK25	IC808 IC810 IC830	TT6080 TT7515	DM4		
	K30	ACK3000 ACU2500 ACK300	VP15TF VP20RT	AH725 AH110 AH120 AH330 GH110 GH130	PR1510 PR1210	JS4045 JX1045 CY150 CY250	GC1010 GC1020 GC1025 GC1030 GC1130	KC510M KC520M KC525M KCU40	MK2050 MH1000			IC830 IC810 IC908 IC910 IC928 IC950	TT6080		

Grade Comparison Chart

■ Cermet

Applica-tion	Class	Sumitomo Electric	Mitsubishi	Tungaloy	Kyocera	Mitsubishi-Hitachi	Sandvik	Kennametal	Dijet	Valenite	SECO Tools Japan	WALTER	ISCAR
Turning	P	P10	T1500Z* T1000A T1500A	AP25N* NX2525 NX3035 VP25N*	GT720* GT9530* J9530* NS520	TN30 PV30* TN60 TN6010 TN610 PV710 PV7005* PV7010*	CZ25* CH550	CT5015	KT125 HTX KT1120	LN10 CX50	VC605		IC20N IC30N IC520N
		P20	T1500Z* T3000Z* T1500A T2500A	AP25N* NX2525 NX3035 MP3025*	NS530 GT530* NS730 AT9530* NS9530 GT9530* GT730*	TN60 TN6020 TN620 PV60* TN90 PV7020* PV7025* PV720	CZ25* CH550	GC1525*	KT6215 KT315* KT175 KT5020*	CX50 CX75	VC610	CM CMP C15M TP1020	IC20N IC30N IC520N IC530N
		P30	T2500A T3000Z*	MX2525 MP3025* VP45N	NS9530 GT9530* AT9530*	TN620 PV7025* PV90* PV720					CX90 CX99		
Milling	P	P30	T2500A T250A T4500A	NX2525 MX3030 NX4545 VP45N*	NS540 NS740	TN90 TC60M TN100M	MZ1000* MZ2000* MZ3000* CH7030 CH7035	CT530	KT530M* KTPK20*	CX90	VC630	C15M	IC30N
		K10	T1000A	AP25N* VP25N* NX2525	GT720* GT9530* NS9530 J9530* NS520	TN30 PV30* TN610 TN6010 PV710 PV7005* PV7010*	CH550	CT5015	KT125 HTX	LN10 CX50	VC605		

* denotes coated cermet

■ Uncoated Carbide

Class	Grade	Sumitomo Electric	Mitsubishi	Tungaloy	Kyocera	Hitachi	Sandvik	Kennametal	Dijet	SECO Tools Japan	ISCAR
P	P10	ST10P		TH10		WS10	S1P		SRT		
	P20	ST20E	UTi20T	KS20		EX35	SMA	K125M	SRT		IC70 IC50M
	P30	A30 A30N	UTi20T	KS15F UX30	PW30	EX35 EX40	SM30		DX30		IC54 IC28
	P40	ST40E		TX40		EX45	S6		SR30		IC54 IC28
M	M10	EH510		TH10		EX35 WA10B	H10A	KU10 K313 K68 KYSM10	UMN	890	IC07 IC08 IC20
	M20	EH520	UTi20T	KS20		EX35	H13A	K313 K68	DX25 UMS	HX 883	IC07 IC08 IC20
	M30	A30 A30N	UTi20T	UX30			H10F SM30		UMS UM40		IC28
K	K01	H2 H1	HTi05T	KS05F		WH01 WH05		KU10 K68 K313 K115M	KG03		IS8
	K10	H1 EH510	HTi10	TH10	KW10 GW15	WH10	H13A	KU10 K313 K68 K115M K110M KY3500	KG10 KT9 CR1	890	IC20 IS8
	K20	G10E EH520	UTi20T	KS15F KS20	GW25	WH20	H13A	KMF KY3500 KYHS10	KT9 KG20 CR1	890 883 HX	IC20 IS8
	K30	G10E	UTi20T			WH30		KY3500	KG30	883	
S	S10 S20	EH510 EH520	RT9005 RT9010 MT9015 TF15	TH10 KS05F KS15F KS20	SW05 SW10 SW25 KW10 GW15	WH10	H10A H10F H13A	KU10 K313 K68 KMF K110M K1025 KYHS10	KG10 KG20	HX H25	IC20 IC07 IC08 IC28
	Fine-grained Carbide	A1		UM		NM25	N6F H10F		FZ20 FB20	883	IC08

Grade Comparison Chart

■ CBN

Class	Grade	Sumitomo Electric	Mitsubishi	Tungaloy	Kyocera	NGK	Sandvik	Kennametal	Dijet	SECO Tools Japan	
K	K01	NCB100 BNC500 BN7000	MB710 MB5015	BX930 BX870 BX910	KBN475 KBN60M	B30 B16	CB7525 CB7925	KB1340	JBN795		
	K10	BN700 BN7000 BN7500	MB710 MB730 MB5015	BX470 BX480 BX950	KBN65B KBN60M KBN900	B23 B16	CB7925 CB7525		JBN330	CBN200, CBN300 CBN300P, CBN400C	
	K20	BN700 BN7000 BNS800	MB730 MBS140 BC5030	BX470 BX480 BXC90 BX90S	KBN900						
	K30	BNS800	MBS140	BX90S BXC90					KB5630		CBN500
S	S01	NCB100 BN700 BN7000	MB730 MB4020 MB4120	BX950 BX470 BX480					KB5630 KB1340		
H	H01	BNC2010 BNC100 BN1000 BN2000 BNX10	BC8105 BC8110 MBC010 MB810 MB8110	BXM10 BX310	KBN05M KBN25M KBN510	B5K B52			KB5610		CH0550 CBN10 CBN100 CBN60K
	H10	BNC2010 BNC2020 BNC160 BNC200 BN2000	BC8110 BC8120 MBC020 MB8025 MB825	BXM10 BX330 BX530	KBN05M KBN25M KBN525	B5K B6K B52 B36	CB7015 CB7115 CB20	KBH20 KB5610 KB5625	JBN300		CBN10, CBN150 CBN100, CBN60K CBN160C
	H20	BNC2020 BNC200 BNX20	BC8120 BC8020 MBC020 MB825	BXA20 BXM20 BX360	KBN30M KBN35M KBN900	B36 B40 B6K	CB7025 CB7125 CB50	KBH20 KB5625 KB5630	JBN245		CH2540 CBN150 CBN160C
	H30	BNC300 BN350 BNX25	MB835 MB8130 BC8130	BXM20 BXA20 BXC50 BX380	KBN30M KBN35M KBN900	B40	CB7525 CB7135	KB5630			CH3515

■ PCD

Class	Grade	Sumitomo Electric	Mitsubishi	Tungaloy	Kyocera	Sandvik	Kennametal	Dijet	SECO Tools Japan
N	N01	DA90 DA1000	MD205	DX180 DX160	KPD001	CD05 CD10	KD1400	JDA30 JDA735	
	N10	DA150 DA1000	MD205 MD220	DX140	KPD001 KPD010 KPD230	CD1810	KD1400 KD1425		PCD05 PCD10
	N20	DA1000 DA2200	MD220 MD230	DX120 DX110	KPD230		KD1400 KD1425	JDA10 JDA715	PCD05 PCD20
	N30	DA1000 DA2200	MD2030 MD230	DX110			KD1400		PCD05 PCD30 PCD30M

Indexable Inserts for Turning

Negative / Positive Inserts

C1–C94



Inserts

C

D

K

R

S

T

V

W

	ISO Inserts Identification Table.....	C2–3	
Chipbreaker for Low Carbon and General Steel Turning	NFE / NFB.....	C4	
Chipbreaker for Hardened Steel Turning	NGH.....	C5	
Chipbreaker for Exotic Alloys and Stainless Steel Turning	NEG / NEF.....	C6–7	
Chipbreaker for Stainless Steel Turning	NEM.....	C8	
Positive M Class Chipbreaker	NFB / NLB.....	C9	
Chipbreaker for Steel Turning	(M) NSI.....	C10	
Comparison Chart	Chipbreaker.....	C11	
Selection	Chipbreaker Application Table.....	C12–17	
Negative Inserts	C / 80° Diamond Type (With Hole).....	C18–26	
	D / 55° Diamond Type (With Hole).....	C27–34	
	S / Square Type (With Hole).....	C35–42	
	S / Square Type (Without Hole).....	C43	
	T / Triangle Type (With Hole).....	C44–52	
	T-REX Insert.....	C50	
	V / 35° Diamond Type (With Hole).....	C53–55	
	W / Polygon Type (With Hole).....	C56–60	
Positive Inserts	C / 80° Diamond Type (With Hole).....	C61–67	
	D / 55° Diamond Type (With Hole).....	C68–71	
	R / Round Type (With Hole).....	C72	
	S / Square Type (With Hole).....	C73–76	
	S / Square Type (Without Hole).....	C77	
	T / Triangle Type (With Hole).....	C78–85	
	T / Triangle Type (Without Hole).....	C86–87	
	V / 35° Diamond Type (With Hole).....	C88–91	
	W / Polygon Type (With Hole).....	C92–93	

Stock marking chart

- : Euro stock item
- : Japan stock item
- ▲ : To be replaced by new item

☐ : We cannot produce

Note:

Stocking policy may change without prior notice, please consult our sales representative for actual stock situation.

Inserts Identification Table

Inserts
C
D
K
R
S
T
V
W

C **N** **M** **G**

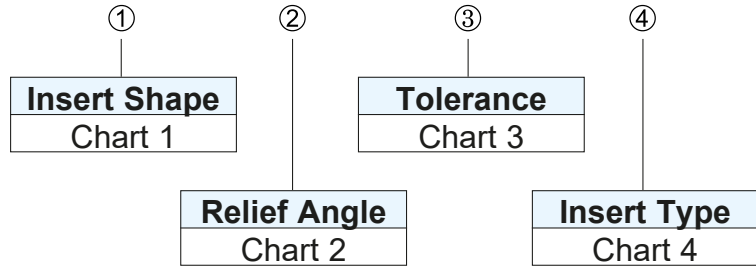


Chart 1: Insert Shape

Symbol	Insert Shape	Angle
C		80°
D		55°
E		75°
F		50°
V		35°
R		Round
S		Square
T		Triangle
W		Trigon
A		85°
B		82°
K		55°
H		Hexagonal
O		Octagonal
P		Pentagonal
L		Rectangular
M		Rhombic

Chart 2: Relief Angle

Symbol	Relief Angle
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P*	11°
O	Others

* Inserts with a 10° relief angle are sometimes considered as "P"

Chart 3: Tolerance (mm)

Symbol	Nose Height	Inscribed Circle	Thickness
A	± 0,005	± 0,025	± 0,025
F	± 0,005	± 0,013	± 0,025
C	± 0,013	± 0,025	± 0,025
H	± 0,013	± 0,013	± 0,025
E	± 0,025	± 0,025	± 0,025
G	± 0,025	± 0,025	± 0,13
J*	± 0,005	±0,05 – ±0,15	± 0,025
K*	± 0,013	±0,05 – ±0,15	± 0,025
L*	± 0,025	±0,05 – ±0,15	± 0,025
M*	±0,08 – ±0,2	±0,05 – ±0,15	± 0,13
N*	±0,08 – ±0,2	±0,05 – ±0,15	± 0,025
U*	±0,13 – ±0,38	±0,08 – ±0,25	± 0,13

The height "m" on sharp corner.

Chart 4: Insert Hole or Breaker

Symbol	Hole	Hole Style	Chip Breaker	Shape	Symbol	Hole	Hole Style	Chip Breaker	Shape
N	No Hole	—	Nil		A	With Hole	Straight Hole	Nil	
R			One Face		M			One Face	
F			Both Faces		G			Both Faces	
W	With Hole	Straight hole with top end counter-sink (40°-60°)	Nil		B	With Hole	Straight hole with top end counter-sink (70°-90°)	Nil	
T			One Face		H			One Face	
Q	With Hole	Straight hole with top end counter-sink (40°-60°)	Nil		C	With Hole	Straight hole with top end counter-sink (70°-90°)	Nil	
U			Both Faces		J			Both Faces	
					X	—	—	—	Special

● **Tolerance of Nose Height (M-Class)**


Inscribed Circle	Triangle	Square	80° Diamond	55° Diamond	35° Diamond	Round
6,35	± 0,08	± 0,08	± 0,08	± 0,11	—	—
9,525	± 0,08	± 0,08	± 0,08	± 0,11	± 0,16	—
12,70	± 0,13	± 0,13	± 0,13	± 0,15	—	—
15,875	± 0,15	± 0,15	± 0,15	± 0,18	—	—
19,05	± 0,15	± 0,15	± 0,15	± 0,18	—	—
25,40	± 0,18	± 0,18	± 0,18	—	—	—
31,75	—	± 0,20	—	—	—	—

● **Tolerance of Inscribed Circle (M-Class)**

Inscribed Circle	Triangle	Square	80° Diamond	55° Diamond	35° Diamond	Round
6,35	± 0,05	± 0,05	± 0,05	± 0,05	—	—
9,525	± 0,05	± 0,05	± 0,05	± 0,05	± 0,05	± 0,05
12,70	± 0,08	± 0,08	± 0,08	± 0,08	—	± 0,08
15,875	± 0,10	± 0,10	± 0,10	± 0,10	—	± 0,10
19,05	± 0,10	± 0,10	± 0,10	± 0,10	—	± 0,10
25,40	± 0,13	± 0,13	± 0,13	—	—	± 0,10
31,75	—	± 0,15	—	—	—	± 0,12

Inserts Identification Table

12 04 08 N - GE

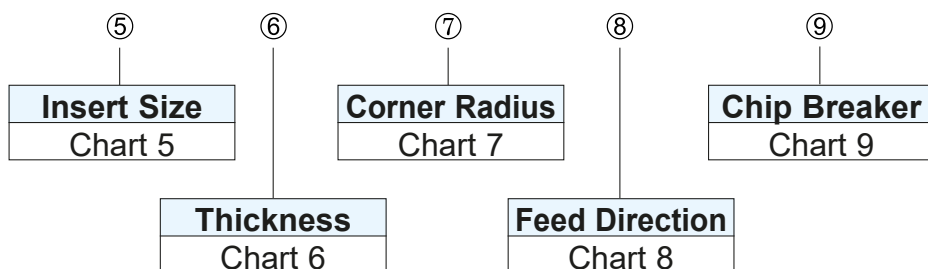

Picture of insert shown as example
(ISO Cat, No.)



Inserts

Chart 5: Cutting Edge Length (mm)

Shape	Symbol	Cutting Edge	Inscribed Circle	Shape	Symbol	Cutting Edge	Inscribed Circle	Shape	Symbol	Cutting Edge	Inscribed Circle	
C	03	3,55	3,50	D	07	7,7	6,35	W	03	3,8	5,56	
	04	4,97	4,30		09	9,7	7,94		04	4,3	6,35	
	06	6,4	6,35		11	11,6	9,525		05	5,4	7,94	
	08	8,0	7,94		15	15,5	12,70		06	6,5	9,525	
	09	9,7	9,525		19	19,4	15,875		08	8,7	12,70	
	12	12,9	12,70	V	08	8,3	4,76		10	10,9	15,875	
	16	16,1	15,875		09	9,7	5,56		R	08	8,0	8,0
	19	19,3	19,05		11	11,1	6,35			10	10,0	10,0
	25	25,8	25,4		16	16,6	9,525			12	12,0	12,0
					22	22,1	12,7			15	15,875	15,875
						16	16,0	16,0				
S	06	6,35	6,35	T	06	6,9	3,97	19	19,05	19,05		
	S7	7,14	7,14		08	8,2	4,76	20	20,0	20,0		
	07	7,94	7,94		09	9,6	5,56	24	24,0	24,0		
	09	9,525	9,525		11	11,0	6,35	25	25,0	25,0		
	12	12,70	12,70		13	13,7	7,94	25	25,40	25,40		
	15	15,875	15,875		16	16,5	9,525	32	32,0	32,0		
	19	19,05	19,05		22	22,0	12,70					
	25	25,40	25,40		27	27,5	15,875					
	31	31,75	31,75		33	33,0	19,05					

Chart 6: Thickness

Symbol	Thickness (mm)
X1	*
01	1,59
02	2,38
T2	2,78
03	3,18
T3	3,97
04	4,76
05	5,56
06	6,35
07	7,94
09	9,52

(*):
CCET03X1 Insert thickness: 1,40
CCET04X1 Insert thickness: 1,80

Chart 7: Nose Radius

Symbol	Nose Radius (mm)
00	Sharp Point
003	0,03
008	0,08
01	0,1
015	0,15
018	0,18
02	0,2
0,35	0,35
04	0,4
08	0,8
10	1,0
12	1,2
16	1,6
20	2,0
24	2,4
32	3,2
M0	Round Insert (Metric)
00	Round Insert (Imperial)

An "M" after the nose radius indicates a negative tolerance
Example:
CCG T09T302 M NSI AC520U

Chart 8: Feed Direction

Symbol	Direction
R	Right-hand
L	Left-hand
N	Neutral

Chart 9: Chip Breaker

Symbol	Process	Bumpy Type	Standard	Handed
F	Fine Finishing to Finishing	FA, FL, FE, FB, FC FK, FP		FT, FX, FZ FY, FW
S	Light Cut	SE, SEW, SI, SC, SF, SP, SU, SX		SD SDW ST
L		LU, LUW, LB		
G	General	GE, GU, GUW	GZ	UM
U		UG, UP US, UX	UZ	
M	Rough	MP, MU, MX, ME	MC	MM HM
H	Heavy	HG, HP, HF	HU HW	

Other Specials	
Wide Chipbreaker	W
For Countersink	C
For Round insert	RD, RP, RX, RH
For Exotic Alloy	EF, EG, EX, EM
For Aluminium	AG, LD, GD,
For Hardened Steel	FV, LV, GH
For Carburized Layer Removal	SV
For Stainless Steel	EF, EG, EM

C

D

K

R

S

T

V

W

Chipbreaker NFE Type / NFB Type


Negative M Class Chipbreakers for Low Carbon and General Steel Turning



General Features

The high performance NFE type, which ensures stable chip control in a wide range of feed rate, has been added to the chipbreaker series for low carbon steel and general steel turning. Extensive product lines are available to meet various machining requirements. A positive insert execution of chipbreaker NFB is also available.

Application Range

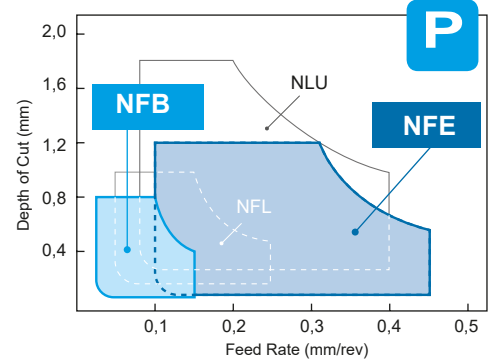



NFE Chipbreaker for Finishing

Supports general purpose machining to high speed machining.

The arc-shaped main breaker ensures stable chip control in a wide feed rate range.

The two step chipbreakers enable stable chip control at a low feed rate of $f = 0,1$ mm/rev.

The sub-breaker controls cutting chips in profiling.




Performance

Work Material: Pipe steel (H240LA, 1.0480)
Insert: CNMG 120408 NFE (AC8025P)
Cutting Conditions: $v_c=200$ m/min, $f=0,4$ mm/rev, $a_p=0,2$ mm, dry

Excellent chip control under low depth of cut and high feed rate condition



NFE Type (AC8025P)



Conventional

Application Examples

Work Material: Deep-draw steel (SPHC440)
Facing Insert: CNMG 120408 NFE (AC8025P)
Cutting Conditions: $v_c = 200$ m/min, $f = 0,15$ mm/rev, $a_p = 0,2-0,5$ mm, wet

Stable chip curling and breaking in facing of gummy steel.



NFE Type (AC8025P)

Competitor

Work Material: C53E, 1.1210, Ø20-100
Exter. Turning+Facing Ins.: DNMG 150412 NFE (AC8025P)
Cutting Conditions: $v_c=180$ m/min, $f=0,25$ mm/rev (radius), 0,45mm/rev (straight section), $a_p = 0,3$ mm, wet

Stable chip control even at a variable feed rate in shallow cutting.



NFE Type (AC8025P)




Conventional

NFB Chipbreaker for Low Feed Finishing

Supports low feed machining.

Smooth chipbreaker geometry with a high rake reduces cutting resistance.

The variable rake angle in nose radius makes effective strain on chips and improves the breaking performance.



Application Example

Work Material: Pipe steel (STKM13C)
Internal Turning Insert: DNMG 150404 NFB (T3000Z)
Cutting Conditions: $v_c=352$ m/min, $f=0,03-0,2$ mm/rev $a_p=0,7$ mm, Wet

Small chip curling and control



NFB Type (T3000Z)



Competitor



General Features

Enables medium roughing of hardened steel in combination with coating and grade AC503U.


Reduces heat generation and enables deep cutting ($a_p = 1-3$ mm) of hardened steel by using a wide neutral ground chipbreaker (rake angle: 4°) and sharp edge.

Discharges chips smoothly.



Negative Insert for Rough Cutting NGH Type Chipbreaker

Performance

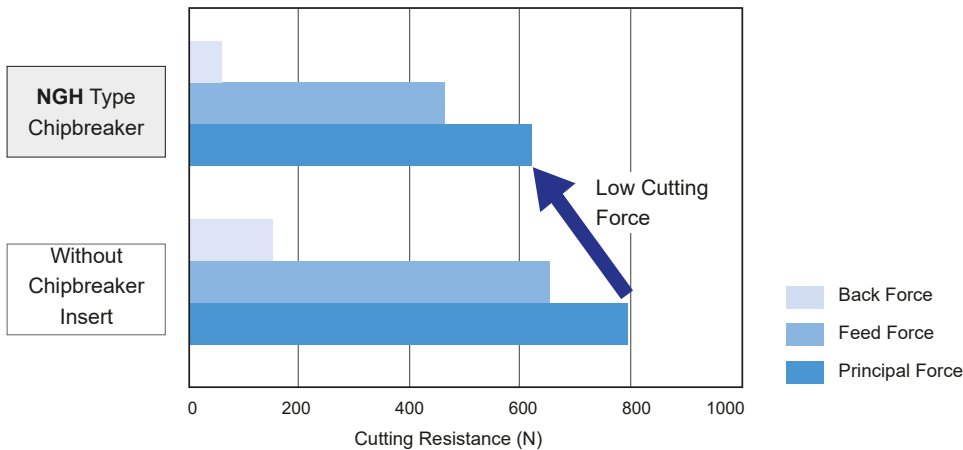

Application Examples



Work Material: X155CrVMo12-1 (61HRC)
 Insert: TNGG 160404 NGH (AC503U)
 Cutting Conditions: $v_c = 50$ m/min, $f = 0,05$ mm/rev, $a_p = 3,0$ mm, dry

Recommended Cutting Conditions

Application Range	Cutting Speed v_c (m/min)	Feed Rate f (mm/rev)	Depth of Cut a_p (mm)	Recommended Chipbreaker
Finishing	40-100	0,02-0,10	<1	Without chipbreaker
Medium Roughing	20-60	0,02-0,05	1-3	NGH Type

Work Material: Hardened steel (50-62 HRC), X155CrVMo12-1, X40CrVMo5-1, S6-5-2, High-speed powder and high speed steel


Chipbreaker NEG Type / NEF Type

For Exotic Alloys and Stainless Steel Turning

General Features

NEG/NEF type chipbreaker for exotic alloy machining can be used for Titanium alloys, heat-resistant alloys and a variety of other exotic alloys. They deliver excellent wear resistance and superior chip management. These chipbreakers can solve quality problems caused by the unstable tool life and poor chip control provided by conventional chipbreakers for exotic alloys.

Application Range

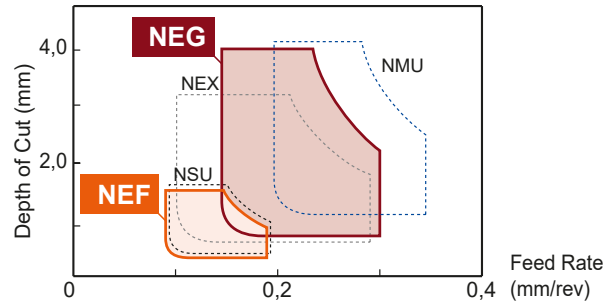


NEG Chipbreaker for Roughing

Provides excellent wear resistance and chip control from general-purpose machining to roughing applications. Reduces damage to insert and eliminates trouble from chips specific to exotic alloys. Also demonstrates very high versatility.


Crater wear advancement is prevented by the round bumps, whilst maintaining excellent control.

The cutting edge maintains the strength slowing the progress of crater wear.

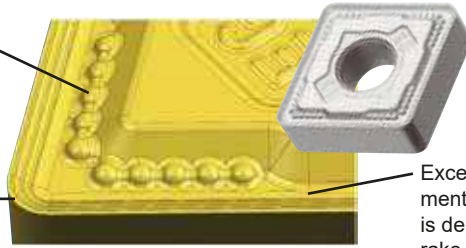

Excellent chip management and wear prevention is delivered by the special rake face design.

Cross Section of Chipbreaker



Cutting Performance – NEG Type

Heat Resistant Alloy

Chipbreaker type: NEG (AC510U)



Suppresses the chipping of peripheral cutting edge and notch wear. Excellent chip management.

Work Material: Inconel 718

Insert: CNMG120412

Cutting Data:
 $v_c = 40$ m/min
 $a_p = 2,5$ mm
 $f = 0,2$ mm/rev
wet
 $T_c = 7$ min

Conventional tool (S10)



Notch wear / poor chip control

Titanium Alloy

Chipbreaker type: NEG (AC510U)




Suppresses crater wear and flank wear. Excellent chip management.

Work Material: Ti-6Al-4V

Insert: CNMG120412

Cutting Data:
 $v_c = 65$ m/min
 $a_p = 2,5$ mm
 $f = 0,2$ mm/rev
wet
 $T_c = 8$ min


Conventional tool (S10)

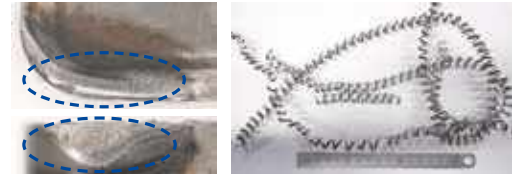

Crater wear / flank wear / poor chip control


Application Example – NEG Type

Inconel 718, machine component

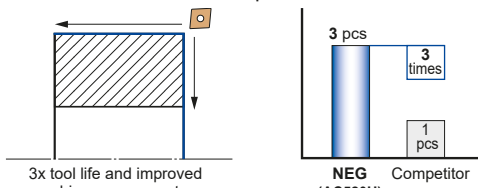

Insert: CNMG120408 NEG (AC520U)
Cutting Data: $v_c = 50$ m/min, $a_p = 1,5$ mm, $f = 0,3$ mm/rev, wet

Pure Titanium (Ti grade 3), machine component


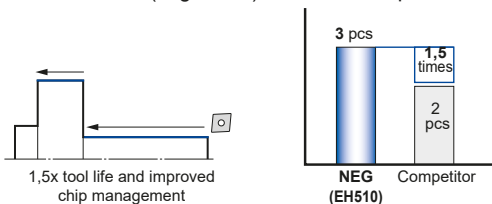


Insert: CNMG120408 NEG (EH510)
Cutting Data: $v_c = 80-100$ m/min, $a_p = 1,0$ mm, $f = 0,25$ mm/rev, wet

Chipbreaker NEG Type / NEF Type

For Exotic Alloys and Stainless Steel Turning

Material Application Range

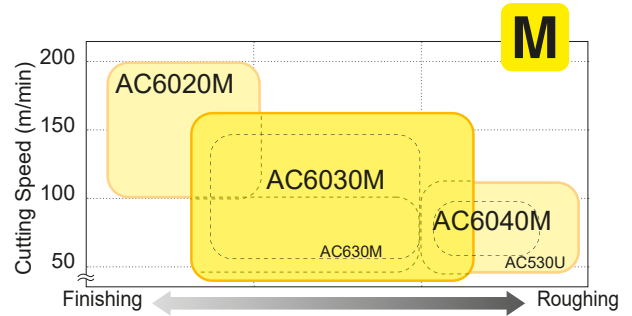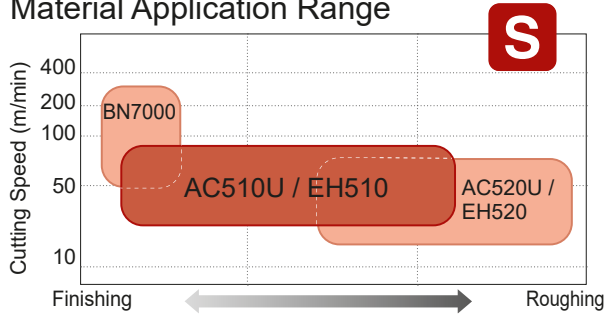


NEF Chipbreaker for Finishing

The NEF chipbreaker reduces chip curl diameter in finishing applications. Provides extremely good chip management not fluctuated by the material in use.


Main chipbreaker that enables good chip control even at low depths of cut.

Sharp edge with 20° rake angle reduces wear.

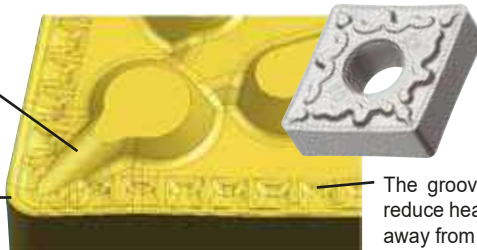

The grooves on the rake face reduce heat and assist chip flow away from the workpiece.

Cross Section of Chipbreaker



Cutting Performance – NEF Type

Heat Resistant Alloy

Chipbreaker type: NEF (AC510U)



Improvements in chip control and chip removal management based on small curled chips.

Work Material: Inconel 718

Insert: CNMG120408

Cutting Data:
 $v_c = 55$ m/min
 $a_p = 0,3$ mm
 $f = 0,15$ mm/rev
 wet
 $T_c = 8$ min

Conventional tool (S10)



Competitor's product (S10)



There is a problem in the length and the diameter of chips.

Titanium Alloy

Chipbreaker type: NEF (AC510U)




Improvements in chip control and chip removal management based on small curled chips.

Work Material: Ti-6Al-4V

Insert: CNMG120408

Cutting Data:
 $v_c = 80$ m/min
 $a_p = 0,5$ mm
 $f = 0,2$ mm/rev
 wet
 $T_c = 25$ min

Conventional tool (S10)




Competitor's product (S10)



There is a problem in the length and the diameter of chips.

Application Example – NEF Type

Inconel 718, shaft component



Great improvement in chip management. Keeps workpieces free of damage. It is possible to omit final polishing process.




NEF (AC510U)



Conventional tool

Insert: CNMG120408 NEF (AC510U)
 Cutting Data: $v_c = 45$ m/min, $a_p = 0,25$ mm, $f = 0,1$ mm/rev, wet

Duplex stainless steel cover



Improvements in chip management. Suppress damage to finished surface with no entanglement of chips.



NEF (AC510U)





Conventional tool

Insert: CNMG120408 NEF (AC510U)
 Cutting Data: $v_c = 55$ m/min, $a_p = 0,3$ mm, $f = 0,125$ mm/rev, wet

Chipbreaker NEM Type

Chipbreaker for Stainless Steel Turning

Application Range

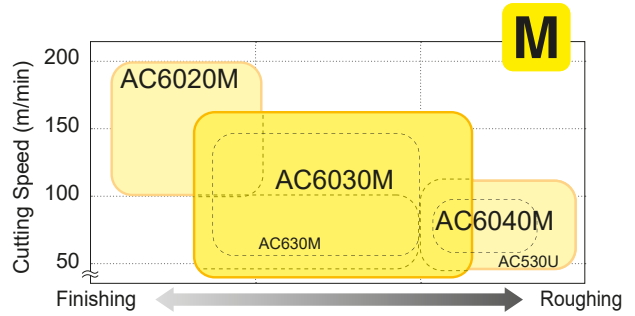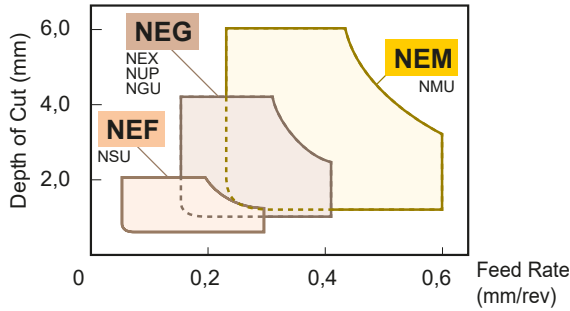

NEM Chipbreaker for Rough Cutting

The NEM chipbreaker achieves excellent fracture and crater resistance and ensures extremely stable machining.

Large radius rake face design that reduces crater wear while maintaining the cutting edge strength.







Bright colors for easy identification of used cutting edge.

Reduces boundary damage by eliminating changing points from the cutting edge.

Reduction of Damage

	Reduction of Boundary Damage		Reduction of Crater Wear	
	Cutting Edge	Boundary Wear Comparison	Cross Section	Crater Wear Comparison
Conventional Geometry				
NEM Type				
	The NEM chipbreaker has no changing points on the cutting edge, so boundary damage is reduced.		The NEM chipbreaker smoothly evacuates chips thanks to its large radius rake face design, so crater wear is reduced.	

Application Example



Reduces breakage out of the cutting edge and ensures stable machining.

Reduces crater wear and provides long tool life.


Work Material: X5CrMo17 12 2
Insert: SNMG190616NEM (AC6030M)
Cutting Conditions: $v_c = 70$ m/min, $f = 0,5$ mm/rev, $a_p = 3,0-8,0$ mm, wet

Work Material: X5CrNiS18 10
Insert: SNMG120408NEM (AC6030M)
Cutting Conditions: $v_c = 100$ m/min, $f = 0,32$ mm/rev, $a_p = 2,0-2,5$ mm, wet

Positive M Class Chipbreakers for Low Carbon and General Steel Turning


Chipbreaker NFB Type / NLB Type

Application Range

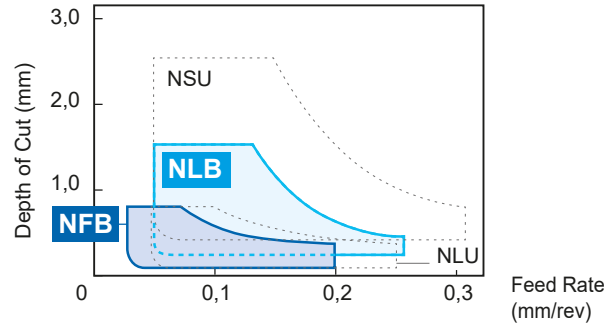


NFB Chipbreaker for Finishing

The NFB type for finishing and the NLB type for light cutting have been added to the chipbreaker series for low carbon and general steel machining in addition to the already present NLU type for finishing and NSU type for light cutting. The NFB and NLB type chipbreakers improve chip control in finishing of low carbon and general steel.

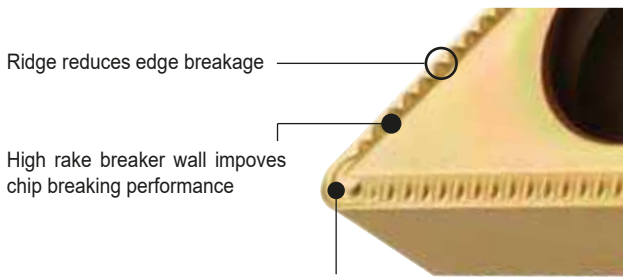


Variable rake angle in nose radius increases chip strain and improves chip breaking performance




Cross Section of Chipbreaker

NLB Chipbreaker for Light Cutting

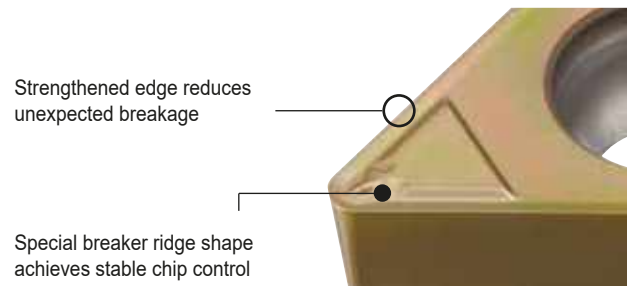

Special breaker ridge shape achieves stable chip control




Cross Section of Chipbreaker

Performance

Chip Control

Achieves stable chip control at small cutting depth and low feed.




NFB Type Chipbreaker (T1500A)



Competitor's Product

Work Material: Pipe (H240LA), Ø 30 Boring
Insert: TPMT 110304 NFB (T1500A)
Cutting Conditions: $v_c = 100$ m/min, $f = 0,12$ mm/rev, $a_p = 0,1$ mm, wet

Comparison of Surface Roughness of Finished Surfaces



NFB Type Chipbreaker (T1500A)



Competitor's Product

Work Material: Pipe (H240LA), Ø 100 Boring
Insert: TPMT 110304 NFB (T1500A)
Cutting Conditions: $v_c = 200$ m/min, $f = 0,07$ mm/rev, $a_p = 0,1$ mm, wet

Performance

Chip Control ①

Achieves stable chip control in light cutting.




NLB Type Chipbreaker (T1500A)



Competitor's Product

Work Material: Pipe (H240LA), Ø 30 Boring
Insert: TPMT 110304 NLB (T1500A)
Cutting Conditions: $v_c = 200$ m/min, $f = 0,15$ mm/rev, $a_p = 0,5$ mm, wet

Chip Control ②



NLB Type Chipbreaker (T1500A)



Competitor's Product



Doubles the tool life by improving chip control and reducing blemishes on machined surfaces.


Work Material: Hub (C45)
Insert: VBMT 160408 NLB (T1500A)
Cutting Conditions: $v_c = 240$ m/min, $f = 0,25-0,28$ mm/rev, $a_p = 0,6$ mm, wet

Chipbreaker for Steel Turning (M)NSI Type


Nose radius with minus tolerance (M)

Example: DCGT 11T304M NSI



Application Range

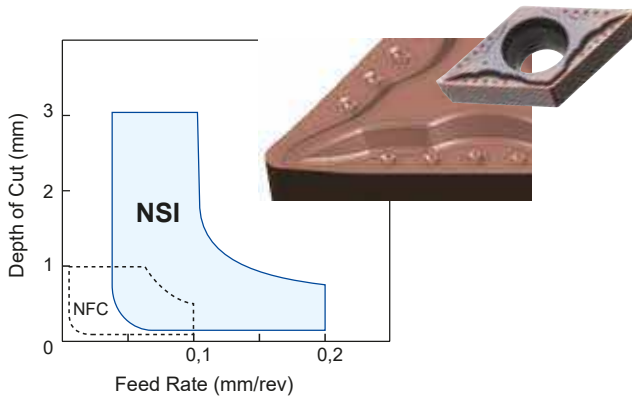


Cutting Performance

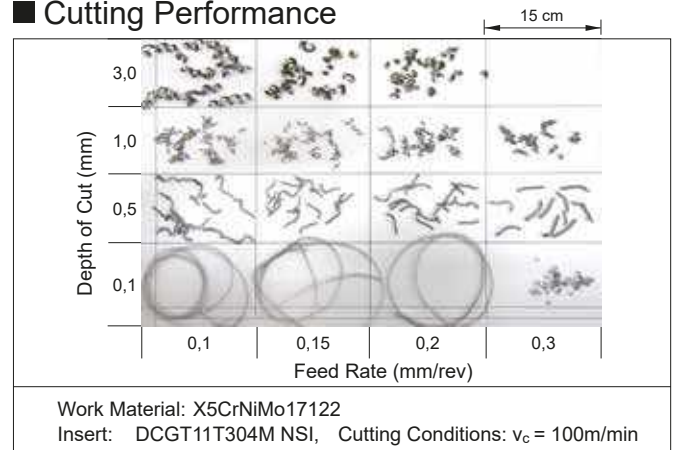

Application Examples

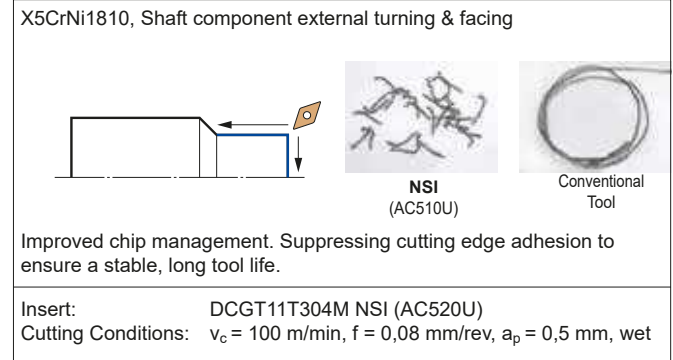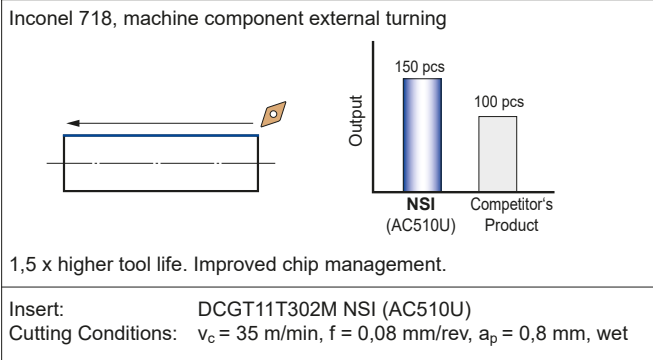

- Sharp designed cutting edge with low-cutting force
- Better chip control in wide range DOC for bar feeder machine
- Combination of high rake edge design and G-class precision offers superior cutting performance
- Suitable for medical parts and high precision machining

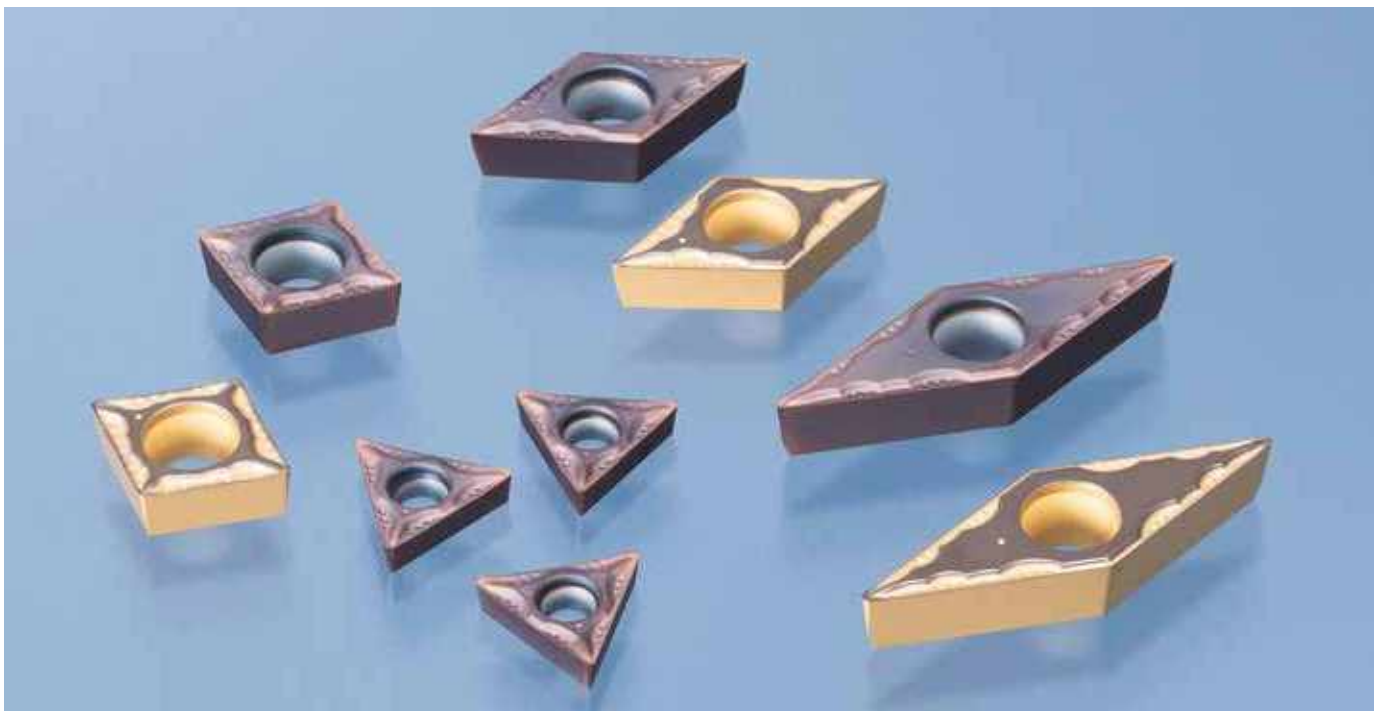

Inserts
C
D
K
R
S
T
V
W

Chipbreaker Comparison

■ Negative Type

Class	Application	Sumitomo Electric	Mitsubishi	Tungaloy	Kyocera	Mitsub.-Hitachi	Sandvik	Kennametal	SECO Tools	WALTER	ISCAR
P	Fine Finishing	FA	FH	TF	GP		QF	FF	FF1		SF
		FL, FB	FS,FY	NS,ZF	XP,XF,VF	FE			FF2	FP5	
	Finishing	LU, FE	SA,SY	NM, SS	XQ,CQ,PP	BE	LC	FN		NF3	
		SU	SH	TS,TSF,11	HQ	CE,B,BH	XF,MF	CT	MF2		NF,TF
	Wiper Edge	LUW		AFW, FW	WP		WL,WP		W-FF2		
		SEW	SW	ASW, SW	WQ		WF,WMX	FW	W-MF2	NF	WF
	Finishing to Light Cut	SE, SX	LP	AS,ZM,27	CJ,XS	AB,CT	PF,KF	LF, 33		MP3,NS6	F3P, TF
	Medium Cut	GU □UG□	MA,MV	TM	HS,PS	AH	XM,QM	P,MG	M3		GN, HT
		GE, UX	MH,MP	DM,AM	CS,GS,PQ,PT	AE,AY	PM,SM,KM	MN, MP1		MP5,NM4,NM6	RF, LF
	Wiper Edge	GUW	MW				WM	MW, RW	W-M3	NM	WG
	Roughing	MU, ME	GH, RP	TH, S	HT,GT,PH	RE,AR	PR,XMR,KR	RP	M5,MR7	NM7,NM9,RP5	M3P,NR
		MX	HAS,MT	CH				RN	MR6		
	Heavy Cut	HG	HA,HZ,HX,HBS	THS,TRS	PX,HX	TE,UE	QR	RM,MR	R4,R5,R6	NR6,NRF	NM
		HP	HH,HXD	65			HR,SR	RH	R7	NR8	TNM
		HU, HW	HV			H					
		HF	HCS	TUS		HX,HE	MR		RR9	NRR	R3P
M	Finishing	SU, EF	LM,SH	SS	MQ,GU	SE,MP	MF	FP,FS,LF	MF2	NF4	
	Light to Medium Cut	EX, EG	GM,MS	SF,SA	MS, MU	PV	23	MS	MF1,M1		TF,VL
		GU	MM	SM	HU	DE	MM, SMR	MP	MF3,M3	NM4	M3M,PP
	Roughing	HM	ES,1M,2M	S					MF4, MF5	NR4, RM5	
EM, MU		GH,RM	SH	TK		MR, MRR		M5,MR3		MR	
S	Finishing	EF	LS,FJ	HRF			SF, SGF			NFT	
	Medium Cut	EG, EX	MJ,MS	HMM,SA			SM, SMC			NMT	
	Roughing	MU	GJ,RS				SMR			NRT	
K	Light Cut	UZ	LK,MA,MK,SW	CM,CF	Standard	V,VA	KF	UN	M5	NM5	GN
	Medium Cut	GZ □UX□	GH,Standard	Standard,CH,33	ZS,GC	Y,RE	KM,KR		MR7	RK5, RK7	
H	Finishing	FV, GH									
	Light Cut	LV									
	Carburized Layer Removal	SV									

■ Positive Type

Class	Application	Sumitomo Electric	Mitsubishi	Tungaloy	Kyocera	Mitsub.-Hitachi	Sandvik	Kennametal	SECO Tools	WALTER	ISCAR
P	Finishing	FC	FJ,AM	01, JRP,JTS	CF,GF,VF		UM		GT-F1	FM4	
		FB, LU □FP, FK□	FP,FM,FV,SQ	PSF,PF,23	GP,XP,MP,PP	JQ,MP	PF,UF,MF,KF	11,UF,FP	FF1	PF4	PF
	Wiper Edge	LUW	SW				WF	FW	W-F1	PF	WF
M		SDW					WK,WM	MW	W-F2		WG
	Finishing to Light Cut	SI	SMG	JS	CK						
K	Light Cut	LB, SU (SK, SF□)	LP,LM,SV,MQ	PSS,PS,24	HQ,XQ,GK	JE	PM,UM,MM,PM	LF	F1	MP4,MM4,FK6	SM,14
		SC			GQ,SK			MP	MF2		
	Medium Cut	MU	MV,MM,MK	PM			PR,UR,MR,KR	MF	F2,M3,M5	PM5,RP4,RM4	19
N	Finishing	AG	AZ	AL,PP	AH		AL	HP	AL	PM2	AS,AF
	Finishing to Light Cut	LD, GD									
H	Finishing	FV									
	Light Cut	LV									

Inserts

C

D

K

R

S

T

V

W

Chipbreaker Application

Bumpy Breaker	Standard Breaker	Handed Breaker
Break Master (CBN/PCD)	For Chamfering	

Negative Type

Finishing to Medium Cutting

Fine Finishing	N-FB P M K N S H Better chipcontrol under low feed conditions with sharp edge shape. 0,80 $\alpha = 0^\circ$ CNMG1204-0-NFB 	N-FA P M K N S H Profile breaker perfect for fine finishing 1,0 20° $\alpha = 0^\circ$ CNMG1204-0-NFA
	N-FL P M K N S H Optimal breaker for chip management on iron sheeting 1,0 10° $\alpha = 0^\circ$ CNMG1204-0-NFL 	N-FE P M K N S H Good chipcontrol from low to high feed rate 1,40 0,70 20° $\alpha = 0^\circ$ CNMG1204-0-NFE

Breaker Code	N-GU P M K N S H	Work Material
Appearance		Characteristics
Relief angle	$\alpha = 0^\circ$	Cross Section
Stock Items		Cross Section Cat. No.


Versatile breaker featuring excellent wear resistance

0,25 2,05
 7° 25°
 CNMG1204-0-NGU

Finishing	N-LU P M K N S H Effective chip management for fluctuating cut depths and copying 1,5 1,0 10° $\alpha = 0^\circ$ CNMG1204-0-NLU 	N-SP P M K N S H Shows excellent cutting performance in finishing to light cutting 1,3 13° $\alpha = 0^\circ$ CNMG1204-0-NSP 	N-SU P M K N S H Effective in high-speed fine finishing 1,3 13° $\alpha = 0^\circ$ CNMG1204-0-NSU 	N-SE P M K N S H Finishing breaker reduces tool wear on rake face. Effective even for high efficiency machining. 0,1 1,5 17° 5° $\alpha = 0^\circ$ CNMG1204-0-NSE 	N-EF P M K N S H Chipbreaker for exotic alloy finishing with excellent chip management 1,2 20° $\alpha = 0^\circ$ CNMG1204-0-NEF
	NLU-W P M K N S H High performance finishing breaker with wiper edge 1,5 1,0 10° $\alpha = 0^\circ$ CNMG1204-0-NLUW Wiper 	NSE-W P M K N S H New high feed finishing breaker with wiper edge 0,13 1,9 17° 5° $\alpha = 0^\circ$ CNMG1204-0-NSEW Wiper 	L/R-FX P M K N S H Parallel breaker with superior sharp edge 1,5 14° $\alpha = 0^\circ$ TNGG1604-0-LRFX 	L/R-FY P M K N S H Wide type breaker with sharp edge 2,5 15° $\alpha = 0^\circ$ TNGG1604-0-LRFY 	L/R-FT P M K N S H Arc-shaped ground type finishing breaker 0,15 1,35 $\alpha = 0^\circ$ TNGG1103-0-LRFT

Light to Medium	N-SJ P M K N S H Standard breaker with excellent cutting edge strength 0,18 1,2 $\alpha = 0^\circ$ SNMG1204-0-NSJ 	L/R-ST P M K N S H Arc-shaped ground type breaker for light cutting 0,15 1,65 $\alpha = 0^\circ$ TNGG1603-0-LRST 	
	N-EX P M K N S H Standard breaker designed especially for use with exotic alloys 2,0 16° $\alpha = 0^\circ$ CNMG1204-0-NEX 	N-UP P M K N S H Double positive edge for optimal stainless steel cutting 2,1 10° $\alpha = 0^\circ$ CNMG1204-0-NUP 	N-SX P M K N S H Perform copying and raise steps 0,2 1,35 3° 15° $\alpha = 0^\circ$ CNMG1204-0-NSX

Chipbreaker Application Range (Insert IC up to $\varnothing 12,7$ mm)

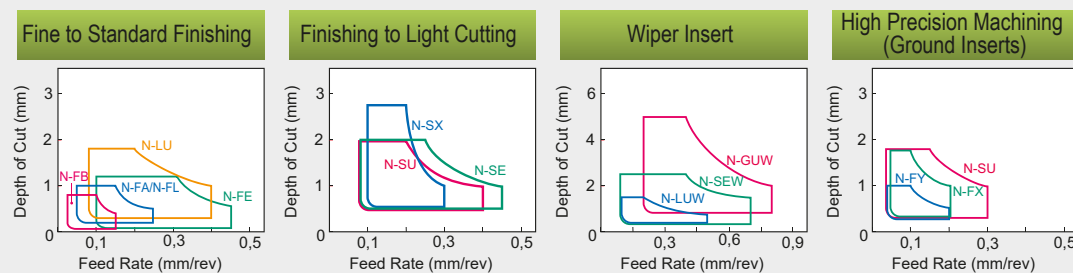

Indicated chipbreaker application ranges and shapes are representative values only. Actual values may change according to the actual catalogue number. For details, refer to stock pages (from Chapter B onward).

Bumpy Breaker	Standard Breaker	Handed Breaker
Break Master (CBN/PCD)	For Chamfering	


Chipbreaker Application

Negative Type Medium to Rough Cutting

Medium	N-GU Features low cutting resistance and excellent wear resistance. $\alpha = 0^\circ$ 	N-GE A versatile breaker with excellent rake surface wear in high efficiency cutting. $\alpha = 0^\circ$ 	N-UX Extremely reliable and versatile breaker with strong cutting edge. $\alpha = 0^\circ$ 	N-UG Popular and versatile breaker. $\alpha = 0^\circ$
	N-EG General-purpose chipbreaker for exotic alloys with good chip control and wear resistance. $\alpha = 0^\circ$ 	NGU-W Finishing breaker with wiper edge for high efficiency medium finishing. $\alpha = 0^\circ$ 	L/R-UM General-purpose ground type medium cutting breaker. $\alpha = 0^\circ$ 	

Medium to Rough	N-EM Achieves excellent fracture and crater resistance. $\alpha = 0^\circ$ 	N-MU Economical, double-sided breaker with low cutting resistance for high feed cutting. $\alpha = 0^\circ$ 	N-ME Chipbreaker for rough cutting that supports high-feed cutting with reduced rake face wear. $\alpha = 0^\circ$ 	N-MX Strong cutting edge for interrupted cutting. $\alpha = 0^\circ$
	N-UZ Standard breaker with stable cutting performance. $\alpha = 0^\circ$ 	N-GZ Extremely reliable standard breaker with strong cutting edge. $\alpha = 0^\circ$ 	L/R-HM Wide, M class, handed breaker with low cutting resistance for medium to rough cutting. $\alpha = 0^\circ$ 	

Chipbreaker Application Range (Insert IC up to $\varnothing 12,7$ mm)

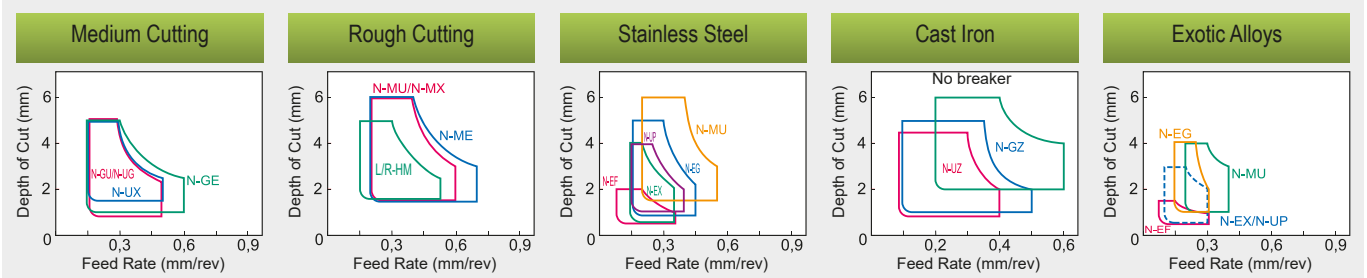

Indicated chipbreaker application ranges and shapes are representative values only. Actual values may change according to the actual catalogue number. For details, refer to stock pages (from Chapter B onward).

Inserts

C

D

K

R






S

T

V


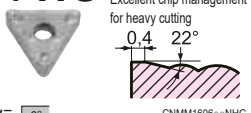

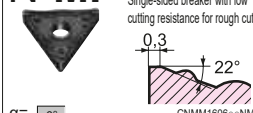

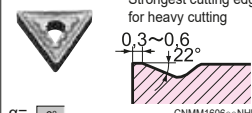

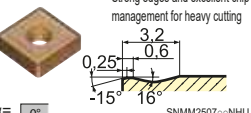

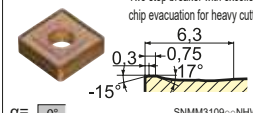

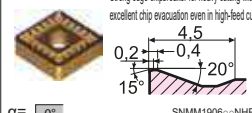
W

Chipbreaker Application

 Bumpy Breaker	 Standard Breaker	 Handed Breaker
 SUMIBORON Break Master	 For Chamfering	

Negative Type


Rough Cutting

Rough to Heavy	N-HG  <p>Excellent chip management for heavy cutting</p>  <p>$\alpha = 0^\circ$ CNMM1606--NHG</p>	N-MP  <p>Single-sided breaker with low cutting resistance for rough cutting</p>  <p>$\alpha = 0^\circ$ CNMM1606--NMP</p>	N-HP  <p>Strongest cutting edge for heavy cutting</p>  <p>$\alpha = 0^\circ$ CNMM1606--NHP</p>
	N-HU  <p>Strong edges and excellent chip management for heavy cutting</p>  <p>$\alpha = 0^\circ$ SNMM2507--NHU</p>	N-HW  <p>Two step breaker with excellent chip evacuation for heavy cutting</p>  <p>$\alpha = 0^\circ$ SNMM3109--NHW</p>	N-HF  <p>Strong edge chipbreaker for heavy cutting with excellent chip evacuation even in high-feed cutting</p>  <p>$\alpha = 0^\circ$ SNMM1906--NHF</p>


Negative Type

For Hardened Steel

Finishing


N-GH 

For cutting hardened steel with low cutting force and excellent chip control



$\alpha = 0^\circ$ CNGG1204--NGH

Chipbreaker Application Range

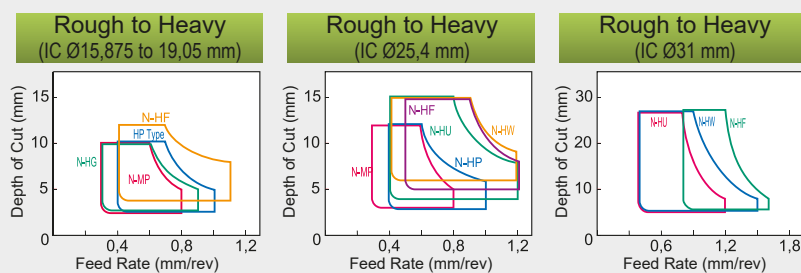

Indicated chipbreaker application ranges and shapes are representative values only. Actual values may change according to the actual catalogue number. For details, refer to stock pages (from Chapter B onward).

Bumpy Breaker
 Standard Breaker
 Handed Breaker
 Break Master (CBN/PCD)

Chipbreaker Application


Positive Type Medium to Rough Cutting

Finish to Light	N-FB P M K N S H Finishing chipbreaker for soft steel providing excellent chip control and surface finish quality. $\alpha = 5^\circ, 7^\circ, 11^\circ$ CCMT09T3--NFB	N-LU P M K N S H Chip management significantly improved in fine finishing. $\alpha = 5^\circ, 7^\circ, 11^\circ$ CCMT09T3--NLU	NLU-W P M K N S H High performance finishing breaker with wiper edge. Wiper $\alpha = 7^\circ, 11^\circ$ CCMT09T3--NLUW	N-FP P M K N S H Provides good chip control in fine finishing. $\alpha = 7^\circ$ CCMT09T3--NFP	N-FK P M K N S H Finishing breaker with sharp edge and good chip control. $\alpha = 11^\circ$ TPMT1604--NFK	
	N-LB P M K N S H Light-cutting breaker with sharp edge and good chip control. $\alpha = 5^\circ, 7^\circ, 11^\circ$ CCMT09T3--NLB	N-SU P M K N S H General-purpose breaker with sharp edge. $\alpha = 7^\circ, 11^\circ$ TPMT1103--NSU	N-US P M K N S H Breaker for small diameter boring bars. $\alpha = 11^\circ$ CPMH0903--NSU			
	N-MU P M K N S H Long lifetime breaker with low cutting resistance. $\alpha = 7^\circ, 11^\circ$ TPMT1604--NMU	N-SF P M K N S H Very reliable breaker with sharp edge. $\alpha = 11^\circ$ TPMT1604--NSF				

Positive Type G Class with Ground Chipbreaker

Finish to Light	L/R-FW P M K N S H Wide dimple breaker with sharp edge. $\alpha = 5^\circ, 11^\circ$ TPMT1102--LRFW	L/R-FX P M K N S H Parallel breaker with sharp edge. $\alpha = 5^\circ, 7^\circ, 11^\circ$ TPGT1103--LRFX	L/R-FY P M K N S H Wide breaker with sharp edge. $\alpha = 5^\circ, 7^\circ, 11^\circ$ TPGT1103--LRFY	L/R-FYS P M K N S H Breaker for fine cutting with sharp edge. $\alpha = 5^\circ, 7^\circ$ CCGT04X1--LRFYS
	L/R-W P M K N S H Wide type finishing breaker. $\alpha = 5^\circ, 11^\circ$ TPGR1103--LRW	L/R-SD P M K N S H Stepped parallel ground type. $\alpha = 7^\circ, 11^\circ$ TPGT1103--LRSND	L/R-SDW P M K N S H Parallel ground type with high performance wiper edge. Wiper $\alpha = 11^\circ$ TPGX1103--LRSWD	

Chipbreaker Application Range

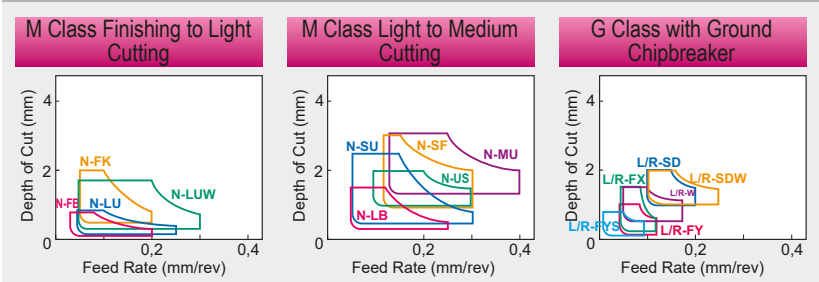

Indicated chipbreaker application ranges and shapes are representative values only. Actual values may change according to the actual catalogue number. For details, refer to stock pages (from Chapter B onward).

Inserts

C

D

K

R





S

T










V

W

Chipbreaker Application







 Bumpy Breaker	 Standard Breaker	 Handed Breaker
 SUMIBORON Break Master		

Positive Type G Class




Finish to Light	N-FC*  <p>Peripheral grinding 3D breaker with good chip control and sharp edge</p>  <p>CCGT09T3...NFC</p>	N-SI*  <p>Shaper-edge breaker for a wide range of cutting applications from finishing to light cutting</p>  <p>CCGT09T3...NSI</p>	N-SC*  <p>Two step breaker for light cutting</p>  <p>TGTT1103...NSC</p>
	$\alpha = 7^\circ, 11^\circ$	$\alpha = 7^\circ$	$\alpha = 7^\circ$
			

* Remarks:
N-FC, N-SI and N-SC have minus tolerance indicated by "M" after the nose radius.
Example:
DCGT 11T302 M NSI AC520U


Positive Type Round Inserts

Round	N-RX  <p>Round, bumpy type insert with excellent chip management</p>  <p>RCMX1606MON-RX</p>	N-RP  <p>Standard breaker for copying</p>  <p>RCMX1606MON-RP</p>
	$\alpha = 7^\circ$	$\alpha = 7^\circ$
		

Positive Type For Al - Alloy Machining

Finishing	N-AG  <p>Al breaker for mirror finish and anti-adhesion</p>  <p>CCGT09T3...NAG</p>
	$\alpha = 7^\circ$
	

Chipbreaker Application Range


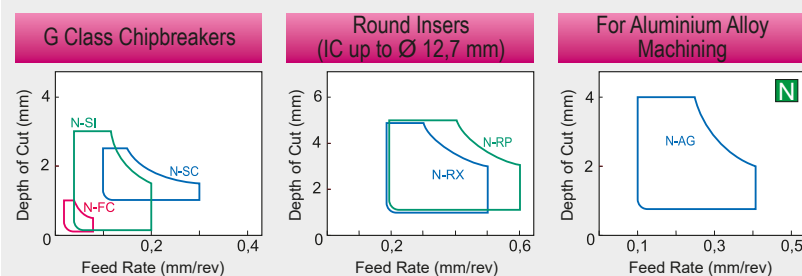


Indicated chipbreaker application ranges and shapes are representative values only. Actual values may change according to the actual catalogue number. For details, refer to stock pages (from Chapter B onward).


Chipbreaker Application

Bumpy Breaker
 Standard Breaker
 Handed Breaker

SUMIBORON Insert CBN

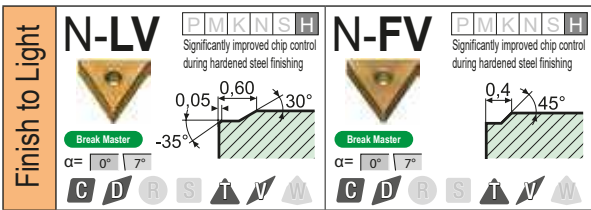

SUMIDIA Insert PCD

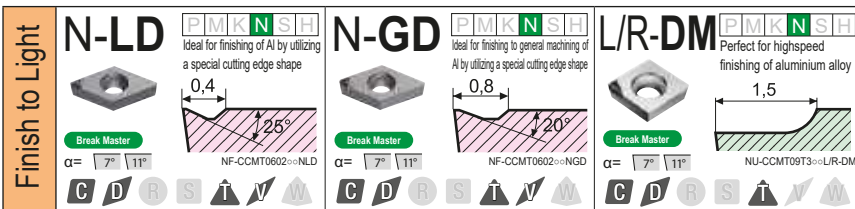

Inserts

C

D

K

R


S

T

V

W

Chipbreaker Application Range

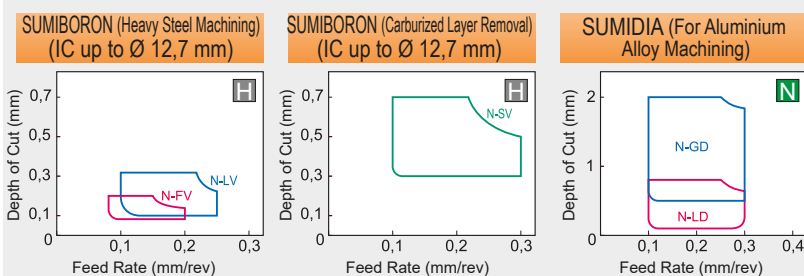

Indicated chipbreaker application ranges and shapes are representative values only. Actual values may change according to the actual catalogue number. For details, refer to stock pages (from Chapter B onward).


C DIAMOND TYPE INSERTS FOR TURNING

Negative Inserts

80° Diamond Type

0° Relief

With Insert Hole



Dimensions (mm)					
CN	L	IC	S	D ₁	
0903..	9,7	9,525	3,18	3,81	
0904..	9,7	9,525	3,18	3,81	
1204..	12,9	12,7	4,76	5,16	



⇨ D12, D18
D41

⇨ E8

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel


CNMG

● M-Class, Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide														Cermets		Carbide		
				Coated														Coated	Uncoated	Uncoated		
				P	M	K	H	S	K _S	M _S	P _M	P	K	S	N							
Fine Finishing	 NFB	CNMG 090304 NFB CNMG 090308 NFB CNMG 090404 NFB CNMG 090408 NFB	0,4 0,8 0,4 0,8																			
		CNMG 120402 NFB CNMG 120404 NFB CNMG 120408 NFB	0,2 0,4 0,8																			
		CNMG 120402 NFA CNMG 120404 NFA CNMG 120408 NFA	0,2 0,4 0,8																			
			CNMG 090308 NFL CNMG 120404 NFL CNMG 120408 NFL	0,8 0,4 0,8	○																	
 NFE	CNMG 090304 NFE CNMG 090308 NFE CNMG 090404 NFE CNMG 090408 NFE	0,4 0,8 0,4 0,8		○	○																	
	CNMG 120402 NFE CNMG 120404 NFE CNMG 120408 NFE CNMG 120412 NFE	0,2 0,4 0,8 1,2	○	○	▲	▲																
	 NLU	CNMG 090304 NLU CNMG 090308 NLU	0,4 0,8	○	○	▲	▲															
		CNMG 120402 NLU CNMG 120404 NLU CNMG 120408 NLU CNMG 120412 NLU	0,2 0,4 0,8 1,2	●	●	▲	▲															
 NLU-W		CNMG 120404 NLU-W CNMG 120408 NLU-W CNMG 120412 NLU-W	0,4 0,8 1,2	●	●	▲	▲															
		 NEF	CNMG 090404 NEF CNMG 090408 NEF	0,4 0,8																		
CNMG 120404 NEF CNMG 120408 NEF CNMG 120412 NEF	0,4 0,8 1,2		○	○	○	○																

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

80° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)					
CN	L	IC	S	D ₁	
0903..	9,7	9,525	3,18	3,81	
0904..	9,7	9,525	3,18	3,81	
09T3..	9,7	9,525	3,97	3,81	
1204..	12,9	12,7	4,46	5,16	
1606..	16,1	15,875	6,35	6,35	



⇨ D12, D18
D41

⇨ E8

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CNMG ○○○○○○ ■■■

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide														Cermets		Carbide						
				Coated														Coated	Uncoated	Uncoated						
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N	P	Uncoated	K	S	N					
Finishing	<p>NSU</p>	CNMG 090304 NSU	0,4	○	●	▲	▲	●	●																	
		CNMG 090308 NSU	0,8	●	○	▲	▲	●	●																	
		CNMG 09T304 NSU	0,4	○	○																					
		CNMG 09T308 NSU	0,8	○	○																					
		CNMG 090404 NSU	0,4	○	○	▲	▲	▲																		
		CNMG 090408 NSU	0,8	○	○	▲	▲																			
		CNMG 090412 NSU	1,2	○	○	▲	▲																			
		CNMG 120402 NSU	0,2					●	●	○																
		CNMG 120404 NSU	0,4	●	●	▲	▲	●	●	○																
		CNMG 120408 NSU	0,8	●	●	▲	▲	●	●	○																
		CNMG 120412 NSU	1,2	●	○	▲	▲	●	●	○																
		Finishing	<p>NSE</p>	CNMG 120404 NSE	0,4	●	○	▲	▲	▲																
CNMG 120408 NSE	0,8			●	○	▲	▲	▲																		
CNMG 120412 NSE	1,2			●	○	▲	▲	▲																		
CNMG 090404 NSE-W	0,4			○	○	▲	▲	▲																		
CNMG 090408 NSE-W	0,8			○	○	▲	▲	▲																		
CNMG 120404 NSE-W	0,4			●	○	▲	▲	▲																		
Finishing	<p>NSX</p>	CNMG 120404 NSX	0,4	○	○	▲	▲	▲																		
		CNMG 120408 NSX	0,8	●	○	▲	▲	▲																		
		CNMG 120412 NSX	1,2	●	○	▲	▲	▲																		
		CNMG 120404 NSU	0,4	○	○																					
		CNMG 120408 NSU	0,8	○	○																					
		CNMG 120412 NSU	1,2	○	○																					
Medium Cut	<p>NGU</p>	CNMG 090304 NGU	0,4	○	●		▲	▲																		
		CNMG 090308 NGU	0,8	○			▲	▲																		
		CNMG 090404 NGU	0,4	○		▲	▲	▲																		
		CNMG 090408 NGU	0,8	○		▲	▲	▲																		
		CNMG 090412 NGU	1,2	○		▲	▲	▲																		
		CNMG 120404 NGU	0,4	●	●	▲	▲	▲	●	●	○															
		CNMG 120408 NGU	0,8	●	●	▲	▲	▲	●	●	○															
		CNMG 120412 NGU	1,2	●	●	▲	▲	▲	●	●	○															
		CNMG 120416 NGU	1,6	○	●	▲	▲	▲																		
		CNMG 160608 NGU	0,8	●	○	▲	▲	▲	●	○																
		CNMG 160612 NGU	1,2	●	○	▲	▲	▲	●	○																
		CNMG 160616 NGU	1,6	●	○	▲	▲	▲		○																
Medium Cut	<p>NGU-W</p>	CNMG 120408 NGU-W	0,8	●	●	▲	▲	●																		
		CNMG 120412 NGU-W	1,2	●	●	▲	▲	●																		
		CNMG 160612 NGU-W	1,2	○	○																					

● = Euro stock
○ = Stock item in Japan
▲ = To be replaced by new item


- Neg. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W

C DIAMOND TYPE

INSERTS FOR TURNING

Negative Inserts

80° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)					
CN	L	IC	S	D ₁	
0903..	9,7	9,525	3,18	3,81	
0904..	9,7	9,525	3,18	3,81	
09T3..	9,7	9,525	3,97	3,81	
1204..	12,9	12,7	4,46	5,16	
1606..	16,1	15,875	6,35	6,35	
1906..	19,3	19,05	6,35	7,94	



⇨ D12, D18
D41

⇨ E8

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide					
				Coated													Coated	Uncoated	Uncoated					
				P	M	K	H	S	K _S	M _S	P _M	P	K	S	N									
Medium Cut Depth of cut (mm) Feed rate (mm/rev)		CNMG 120404 NGE	0,4	●	●	●	▲	▲																
		CNMG 120408 NGE	0,8	●	●	●	▲	▲																
		CNMG 120412 NGE	1,2	●	●	●	▲	▲																
		CNMG 120416 NGE	1,6	●	●	○	▲	▲																
		CNMG 160608 NGE	0,8	○	○	○	▲	▲																
		CNMG 160612 NGE	1,2	●	●	○	▲	▲																
		CNMG 160616 NGE	1,6	●	●	●	▲	▲																
		CNMG 190612 NGE	1,2	●	●	●	▲	▲																
		CNMG 190616 NGE	1,6	○	●	○	▲	▲																
		Medium Cut Depth of cut (mm) Feed rate (mm/rev)		CNMG 090304 NUG	0,4	○																		
CNMG 090308 NUG	0,8			○																				
CNMG 090404 NUG	0,4			○																				
CNMG 090408 NUG	0,8			○																				
CNMG 09T304 NUG	0,4			○																				
CNMG 09T308 NUG	0,8			○																				
CNMG 120404 NUG	0,4			○	●	●	▲	▲																
CNMG 120408 NUG	0,8			●	●	●	▲	▲																
CNMG 120412 NUG	1,2			●	●	●	▲	▲																
CNMG 120416 NUG	1,6			○	●		▲	▲																
Medium Cut Depth of cut (mm) Feed rate (mm/rev)		CNMG 090408 NEG	0,8																					
		CNMG 090412 NEG	1,2																					
		CNMG 120404 NEG	0,4	○	●	○	●	●	●	●	●	●											●	
		CNMG 120408 NEG	0,8	○	●	○	●	●	●	●	●	●											●	
		CNMG 120412 NEG	1,2	○	●	○	●	●	●	●	●	●											●	
		CNMG 160608 NEG	0,8	○	●	○	●	●	○	○														
		CNMG 160612 NEG	1,2	○	●	○	●	●	○	○														
		CNMG 160616 NEG	1,6	○	●	○	●	●	○	○														
		CNMG 190612 NEG	1,2	○	○	○	●	●																
		CNMG 190616 NEG	1,6	○	○	○	●	●																
Medium Cut Depth of cut (mm) Feed rate (mm/rev)		CNMG 120404 NEX	0,4																					
		CNMG 120408 NEX	0,8																					
		CNMG 120412 NEX	1,2																					
		CNMG 160612 NEX	1,2																					
		CNMG 190612 NEX	1,2																					

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

Neg. Inserts

C

D

K

R


S

T

V

W

80° Diamond Type 0° Relief
With Insert Hole



CN	Dimensions (mm)			
	L	IC	S	D ₁
1204..	12,9	12,7	4,46	5,16
1606..	16,1	15,875	6,35	6,35
1906..	19,3	19,05	6,35	7,94
2509..	25,8	25,4	9,52	9,2



⇨ D12, D18
D41

⇨ E8

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide	
				Coated													Coated	Uncoated	Uncoated	
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N				
Medium Cut Depth of cut (mm) Feed rate (mm/rev)	 NUP	CNMG 120404 NUP	0,4	●	●	▲	▲						●	●	▲	▲				
		CNMG 120408 NUP	0,8	●	●	▲	▲						●	●	▲	▲				
		CNMG 120412 NUP	1,2	●	●	▲	▲						○	○	▲	▲				
		CNMG 120416 NUP	1,6			▲	▲							○	○	▲	▲			
		CNMG 160612 NUP	1,2		●		▲	●												
		CNMG 190612 NUP	1,2	●	●		▲	▲												
Medium Cut Depth of cut (mm) Feed rate (mm/rev)	 NEM	CNMG 120408 NEM	0,8	○	●	○									○					
		CNMG 120412 NEM	1,2	○	●	○														
		CNMG 120416 NEM	1,6	○	●	○														
		CNMG 160608 NEM	0,8	○	●	○		○	○											
		CNMG 160612 NEM	1,2	○	●	○		●	●											
		CNMG 160616 NEM	1,6	○	●	○		●	●											
		CNMG 190612 NEM	1,2	○	●	○		●	●											
		CNMG 190616 NEM	1,6	○	●	○		●	●							○				
CNMG 190624 NEM	2,4	○	○	○		○	○													
CNMG 250924 NEM	2,4	○	○	○		○														


● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item

- Neg. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W

C DIAMOND TYPE INSERTS FOR TURNING

Negative Inserts

80° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)				
CN	L	IC	S	D ₁
0903..	9,7	9,525	3,18	3,81
1204..	12,9	12,7	4,76	5,16
1606..	16,1	15,875	6,35	6,35
1906..	19,3	19,05	6,35	7,94



⇨ D12, D18
D41

⇨ E8

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CNMG


● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide		
				Coated													Coated	Uncoated	Uncoated		
				P	M	P _M	K	H	S	K _S	M _S	P _M	P	P	K	S	N				
Roughing Depth of cut (mm) Feed rate (mm/rev)		CNMG 120408 NMU CNMG 120412 NMU CNMG 120416 NMU	0,8	●	●	▲	▲	▲	●	●	●	●	●	●	●	●	○	○	○		
			1,2	●	●	▲	▲	▲	●	●	●	●	●	●	●	●	●	○	○	○	
			1,6	●	●	▲	▲	▲	●	●	●	●	●	●	●	●	●	○	○	○	
		CNMG 160608 NMU CNMG 160612 NMU CNMG 160616 NMU CNMG 160624 NMU	0,8	●	●	▲	▲	▲	●	●	●	●	●	●	●	●	●	○	○	○	
			1,2	●	●	▲	▲	▲	●	●	●	●	●	●	●	●	●	○	○	○	
			1,6	●	●	▲	▲	▲	●	●	●	●	●	●	●	●	●	○	○	○	
			2,4	●	●	▲	▲	▲	●	●	●	●	●	●	●	●	●	○	○	○	
			CNMG 190608 NMU CNMG 190612 NMU CNMG 190616 NMU CNMG 190624 NMU	0,8	○	●	▲	▲	▲	●	●	●	●	●	●	●	●	○	○	○	
				1,2	●	●	▲	▲	▲	●	●	●	●	●	●	●	●	○	○	○	
		1,6		●	●	▲	▲	▲	●	●	●	●	●	●	●	●	○	○	○		
CNMG 250924 NMU	2,4	○	○	●	▲	▲	▲	●	●	●	●	●	●	●	○	○	○				
Roughing Depth of cut (mm) Feed rate (mm/rev)		CNMG 120408 NME CNMG 120412 NME CNMG 120416 NME	0,8	●	●	▲	▲	▲	○	○	○	○	○	○	○	○	○	○			
			1,2	●	●	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○		
			1,6	●	●	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○		
		CNMG 160608 NME CNMG 160612 NME CNMG 160616 NME	0,8	○	●	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○		
			1,2	●	●	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○		
			1,6	●	●	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○		
			CNMG 190612 NME CNMG 190616 NME CNMG 190624 NME	1,2	○	○	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○	
				1,6	●	●	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○	
				2,4	○	○	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○	
		CNMG 250924 NME	2,4	○	○	○	▲	▲	▲	○	○	○	○	○	○	○	○	○	○		
Roughing Depth of cut (mm) Feed rate (mm/rev)		CNMG 090304 NUX	0,4																		
			CNMG 120404 NUX CNMG 120408 NUX CNMG 120412 NUX CNMG 120416 NUX	0,4	○	●	▲	▲	▲												
				0,8	●	●	▲	▲	▲												
		1,2		●	●	▲	▲	▲													
		1,6		●	○	▲	▲	▲													
		CNMG 160608 NUX CNMG 160612 NUX CNMG 160616 NUX		0,8	●	○	▲	▲	▲			●	●								
				1,2	●	●	▲	▲	▲			●	●								
			1,6	●	●	▲	▲	▲			●	●									
		CNMG 190608 NUX CNMG 190612 NUX CNMG 190616 NUX	0,8		●	▲	▲	▲													
			1,2	○	○	▲	▲	▲													
1,6	○		○	▲	▲	▲															
Roughing Depth of cut (mm) Feed rate (mm/rev)		CNMG 120408 NMX CNMG 120412 NMX CNMG 120416 NMX	0,8	●	●	▲	▲														
			1,2	●	●	▲	▲														
			1,6	●	●	▲	▲														
		CNMG 160608 NMX CNMG 160612 NMX CNMG 160616 NMX	0,8	●	●	▲	▲														
			1,2	●	●	▲	▲														
			1,6	●	●	▲	▲														
			CNMG 190612 NMX CNMG 190616 NMX	1,2	●	●	▲	▲													
				1,6	●	●	▲	▲													

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

Neg. Inserts
C
D
K
R
S
T
V
W

80° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)				
CN	L	IC	S	D ₁
0904..	9,7	9,525	3,18	3,81
1204..	12,9	12,7	4,76	5,16
1606..	16,1	15,875	6,35	6,35
1906..	19,3	19,05	6,35	7,94



⇨ D12, D18
D41

⇨ E8

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide	
				Coated													Coated	Uncoated	Uncoated	
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N				
Roughing NGZ	 CNMG 090408 NGZ CNMG 090412 NGZ CNMG 120404 NGZ CNMG 120408 NGZ CNMG 120412 NGZ CNMG 120416 NGZ CNMG 160608 NGZ CNMG 160612 NGZ CNMG 160616 NGZ CNMG 190612 NGZ CNMG 190616 NGZ	0,8																		
		1,2																		
		0,4																		
		0,8																		
		1,2																		
		1,6																		
	Roughing NUZ	 CNMG 120404 NUZ CNMG 120408 NUZ CNMG 120412 NUZ CNMG 120416 NUZ CNMG 160608 NUZ CNMG 160612 NUZ CNMG 160616 NUZ CNMG 190608 NUZ CNMG 190612 NUZ CNMG 190616 NUZ	0,4	○		▲														
			0,8	○	○	▲														
			1,2	○	○															
			1,6	○																
			0,8	○	○															
			1,2	○	○															
Roughing V		 CNMG 190608 NUZ CNMG 190612 NUZ CNMG 190616 NUZ	0,8	○	○	▲	▲													
			1,2	○	○															
			1,6	○																
			0,8	○	○															
			1,2	○	○															
			1,6	○																

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item


Neg. Inserts



C DIAMOND TYPE INSERTS FOR TURNING

Negative Inserts

80° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)				
CN	L	IC	S	D ₁
1204..	12,9	12,7	4,76	5,16
1606..	16,1	15,875	6,35	6,35
1906..	19,3	19,05	6,35	7,94
2507..	25,8	25,4	7,94	9,2
2509..	25,8	25,4	9,52	9,2



- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel


CNMM

● M-Class One Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide			
				Coated													Coated	Uncoated	Uncoated			
				P	M	P _M	K	H	S	K _S	M _S	P _M	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Heavy Roughing 	NMP 	CNMM 120408 NMP	0,8	●	●	▲	▲	▲	○													
		CNMM 120412 NMP	1,2	●	●	▲	▲	▲	○													
		CNMM 120416 NMP	1,6	○	●	▲	▲	▲	○													
		CNMM 160608 NMP	0,8	●	●	▲	▲	▲	○													
		CNMM 160612 NMP	1,2	●	●	▲	▲	▲	○													
		CNMM 160616 NMP	1,6	●	●	▲	▲	▲	○													
	NMH 	NMH 	CNMM 160612 NMH	1,2	●	●	▲	▲	●													
			CNMM 160616 NMH	1,6	●	●	▲	▲	●													
			CNMM 190612 NMH	1,2	●	●	▲	▲	●													
			CNMM 190616 NMH	1,6	●	●	▲	▲	●													
			CNMM 190624 NMH	2,4	●	●	▲	▲	●													
			CNMM 250924 NMH	2,4	●																	
Heavy Roughing 	NHG 	CNMM 120408 NHG	0,8	●	●	▲	▲	▲														
		CNMM 120412 NHG	1,2	●	●	▲	▲	▲														
		CNMM 120416 NHG	1,6	○	●	▲	▲	▲														
		CNMM 160608 NHG	0,8	●	●	▲	▲	▲														
		CNMM 160612 NHG	1,2	●	●	▲	▲	▲														
		CNMM 160616 NHG	1,6	●	●	▲	▲	▲														
	NHP 	NHP 	CNMM 120408 NHP	0,8	●	●	▲	▲														
			CNMM 120412 NHP	1,2	●	●	▲	▲														
			CNMM 120416 NHP	1,6	○	○	▲	▲														
			CNMM 160608 NHP	0,8	○	●	▲	▲														
			CNMM 160612 NHP	1,2	○	●	▲	▲														
			CNMM 160616 NHP	1,6	●	●	▲	▲														

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

80° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)					
CN	L	IC	S	D ₁	
1906..	19,3	19,05	6,35	7,94	
2509..	25,8	25,4	9,52	9,2	



⇒ D12, D18

⇒ E8

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CNMM

● M-Class One Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE
Heavy Roughing 	 NHU	CNMM 190616 NHU	1,6
		CNMM 190624 NHU	2,4
	 NHW	CNMM 250924 NHU	2,4
		CNMM 250924 NHW	2,4
Heavy Roughing 	 NHF	CNMM 190616 NHF	1,6
		CNMM 190624 NHF	2,4
		CNMM 250924 NHF	2,4
		CNMM 250932 NHF	3,2

Carbide																	Cermet		Carbide									
Coated																	Coated		Uncoated									
P	M	K	H	S	Ks	Ms	Pm	P	K	S	N																	
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
●		▲	▲						●																			
	○	○		▲	▲																							
	○	○		▲	▲																							
	○	○		▲	▲																							

Neg. Inserts




- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

C DIAMOND TYPE

INSERTS FOR TURNING

Negative Inserts

80° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)					
CN	L	IC	S	D ₁	
1204..	12,9	12,7	4,76	5,16	
1606..	16,1	15,875	6,35	6,35	
1906..	19,3	19,05	6,35	7,94	



- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CNMA / CNGA / CNMX

● Flat and One Side Handed Inserts

Application	Shape	ISO Cat. No.	RE	Carbide														Cermet		Carbide		
				Coated														Coated	Uncoated	Uncoated		
				P	M	P _M	K	H	S	K _S	M _S	P _M	P	K	S	N						
Roughing		CNMA 120404	0,4																			
		CNMA 120408	0,8																			
		CNMA 120412	1,2																			
Medium Cut		CNGA 120402	0,2																			
		CNGA 120404	0,4																			
		CNGA 120408	0,8																			
Heavy Roughing		CNMX 120408 L	0,8	●		▲																
		CNMX 120408 R	0,8	●		▲																

CNGG

● G-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide														Cermet		Carbide		
				Coated														Coated	Uncoated	Uncoated		
				P	M	P _M	K	H	S	K _S	M _S	P _M	P	K	S	N						
Finishing	 Depth of cut (mm) vs Feed rate (mm/rev) graph	CNGG 120402 NSU	0,2																			
		CNGG 120404 NSU	0,4																			
		CNGG 120408 NSU	0,8																			
Finishing	 Depth of cut (mm) vs Feed rate (mm/rev) graph	CNGG 120402 NGH	0,2																			
		CNGG 120404 NGH	0,4																			
		CNGG 120408 NGH	0,8																			
Finishing	 Depth of cut (mm) vs Feed rate (mm/rev) graph	CNGG 120402 NEF	0,2																			
		CNGG 120404 NEF	0,4																			
		CNGG 120408 NEF	0,8																			

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

Neg. Inserts

C

D

K

R


S

T

V

W

55° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)				
DN	L	IC	S	D ₁
1104..	11,6	9,525	4,76	3,81
1504..	15,5	12,7	4,76	5,16
1506..	15,5	12,7	6,35	5,16



⇨ D13, D19
D41

⇨ E9

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

DNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide
				Coated													Coated	Uncoated	Uncoated
				P	M	K	H	S	K _s	M _s	P _M	P	K	S	N				
Fine Finishing	 NFB	DNMG 110404 NFB	0,4																
		DNMG 110408 NFB	0,8																
		DNMG 150404 NFB	0,4																
Fine Finishing	 NFA	DNMG 150404 NFA	0,4																
		DNMG 150408 NFA	0,8																
		DNMG 150604 NFA	0,4																
Fine Finishing	 NFL	DNMG 150404 NFL	0,4	○		▲													
		DNMG 150408 NFL	0,8	○		▲													
		DNMG 150412 NFL	1,2	○															
Fine Finishing	 NFE	DNMG 150604 NFL	0,4			▲													
		DNMG 150608 NFL	0,8			▲													
		DNMG 110404 NFE	0,4	○	○	▲	▲												
Fine Finishing	 NLU	DNMG 110408 NFE	0,8	○	○	▲	▲												
		DNMG 110412 NFE	1,2	○	○	▲	▲												
		DNMG 150402 NFE	0,2	○	○	▲	▲												
Finishing	 NLU	DNMG 150404 NFE	0,4	○	○	▲	▲												
		DNMG 150408 NFE	0,8	○	○	▲	▲												
		DNMG 150412 NFE	1,2	○	○	▲	▲												
Finishing	 NLU	DNMG 150602 NFE	0,2	○	○	▲	▲												
		DNMG 150604 NFE	0,4	○	○	▲	▲												
		DNMG 150608 NFE	0,8	○	○	▲	▲												
Finishing	 NLU	DNMG 150612 NFE	1,2	○	○	▲	▲												
		DNMG 110404 NLU	0,4	●	●	▲	▲												
		DNMG 110408 NLU	0,8	●	●	▲	▲												
Finishing	 NLU	DNMG 150402 NLU	0,2	○	○	▲	▲												
		DNMG 150404 NLU	0,4	○	○	▲	▲												
		DNMG 150408 NLU	0,8	○	○	▲	▲												
Finishing	 NLU	DNMG 150412 NLU	1,2	○	○	▲	▲												
		DNMG 150604 NLU	0,4	●	●	▲	▲												
		DNMG 150608 NLU	0,8	●	●	▲	▲												
Finishing	 NLU	DNMG 150612 NLU	1,2	●	●	▲	▲												

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item

- Neg. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W


DIAMOND TYPE

INSERTS FOR TURNING

Negative Inserts

55° Diamond Type

0° Relief
With Insert Hole



Dimensions (mm)				
DN	L	IC	S	D ₁
1104..	11,6	9,525	4,76	3,81
1504..	15,5	12,7	4,76	5,16
1506..	15,5	12,7	6,35	5,16



⇒ D13, D19
D41

⇒ E9

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

DNMG

Application	Shape	ISO Cat. No.	RE	Carbide														Cermet		Carbide				
				Coated														Coated		Uncoated				
				P	M	K	H	S	K _S	M _S	P _M	P	K	S	N	P	K	S	N					
Finishing	NEF	DNMG 110404 NEF	0,4	○	●	○																		
		DNMG 110408 NEF	0,8	○	●	○																		
		DNMG 110412 NEF	1,2	○	○	○																		
		DNMG 150404 NEF	0,4	○	○	○																		
		DNMG 150408 NEF	0,8	○	○	○																		
		DNMG 150412 NEF	1,2	○	○	○																		
	NEF	DNMG 150604 NEF	0,4	○	●	○																		
		DNMG 150608 NEF	0,8	○	●	○																		
		DNMG 150612 NEF	1,2	○	●	○																		
		NSU	DNMG 110404 NSU	0,4	○	●	○	▲	▲	▲														
			DNMG 110408 NSU	0,8	○	●	○	▲	▲	▲														
			DNMG 110412 NSU	1,2	○	○	○																	
DNMG 150402 NSU	0,2		○	○	○	▲	▲	▲																
DNMG 150404 NSU	0,4		○	○	○	▲	▲	▲																
DNMG 150408 NSU	0,8		○	○	○	▲	▲	▲																
NSU	DNMG 150412 NSU	1,2	○	○	○																			
	DNMG 150604 NSU	0,4	○	●	○	▲	▲	▲																
	DNMG 150608 NSU	0,8	○	●	○	▲	▲	▲																
	DNMG 150612 NSU	1,2	○	●	○	▲	▲	▲																
	NSE	DNMG 110408 NSE	0,8	○	○	○	▲																	
		DNMG 150404 NSE	0,4	○	○	○	▲	▲	▲															
DNMG 150408 NSE		0,8	○	○	○	▲	▲	▲																
DNMG 150412 NSE		1,2	○	○	○	▲	▲	▲																
DNMG 150604 NSE		0,4	○	●	○																			
DNMG 150608 NSE		0,8	○	●	○																			
DNMG 150612 NSE	1,2	○	●	○																				
Finishing	NSX	DNMG 150404 NSX	0,4	○	○	○	▲	▲																
		DNMG 150408 NSX	0,8	○	○	○	▲	▲																
		DNMG 150412 NSX	1,2	○	○	○		▲																
	DNMG 150604 NSX	0,4					▲																	
	DNMG 150608 NSX	0,8	○																					
	Medium Cut	NGU	DNMG 110404 NGU	0,4	○	●	○	▲	▲	▲														
DNMG 110408 NGU			0,8	○	●	○	▲	▲	▲															
DNMG 110412 NGU			1,2	○	●	○	▲	▲	▲															
DNMG 150404 NGU			0,4	○	○	○	▲	▲	▲															
DNMG 150408 NGU			0,8	○	○	○	▲	▲	▲															
DNMG 150412 NGU			1,2	○	○	○	▲	▲	▲															
DNMG 150416 NGU		1,6	○	○	○	▲	▲	▲																
DNMG 150604 NGU		0,4	○	●	○	▲	▲	▲																
DNMG 150608 NGU		0,8	○	●	○	▲	▲	▲																
DNMG 150612 NGU		1,2	○	●	○	▲	▲	▲																
DNMG 150616 NGU		1,6	○	○	○																			

Neg. Inserts

C

D

K

R

S


T

V

W

● = Euro stock
○ = Stock item in Japan
▲ = To be replaced by new item

55° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)				
DN	L	IC	S	D ₁
1104..	11,6	9,525	4,76	3,81
1504..	15,5	12,7	4,76	5,16
1506..	15,5	12,7	6,35	5,16



⇨ D13, D19
D41

⇨ E9

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

DNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide			
				Coated													Coated	Uncoated	Uncoated			
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	P	K	S	N					
Medium Cut	<p>NGE</p>	DNMG 110408 NGE DNMG 110412 NGE	0,8	○	○	▲	▲	▲														
			1,2	○	○	○																
			DNMG 150404 NGE DNMG 150408 NGE DNMG 150412 NGE DNMG 150416 NGE	0,4	○	○	○	▲	▲	▲												
				0,8	○	○	○	▲	▲	▲												
		1,2		○	○	○																
		1,6		○																		
		DNMG 150604 NGE DNMG 150608 NGE DNMG 150612 NGE DNMG 150616 NGE	0,4	●	●	○	▲	▲	▲													
			0,8	●	●	▲	▲	▲														
			1,2	●	●	▲	▲	▲														
			1,6	●	●	▲	▲	▲														
		Medium Cut	<p>NUG</p>	DNMG 110404 NUG DNMG 110408 NUG	0,4	○	●		▲													
					0,8	○	○		▲													
DNMG 150404 NUG DNMG 150408 NUG DNMG 150412 NUG	0,4				○	○		▲														
	0,8				○	○		▲														
	1,2			○	○																	
	DNMG 150604 NUG DNMG 150608 NUG DNMG 150612 NUG DNMG 150616 NUG			0,4	●	○		▲	▲													
0,8				●	●	○	▲	▲														
1,2				○	○		▲	▲														
1,6				○			▲	▲														
Medium Cut	<p>NEG</p>			DNMG 110408 NEG DNMG 110412 NEG	0,8	○	●	○		●	●	●			○		▲					
					1,2	○	●	○								○		▲				
					DNMG 150404 NEG DNMG 150408 NEG DNMG 150412 NEG	0,4	○	○	○		○	○	○				○		▲	▲		○
		0,8	○			○	○		○	○	○				○		▲	▲		○		
		1,2	○	○		○								○		▲	▲		○			
		DNMG 150604 NEG DNMG 150608 NEG DNMG 150612 NEG	0,4	○		●	○		●	●	●				○		▲	▲		○		
			0,8	○	●	○		●	●	●				○		▲	▲		○			
			1,2	○	●	○		●	●	●				○		▲	▲		○			
			1,6	○	●	○		●	●	●				○		▲	▲		○			
		Medium Cut	<p>NEX</p>	DNMG 110404 NEX DNMG 110408 NEX	0,4										●	▲	▲					
					0,8											●	▲	▲				
					DNMG 150404 NEX DNMG 150408 NEX DNMG 150412 NEX	0,4					○	○	○					○	○	○		
0,8									○	○	○					○	○	○				
1,2								○	○	○					○	○	○					
DNMG 150604 NEX DNMG 150608 NEX DNMG 150612 NEX	0,4					●	●		●	●	●				●	▲	▲					
	0,8				●	●		●	●	●				●	▲	▲						
	1,2				●	●		●	●	●				●	▲	▲						
	1,6				●	●		●	●	○				●	▲	▲						

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item

- Neg. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W

DIAMOND TYPE


INSERTS FOR TURNING

Negative Inserts

55° Diamond Type

0° Relief

With Insert Hole



Dimensions (mm)				
DN	L	IC	S	D ₁
1504..	15,5	12,7	4,76	5,16
1506..	15,5	12,7	6,35	5,16



⇨ D13, D19
D41

⇨ E9

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

DNMG


Carbide													Cermets		Carbide	
Coated													Coated / Uncoated		Uncoated	
P	M	K	H	S	K _S	M _S	P _M	P	K	S	N	P	K	S	N	

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
Medium Cut	 NUP	DNMG 150404 NUP	0,4					▲	▲																									
		DNMG 150408 NUP	0,8					▲	▲																									
		DNMG 150412 NUP	1,2					▲																										
Medium Cut	 L/RUM	DNMG 150604 NUP	0,4	●	●		▲	▲	●	●	●	●	●																					
		DNMG 150608 NUP	0,8	●	●		▲	▲	●	●	●	●	●	●																				
		DNMG 150612 NUP	1,2		●		▲		●		●		●																					
Medium Cut	 L/RUM	DNMG 150404 LUM	0,4																															
		DNMG 150408 LUM	0,8																															
		DNMG 150404 RUM	0,4																															
Medium Cut	 L/RUM	DNMG 150408 RUM	0,8																															
		DNMG 150608 NMU	0,8	●	●	●	▲	▲	▲	●	●	●	●	●																				
		DNMG 150612 NMU	1,2	●	●	●	▲	▲	▲	●	●	●	●	●																				
Roughing	 NMU	DNMG 150404 NMU	0,4	○	○		▲	▲	▲				○																					
		DNMG 150408 NMU	0,8	○	○		▲	▲	▲					○																				
		DNMG 150412 NMU	1,2	○	○		▲	▲	▲																									
Roughing	 NMU	DNMG 150416 NMU	1,6	○	○		▲	▲	▲																									
		DNMG 150608 NMU	0,8	●	●	●	▲	▲	▲	●	●	●	●	●																				
		DNMG 150612 NMU	1,2	●	●	●	▲	▲	▲	●	●	●	●	●																				
Roughing	 NEM	DNMG 150616 NMU	1,6	●	●		▲			●																								
		DNMG 150408 NEM	0,8	○	○	○			▲																									
		DNMG 150412 NEM	1,2	○	○	○				▲																								
Roughing	 NEM	DNMG 150416 NEM	1,6	○																														
		DNMG 150608 NEM	0,8	●	●	●	▲	▲	▲	●	●	●	●	●																				
		DNMG 150612 NEM	1,2	●	●	●	▲	▲	▲	●	●	●	●	●																				
Roughing	 NME	DNMG 150616 NEM	1,6	●	●		▲			●																								
		DNMG 150408 NME	0,8	○	○	○			▲																									
		DNMG 150412 NME	1,2	○	○	○				▲																								
Roughing	 NME	DNMG 150416 NME	1,6	○																														
		DNMG 150608 NME	0,8	●	●	●	▲	▲	▲	●	●	●	●	●																				
		DNMG 150612 NME	1,2	●	●	●	▲	▲	▲	●	●	●	●	●																				
Roughing	 NME	DNMG 150616 NME	1,6	●	●		▲			●																								

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

55° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)				
DN	L	IC	S	D ₁
1104..	11,6	9,525	4,76	3,81
1504..	15,5	12,7	4,76	5,16
1506..	15,5	12,7	6,35	5,16



⇨ D13, D19
D41

⇨ E9

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

DNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide
				Coated													Coated	Uncoated	Uncoated
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N			
Roughing	 L/RHM	DNMG 150404 LHM DNMG 150408 LHM	0,4 0,8	○	○														
		DNMG 150404 RHM DNMG 150408 RHM	0,4 0,8	○	○	○	▲	▲											
		DNMG 150604 NUX DNMG 150608 NUX DNMG 150612 NUX DNMG 150616 NUX	0,4 0,8 1,2 1,6	○	●	○	▲	▲											
		DNMG 150408 NMX DNMG 150412 NMX	0,8 1,2	○	○	▲	▲												
		DNMG 150608 NMX DNMG 150612 NMX	0,8 1,2	●	●	▲	▲												
Roughing	 NGZ	DNMG 110408 NGZ DNMG 110412 NGZ	0,8 1,2				○	○	●	▲	▲								
		DNMG 150404 NGZ DNMG 150408 NGZ DNMG 150412 NGZ	0,4 0,8 1,2			▲	○	○	○	▲	▲								
		DNMG 150604 NGZ DNMG 150608 NGZ DNMG 150612 NGZ	0,4 0,8 1,2				○	○	●	▲	▲	▲							
Roughing	 NUZ	DNMG 150404 NUZ DNMG 150408 NUZ DNMG 150412 NUZ	0,4 0,8 1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
		DNMG 150608 NUZ DNMG 150612 NUZ	0,8 1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item

- Neg. Inserts
- -
 -
 -
 -
 -
 -
 -

DIAMOND TYPE


INSERTS FOR TURNING

Negative Inserts

55° Diamond Type

0° Relief

With Insert Hole



Dimensions (mm)				
DN	L	IC	S	D ₁
1504..	15,5	12,7	4,76	5,16
1506..	15,5	12,7	6,35	5,16



⇒ D13, D19

⇒ E9

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

DNMM

Carbide												Cermets		Carbide	
Coated												Coated		Uncoated	
P	M	K	H	S	N	S	M	P	K	S	N	P	K	S	N

M-Class One Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1						
Heavy Roughing Depth of cut (mm) Feed rate (mm/rev)		DNMM 150404 NMP DNMM 150408 NMP DNMM 150412 NMP DNMM 150416 NMP DNMM 150604 NMP DNMM 150608 NMP DNMM 150612 NMP DNMM 150616 NMP	0,4	○	○	○	▲	▲	▲																													
			0,8	○	○	○	▲	▲	▲																													
			1,2	○	○	○	▲	▲	▲																													
			1,6	○	○		▲	▲	▲																													
Heavy Roughing Depth of cut (mm) Feed rate (mm/rev)		DNMM 150604 NHG DNMM 150608 NHG DNMM 150612 NHG DNMM 150616 NHG	0,4				▲	▲	▲																													
			0,8	●	●		▲	▲	▲																													
			1,2	●	●		▲	▲	▲																													
			1,6	●	●		▲	▲	▲																													
Heavy Roughing Depth of cut (mm) Feed rate (mm/rev)		DNMM 150404 NHP DNMM 150408 NHP DNMM 150412 NHP DNMM 150416 NHP DNMM 150604 NHP DNMM 150608 NHP DNMM 150612 NHP DNMM 150616 NHP	0,4	○	○																																	
			0,8	○	○																																	
			1,2	○	○																																	
			1,6	○																																		

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

Neg. Inserts

C

D

K

R


S

T

V

W

55° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)					
DN	L	IC	S	D ₁	
1104..	11,6	9,525	4,76	3,81	
1504..	15,5	12,7	4,76	5,16	
1506..	15,5	12,7	6,35	5,16	



- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

DNMA / DNMX

Flat Inserts and One Side Handed Inserts
 ● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide															
				Coated													Coated	Uncoated	Uncoated															
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N																		
Roughing		DNMA 150404 DNMA 150408 DNMA 150412	0,4 0,8 1,2	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
		DNMA 150608 DNMA 150612	0,8 1,2																															
		DNMX 150608 L	0,8																															
Finishing		DNMX 150608 R	0,8																															
		DNMX 110404 NSE-W DNMX 110408 NSE-W DNMX 110412 NSE-W	0,4 0,8 1,2	●	○	○	▲	▲	▲																									
	DNMX 150404 NSE-W DNMX 150408 NSE-W DNMX 150412 NSE-W	0,4 0,8 1,2	○	○	▲																													
Finishing		DNMX 150604 NSE-W DNMX 150608 NSE-W DNMX 150612 NSE-W	0,4 0,8 1,2	●	●	▲	▲																											

r	Compensation (mm)	
	X (Diam. change)	Z
0,4	-0,14 (Ø: -0,28)	-0,02
0,8	-0,14 (Ø: -0,28)	-0,02
1,2	-0,1 (Ø: -0,2)	-0,03

(Note) The cutting point position of the SDW type does not follow the ISO standard. Wenn using on a boring holder with a 93° approach angle, there is a need to revise the cutting point position (refer to right table) relative to using standard inserts.

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item


- Neg. Inserts
- -
 -
 -
 -
 -
 -
 -

DIAMOND TYPE

INSERTS FOR TURNING

Negative Inserts

55° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)					
DN	L	IC	S	D ₁	
1104..	11,6	9,525	4,76	3,81	
1504..	15,5	12,7	4,76	5,16	



⇨ D13, D19

⇨ E9

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

DNGA ○○○○○○

● G-Class One Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide																	
				Coated													Coated	Uncoated	Uncoated																	
				P	M	M	P	K	H	S	K	N	S	P	P	K	S	N																		
Medium Cut		DNGA 150402 DNGA 150404 DNGA 150408	0,2 0,4 0,8	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1			
				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


DNGG ○○○○○○-■-■

● G-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide														
				Coated													Coated	Uncoated	Uncoated														
				P	M	M	P	K	H	S	K	N	S	P	P	K	S	N															
Finishing	 NEF	DNGG 150404 NEF DNGG 150408 NEF	0,4 0,8	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Finishing	 NSU	DNGG 150402 NSU DNGG 150404 NSU DNGG 150408 NSU	0,2 0,4 0,8	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Medium Cut	 L/RUM	DNGG 110404 LUM DNGG 110408 LUM DNGG 150404 LUM DNGG 150408 LUM	0,4 0,8 0,4 0,8	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Finishing	 NGH	DNGG 150402 NGH DNGG 150404 NGH DNGG 150408 NGH	0,2 0,4 0,8	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

● = Euro stock
○ = Stock item in Japan
▲ = To be replaced by new item

90° Square Type **0° Relief**
 With Insert Hole



Dimensions (mm)				
SN	L	IC	S	D ₁
1204..	12,7	12,7	4,76	5,16



⇒ D14, D20~21
D41

⇒ E10

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide															
				Coated													Coated	Uncoated	Uncoated															
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N																		
Fine Finishing	 NFB Feed rate (mm/rev)	SNMG 120404 NFB SNMG 120408 NFB	0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	 NFL Feed rate (mm/rev)	SNMG 120408 NFL	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	 NFE Feed rate (mm/rev)	SNMG 120404 NFE SNMG 120408 NFE SNMG 120412 NFE	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
 NLU Feed rate (mm/rev)	SNMG 120408 NLU SNMG 120412 NLU	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
		1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
 NSU Feed rate (mm/rev)	SNMG 120408 NSU SNMG 120412 NSU	0,8	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
		1,2	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
 NSE Feed rate (mm/rev)	SNMG 120408 NSE SNMG 120412 NSE	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
		1,2	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item


- Neg. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W

S SQUARE TYPE

INSERTS FOR TURNING

Negative Inserts

90° Square Type 0° Relief
With Insert Hole



Dimensions (mm)				
SN	L	IC	S	D ₁
0903..	9,525	9,525	3,18	3,81
1204..	12,7	12,7	4,76	5,16
1506..	15,875	15,875	6,35	6,35



⇨ D14, D20~21
D41



⇨ E10

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SNMG


Carbide													Cermets		Carbide	
Coated													Coated		Uncoated	
P	M	K	H	S	K _S	M _S	P _M	P	K	S	N	P	K	S	N	

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
Finishing	NEF	SNMG 120404 NEF	0,4	○	○	○				●	●	●																					
		SNMG 120408 NEF	0,8	○	●	○					○	○	○																				
Finishing	NSJ	SNMG 090304 NSJ	0,4																														
		SNMG 120404 NSJ	0,4																														
Finishing	NSX	SNMG 120404 NSX	0,4																														
		SNMG 120408 NSX	0,8	○	○	○																											
		SNMG 120412 NSX	1,2	○	○	○																											
Medium Cut	NGU	SNMG 090304 NGU	0,4		●				▲																								
		SNMG 090308 NGU	0,8	○	●	○			▲	▲																							
		SNMG 120404 NGU	0,4	●	●	○	▲	▲	▲	▲	○	●	●	○	○	○	○	○															
		SNMG 120408 NGU	0,8	●	●	▲	▲	▲	▲	▲	●	●	●	○	○	○	○	○															
		SNMG 120412 NGU	1,2	●	●	▲	▲	▲	▲	▲	●	●	●	○	○	○	○	○															
		SNMG 120416 NGU	1,6	●	○		▲	▲	▲	▲	●	●	●	○	○	○	○	○															
Medium Cut	NGE	SNMG 150608 NGU	0,8	○	○	○																											
		SNMG 150612 NGU	1,2	○	○	○																											
		SNMG 150616 NGU	1,6	○	○	▲																											
		SNMG 120408 NGE	0,8	○	●	○	▲	▲	▲	▲																							
		SNMG 120412 NGE	1,2	○	●	▲	▲	▲	▲	▲																							
		SNMG 120416 NGE	1,6	○	●	▲	▲	▲	▲	▲																							

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

90° Square Type 0° Relief
With Insert Hole



Dimensions (mm)				
SN	L	IC	S	D ₁
0903..	9,525	9,525	3,18	3,81
1204..	12,7	12,7	4,76	5,16
1506..	15,875	15,875	6,35	6,35
1906..	19,05	19,05	6,35	7,94
2509..	25,4	25,4	9,52	9,2



⇒ D14, D20~21
D41

⇒ E10

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SNMG

● M-Class Double Sided Bumpy Chipbreaker


Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide
				Coated													Coated	Uncoated	Uncoated
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N			
Medium Cut NUG	SNMG 090308 NUG		0,8	●	●	▲													
	SNMG 120408 NUG		0,8	○	○	▲													
	SNMG 120412 NUG		1,2	○	○	▲													
	SNMG 120416 NUG		1,6	●	○	▲													
	SNMG 150612 NUG		1,2		○														
	SNMG 190612 NUG		1,2		○	▲													
SNMG 190616 NUG		1,6		○															
SNMG 250924 NUG		2,4		○	▲														
Medium Cut L/RUM	SNMG 120404 LUM		0,4												○				
	SNMG 120408 LUM		0,8												○				
	SNMG 120412 LUM		1,2												○				
	SNMG 120404 RUM		0,4												○				
SNMG 120408 RUM		0,8												○					
Medium Cut NEG	SNMG 120404 NEG		0,4	○	●	○													
	SNMG 120408 NEG		0,8	○	○	○													
	SNMG 120412 NEG		1,2	○	○	○													
	SNMG 150608 NEG		0,8	○	○	○													
	SNMG 150612 NEG		1,2	○	○	○	●	●											
	SNMG 150616 NEG		1,6	○	○	○	○												
SNMG 190612 NEG		1,2	○	○	○														
SNMG 190616 NEG		1,6	○	○	○														
Medium Cut NEX	SNMG 120404 NEX		0,4				●	●	○				○	●	▲	▲			
	SNMG 120408 NEX		0,8				●	●	○				○	●	▲	▲			
	SNMG 120412 NEX		1,2				●	●	○				○	●	▲	▲			
	SNMG 150612 NEX		1,2											○	▲	▲			
	SNMG 190612 NEX		1,2											○	▲	▲			
	SNMG 190616 NEX		1,6											●	▲	▲			
Medium Cut NUP	SNMG 120404 NUP		0,4	●	●	▲	▲						●	●	▲	▲			
	SNMG 120408 NUP		0,8	●	●	▲	▲						●	●	▲	▲			
	SNMG 120412 NUP		1,2			▲	▲						○	○	▲	▲			

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

Neg. Inserts



90° Square Type 0° Relief
With Insert Hole



Dimensions (mm)				
SN	L	IC	S	D1
1204..	12,7	12,7	4,46	5,16
1506..	15,875	15,875	6,35	6,35
1906..	19,05	19,05	6,35	7,94



⇒ D14, D20~21
D41

⇒ E10

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide
				Coated													Coated	Uncoated	Uncoated
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N			
Roughing	 L/RHM	SNMG 120408 LHM	0,8	○	○	○													
		SNMG 120408 RHM	0,8	○	○	○													
Roughing	 NMX	SNMG 120408 NMX	0,8	○	○		▲	▲											
		SNMG 120412 NMX	1,2	○	●		▲	▲											
		SNMG 120416 NMX	1,6	○			▲	▲											
		SNMG 150612 NMX	1,2	●			▲	▲											
		SNMG 150616 NMX	1,6	●			▲	▲											
Roughing	 NGZ	SNMG 120408 NGZ	0,8						●	●	●	▲							
		SNMG 120412 NGZ	1,2						○	●	●	▲							
		SNMG 120416 NGZ	1,6						○	○	●	▲							
		SNMG 150612 NGZ	1,2						○	○	○	▲							
		SNMG 150616 NGZ	1,6						○	○	○	▲							
Roughing	 NUZ	SNMG 120408 NUZ	0,8	○	○		▲			○	○	●	▲						
		SNMG 120412 NUZ	1,2	○	○		▲			○	○	●	▲			○			
		SNMG 120416 NUZ	1,6	○	○						●	○	●	▲					
		SNMG 150612 NUZ	1,2	○	○							●	▲						
		SNMG 150616 NUZ	1,6	○	○							●	▲						

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item

- Neg. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W


S SQUARE TYPE

INSERTS FOR TURNING

Negative Inserts

90° Square Type

0° Relief
With Insert Hole



Dimensions (mm)				
SN	L	IC	S	D1
1204..	12,7	12,7	4,46	5,16
1506..	15,875	15,875	6,35	6,35
1906..	19,05	19,05	6,35	7,94
2507..	25,4	25,4	7,94	9,2
2509..	25,4	25,4	9,52	9,2
3109..	31,75	31,75	9,52	8,8



- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

SNMM ○○○○


	Carbide													Cermets		Carbide		
	Coated													Coated	Uncoated	Uncoated		
	P	M	M	K	H	S	K	S	M	P	P	K	S	N				

● M-Class One Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Heavy Roughing Depth of cut (mm) Feed rate (mm/rev)	NMP	SNMM 120408 NMP	0,8	●	●	●	▲	▲	▲	●	○								○		▲													
		SNMM 120412 NMP	1,2	○	○	●	▲	▲	▲	●	●									○		▲												
		SNMM 120416 NMP	1,6	○	○	○	▲	▲	▲	▲	●	○									○		▲											
		SNMM 120420 NMP	2,0	○	○	○	▲	▲	▲	▲	●	○									○		▲											
		SNMM 150612 NMP	1,2	○	○	●	▲	▲	▲	▲	●	○			●								▲											
		SNMM 150616 NMP	1,6	○	○	●	▲	▲	▲	▲	●	○			●								▲											
		SNMM 190612 NMP	1,2	○	○	●	▲	▲	▲	▲	●	○			●							○		▲										
		SNMM 190616 NMP	1,6	○	○	●	▲	▲	▲	▲	●	○			●							○		▲										
		SNMM 190624 NMP	2,4	○	○	●	▲	▲	▲	▲	●	○			●							○		▲										
		SNMM 250724 NMP	2,4	○	○	●	▲	▲	▲	▲	●	○			○																			
SNMM 250924 NMP	2,4	○	○	●	▲	▲	▲	▲	●	○			○																					
SNMM 310924 NMP	2,4	○	○	●	▲	▲	▲	▲	●	○			○																					
Heavy Roughing Depth of cut (mm) Feed rate (mm/rev)	NMH	SNMM 190612 NMH	1,2	●	●	●	▲	▲	▲	●																								
		SNMM 190616 NMH	1,6	●	●	●	▲	▲	▲	●																								
		SNMM 250724 NMH	2,4	○	○	●	▲	▲	▲	▲	●																							
		SNMM 250924 NMH	2,4	○	○	●	▲	▲	▲	▲	●																							
Heavy Roughing Depth of cut (mm) Feed rate (mm/rev)	NHG	SNMM 120408 NHG	0,8	●	○	○	▲	▲	▲	○				○																				
		SNMM 120412 NHG	1,2	○	○	○	▲	▲	▲	○				○																				
		SNMM 120416 NHG	1,6	○	○	○	▲	▲	▲	○				○																				
		SNMM 150612 NHG	1,2	○	○	○	▲	▲	▲	○				○																				
		SNMM 150616 NHG	1,6	○	○	○	▲	▲	▲	○				○																				
		SNMM 190612 NHG	1,2	○	○	○	▲	▲	▲	○				○																				
		SNMM 190616 NHG	1,6	○	○	○	▲	▲	▲	○				○																				
		SNMM 190624 NHG	2,4	○	○	○	▲	▲	▲	○				○																				
SNMM 190616 NHGS	1,6	○	○	○	▲	▲	▲	○				○																						
Heavy Roughing Depth of cut (mm) Feed rate (mm/rev)	NHP	SNMM 120408 NHP	0,8	○	○	○	▲	▲	▲	○																								
		SNMM 120412 NHP	1,2	○	○	○	▲	▲	▲	○																								
		SNMM 120416 NHP	1,6	○	○	○	▲	▲	▲	○																								
		SNMM 150612 NHP	1,2	○	○	○	▲	▲	▲	○																								
		SNMM 190612 NHP	1,2	○	○	○	▲	▲	▲	○					○																			
		SNMM 190616 NHP	1,6	○	○	○	▲	▲	▲	○					○																			
		SNMM 190624 NHP	2,4	○	○	○	▲	▲	▲	○					○																			
		SNMM 250724 NHP	2,4	○	○	○	▲	▲	▲	○					○																			
SNMM 250924 NHP	2,4	○	○	○	▲	▲	▲	○					○																					
SNMM 310924 NHP	2,4	○	○	○	▲	▲	▲	○					○																					

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

90° Square Type 0° Relief
With Insert Hole



Dimensions (mm)				
SN	L	IC	S	D ₁
1906..	19,05	19,05	6,35	7,94
2507..	25,4	25,4	7,94	9,2
2509..	25,4	25,4	9,52	9,2
3109..	31,75	31,75	9,52	8,8



⇒ D14, D20~21

⇒ E10

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SNMM

● M-Class One Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide		
				Coated													Coated	Uncoated	Uncoated		
				P	M	P _M	K	H	S	K _S	M _S	P _M	P	K	S	N					
Heavy Roughing 		SNMM 190616 NHU SNMM 250724 NHU SNMM 250924 NHU SNMM 310924 NHU	1,6																		
			2,4	●	▲	▲															
			2,4	○	▲	▲															
			2,4	○	▲																
			1,6		▲																
			2,4	●	▲	▲	▲														
			2,4	●	▲	▲															
			2,4	○	▲																
			2,4	○																	
			Heavy Roughing 		SNMM 190612 NHF SNMM 190616 NHF SNMM 190624 NHF SNMM 250724 NHF SNMM 250732 NHF SNMM 250924 NHF SNMM 250932 NHF SNMM 310924 NHF	1,2															
1,6	○	○				▲	▲														
2,4	○	●				▲	▲														
2,4	○	○				▲	▲														
3,2	○	○				▲															
2,4	○	●				▲	▲														
3,2	○	○				▲															
2,4	○	○				▲															
2,4	○	○				▲															
2,4	○	○				▲															

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item


- Neg. Inserts
- -
 -
 -
 -
 -
 -
 -

S SQUARE TYPE


INSERTS FOR TURNING

Negative Inserts

90° Square Type 0° Relief
With Insert Hole



Dimensions (mm)				
SN	L	IC	S	D ₁
0903..	9,525	9,525	3,18	3,81
1204..	12,7	12,7	4,76	5,16
1506..	15,875	15,875	6,35	6,35
1906..	19,05	19,05	6,35	7,94

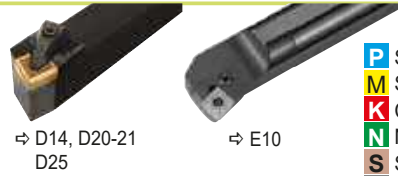

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SNMA/SNGA

● G/M-Class No Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide																
				Coated													Coated	Uncoated	Uncoated																
				P	M	K	H	S	K _S	N _S	P _M	P	K	S	N																				
Roughing		SNMA 120404	0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1			
		SNMA 120408	0,8												○	○	○	○																	
		SNMA 120412	1,2												○	○	○	○																	
		SNMA 120416	1,6												○	○	○	○																	
		SNMA 120420	2,0												○	○	○	○																	
	Medium Cut		SNMA 150612	1,2											○	○	○	○																	
			SNMA 150616	1,6											○	○	○	○																	
			SNMA 190612	1,2												○	○	○	○																
			SNMA 190616	1,6												○	○	○	○																
			SNGA 120404	0,4																○															


SNGG

● G-Class Double Sided Bumpy Chipbreaker


Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide															
				Coated													Coated	Uncoated	Uncoated															
				P	M	K	H	S	K _S	N _S	P _M	P	K	S	N																			
Light Cutting		SNGG 090304 LST	0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
		SNGG 090308 LST	0,8																															
		SNGG 090304 RST	0,4																															
		SNGG 090308 RST	0,8																															
Medium Cut		SNGG 120404 LUM	0,4																															
		SNGG 120408 LUM	0,8																															
		SNGG 120404 RUM	0,4																															
		SNGG 120408 RUM	0,8																															
			1,2																															

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

90° Square Type 0° Relief
Without Insert Hole



Dimensions (mm)				
SN	L	IC	S	D ₁
1204..	12,7	12,7	4,76	5,16



- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SN_N ○○○○○○ ■■■

● G/M-Class No Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide														Cermet		Carbide													
				Coated														Coated	Uncoated	Uncoated													
				P	M	M	K	H	S	K	M	P	P	P	K	S	N																
Medium Cut		SNGN 120408	0,8	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Medium Cut		SNMN 120408 SNMN 120412 SNMN 120416	0,8 1,2 1,6																														

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item

Neg. Inserts




T TRIANGLE TYPE

INSERTS FOR TURNING

Negative Inserts

60° Triangle Type 0° Relief
With Insert Hole



Dimensions (mm)				
TN	L	IC	S	D ₁
1604..	16,5	9,525	4,76	3,81



⇒ D15, D22~23
D42

⇒ E12

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

TNMG

Application	Shape	ISO Cat. No.	RE	Carbide														Cermets		Carbide													
				Coated														Coated		Uncoated													
				P	M	P _M	K	H	S	K _S	M _S	P _M	P	K	S	N	P	K	S	N													
				AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
Fine Finishing	 NFB	TNMG 160402 NFB TNMG 160404 NFB TNMG 160408 NFB	0,2 0,4 0,8																														
Fine Finishing	 NFA	TNMG 160402 NFA TNMG 160404 NFA TNMG 160408 NFA	0,2 0,4 0,8																														
Fine Finishing	 NFL	TNMG 160404 NFL TNMG 160408 NFL	0,4 0,8																														
Fine Finishing	 NFE	TNMG 160402 NFE TNMG 160404 NFE TNMG 160408 NFE TNMG 160412 NFE	0,2 0,4 0,8 1,2																														
Finishing	 NLU	TNMG 160402 NLU TNMG 160404 NLU TNMG 160408 NLU TNMG 160412 NLU	0,2 0,4 0,8 1,2																														
Finishing	 NEF	TNMG 160404 NEF TNMG 160408 NEF	0,4 0,8																														
Finishing	 NSU	TNMG 160402 NSU TNMG 160404 NSU TNMG 160408 NSU TNMG 160412 NSU	0,2 0,4 0,8 1,2																														

Neg. Inserts

C

D

K

R

S


T

V

W

● = Euro stock
○ = Stock item in Japan
▲ = To be replaced by new item

60° Triangle Type 0° Relief
With Insert Hole



Dimensions (mm)				
TN	L	IC	S	D ₁
1603..	16,5	9,525	3,18	3,81
1604..	16,5	9,525	4,76	3,81
2204..	22,0	12,7	4,76	5,16



⇒ D15, D22~23
D42

⇒ E12

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

TNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide	
				Coated													Coated	Uncoated	Uncoated	
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N				
Finishing	<p>NSE</p>	TNMG 160404 NSE	0,4	●	●	○	▲	▲	▲									○		
		TNMG 160408 NSE	0,8	●	●	○	▲	▲	▲										○	
		TNMG 160412 NSE	1,2	●	●	○	▲	▲	▲										○	
		TNMG 220404 NSE	0,4	●	●	○	▲	▲	▲										○	
		TNMG 220408 NSE	0,8	●	○	○	▲	▲	▲										○	
		TNMG 220412 NSE	1,2	○	○	○	▲												○	
	Finishing	<p>NSX</p>	TNMG 160308 NSX	0,8															○	
			TNMG 160404 NSX	0,4	●	○	○	▲												○
			TNMG 160408 NSX	0,8	○	●	○	▲	▲											○
			TNMG 220404 NSX	0,4	○	○	○	▲												○
			TNMG 220408 NSX	0,8	○	○	○	▲	▲											○
			TNMG 220412 NSX	1,2	○	○	○	▲												○
Medium Cut	<p>NGU</p>	TNMG 160404 NGU	0,4	●	●	▲	▲	▲										○		
		TNMG 160408 NGU	0,8	●	●	▲	▲	▲											○	
		TNMG 160412 NGU	1,2	●	●	▲	▲	▲											○	
		TNMG 160416 NGU	1,6	○	●	●	▲	▲											○	
		TNMG 220404 NGU	0,4	○	○	▲	▲												○	
		TNMG 220408 NGU	0,8	●	○	▲	▲	▲											○	
	TNMG 220412 NGU	1,2	●	○	▲	▲	▲											○		
	Medium Cut	<p>NGE</p>	TNMG 160404 NGE	0,4	●	●	○	▲	▲										○	
			TNMG 160408 NGE	0,8	●	●	○	▲	▲											○
			TNMG 160412 NGE	1,2	●	●	○	▲	▲											○
			TNMG 220408 NGE	0,8	○	●	▲	▲	▲											○
			TNMG 220412 NGE	1,2	○	○	●	▲	▲											○

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item


- Neg. Inserts
- -
 -
 -
 -
 -
 -
 -

T TRIANGLE TYPE

INSERTS FOR TURNING

Negative Inserts

60° Triangle Type 0° Relief
With Insert Hole



Dimensions (mm)				
TN	L	IC	S	D ₁
1604..	16,5	9,525	4,76	3,81
2204..	22,0	12,7	4,76	5,16








- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

⇒ D15, D22~23
D42

⇒ E12

TNMG

	Carbide														Cermets		Carbide															
	Coated														Coated		Uncoated		Uncoated													
	P	M	P _M	K	H	S	K _S	M _S	P _M	P	K	S	N	P	K	S	N															
Application	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Shape	    																															
ISO Cat. No.	TNMG 160404 NUG TNMG 160408 NUG TNMG 160412 NUG TNMG 160416 NUG TNMG 220408 NUG TNMG 220412 NUG TNMG 160404 LUM TNMG 160408 LUM TNMG 220404 LUM TNMG 220408 LUM TNMG 160404 RUM TNMG 160408 RUM TNMG 220404 RUM TNMG 220408 RUM TNMG 160404 NEG TNMG 160408 NEG TNMG 160412 NEG TNMG 160404 NEX TNMG 160408 NEX TNMG 160412 NEX TNMG 160404 NUP TNMG 160408 NUP TNMG 160412 NUP TNMG 220408 NUP TNMG 220412 NUP																															
RE	0,4	0,8	1,2	1,6	0,8	1,2	0,4	0,8	0,4	0,8	0,4	0,8	0,4	0,8	0,4	0,8	0,4	0,8	0,4	0,8	0,4	0,8	0,4	0,8	0,4	0,8	0,4	0,8	0,4	0,8	0,4	0,8

● M-Class Double Sided Bumpy Chipbreaker

Neg. Inserts

C

D

K

R

S


T

V

W

● = Euro stock
○ = Stock item in Japan
▲ = To be replaced by new item

60° Triangle Type 0° Relief
With Insert Hole



Dimensions (mm)				
TN	L	IC	S	D ₁
1604..	16,5	9,525	4,76	3,81
2204..	22,0	12,7	4,76	5,16
2706..	27,5	15,875	6,35	6,35
3309..	33,0	19,05	9,52	7,93



⇒ D15, D22~23
D42

⇒ E12

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

TNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide
				Coated													Coated	Uncoated	Uncoated
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N			
Roughing	 NUX	TNMG 160404 NUX	0,4	●	●	○	▲	▲											
		TNMG 160408 NUX	0,8	●	●	○	▲	▲											
		TNMG 160412 NUX	1,2	●	●	○	▲	▲											
		TNMG 220408 NUX	0,8	○	○	○	▲	▲											
		TNMG 220412 NUX	1,2	○	●	○	▲	▲											
Roughing	 NMU	TNMG 160408 NMU	0,8	●	●	○	▲	▲					○						
		TNMG 160412 NMU	1,2	●	●	○	▲	▲											
		TNMG 220408 NMU	0,8	●	●	○	▲	▲					●						
		TNMG 220412 NMU	1,2	●	●	○	▲	▲					●						
		TNMG 220416 NMU	1,6	●	●	○	▲	▲					●						
Roughing	 NEM	TNMG 160408 NEM	0,8	○	●	○							○						
		TNMG 160412 NEM	1,2	○	●	○													
		TNMG 330924 NEM	2,4	○	○														
Roughing	 NME	TNMG 160408 NME	0,8	○	●	○	▲	▲					○	○					
		TNMG 160412 NME	1,2	●	●	○	▲	▲											
		TNMG 220408 NME	0,8	○	○	○	▲	▲						○	○				
		TNMG 220412 NME	1,2	○	○	○	▲	▲						○	○				
		TNMG 220416 NME	1,6	○	○	○	▲	▲						○	○				
Roughing	 NMX	TNMG 160408 NMX	0,8	○	○		▲	▲											
		TNMG 160412 NMX	1,2	●	●		▲	▲											
		TNMG 220408 NMX	0,8	○	○		▲	▲											
		TNMG 220412 NMX	1,2	○	○		▲	▲											

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item


- Neg. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W

T TRIANGLE TYPE

INSERTS FOR TURNING

Negative Inserts

60° Triangle Type 0° Relief
With Insert Hole



Dimensions (mm)				
TN	L	IC	S	D ₁
1604..	16,5	9,525	4,76	3,81
2204..	22,0	12,7	4,76	5,16
2706..	27,5	15,875	6,35	6,35



⇒ D15, D22~23
D42

⇒ E12

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

TNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide		
				Coated													Coated	Uncoated	Uncoated		
				P	M	M	K	H	S	K	S	M	P	P	K	S	N				
Roughing NGZ 	TNMG 160404 NGZ TNMG 160408 NGZ TNMG 160412 NGZ TNMG 220408 NGZ TNMG 220412 NGZ TNMG 220416 NGZ	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
		1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
		0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
		1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
		1,6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
	Roughing L/RHM 	TNMG 160404 LHM TNMG 160408 LHM	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
		TNMG 220404 LHM TNMG 220408 LHM	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
		TNMG 160404 RHM TNMG 160408 RHM	0,4	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
TNMG 220404 RHM TNMG 220408 RHM	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○				
	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○				
Roughing NUZ 	TNMG 160404 NUZ TNMG 160408 NUZ TNMG 160412 NUZ TNMG 160416 NUZ TNMG 160420 NUZ	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		1,6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		2,0	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
	TNMG 220408 NUZ TNMG 220412 NUZ TNMG 220416 NUZ TNMG 270608 NUZ TNMG 270612 NUZ TNMG 270616 NUZ	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		1,6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
		1,6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			


- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

T TRIANGLE TYPE

INSERTS FOR TURNING

Negative Inserts

60° Triangle Type 0° Relief
With Insert Hole



Dimensions (mm)					
TN	L	IC	S	D ₁	
1604..	16,5	9,525	4,76	3,81	
2204..	22,0	12,7	4,76	5,16	



⇒ D15, D22~23


⇒ E12

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

TNMA

● G/M-Class No Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide																	
				Coated													Coated	Uncoated	Uncoated																	
				P	M	P _M	K	H	S	K _S	M _S	P _M	P	K	S	N																				
Roughing		TNMA 160404 TNMA 160408 TNMA 160412 TNMA 160416 TNMA 160420	0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1			
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
			1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
			1,6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
			2,0	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
		1,6	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



⇒ D11

⇒ E11


TRM

● M-Class Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide																	
				Coated													Coated	Uncoated	Uncoated																	
				P	M	P _M	K	H	S	K _S	M _S	P _M	P	K	S	N																				
Fine Finishing		TRM 551704 -FL TRM 551708 -FL	0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1			
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
Finishing	 	TRM 551704 -LU TRM 551708 -LU TRM 551712 -LU	0,4	●	○	▲	▲	▲	▲	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			
			0,8	●	○	▲	▲	▲	▲	▲	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
			1,2	○	○	▲	▲	▲	▲	▲	▲	▲	▲	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
Light Cut	 	TRM 551704 -SU TRM 551708 -SU TRM 551712 -SU	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
			1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Light Cut	 	TRM 551704 -GU TRM 551708 -GU TRM 551712 -GU	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
			0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
			1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

60° Triangle Type 0° Relief
With Insert Hole



Dimensions (mm)					
TN	L	IC	S	D ₁	
1103..	11,0	6,35	3,18	2,26	
1603..	16,5	9,525	3,18	3,81	
1604..	16,5	9,525	4,76	3,81	



⇒ D15, D22~23

⇒ E12

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

TNGG

● G-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide					
				Coated													Coated	Uncoated	Uncoated					
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N								
Finishing	 L/RFT	TNGG 110302 LFT TNGG 110304 LFT	0,2																					
			0,4																					
		TNGG 110302 RFT TNGG 110304 RFT	0,2																					
			0,4																					
Light Cutting	 L/RST	TNGG 160302 LST TNGG 160304 LST TNGG 160308 LST	0,2																					
			0,4																					
			0,8																					
		TNGG 160402 LST TNGG 160404 LST TNGG 160408 LST TNGG 160412 LST	0,2																					
	0,4																							
	0,8																							
	TNGG 160302 RST TNGG 160304 RST TNGG 160308 RST	0,2																						
		0,4																						
TNGG 160402 RST TNGG 160404 RST TNGG 160408 RST TNGG 160412 RST	0,2																							
	0,4																							
Finishing	 NSU	TNGG 160402 NSU TNGG 160404 NSU TNGG 160408 NSU	0,2																					
			0,4																					
			0,8																					
Finishing	 L/RFY	TNGG 160401 LFY TNGG 160402 LFY TNGG 160404 LFY TNGG 160408 LFY TNGG 160412 LFY	0,1																					
			0,2																					
			0,4																					
	TNGG 160401 RFY TNGG 160402 RFY TNGG 160404 RFY TNGG 160408 RFY TNGG 160412 RFY	0,1																						
		0,2																						
		0,4																						
Finishing	 L/RFX	TNGG 160402 LFX TNGG 160404 LFX TNGG 160408 LFX	0,2																					
			0,4																					
			0,8																					
TNGG 160402 RFX TNGG 160404 RFX TNGG 160408 RFX	0,2																							
	0,4																							
	0,8																							

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

Neg. Inserts

C

D

K

R

S

T

V


W

T TRIANGLE TYPE

INSERTS FOR TURNING

Negative Inserts

60° Triangle Type 0° Relief
With Insert Hole



Dimensions (mm)				
TN	L	IC	S	D ₁
1103..	11,0	6,35	3,18	2,26
1604..	16,5	9,525	4,76	3,81
2204..	22,0	12,7	4,76	5,16



⇒ D15, D22~23

⇒ E12

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

TNGG

● G-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide		
				Coated													Coated	Uncoated	Uncoated		
				P	M	K	H	S	K _S	N _S	P _M	P	K	S	N						
Medium Cut	<p>L/RUM</p>	TNGG 160402 LUM	0,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
		TNGG 160404 LUM	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGG 160408 LUM	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGG 160412 LUM	1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGG 220404 LUM	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGG 220408 LUM	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	<p>RUM</p>	TNGG 160402 RUM	0,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
		TNGG 160404 RUM	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGG 160408 RUM	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGG 160412 RUM	1,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGG 220404 RUM	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGG 220408 RUM	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Finishing	<p>NGH</p>	TNGG 160402 NGH	0,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
		TNGG 160404 NGH	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGG 160408 NGH	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


TNGA

● G-Class No Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide		
				Coated													Coated	Uncoated	Uncoated		
				P	M	K	H	S	K _S	N _S	P _M	P	K	S	N						
Medium Cut		TNGA 110308	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
		TNGA 160402	0,2	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGA 160404	0,4	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		TNGA 160408	0,8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
						○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

35° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)				
VN	L	IC	S	D ₁
1604..	16,6	9,525	4,76	3,81



⇒ D16

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

VNMA ○○○○○○

● M-Class No Chipbreaker

Application	Shape	ISO Cat. No.	RE
Roughing		VNMA 160404	0,4
		VNMA 160408	0,8
		VNMA 160412	1,2

Carbide Coated														Cermets		Carbide Uncoated													
P	M	K	H	S	K _s	M _s	P _M	P	K	S	N	Coated		Uncoated															
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

VNMG ○○○○○○

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE
Fine Finishing	 NFB	VNMG 160404 NFB VNMG 160408 NFB	0,4 0,8
Fine Finishing	 NFA	VNMG 160404 NFA VNMG 160408 NFA	0,4 0,8
Fine Finishing	 NFL	VNMG 160404 NFL VNMG 160408 NFL	0,4 0,8
Fine Finishing	 NFE	VNMG 160402 NFE VNMG 160404 NFE VNMG 160408 NFE VNMG 160412 NFE	0,2 0,4 0,8 1,2
Finishing	 NLU	VNMG 160402 NLU VNMG 160404 NLU VNMG 160408 NLU VNMG 160412 NLU	0,2 0,4 0,8 1,2
Medium Cut	 NEF	VNMG 160402 NEF VNMG 160404 NEF VNMG 160408 NEF	0,2 0,4 0,8

Carbide Coated														Cermets		Carbide Uncoated												
P	M	K	H	S	K _s	M _s	P _M	P	K	S	N	Coated		Uncoated														
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


● = Euro stock
○ = Stock item in Japan
▲ = To be replaced by new item

- Neg. Inserts
- C
- D
- K
- R
- S
- T
- V
- W

DIAMOND TYPE INSERTS FOR TURNING

Negative Inserts

35° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)				
VN	L	IC	S	D ₁
1604..	16,6	9,525	4,76	3,81



⇨ D16

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

VNMG


Carbide													Cermets		Carbide	
Coated													Coated		Uncoated	
P	M	K	H	S	K _S	M _S	P _M	P	K	S	N	P	K	S	N	

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
Finishing	 NSU	VNMG 160402 NSU VNMG 160404 NSU VNMG 160408 NSU	0,2					▲			●	●	●																					
			0,4	●	●	○	▲	▲	▲	▲	▲	●	●	●	●							○					○	○	○	○	○	○	○	○
			0,8	●	●	●	▲	▲	▲	▲	▲	●	●	●	●							●					○	○	○	○	○	○	○	○
Medium Cut	 NSE	VNMG 160404 NSE VNMG 160408 NSE	0,4	○	○	○	▲	▲																			○							
			0,8	●	●	○	▲	▲																			○		○					
Medium Cut	 NSX	VNMG 160404 NSX VNMG 160408 NSX	0,4	○	○	○																					○							
			0,8	○	○	○	▲																				○		○					
Medium Cut	 NGU	VNMG 160404 NGU VNMG 160408 NGU VNMG 160412 NGU	0,4	●	●	○	▲	▲	▲	▲	●	●	○	○	○							○					○							
			0,8	●	●	○	▲	▲	▲	▲	▲	●	●	●	○	○	○						○				○		○					
			1,2	●	●	○	▲					●	●	●	○	○	○						○				○		○					
Medium Cut	 NGE	VNMG 160404 NGE VNMG 160408 NGE VNMG 160412 NGE	0,4	○	○	○	▲	▲																										
			0,8	○	○	○	▲	▲																										
			1,2	○	○	○	▲	▲																										
Medium Cut	 NUG	VNMG 160404 NUG VNMG 160408 NUG VNMG 160412 NUG	0,4	○	○	○	▲	▲																										
			0,8	○	○	○	▲	▲																										
			1,2	●			▲	▲																										
Medium Cut	 NEG	VNMG 160404 NEG VNMG 160408 NEG VNMG 160412 NEG	0,4	○	●	○				●	●	●																						
			0,8	○	●	○						●	●	●									○										○	○
			1,2	○	●	○						●	●	●																				
Medium Cut	 NEX	VNMG 160404 NEX VNMG 160408 NEX	0,4							●	●	●									●	○	▲	▲										
			0,8									●	●	●	●							●	○	▲	▲		○							

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

35° Diamond Type 0° Relief
With Insert Hole



Dimensions (mm)				
VN	L	IC	S	D ₁
1604..	16,6	9,525	4,76	3,81



⇒ D16

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

VNMG ○○○○○○ ■■■

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE
Medium Cut	 NUP	VNMG 160404 NUP VNMG 160408 NUP	0,4 0,8
Medium Cut	 NUX	VNMG 160404 NUX VNMG 160408 NUX VNMG 160412 NUX	0,4 0,8 1,2
Medium Cut	 NGZ	VNMG 160404 NGZ VNMG 160408 NGZ VNMG 160412 NGZ	0,4 0,8 1,2
Medium Cut	 NUZ	VNMG 160404 NUZ VNMG 160408 NUZ VNMG 160412 NUZ	0,4 0,8 1,2

Carbide Coated														Cermets		Carbide Uncoated														
P	M	K	H	S	K _s	M _s	P _M	P	Uncoated	P	K	S	N	Coated	Uncoated	Uncoated														
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
●	●	●	▲	▲	▲	●	●	○	○	○	○	○	○	○	●	●	▲	▲	▲	▲	○	○	○	○	○	○	○	○	○	○

VNGG ○○○○○○ ■■■

● G-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE
Finishing	 NSU	VNGG 160402 NSU VNGG 160404 NSU VNGG 160408 NSU	0,2 0,4 0,8
Medium Cut	 NEF	VNGG 160402 NEF VNGG 160404 NEF	0,2 0,4

Carbide Coated														Cermets		Carbide Uncoated														
P	M	K	H	S	K _s	M _s	P _M	P	Uncoated	P	K	S	N	Coated	Uncoated	Uncoated														
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

● = Euro stock
○ = Stock item in Japan
▲ = To be replaced by new item

Neg. Inserts



W TRIGON TYPE


INSERTS FOR TURNING

Negative Inserts

80° Trigon Type

0° Relief

With Insert Hole



Dimensions (mm)				
WN	L	IC	S	D ₁
0604..	6,5	9,525	4,76	3,81
0804..	8,7	12,7	4,76	5,16



⇨ D17, D24
D42

⇨ E13

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

WNMG

Application	Shape	ISO Cat. No.	RE	Carbide														Cermets		Carbide														
				Coated														Coated	Uncoated	Uncoated														
				P	M	P _M	K	H	S	K _S	M _S	P _M	P	K	S	N																		
				AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Fine Finishing		WNMG 060404 NFB WNMG 060408 NFB WNMG 080402 NFB WNMG 080404 NFB WNMG 080408 NFB	0,4 0,8																															
Fine Finishing		WNMG 080402 NFA WNMG 080404 NFA WNMG 080408 NFA	0,2 0,4 0,8																															
Fine Finishing		WNMG 080404 NFL WNMG 080408 NFL	0,4 0,8																															
Fine Finishing		WNMG 060404 NFE WNMG 060408 NFE WNMG 080402 NFE WNMG 080404 NFE WNMG 080408 NFE WNMG 080412 NFE	0,4 0,8 0,2 0,4 0,8 1,2																															
Finishing		WNMG 060404 NLU WNMG 060408 NLU WNMG 060412 NLU WNMG 080404 NLU WNMG 080408 NLU WNMG 080412 NLU	0,4 0,8 1,2 0,4 0,8 1,2																															
Finishing		WNMG 060404 NLU-W WNMG 060408 NLU-W WNMG 080404 NLU-W WNMG 080408 NLU-W WNMG 080412 NLU-W	0,4 0,8 0,4 0,8 1,2																															

Neg. Inserts

C

D

K

R

S


T

V

W

● = Euro stock
○ = Stock item in Japan
▲ = To be replaced by new item

80° Trigon Type 0° Relief
With Insert Hole



Dimensions (mm)				
WN	L	IC	S	D ₁
0604..	6,5	9,525	4,76	3,81
06T3..	6,5	9,525	3,97	3,81
0804..	8,7	12,7	4,76	5,16



⇒ D17, D24
D42

⇒ E13

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

WNMG

Carbide													Cermet		Carbide	
Coated													Coated	Uncoated	Uncoated	
P	M	K	H	S	K _s	M _s	P _M	P	K	S	N	P	K	S	N	

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC4020K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
Finishing	NEF	WNMG 060404 NEF	0,4	●	●	○				●	●	●										○												
		WNMG 060408 NEF	0,8	○	○	○					●	●	●										○											
Finishing	NSU	WNMG 060404 NSU	0,4	●	●	○	▲	▲	▲	●	○	○	●								●	●	▲	▲										
		WNMG 060408 NSU	0,8	●	○	○	▲	▲	▲		○	○	○	●								●	●	▲	▲									
Finishing	NSE	WNMG 080404 NSE	0,4	●	●	○	▲	▲	▲																			○	○	○				
		WNMG 080408 NSE	0,8	●	○	○	▲	▲	▲																			○	○	○				
Finishing	NSE-W	WNMG 060404 NSE-W	0,4	○	○	○																												
		WNMG 060408 NSE-W	0,8	○	○	○	▲	▲	▲																									
Finishing	NSX	WNMG 080404 NSX	0,4	○	○	○																						○	○	○				
		WNMG 080408 NSX	0,8	○	○	○			▲	▲																		○	○	○				
Medium Cut	NGU	WNMG 060404 NGU	0,4	●	●	○	▲	▲	▲	●	○	○	●	○	○																			
		WNMG 060408 NGU	0,8	●	○	○	▲	▲	▲		○	○	○	●	○	○																		
Medium Cut	NGU-W	WNMG 080404 NGU-W	0,4	●	●	○	▲	▲	▲	●	○	○	●	○	○						○	○	▲	▲			○	○	○					
		WNMG 080408 NGU-W	0,8	●	○	○	▲	▲	▲		○	○	○	●	○	○						○	○	▲	▲			○	○	○				
Medium Cut	NGU-W	WNMG 060408 NGU-W	0,8	○	○	○			▲																									
		WNMG 080408 NGU-W	1,2	●	●	○	▲	▲	▲					●					▲	▲														

● = Euro stock
 ○ = Stock item in Japan
 ▲ = To be replaced by new item

- Neg. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W

W TRIGON TYPE


INSERTS FOR TURNING

Negative Inserts

80° Trigon Type

0° Relief

With Insert Hole



Dimensions (mm)				
WN	L	IC	S	D ₁
0604..	6,5	9,525	4,76	3,81
06T3..	6,5	9,525	3,97	3,81
0804..	8,7	12,7	4,76	5,16



⇨ D17, D24
D42

⇨ E13

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

WNMG


Carbide													Cermets		Carbide	
Coated													Coated		Uncoated	
P	M	K	H	S	K _S	M _S	P _M	P	K	S	N	P	K	S	N	

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1				
Medium Cut	 NGE	WNMG 060408 NGE	0,8	●	○	○	▲	▲	▲																												
		WNMG 060412 NGE	1,2	●	●	○	▲	▲	▲																												
		WNMG 080404 NGE	0,4	○	●	○	▲	▲	▲																												
		WNMG 080408 NGE	0,8	●	●	●	▲	▲	▲																												
		WNMG 080412 NGE	1,2	●	●	●	▲	▲	▲																												
Medium Cut	 NUG	WNMG 060404 NUG	0,4		○																																
		WNMG 060408 NUG	0,8		○																																
		WNMG 080404 NUG	0,4		○	○	▲	▲																													
Medium Cut	 NEG	WNMG 060408 NEG	0,8	○	●	○				○	○	○																									
		WNMG 060412 NEG	1,2	○	●	○					○	○	○																								
		WNMG 080404 NEG	0,4	○	●	○					●	●	●																								
Medium Cut	 NEX	WNMG 060404 NEX	0,4							●										●	●	▲	▲														
		WNMG 060408 NEX	0,8								●										●	●	▲	▲													
		WNMG 080404 NEX	0,4								●	●	●	●							●	○	▲	▲													
Medium Cut	 NUP	WNMG 080408 NUP	0,8		●	●		▲	▲		●	●	●							●	●	▲	▲														
		WNMG 080412 NUP	1,2		●			▲	▲		●	●	●	○							○	○	▲	▲													
		WNMG 080408 NEM	0,8	○	●	○					●	●	●																								
Medium Cut	 NEM	WNMG 080412 NEM	1,2	○	●	○				●	●	●																									

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

80° Trigon Type 0° Relief
With Insert Hole



Dimensions (mm)				
WN	L	IC	S	D ₁
0604..	6,5	9,525	4,76	3,81
0804..	8,7	12,7	4,76	5,16



⇒ D17, D24
D42

⇒ E13

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

WNMG

● M-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide
				Coated													Coated	Uncoated	Uncoated
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N			
Roughing	 NUX	WNMG 080404 NUX WNMG 080408 NUX WNMG 080412 NUX	0,4	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
			0,8	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
			1,2	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Roughing	 NMU	WNMG 060408 NMU WNMG 060412 NMU WNMG 080408 NMU WNMG 080412 NMU WNMG 080416 NMU	0,8	●	○	●	●	●	●	●	●	●	●	●	●	●	●		
			1,2	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
			1,6	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Roughing	 NME	WNMG 060408 NME WNMG 060412 NME WNMG 080408 NME WNMG 080412 NME WNMG 080416 NME	0,8	○	○	○	●	●	●	●	●	●	●	●	●	●	●		
			1,2	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
			1,6	●	●	○	●	●	●	●	●	●	●	●	●	●	●	●	●
Roughing	 NMX	WNMG 080408 NMX WNMG 080412 NMX	0,8	○	●	●	●	●	●	●	●	●	●	●	●	●	●		
			1,2	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Roughing	 NGZ	WNMG 060408 NGZ WNMG 060412 NGZ WNMG 080404 NGZ WNMG 080408 NGZ WNMG 080412 NGZ	0,8	○	○	○	●	●	●	●	●	●	●	●	●	●	●		
			1,2	○	○	○	●	●	●	●	●	●	●	●	●	●	●	●	
			1,6	○	○	○	●	●	●	●	●	●	●	●	●	●	●	●	●
Roughing	 NUZ	WNMG 080404 NUZ WNMG 080408 NUZ WNMG 080412 NUZ	0,4	○	○	○	●	●	●	●	●	●	●	●	●	●	●		
			0,8	○	○	○	●	●	●	●	●	●	●	●	●	●	●	●	
			1,2	○	○	○	●	●	●	●	●	●	●	●	●	●	●	●	●

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

- Neg. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W


W TRIGON TYPE

INSERTS FOR TURNING

Negative Inserts

80° Trigon Type

0° Relief
With Insert Hole



Dimensions (mm)					
WN	L	IC	S	D ₁	
0804..	8,7	12,7	4,76	5,16	



⇒ D17, D24

⇒ E13

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

WNMM

M-Class One Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide															Cermets		Carbide											
				Coated															Coated	Uncoated	Uncoated											
Heavy Roughing	NMP	WNMM 080408 NMP WNMM 080412 NMP	0,8 1,2	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
				●	●	●	▲	▲	▲	▲	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heavy Roughing	NHG	WNMM 080408 NHG WNMM 080412 NHG	0,8 1,2	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
				●	●	●	▲	▲	▲	▲	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

WNMA

M-Class No Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide															Cermets		Carbide											
				Coated															Coated	Uncoated	Uncoated											
Roughing	[Shape]	WNMA 080408 WNMA 080412 WNMA 080416	0,8 1,2 1,6	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


WNGG

G-Class Double Sided Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide															Cermets		Carbide											
				Coated															Coated	Uncoated	Uncoated											
Finishing	NSU	WNGG 080404 NSU	0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

- = Euro stock
- = Stock item in Japan
- ▲ = To be replaced by new item

80° Diamond Type 7° Relief
With Insert Hole



Dimensions (mm)					
CC	L	IC	S	D ₁	
03X1..	3,55	3,5	1,4	1,9	
04X1..	4,37	4,3	1,8	2,3	
0602..	6,4	6,35	2,38	2,8	
09T3..	9,7	9,525	3,97	4,4	



- Steel
- Stainless Steel
- Cast Iron
- Non-Ferrous Metals
- Super Alloy
- Hardened Steel



● E-Class

Application	Shape	ISO Cat. No.	RE
Finishing Depth of cut (mm) Feed rate (mm/rev)		CCET 03X1003 LFY	0,03
		CCET 03X101 LFY	0,1
		CCET 03X102 LFY	0,2
		CCET 03X104 LFY	0,4
		CCET 04X1003 LFY	0,03
		CCET 04X101 LFY	0,1
		CCET 04X102 LFY	0,2
		CCET 04X104 LFY	0,4
		CCET 060201 LFY	0,1
		CCET 060202 LFY	0,2
		CCET 09T301 LFY	0,1
		CCET 09T302 LFY	0,2
		CCET 03X1003 RFY	0,03
		CCET 03X101 RFY	0,1
CCET 03X102 RFY	0,2		
CCET 03X104 RFY	0,4		
CCET 04X1003 RFY	0,03		
CCET 04X101 RFY	0,1		
CCET 04X102 RFY	0,2		
CCET 04X104 RFY	0,4		
CCET 060201 RFY	0,1		
CCET 060202 RFY	0,2		
CCET 09T301 RFY	0,1		
CCET 09T302 RFY	0,2		

Carbide																	Cermet			Carbide																																																																																																																																																																																																																																																																																																																																	
Coated																	Coated	Uncoated	Uncoated																																																																																																																																																																																																																																																																																																																																		
P	M	K	N	S	H	S	K _s	M _s	P _M	P	K	S	N	P	K	S	N																																																																																																																																																																																																																																																																																																																																				
●																																																																																																																																																																																																																																																																																																																																																					

Pos. Inserts

● = Euro stock
 ○ = Japan stock
 ▲ = To be replaced by new item

C DIAMOND TYPE


INSERTS FOR TURNING

7° Positive Inserts

80° Diamond Type

7° Relief
With Insert Hole

Dimensions (mm)					
CC	L	IC	S	D ₁	
03X1..	3,55	3,5	1,4	1,9	
04X1..	4,37	4,3	1,8	2,3	
0602..	6,4	6,35	2,38	2,8	
09T3..	9,7	9,525	3,97	4,4	



⇨ D31

⇨ E14

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CCGT


Carbide													Cermet		Carbide	
Coated													Coated / Uncoated		Uncoated	
	P	M	K	H	S	K _S	M _S	P _M	P	K	S	N				

G-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1			
Finishing Depth of cut (mm) Feed rate (mm/rev)		CCGT 060201M NFC	<0,1																																	
		CCGT 060202M NFC	<0,2																																	
		CCGT 060204M NFC	<0,4																																	
		CCGT 09T301M NFC	<0,1																																	
CCGT 09T302M NFC	<0,2																																			
CCGT 09T304M NFC	<0,4																																			
Finishing Depth of cut (mm) Feed rate (mm/rev)		CCGT 0602003 LFX	0,03																																	
		CCGT 060201 LFX	0,1																																	
		CCGT 060202 LFX	0,2																																	
		CCGT 060204 LFX	0,4																																	
CCGT 09T3003 LFX	0,03																																			
CCGT 09T301 LFX	0,1																																			
CCGT 09T302 LFX	0,2																																			
CCGT 09T304 LFX	0,4																																			
CCGT 09T308 LFX	0,8																																			
Finishing Depth of cut (mm) Feed rate (mm/rev)		CCGT 03X1003 LFYS	0,03																																	
		CCGT 03X101 LFYS	0,1																																	
		CCGT 03X102 LFYS	0,2																																	
		CCGT 03X104 LFYS	0,4																																	
CCGT 04X1003 LFYS	0,03																																			
CCGT 04X101 LFYS	0,1																																			
CCGT 04X102 LFYS	0,2																																			
CCGT 04X104 LFYS	0,4																																			
CCGT 03X1003 RFYS	0,03																																			
CCGT 03X101 RFYS	0,1																																			
CCGT 03X102 RFYS	0,2																																			
CCGT 03X104 RFYS	0,4																																			
CCGT 04X1003 RFYS	0,03																																			
CCGT 04X101 RFYS	0,1																																			
CCGT 04X102 RFYS	0,2																																			
CCGT 04X104 RFYS	0,4																																			

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

80° Diamond Type 7° Relief
With Insert Hole



Dimensions (mm)				
CC	L	IC	S	D ₁
03X1..	3,55	3,5	1,4	1,9
04X1..	4,37	4,3	1,8	2,3
0602..	6,4	6,35	2,38	2,8
0903..	9,7	9,525	3,18	4,4
09T3..	9,7	9,525	3,97	4,4
1204..	12,9	12,7	4,76	5,5



⇒ E14

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CCGT

● G-Class

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide	
				Coated													Coated	Uncoated	Uncoated	
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N				
Finishing Depth of cut (mm) Feed rate (mm/rev) L/RFY	CCGT 03X101 LFY CCGT 03X102 LFY CCGT 03X104 LFY CCGT 04X101 LFY CCGT 04X102 LFY CCGT 04X104 LFY	0,1																		
		0,2																		
		0,4																		
	CCGT 03X101 RFY CCGT 03X102 RFY CCGT 03X104 RFY CCGT 04X101 RFY CCGT 04X102 RFY CCGT 04X104 RFY	0,1																		
		0,2																		
		0,4																		
	Light Cut Depth of cut (mm) Feed rate (mm/rev) NAG	CCGT 060202 NAG CCGT 060204 NAG	0,2																	
			0,4																	
		CCGT 09T302 NAG CCGT 09T304 NAG CCGT 09T308 NAG	0,2																	
			0,4																	
CCGT 120404 NAG CCGT 120408 NAG		0,4																		
		0,8																		
Light cut Depth of cut (mm) Feed rate (mm/rev) NSI	CCGT 09T301M NSI CCGT 09T302M NSI CCGT 09T304M NSI	<0,1																		
		<0,2																		
		<0,4																		
Light cut Depth of cut (mm) Feed rate (mm/rev) NSC	CCGT 0602003 NSC CCGT 09T3003 NSC	0,03																		
		0,03																		
	CCGT 060201M NSC CCGT 060202M NSC CCGT 060204M NSC	<0,1																		
		<0,2																		
		<0,4																		
	CCGT 080201M NSC CCGT 080202M NSC	<0,1																		
		<0,2																		
	CCGT 090301M NSC CCGT 090302M NSC	<0,1																		
		<0,2																		
		<0,1																		
		<0,2																		
CCGT 09T301M NSC CCGT 09T302M NSC CCGT 09T304M NSC CCGT 09T308M NSC	<0,1																			
	<0,2																			
	<0,4																			
	<0,8																			

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

Pos.
Inserts




C DIAMOND TYPE

INSERTS FOR TURNING


7° Positive Inserts

80° Diamond Type

7° Relief
With Insert Hole



Dimensions (mm)				
CC	L	IC	S	D ₁
0602..	6,4	6,35	2,38	2,8
09T3..	9,7	9,525	3,97	4,4
1204..	12,9	12,7	4,76	5,5

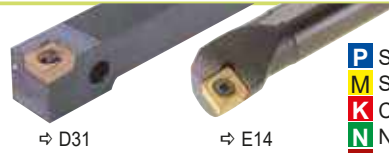

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

CCMT


Carbide													Cermets		Carbide		
Coated													Coated		Uncoated		
P	M	K	N	S	H	S	K	M	P	P	K	S	N	P	K	S	N

M-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Finishing	NFB	CCMT 060202 NFB	0,2																																
		CCMT 060204 NFB	0,4																																
Finishing	NFP	CCMT 09T302 NFP	0,2																																
		CCMT 09T304 NFP	0,4																																
		CCMT 09T308 NFP	0,8																																
Finishing	NLU	CCMT 060202 NLU	0,2	●	●	▲	▲	●	●	○																	●	○	○	○					
		CCMT 060204 NLU	0,4	●	●	▲	▲	●	●	○																	●	○	○	○					
		CCMT 09T302 NLU	0,2								●																●								
Finishing	NLU-W	CCMT 09T304 NLU-W	0,4	●	●	▲	▲	●					○			▲	▲									●	●	●	○						
		CCMT 09T308 NLU-W	0,8	●	●	▲	▲	●						○			▲	▲								●	●	●	○						
Light Cut	NLB	CCMT 060202 NLB	0,2		○	○	▲	▲	○	●	●																●	○		●					
		CCMT 060204 NLB	0,4		○	○	▲	▲	○	●	●																	●	○		●				
		CCMT 060208 NLB	0,8		○	○	▲	▲	○	●	●																		●	○		●			
Light Cut	NSU	CCMT 09T302 NSU	0,2	○	●	○	▲	▲	○	●	●															●	○		●						
		CCMT 09T304 NSU	0,4	○	●	○	▲	▲	○	●	●																●	○		●					
		CCMT 09T308 NSU	0,8	○	●	○	▲	▲	○	●	●																●	○		●					
Light Cut		CCMT 120404 NSU	0,4																							●									
		CCMT 120408 NSU	0,8																								●								

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

80° Diamond Type 7° Relief
With Insert Hole



Dimensions (mm)				
C	L	IC	S	D ₁
0602..	6,4	6,35	2,38	2,8
0803..	8,0	7,94	3,18	3,4
0903..	9,7	9,525	3,18	4,4
09T3..	9,7	9,525	3,97	4,4
1204..	12,9	12,7	4,76	5,5



⇒ E15

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CCMT/-W

Carbide													Cermet		Carbide	
Coated													Coated	Uncoated	Uncoated	
P	M	K	H	S	K _s	M _s	P _M	P	K	S	N					

● M-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Light Cut	 NUS	CCMT 09T308 NUS	0,8	●																														
		 Depth of cut (mm) vs Feed rate (mm/rev)																																
Light Cut	 NSC	CCMT 060204 NSC	0,4	○																														
		CCMT 080304 NSC	0,4	●			▲																											
		CCMT 090304 NSC	0,4																															
		CCMT 090308 NSC	0,8	○																														
Light Cut	 NSK	CCMT 060204 NSK	0,4	●	●	●			▲	▲																								
		CCMT 060208 NSK	0,8	○	●	●			▲	▲																								
		CCMT 060212 NSK	1,2						▲	▲																								
		CCMT 09T304 NSK	0,4	○	●	●			▲	▲																								
Light Cut	 Depth of cut (mm) vs Feed rate (mm/rev)	CCMT 09T308 NSK	0,8	○	●	●		▲	▲																									
		CCMT 120404 NSK	0,4		●	●			▲	▲																								
Light Cut	 Depth of cut (mm) vs Feed rate (mm/rev)	CCMT 120408 NSK	0,8		●	●			▲	▲																								
		CCMT 120412 NSK	1,2						▲																									
Roughing	 NMU	CCMT 09T304 NMU	0,4	●	●	●	▲	▲	▲	●	●		●	○	●	●	▲	▲																
		CCMT 09T308 NMU	0,8	●	●	●	▲	▲	▲	●	●		●	○	●	●	▲	▲																
Roughing	 CCMW	CCMW 060204	0,4											○	○		▲																	
		CCMW 09T304	0,4												○	○	○	▲	▲															
		CCMW 09T308	0,8												○	●	○	▲	▲															

● = Euro stock
 ○ = Japan stock
 ▲ = To be replaced by new item

Pos. Inserts




C DIAMOND TYPE

INSERTS FOR TURNING

11° Positive Inserts

80° Diamond Type 11° Relief
With Insert Hole



Dimensions (mm)				
CP	L	IC	S	D ₁
0802..	8,0	7,94	2,38	3,4
0903..	9,7	9,525	3,18	4,4
1204..	12,9	12,7	4,76	5,5



⇨ E15

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CPGT ○○○○○○ NSD

● G-Class

Application	Shape	ISO Cat. No.	RE
Finishing ~ Light Cut 	 NSD	CPGT 080202 NSD	0,2
		CPGT 080204 NSD	0,4
		CPGT 080208 NSD	0,8
	 NSD	CPGT 090302 NSD	0,2
		CPGT 090304 NSD	0,4
		CPGT 090308 NSD	0,8
	 NSD	CPGT 120402 NSD	0,2
		CPGT 120404 NSD	0,4
		CPGT 120408 NSD	0,8

Carbide Coated														Cermets		Carbide Uncoated													
P	M	M	K	H	S	K _S	M _S	P _M	P	K	S	N																	
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

CPMT ○○○○○○-■


● M-Class

Application	Shape	ISO Cat. No.	RE
Finishing 	 NFB	CPMT 080204 NFB	0,4
		CPMT 090304 NFB	0,4
		CPMT 090308 NFB	0,8
Finishing 	 NLU	CPMT 080204 NLU	0,4 ○ ○
		CPMT 090304 NLU	0,4 ○ ○
		CPMT 090308 NLU	0,8 ○ ○
Finishing 	 NLU-W	CPMT 090304 NLU-W	0,4 ○ ○
		CPMT 090308 NLU-W	0,8 ○ ○
Light Cut 	 NLB	CPMT 080204 NLB	0,4 ○ ○
		CPMT 090304 NLB	0,4 ○ ○
		CPMT 090308 NLB	0,8 ○ ○

Carbide Coated														Cermets		Carbide Uncoated													
P	M	M	K	H	S	K _S	M _S	P _M	P	K	S	N																	
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

80° Diamond Type 11° Relief
With Insert Hole



Dimensions (mm)					
CP	L	IC	S	D ₁	
0602..	6,4	6,35	2,38	2,8	
0802..	8,0	7,94	2,38	3,4	
0903..	9,7	9,525	3,18	4,4	
09T3..	9,7	9,525	3,97	4,4	
1204..	12,9	12,7	4,76	5,5	
1604..	16,1	15,875	4,76	6,5	



⇒ E15

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

CPMT/-H

● M-Class

Application	Shape	ISO Cat. No.	RE
Light Cut NSU	CPMT 060204 NSU CPMT 060208 NSU CPMT 080204 NSU CPMT 080208 NSU CPMT 090304 NSU CPMT 090308 NSU	0,4	○
		0,8	○
		0,4	○ ○ ○ ▲ ▲ ▲
		0,8	○ ○ ○ ▲ ▲ ▲
		0,4	○ ○ ○ ▲ ▲ ▲
		0,8	○ ● ○ ▲ ▲ ▲
Light Cut NUS	CPMT 060204 NUS CPMT 080308 NUS CPMT 09T308 NUS CPMH 120408 NUS CPMH 160408 NUS	0,4	●
		0,8	●
		0,8	●
		0,8	●
		0,8	○
Light-Medium Cut NMU	CPMT 080204 NMU CPMT 080208 NMU CPMT 090304 NMU CPMT 090308 NMU	0,4	○ ○
		0,8	○ ○
		0,4	○ ○
		0,8	○ ○

Carbide														Cermet		Carbide												
Coated														Coated	Uncoated	Uncoated												
P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N																
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1

- Pos. Inserts
- -
 -
 -
 -
 -
 -
 -

● = Euro stock
○ = Japan stock
▲ = To be replaced by new item


DIAMOND TYPE

INSERTS FOR TURNING

7° Positive Inserts

55° Diamond Type

7° Relief
With Insert Hole



Dimensions (mm)				
DC	L	IC	S	D ₁
0702..	7,7	6,35	2,38	2,8
11T3..	11,6	9,525	3,97	4,4



⇒ D32-33

⇒ E16-17

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel


DCGT

G-Class

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide		
				Coated													Coated	Uncoated	Uncoated		
				P	M	K	H	S	K _S	N _S	P _M	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Finishing Depth of cut (mm) Feed rate (mm/rev)	 NFC	DCGT 070201M NFC	<0,1																		
		DCGT 070202M NFC	<0,2																		
		DCGT 070204M NFC	<0,4																		
		DCGT 11T301M NFC	<0,1																		
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFX	DCGT 0702003 LFX	0,03																		
		DCGT 070201 LFX	0,1																		
		DCGT 070202 LFX	0,2																		
		DCGT 070204 LFX	0,4																		
		DCGT 11T3003 LFX	0,03																		
		DCGT 11T301 LFX	0,1																		
		DCGT 11T302 LFX	0,2																		
		DCGT 11T304 LFX	0,4																		
		DCGT 0702003 RFX	0,03																		
		DCGT 070201 RFX	0,1																		
		DCGT 070202 RFX	0,2																		
		DCGT 070204 RFX	0,4																		
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFYs	DCGT 11T3003 RFX	0,03																		
		DCGT 11T301 RFX	0,1																		
		DCGT 11T302 RFX	0,2																		
		DCGT 11T304 RFX	0,4																		
		DCGT 0702003 LFYS	0,03																		
		DCGT 070201 LFYS	0,1																		
		DCGT 070202 LFYS	0,2																		
		DCGT 070204 LFYS	0,4																		
		DCGT 11T3003 LFYS	0,03																		
		DCGT 11T301 LFYS	0,1																		
		DCGT 11T302 LFYS	0,2																		
		DCGT 11T304 LFYS	0,4																		
Finishing Depth of cut (mm) Feed rate (mm/rev)	 RFYS	DCGT 0702003 RFYS	0,03																		
		DCGT 070201 RFYS	0,1																		
		DCGT 070202 RFYS	0,2																		
		DCGT 070204 RFYS	0,4																		
DCGT 11T3003 RFYS	0,03																				
DCGT 11T301 RFYS	0,1																				
DCGT 11T302 RFYS	0,2																				
DCGT 11T304 RFYS	0,4																				

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

55° Diamond Type **7° Relief**
 With Insert Hole



Dimensions (mm)					
DC	L	IC	S	D ₁	
0702..	7,7	6,35	2,38	2,8	
11T3..	11,6	9,525	3,97	4,4	



⇨ D32-33

⇨ E16-17

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

DCGT

● G-Class

Application	Shape	ISO Cat. No.	RE	Carbide														Cermets		Carbide																
				Coated														Coated	Uncoated	Uncoated																
				P	M	K	H	S	Ks	Ms	Pm	P	K	S	N	P	K	S	N																	
Finishing Depth of cut (mm) Feed rate (mm/rev)	LFY	DCGT 0702003 LFY	0,03	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC420K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1			
		DCGT 070201 LFY	0,1																																	
		DCGT 070202 LFY	0,2																																	
		DCGT 070204 LFY	0,4																																	
		DCGT 11T3003 LFY	0,03																																	
		DCGT 11T301 LFY	0,1																																	
		DCGT 11T302 LFY	0,2																																	
		DCGT 11T304 LFY	0,4																																	
		Finishing Depth of cut (mm) Feed rate (mm/rev)	RFY	DCGT 0702003 RFY	0,03																															
				DCGT 070201 RFY	0,1																															
DCGT 070202 RFY	0,2																																			
DCGT 070204 RFY	0,4																																			
DCGT 11T3003 RFY	0,03																																			
Finishing ~ Light Cut Depth of cut (mm) Feed rate (mm/rev)	L/RSD	DCGT 070202 LSD	0,2																																	
		DCGT 070204 LSD	0,4																																	
		DCGT 11T304 LSD	0,4																																	
		DCGT 11T308 LSD	0,8																																	
		DCGT 070202 RSD	0,2																																	
		DCGT 070204 RSD	0,4																																	
Light Cut Depth of cut (mm) Feed rate (mm/rev)	NAG	DCGT 11T304 RSD	0,4																																	
		DCGT 11T308 RSD	0,8																																	
		DCGT 070202 NAG	0,2																																	
		DCGT 070204 NAG	0,4																																	
Light Cut Depth of cut (mm) Feed rate (mm/rev)	NAG	DCGT 11T302 NAG	0,2																																	
		DCGT 11T304 NAG	0,4																																	
		DCGT 11T308 NAG	0,8																																	
		DCGT 11T308 NAG	0,8																																	

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

- Pos. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W


D DIAMOND TYPE

INSERTS FOR TURNING


7° Positive Inserts

55° Diamond Type

7° Relief
With Insert Hole



Dimensions (mm)				
DC	L	IC	S	D ₁
0702..	7,7	6,35	2,38	2,8
0902..	9,7	7,94	2,38	3,4
1103..	11,6	9,525	3,18	4,4
11T3..	11,6	9,525	3,97	4,4

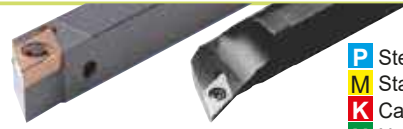

⇒ D32-33

⇒ E16-17

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

DCGT/-W


Carbide													Cermets		Carbide		
Coated													Coated		Uncoated		
P	M	K	N	S	H	S	K	S	N	P	K	S	N	P	K	S	N

G-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1			
Light Cut Depth of cut (mm) Feed rate (mm/rev)	NSI 	DCGT 070201M NSI	<0,1																																	
		DCGT 070202M NSI	<0,2																																	
		DCGT 070204M NSI	<0,4																																	
		DCGT 11T301M NSI	<0,1																																	
		DCGT 11T302M NSI	<0,2																																	
		DCGT 11T304M NSI	<0,4																																	
Light cut Depth of cut (mm) Feed rate (mm/rev)	NSC 	DCGT 0702003 NSC	0,03																																	
		DCGT 11T3003 NSC	0,03																																	
		DCGT 070201M NSC	<0,1																																	
		DCGT 070202M NSC	<0,2																																	
		DCGT 070204M NSC	<0,4																																	
		DCGT 090201M NSC	<0,1																																	
Light Cut Depth of cut (mm) Feed rate (mm/rev)	DCGW 	DCGW 070202	0,2																																	
		DCGW 070204	0,4																																	
		DCGW 070208	0,8																																	
		DCGW 11T302	0,2																																	
		DCGW 11T304	0,4																																	
		DCGW 11T308	0,8																																	

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

55° Diamond Type 7° Relief
With Insert Hole



Dimensions (mm)				
DC	L	IC	S	D ₁
0702..	7,7	6,35	2,38	2,8
11T3..	11,6	9,525	3,97	4,4



⇨ D32-33

⇨ E16-17

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel



Carbide													Cermets		Carbide	
Coated													Coated	Uncoated	Uncoated	
P	M	K	H	S	K _s	M _s	P _M	P	K	S	N					

● M-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC4020K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Finishing	NFB	DCMT 070202 NFB	0,2																																
		DCMT 070204 NFB	0,4																																
		DCMT 070208 NFB	0,8																																
Finishing	NFP	DCMT 11T302 NFB	0,2																																
		DCMT 11T304 NFB	0,4																																
		DCMT 11T308 NFB	0,8																																
Finishing	NLU	DCMT 070202 NLU	0,2	●	○		▲	▲			●	●	○													●	○	○	○						
		DCMT 070204 NLU	0,4	●	○		▲	▲			●	●	○													●	○	○	○						
		DCMT 11T302 NLU	0,2	●	○		▲	▲			●	●	○													●	○	○	○						
Light Cut	NLB	DCMT 070202 NLB	0,2	○	○		▲	▲		○	●	●														●	○	○	○						
		DCMT 070204 NLB	0,4	○	○		▲	▲		○	●	●														●	○	○	○						
		DCMT 070208 NLB	0,8	○	○		▲	▲		○	●	●														●	○	○	○						
Light Cut	NSU	DCMT 11T302 NSU	0,2	●	○	▲	▲	▲		●	●	○					▲	▲			●	▲	▲		●	○	○	○							
		DCMT 11T304 NSU	0,4	●	○	▲	▲	▲		●	●	○					▲	▲			●	▲	▲		●	○	○	○							
		DCMT 11T308 NSU	0,8	●	○	▲	▲	▲		●	●	○					▲	▲			●	▲	▲		●	○	○	○							
Light Cut	NSK	DCMT 070204 NSK	0,4	●	○		▲	▲																											
		DCMT 070208 NSK	0,8	●	○		▲	▲																											
		DCMT 11T304 NSK	0,4	●	○		▲	▲											▲																
Roughing	NMU	DCMT 11T308 NSK	0,8	●	○		▲	▲																											
		DCMT 11T312 NSK	1,2	●	○		▲	▲																											
		DCMT 11T304 NMU	0,4	●	○	▲	▲	▲		●	○	●	●		○	○	○	▲	▲																
Roughing	DCMW 070204	DCMT 11T308 NMU	0,8	●	○	▲	▲	▲		●	○	●	●		○	○	○	▲	▲																
		DCMW 070208	0,8	●	○	▲	▲	▲		●	○	●	●		○	○	○	▲	▲																
		DCMW 11T304	0,4	●	○	▲	▲	▲		●	○	●	●		○	○	○	▲	▲																
Finishing	DCMX 11T308 NLUW	DCMW 11T308	0,8	●	○	▲	▲	▲		●	○	●	●		○	○	○	▲	▲																
		DCMX 11T308 NLUW	0,8	●	○	▲	▲	▲		●	○	●	●		○	○	○	▲	▲																

● = Euro stock
 ○ = Japan stock
 ▲ = To be replaced by new item

Pos. Inserts




R ROUND TYPE


INSERTS FOR TURNING

7° Positive Inserts

Round Type Inserts 7° Relief With Insert Hole



RC...	L	IC	S	D ₁
1003	-	10,0	3,18	3,6
10T3	-	10,0	3,97	3,6
12	-	12,0	4,76	4,2
16	-	16,0	6,35	5,2
20	-	20,0	6,35	6,5
25	-	25,0	7,94	7,2
32	-	32,0	9,52	9,5



Lever lock holders for RCMX
⇒ D34-35

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

(M0: IC is metric)

RCMT M0

● M-Class Bumpy Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide		
				Coated													Coated	Uncoated	Uncoated		
				P	M	P _M	K	H	S	K _S	N _S	P _M	P	K	S	N					
Roughing NRX	RCMT 1003M0 NRX	-	-	●	●	○	▲	▲	▲	○											
	RCMT 10T3M0 NRX	-	-	●	●	▲	▲	▲	○												
	RCMT 1204M0 NRX	-	-	●	●	▲	▲	▲	○												
	RCMT 1606M0 NRX	-	-	●	●	▲	▲	▲	○												
	RCMT 2006M0 NRX	-	-	●	●	▲	▲	▲	○												
	RCMT 2507M0 NRX	-	-	○	○	▲	▲	▲	○												
	RCMT 3209M0 NRX	-	-	○	○	▲	▲	▲	○												
Roughing NRH	RCMT 1204M0 NRH	-	-	○	○	▲	▲	▲	○												
	RCMT 1606M0 NRH	-	-	○	●	▲	▲	▲	○												
	RCMT 2006M0 NRH	-	-	○	○	▲	▲	▲	○												


RCMX M0

● M-Class Grooved Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide		
				Coated													Coated	Uncoated	Uncoated		
				P	M	P _M	K	H	S	K _S	N _S	P _M	P	K	S	N					
Roughing NRP	RCMX 1003M0 NRP	-	-	○	●	▲	▲	▲	○												
	RCMX 1204M0 NRP	-	-	○	●	▲	▲	▲	○												
	RCMX 1606M0 NRP	-	-	○	●	▲	▲	▲	○												
	RCMX 2006M0 NRP	-	-	○	●	▲	▲	▲	○												
	RCMX 2507M0 NRP	-	-	○	○	▲	▲	▲	○												
	RCMX 3209M0 NRP	-	-	○	○	▲	▲	▲	○												

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

90° Square Type 7° Relief
With Insert Hole



Dimensions (mm)					
SC	L	IC	S	D ₁	
0702..	7,94	7,94	2,38	3,4	
0903..	9,525	9,525	3,18	4,4	
09T3..	9,525	9,525	3,97	4,4	
1204..	12,7	12,7	4,76	5,5	



⇨ D36

"S ... SSKC" - Type
 (⇨ Stock in Japan)

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SCGT

● G-Class

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide																			
				Coated													Coated	Uncoated	Uncoated																			
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N																						
Finishing L/RFX 	SCGT 09T302 LFX SCGT 09T304 LFX SCGT 120404 LFX	0,2 0,4 0,4		AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1						
				○																																		
				○																																		
				○																																		
				○																																		
				○																																		
Light Cut NSC 	SCGT 070201M NSC SCGT 070202M NSC SCGT 090301M NSC SCGT 090302M NSC SCGT 09T301M NSC SCGT 09T302M NSC	<0,1 <0,2 <0,1 <0,2 <0,1 <0,2		AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1						

● = Euro stock
 ○ = Japan stock
 ▲ = To be replaced by new item

Pos. Inserts




S SQUARE TYPE

INSERTS FOR TURNING


7° Positive Inserts

90° Square Type

7° Relief
With Insert Hole



Dimensions (mm)				
SC	L	IC	S	D ₁
09T3..	9,525	9,525	3,97	4,4
1204..	12,7	12,7	4,76	5,5

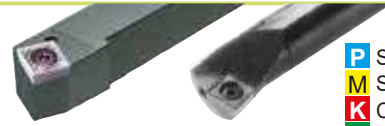

↔ D36

"S... SSKC" - Type
(↔ Stock in Japan)

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SCMT/-W


Carbide														Cermets		Carbide	
Coated														Coated		Uncoated	
P	M	K	H	S	K _S	M _S	P _M	P	K	S	N	P	K	S	N		

● M-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Finishing Depth of cut (mm) Feed rate (mm/rev)	 NFB	SCMT 09T304 NFB SCMT 09T308 NFB	0,4 0,8																							○	●	○	○	○					
																											○	●	○	○	○				
Finishing Depth of cut (mm) Feed rate (mm/rev)	 NFP	SCMT 09T304 NFP SCMT 09T308 NFP	0,4 0,8																								▲		▲	▲	▲				
		SCMT 120404 NFP	0,4																																
Finishing Depth of cut (mm) Feed rate (mm/rev)	 NLU	SCMT 09T304 NLU SCMT 09T308 NLU	0,4 0,8	○	○		▲					○	○														○	○	○	○					
		SCMT 120412 NLU	1,2	●																							○	○	○	○					
Light Cut Depth of cut (mm) Feed rate (mm/rev)	 NLB	SCMT 09T304 NLB SCMT 09T308 NLB	0,4 0,8	○	○		▲	▲				○	○														○	○	○						
																												○	○	○					
Light Cut Depth of cut (mm) Feed rate (mm/rev)	 NSU	SCMT 09T304 NSU SCMT 09T308 NSU	0,4 0,8	●	●	●	▲	▲			●	●	○			▲	▲				●	●	●	▲		●									
		SCMT 120404 NSU SCMT 120408 NSU	0,4 0,8	○	●	●	▲	▲	▲		●			●			▲	▲								●									
Light Cut Depth of cut (mm) Feed rate (mm/rev)	 NSK	SCMT 09T304 NSK SCMT 09T308 NSK	0,4 0,8	●	●		▲	▲																											
		SCMT 120404 NSK SCMT 120408 NSK SCMT 120412 NSK	0,4 0,8 1,2	●			▲	▲																											
Light-Medium Cut Depth of cut (mm) Feed rate (mm/rev)	 NMU	SCMT 09T308 NMU	0,8	○	●	●	▲	▲	▲		○	●		○	○	○	●	▲	▲																
		SCMT 120408 NMU SCMT 120412 NMU	0,8 1,2	●	●	●	▲	▲	▲					○	○	○	●	▲	▲																
		SCMW 09T308	0,8													○	○	○	▲																
		SCMW 120408 SCMW 120412	0,8 1,2													○	○	○																	

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

90° Square Type 11° Relief
With Insert Hole



Dimensions (mm)				
SP	L	IC	S	D ₁
0602..	6,35	6,35	2,38	2,8
0703..	7,94	7,94	3,18	3,4
0903..	9,525	9,525	3,18	3,4
09T3..	9,525	9,525	3,97	4,4
1204..	12,7	12,7	4,76	5,5
1504..	15,875	15,875	4,76	6,5



⇒ E18

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SPMT/-H

Carbide													Cermets		Carbide	
Coated													Coated	Uncoated	Uncoated	
P	M	K	H	S	K _s	M _s	P _M	P	K	S	N					

● M-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
Finishing	 NFB	SPMT 090304 NFB	0,4																															
		SPMT 090308 NFB	0,8																									○	●	○	○			
Finishing	 NLU	SPMT 090304 NLU	0,4																															
		SPMT 090308 NLU	0,8	○	○							○																	○	○	○			
Finishing	 NFK	SPMT 090304 NFK	0,4																															
Light Cut	 NUS	SPMT 060204 NUS	0,4											○														○	○					
		SPMT 070308 NUS	0,8												○																			
		SPMT 09T308 NUS	0,8												○																			
Light Cut	 NUS	SPMH 090308 NUS	0,8											○																				
		SPMH 120408 NUS	0,8												○																			
		SPMH 150408 NUS	0,8												○																			
Light - Medium Cut	 NLB	SPMT 090304 NLB	0,4	○	○				▲	▲	○	○	○																					
		SPMT 090308 NLB	0,8	○	○				▲	▲	○	○	○																					
Light - Medium Cut	 NSF	SPMT 090304 NSF	0,4	○	○				▲	▲																								
		SPMT 090308 NSF	0,8	○	●				▲	▲																								

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

Pos. Inserts




S SQUARE TYPE

INSERTS FOR TURNING

11° Positive Inserts

90° Square Type 11° Relief With Insert Hole



Dimensions (mm)				
SP	L	IC	S	D ₁
0703..	7,94	7,94	3,18	3,4
0903..	9,525	9,525	3,18	3,4



⇨ E18

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

SPGW

● G-Class No Chipbreaker


Application	Shape	ISO Cat. No.	RE
Light Cut		SPGW 090304 T	0,4
		SPGW 070304	0,4
		SPGW 090304	0,4

Carbide Coated															Cermets		Carbide Uncoated											
P	M	K	H	S	K _S	M _S	F _M	P	K	S	N																	
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1

SPGT

● G-Class


Application	Shape	ISO Cat. No.	RE
Finishing - Light Cut	 L/RSD	SPGT 090302 LSD	0,2
		SPGT 090304 LSD	0,4
		SPGT 090308 LSD	0,8
		SPGT 090302 RSD	0,2
		SPGT 090304 RSD	0,4
		SPGT 090308 RSD	0,8



Carbide Coated															Cermets		Carbide Uncoated											
P	M	K	H	S	K _S	M _S	F _M	P	K	S	N																	
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

90° Square Type 11° Relief
Without Insert Hole



Dimensions (mm)				
SP	L	IC	S	D ₁
0903..	9,525	9,525	3,18	-
1203..	12,7	12,7	3,18	-



"S... CSKP...09/12" - Type
(⇒ Stock in Japan)

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

SPMR

● M-Class

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide													
				Coated													Coated	Uncoated	Uncoated													
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N																
Finishing		SPMR 090304 NFK	0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
		SPMR 120304 NFK	0,8																													
Light-Medium Cut		SPMR 090304 NSF	0,4																													
		SPMR 120304 NSF	0,8																													
Light-Medium Cut		SPMR 090304 NUJ	0,4																													
		SPMR 120304 NUJ	0,8																													

SP_N

● G/M-Class No Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide														
				Coated													Coated	Uncoated	Uncoated														
				P	M	F _M	K	H	S	K _S	M _S	P _M	P	K	S	N																	
Medium Cut		SPGN 090304	0,4																														
		SPGN 120304	0,8																														
Medium Cut		SPMN 090304	0,4																														
		SPMN 120304	0,8																														

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

Pos. Inserts




T TRIANGLE TYPE

INSERTS FOR TURNING

5° Positive Inserts

60° Triangle Type

5° Relief
With Insert Hole



Dimensions (mm)				
TB	L	IC	S	D ₁
0601..	6,9	3,97	1,59	2,2



⇨ E20

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

TBGT

● G-Class

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide															
				Coated													Coated	Uncoated	Uncoated															
				P	M	K	H	S	K _s	M _s	P _M	P	K	S	N																			
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFW	TBGT 060102 LFW TBGT 060104 LFW	0,2 0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
		TBGT 060102 RFW TBGT 060104 RFW	0,2 0,4																															
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFX	TBGT 060102 LFX TBGT 060104 LFX	0,2 0,4																															
		TBGT 060102 RFX TBGT 060104 RFX	0,2 0,4																															
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFY	TBGT 060101 LFY TBGT 060102 LFY TBGT 060104 LFY	0,1 0,2 0,4																															
		TBGT 060101 RFY TBGT 060102 RFY TBGT 060104 RFY	0,1 0,2 0,4																															
Finishing-Light Cut Depth of cut (mm) Feed rate (mm/rev)	 L/RW	TBGT 060102 LW TBGT 060104 LW	0,2 0,4																															
		TBGT 060102 RW TBGT 060104 RW	0,2 0,4																															

TBGW

● G-Class No Chipbreaker


Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide														
				Coated													Coated	Uncoated	Uncoated														
				P	M	K	H	S	K _s	M _s	P _M	P	K	S	N																		
Light Cut		TBGW 060102 TBGW 060104	0,2 0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

T TRIANGLE TYPE

INSERTS FOR TURNING

60° Triangle Type 7° Relief With Insert Hole



TC	L	IC	S	D ₁
0802..	8,2	4,76	2,38	2,3
0902..	9,62	5,56	2,38	2,5
1102..	11,0	6,35	2,38	2,8
16T3..	16,5	9,525	3,97	4,3



- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

TCGT

Carbide												Cermets		Carbide	
Coated												Coated	Uncoated	Uncoated	
P	M	K	H	S	K _s	M _s	P _M	P	K	S	N				

● G-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1				
Finishing Depth of cut (mm) Feed rate (mm/rev)	L/RFX	TCGT 090201 LFX TCGT 090202 LFX	0,1 0,2																																	
		TCGT 110201 LFX TCGT 110202 LFX	0,1 0,2																																	
		TCGT 090201 RFX TCGT 090202 RFX	0,1 0,2																																	
		TCGT 110201 RFX TCGT 110202 RFX	0,1 0,2																																	
Finishing Depth of cut (mm) Feed rate (mm/rev)	L/RFY	TCGT 090201 LFY TCGT 090202 LFY	0,1 0,2																																	
		TCGT 110201 LFY TCGT 110202 LFY	0,1 0,2																																	
		TCGT 090201 RFY TCGT 090202 RFY	0,1 0,2																																	
		TCGT 110201 RFY TCGT 110202 RFY	0,1 0,2																																	
Light cut Depth of cut (mm) Feed rate (mm/rev)	NSI	TCGT 110204M NSI	<0,4																																	
Light Cut Depth of cut (mm) Feed rate (mm/rev)	NAG	TCGT 110202 NAG TCGT 110204 NAG	0,2 0,4																																	
		TCGT 16T304 NAG TCGT 16T308 NAG	0,4 0,8																																	
Light Cut Depth of cut (mm) Feed rate (mm/rev)	NSC	TCGT 080201M NSC TCGT 080202M NSC	<0,1 <0,2																																	
		TCGT 090201M NSC TCGT 090202M NSC	<0,1 <0,2																																	
		TCGT 110201M NSC TCGT 110202M NSC TCGT 110204M NSC	<0,1 <0,2 <0,4																																	
		TCGT 110301M NSC TCGT 110302M NSC	<0,1 <0,2																																	

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

- Pos. Inserts
- C
- D
- K
- R
- S
- T
- V
- W

T TRIANGLE TYPE


INSERTS FOR TURNING

7° Positive Inserts

60° Triangle Type

7° Relief

With Insert Hole



Dimensions (mm)				
TC	L	IC	S	D ₁
0902..	9,6	5,56	2,38	2,5
1102..	11,0	6,35	2,38	2,8
16T3..	16,5	9,525	3,97	4,3



⇒ D37

⇒ E19

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

TCMT/-W


Carbide													Cermets		Carbide		
Coated													Coated / Uncoated		Uncoated		
P	M	K	N	S	H	S	K	M	P	P	K	S	N	P	K	S	N

● M-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
Finishing	NFB	TCMT 110204 NFB	0,4																														
		TCMT 110208 NFB	0,8																														
Finishing	NFP	TCMT 090202 NFP	0,2																														
		TCMT 090204 NFP	0,4																														
		TCMT 110202 NFP	0,2																														
		TCMT 110204 NFP	0,4																														
Finishing	NLU	TCMT 110204 NLU	0,4	○	●		▲	▲																									
		TCMT 110208 NLU	0,8	○	○			▲																									
Light Cut	NLB	TCMT 110204 NLB	0,4		○	○		▲	▲																								
		TCMT 110208 NLB	0,8		○	○																											
Light Cut	NSU	TCMT 110204 NSU	0,4	●	●	●	▲	▲	▲	●	●	●	●				▲	▲							●	●	●						
		TCMT 110208 NSU	0,8	●	●	●	▲	▲	▲	●	●	●	○				▲	▲							○								
Light Cut	NSK	TCMT 16T304 NSU	0,4	●	●	●	▲	▲	▲	●	●	●	●				▲	▲							●								
		TCMT 16T308 NSU	0,8	●	●	●	▲	▲	▲	●	●	○	●				▲	▲							●								
Light Cut	NSK	TCMT 110204 NSK	0,4	○	●	●		▲	▲																								
		TCMT 110208 NSK	0,8	○	●	●		▲	▲																								
		TCMT 16T304 NSK	0,4	○	●	●		▲	▲																								
		TCMT 16T308 NSK	0,8	○	●	●		▲	▲																								
Light Cut	TCMW	TCMT 16T312 NSK	1,2	●				▲										▲															
		TCMW 110204	0,4												○	○		▲	▲														
		TCMW 110208	0,8												○	○		▲	▲														
		TCMW 16T304	0,4												○	○		▲	▲														
Light Cut	TCMW	TCMW 16T308	0,8											○	○		▲	▲															
		TCMW 16T312	1,2												○	○		▲	▲														

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

60° Triangle Type 11° Relief
With Insert Hole



Dimensions (mm)				
TP	L	IC	S	D ₁
0802..	8,2	4,76	2,38	2,4
0902..	9,6	5,56	2,38	2,8
1103..	11,0	6,35	3,18	3,4
1603..	16,5	9,525	3,18	4,4



⇒ E20

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

TPGT

● G-Class

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide															
				Coated													Coated	Uncoated	Uncoated															
				P	M	M	K	H	S	K	M	P	P	P	K	S	N																	
Finishing Depth of cut (mm) Feed rate (mm/rev)	 NFC	TPGT 110302M NFC	<0,2	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC420K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
		TPGT 110304M NFC	<0,4																															
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFW	TPGT 080202 LFW	0,2																															
		TPGT 080204 LFW	0,4																															
		TPGT 110202 LFW	0,2																															
		TPGT 110204 LFW	0,4																															
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFX	TPGT 080202 RFW	0,2																															
		TPGT 080204 RFW	0,4																															
		TPGT 110202 RFW	0,2																															
		TPGT 110204 RFW	0,4																															
		TPGT 080202 LFX	0,2																															
		TPGT 080204 LFX	0,4																															
		TPGT 090204 LFX	0,4																															
		TPGT 110204 LFX	0,2																															
		TPGT 110302 LFX	0,2																															
		TPGT 110304 LFX	0,4																															
		TPGT 110308 LFX	0,8																															
		TPGT 160304 LFX	0,4																															
TPGT 160308 LFX	0,8																																	
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFX	TPGT 080202 RFX	0,2																															
		TPGT 080204 RFX	0,4																															
		TPGT 110202 RFX	0,2																															
		TPGT 110302 RFX	0,2																															
		TPGT 110304 RFX	0,4																															
		TPGT 110308 RFX	0,8																															
TPGT 160304 RFX	0,4																																	
TPGT 160308 RFX	0,8																																	

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

Pos. Inserts




T TRIANGLE TYPE

INSERTS FOR TURNING

11° Positive Inserts

60° Triangle Type

11° Relief
With Insert Hole



Dimensions (mm)				
TP	L	IC	S	D ₁
0802..	8,2	4,76	2,38	2,4
0902..	9,6	5,56	2,38	2,8
1102..	11,0	6,35	2,38	2,8
1103..	11,0	6,35	3,18	3,4
1603..	16,5	9,525	3,18	4,4



⇒ E20

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

TPGT/-W


Carbide													Cermets		Carbide		
Coated													Coated		Uncoated		
P	M	K	N	S	H	S	K	M	P	P	K	S	N	P	K	S	N

● G-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1								
Finishing Depth of cut (mm) Feed rate (mm/rev)		L/RFY		TPGT 0802003 LFY	0,03																																			
				TPGT 080201 LFY	0,1																																			
				TPGT 080202 LFY	0,2																																			
				TPGT 080204 LFY	0,4																																			
				TPGT 090201 LFY	0,1																																			
				TPGT 090202 LFY	0,2																																			
				TPGT 090204 LFY	0,4																																			
				TPGT 110202 LFY	0,2																																			
				TPGT 110204 LFY	0,4																																			
				TPGT 110208 LFY	0,8																																			
				TPGT 1103003 LFY	0,03																																			
				TPGT 110301 LFY	0,1																																			
				TPGT 110302 LFY	0,2																																			
				TPGT 110304 LFY	0,4																																			
				TGPT 110308 LFY	0,8																																			
				TPGT 160302 LFY	0,2																																			
				TPGT 160304 LFY	0,4																																			
				TPGT 160308 LFY	0,8																																			
				Light Cut		TPGW		TPGW 080202	0,2																															
								TPGW 110302	0,2																															
								TPGW 110304	0,4																															
								TPGW 110308	0,8																															

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

60° Triangle Type 11° Relief
With Insert Hole



Dimensions (mm)				
TP	L	IC	S	D1
0802..	8,2	4,76	2,38	2,4
1103..	11,0	6,35	3,18	3,4
1604..	16,5	9,525	4,76	4,4



⇒ E20

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

TPGT/-X ○○○○○○-□□

● G-Class Handed Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide													Cermet		Carbide	
				Coated													Coated	Uncoated	Uncoated	
				P	M	P _M	K	H	S	K _S	M _S	P _M	P	K	S	N				
Finishing-Light Cutting 		TPGT 080202 LW TPGT 080204 LW	0,2																	
			0,4																	
		TPGT 110302 LW TPGT 110304 LW	0,2																	
			0,4																	
		TPGT 160402 LW TPGT 160404 LW	0,2																	
			0,4																	
Finishing-Light Cutting 		TPGT 080202 RW TPGT 080204 RW	0,2																	
			0,4																	
		TPGT 110302 RW TPGT 110304 RW	0,2																	
			0,4																	
		TPGT 160404 RW	0,4																	
Finishing-Light Cutting 		TPGT 110302 LSD TPGT 110304 LSD TPGT 110308 LSD	0,2																	
			0,4																	
		TPGT 160402 LSD TPGT 160404 LSD TPGT 160408 LSD	0,2																	
			0,4																	
		TPGT 160408 LSD	0,8																	
Finishing-Light Cutting 		TPGX 110304 L-SDW TPGX 110308 L-SDW	0,4																	
			0,8																	
		TPGX 160404 L-SDW TPGX 160408 L-SDW	0,4																	
			0,8																	
		TPGX 110304 R-SDW TPGX 110308 R-SDW	0,4																	
			0,8																	
TPGX 160404 R-SDW TPGX 160408 R-SDW	0,4																			
	0,8																			



(Note) The cutting point position of the SDW type does not follow the ISO standard. Wenn using on a boring holder with a 93° approach angle, there is a need to revise the cutting point position (refer to right table) relative to using standard inserts.

RE	Compensation (mm)	
	X (Diam. change)	Z
0,4	+0,12 (Ø: +0,24)	-0,02
0,8	+0,12 (Ø: +0,24)	-0,02

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

- Pos. Inserts
- C
 - D
 - K
 - R
 - S
 - T
 - V
 - W


T TRIANGLE TYPE

INSERTS FOR TURNING

11° Positive Inserts

60° Triangle Type

11° Relief
With Insert Hole



TP	Dimensions (mm)			
	L	IC	S	D ₁
0802..	8,2	4,76	2,38	2,4
0902..	9,6	5,56	2,38	2,8
1103..	11,0	6,35	3,18	3,4
1603..	16,5	9,525	3,18	4,4
1604..	16,5	9,525	4,76	4,4



⇒ E20

P	Steel
M	Stainless Steel
K	Cast Iron
N	Non-Ferrous Metals
S	Super Alloy
H	Hardened Steel

TPMT


Carbide													Cermets		Carbide		
Coated													Coated		Uncoated		
P	M	K	H	S	K _S	M _S	P _M	P	K	S	N						

● M-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Finishing Depth of cut (mm) Feed rate (mm/rev)	NFB	TPMT 080202 NFB	0,2																					○	●	○	○	○						
		TPMT 080204 NFB	0,4																						○	●	○	○	○					
		TPMT 090202 NFB	0,2																							○	●	○	○	○				
		TPMT 090204 NFB	0,4																							○	●	○	○	○				
		TPMT 110302 NFB	0,2																							○	●	○	○	○				
		TPMT 110308 NFB	0,8																							○	●	○	○	○				
Light Cut Depth of cut (mm) Feed rate (mm/rev)	NLB	TPMT 160304 NFB	0,4																						○	○	○	○	○					
		TPMT 160308 NFB	0,8																						○	○	○	○	○					
		TPMT 160404 NFB	0,4																							○	○	○	○	○				
		TPMT 160408 NFB	0,8																							○	○	○	○	○				
		TPMT 080202 NLB	0,2	○	○		▲	▲	▲	○	○	○	○													○	○	○	○	○				
		TPMT 080204 NLB	0,4	○	○		▲	▲	▲	○	○	○	○													○	○	○	○	○				
Finishing Depth of cut (mm) Feed rate (mm/rev)	NFK	TPMT 110304 NFK	0,4																									●	●					
		TPMT 110308 NFK	0,8																									○	○	○	○			
		TPMT 160404 NFK	0,4																									○	○	○	○			
		TPMT 160408 NFK	0,8																									○	○	○	○			
		TPMT 080202 NLU	0,2											●	●											○	○	○	○	○				
		TPMT 080204 NLU	0,4	●		▲							●	●												○	○	○	○	○				
Finishing Depth of cut (mm) Feed rate (mm/rev)	NLU	TPMT 090202 NLU	0,2	○	○		▲																		○	○	○	○	○					
		TPMT 090204 NLU	0,4	○	○		▲																			○	○	○	○	○				
		TPMT 110302 NLU	0,2											●	●											○	○	○	○	○				
		TPMT 110304 NLU	0,4	●	○	▲							●	●	○											○	○	○	○	○				
		TPMT 110308 NLU	0,8	●	○	▲							●	●	○											○	○	○	○	○				

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

60° Triangle Type 11° Relief
With Insert Hole



Dimensions (mm)					
TP	L	IC	S	D ₁	
0802..	8,2	4,76	2,38	2,4	
1103..	11,0	6,35	3,18	3,4	
1604..	16,5	9,525	4,76	4,4	



⇒ E20

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

TPMT

● M-Class

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide			
				Coated													Coated	Uncoated	Uncoated			
				P	M	M	K	H	S	S	S	S	S	S	P	P	K	S	N			
Light Cut Depth of cut (mm) Feed rate (mm/rev)		TPMT 080202 NSU TPMT 080204 NSU TPMT 110302 NSU TPMT 110304 NSU TPMT 110308 NSU TPMT 160404 NSU TPMT 160408 NSU	0,2																			
			0,4																			
			0,2	○	○	○	▲	▲	○	●	●	●	●	○								
			0,4	●	●	●	▲	▲	●	●	●	●	●	○								
			0,8	●	●	●	▲	▲	●	●	●	●	●	○								
			0,4	●	○	○	▲	▲	●	●	●	●	●	○								
0,8	●	○	○	▲	▲	●	●	●	●	●	○											
Light-Medium Cut Depth of cut (mm) Feed rate (mm/rev)		TPMT 110304 NMU TPMT 110308 NMU TPMT 160404 NMU TPMT 160408 NMU	0,4	○	○		▲															
			0,8	○	○		▲															
			0,4	○	○		▲															
			0,8	○	○		▲															
			0,4	○	○		▲															
			0,8	○	○		▲															

TPMT/H NSF

● M-Class

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide			
				Coated													Coated	Uncoated	Uncoated			
				P	M	M	K	H	S	S	S	S	S	P	P	K	S	N				
Light-Medium Cut Depth of cut (mm) Feed rate (mm/rev)		TPMH 110304 NSF TPMH 110308 NSF TPMT 160404 NSF TPMT 160408 NSF	0,4																			
			0,8	●	●		▲	▲														
			0,4	○	●		▲	▲														
			0,8	●	●		▲	▲														

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

Pos. Inserts




T TRIANGLE TYPE

INSERTS FOR TURNING

5°/11° Positive Inserts

60° Triangle Type

5°/11° Relief
Without Insert Hole



Dimensions (mm)				
TP/TB	L	IC	S	D ₁
0601..	6,9	3,97	1,59	-
0902..	9,6	5,56	2,38	-
1103..	11,0	6,35	3,18	-
1603..	16,5	9,525	3,18	-



- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

TPGR

● G-Class Handed Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide																	Cermets		Carbide											
				Coated																	Coated	Uncoated	Uncoated											
				P	M	K	H	S	K _s	N _s	P _M	P	K	S	N																			
Finishing-Light Cut	 L-W	TPGR 090202 LW	0,2	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
		TPGR 110302 LW	0,2																															
		TPGR 160302 LW	0,2																															
Finishing-Light Cut	 R-W	TPGR 090202 RW	0,2																															
		TPGR 110302 RW	0,2																															
		TPGR 160302 RW	0,2																															

TBG

● G-Class No Chipbreaker/ Handed Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide																	Cermets		Carbide									
				Coated																	Coated	Uncoated	Uncoated									
				P	M	K	H	S	K _s	N _s	P _M	P	K	S	N																	
Finishing - Light-Cut		TBGN 060104	0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
		TBGR 060104 LW	0,4																													


TPGN

● G-Class No Chipbreaker

Application	Shape	ISO Cat. No.	RE	Carbide																	Cermets		Carbide													
				Coated																	Coated	Uncoated	Uncoated													
				P	M	K	H	S	K _s	N _s	P _M	P	K	S	N																					
Light Cut		TPGN 090202	0,2	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1				
		TPGN 090204	0,4																																	
		TPGN 090208	0,8																																	
		TPGN 110302	0,2																																	
		TPGN 110304	0,4																																	
		TPGN 110308	0,8																																	
Light Cut		TPGN 160302	0,2																																	
		TPGN 160304	0,4																																	
		TPGN 160308	0,8																																	
		TPGN 160312	1,2																																	

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

60° Triangle Type 11°/20° Relief
Without Insert Hole



Dimensions (mm)				
TP	L	IC	S	D ₁
0902..	9,6	5,56	2,38	-
1103..	11,0	6,35	3,18	-
1603..	16,5	9,525	3,18	-
2204..	22,0	12,7	4,76	-



- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

TPMR

● M-Class

Application	Shape	ISO Cat. No.	RE
Finishing Depth of cut (mm) Feed rate (mm/rev)		TPMR 090204 NFK	0,4
		TPMR 110302 NFK	0,2
		TPMR 110304 NFK	0,4
		TPMR 110308 NFK	0,8
		TPMR 160304 NFK	0,2
Light-Medium Cut Depth of cut (mm) Feed rate (mm/rev)		TPMR 110304 NSF	0,4
		TPMR 110308 NSF	0,8
		TPMR 160304 NSF	0,4
		TPMR 160308 NSF	0,8
		TPMR 160312 NSF	1,2
Light-Medium Cut Depth of cut (mm) Feed rate (mm/rev)		TPMR 110304 NUJ	0,4
		TPMR 110308 NUJ	0,8
		TPMR 160304 NUJ	0,4
		TPMR 160308 NUJ	0,8

Carbide Coated														Cermets		Carbide Uncoated												
P	M	K	H	S	Ks	Ms	Pm	P	K	S	N	P	K	S	N	P	K	S	N									
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1

TPMN

● M-Class No Chipbreaker

Application	Shape	ISO Cat. No.	RE
Medium Cut		TPMN 110304	0,4
		TPMN 110308	0,8
		TPMN 160304	0,4
		TPMN 160308	0,8
		TPMN 160312	1,2
		TPMN 220408	0,8

Carbide Coated														Cermets		Carbide Uncoated												
P	M	K	H	S	Ks	Ms	Pm	P	K	S	N	P	K	S	N	P	K	S	N									
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1

TEGN

● E-Class No Chipbreaker

Application	Shape	ISO Cat. No.	RE
Light-Medium Cut		TEGN 160308	0,8

Carbide Coated														Cermets		Carbide Uncoated												
P	M	K	H	S	Ks	Ms	Pm	P	K	S	N	P	K	S	N	P	K	S	N									
AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

Pos. Inserts




DIAMOND TYPE

INSERTS FOR TURNING

5° Positive Inserts

35° Diamond Type 5° Relief With Insert Hole



Dimensions (mm)				
VB	L	IC	S	D ₁
1102..	11,0	6,35	2,38	2,38
1103..	11,1	6,35	3,18	2,8
1604..	16,6	9,525	4,76	4,4



⇒ D38

⇒ E21-22

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

VBMT/-W

		Carbide													Cermets		Carbide																
		Coated													Coated	Uncoated	Uncoated																
		P	M	M	K	H	S	K	S	M	P	P	K	S	N																		
		AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
Finishing	Depth of cut (mm) Feed rate (mm/rev)	NFB		0,2	0,4	0,8																											
		NFB		0,4	0,8																												
Finishing	Depth of cut (mm) Feed rate (mm/rev)	NFP		0,2	0,4	0,8																											
		NFP		0,4	0,8																												
Finishing	Depth of cut (mm) Feed rate (mm/rev)	NLU		0,2	0,4	0,8																											
		NLU		0,4	0,8																												
Light Cut	Depth of cut (mm) Feed rate (mm/rev)	NLB		0,2	0,4	0,8																											
		NLB		0,4	0,8	1,2																											
Light Cut	Depth of cut (mm) Feed rate (mm/rev)	NSU		0,4	0,8																												
		NSU		0,2	0,4	0,8																											
Light Cut	Depth of cut (mm) Feed rate (mm/rev)	NSK		0,4	0,8																												
		NSK		0,4	0,6	0,8	1,2																										
Light - Medium Cut	Depth of cut (mm) Feed rate (mm/rev)	NMU		0,8																													
Light Cut	Depth of cut (mm) Feed rate (mm/rev)	VBMW 160404		0,4																													
		VBMW 160408		0,8																													

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

Pos. Inserts

C

D

K

R

S


T

V

W

35° Diamond Type

5° Relief
With Insert Hole



Dimensions (mm)					
VB	L	IC	S	D ₁	
1103..	11,1	6,35	3,18	2,8	
1604..	16,6	9,525	4,76	4,4	



⇨ D38

⇨ E21-22

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

VBGT

Application	Shape	ISO Cat. No.	RE	Carbide														Cermets		Carbide													
				Coated														Coated	Uncoated	Uncoated													
				P	M	K	H	S	K _s	M _s	P _M	N	P	K	S	N																	
				AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
Finishing	L/RFX	VBGT 110301 LFX	0,1																														
		VBGT 110302 LFX	0,2																														
		VBGT 110304 LFX	0,4																														
		VBGT 160402 LFX	0,2																														
Finishing	L/RFX	VBGT 160404 LFX	0,4																														
		VBGT 110301 RFX	0,1																														
		VBGT 110302 RFX	0,2																														
		VBGT 110304 RFX	0,4																														
Finishing	L/RFX	VBGT 160402 RFX	0,2																														
		VBGT 160404 RFX	0,4																														
		VBGT 110303 LFYS	0,03																														
		VBGT 110301 LFYS	0,1																														
Finishing	L/RFYS	VBGT 110302 LFYS	0,2																														
		VBGT 110304 LFYS	0,4																														
		VBGT 110308 LFYS	0,8																														
		VBGT 110303 RFYS	0,03																														
Finishing	L/RFY	VBGT 110301 RFY	0,1																														
		VBGT 110302 RFY	0,2																														
		VBGT 110304 RFY	0,4																														
		VBGT 160401M NSI	<0,1																														
Light Cut	NSI	VBGT 110302M NSI	<0,2																														
		VBGT 110304M NSI	<0,4																														
		VBGT 110308M NSI	<0,8																														
		VBGT 160402M NSI	<0,2																														
Light Cut	NSI	VBGT 160404M NSI	<0,4																														
		VBGT 160408M NSI	<0,8																														

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

Pos. Inserts

C

D

K

R

S

T

V

W


DIAMOND TYPE

INSERTS FOR TURNING

7° Positive Inserts

35° Diamond Type

7° Relief
With Insert Hole



Dimensions (mm)				
VC	L	IC	S	D ₁
0802..	8,3	4,76	2,38	2,3
1103..	11,1	6,35	3,18	2,8
1604..	16,6	9,525	4,76	4,4



⇒ D39

"S...- SV...C" - Type
(⇒ Stock in Japan)

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel


VCGT

● G-Class

Application	Shape	ISO Cat. No.	RE	Carbide													Cermets		Carbide															
				Coated													Coated	Uncoated	Uncoated															
				P	M	K	H	S	K _S	N _S	P _M	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1															
Finishing	NFC	VCVT 080204M NFC	<0,4	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1		
		VCVT 110301M NFC	<0,1																															
		VCVT 110302M NFC	<0,2																															
		VCVT 110304M NFC	<0,4																															
Finishing	L/RFX	VCVT 110301 LFX	0,1																															
		VCVT 110302 LFX	0,2																															
		VCVT 110304 LFX	0,4																															
Finishing	L/RFY	VCVT 110301 RFX	0,1																															
		VCVT 110302 RFX	0,2																															
		VCVT 110304 RFX	0,4																															
Finishing	L/RFY	VCVT 110301 LFY	0,1																															
		VCVT 110302 LFY	0,2																															
Finishing	L/RFY	VCVT 110304 LFY	0,4																															
		VCVT 110301 RFY	0,1																															
Light Cut	NAG	VCVT 110302 NAG	0,2																															
		VCVT 110304 NAG	0,4																															
		VCVT 160408 NAG	0,8																															
Light Cut	NSI	VCVT 160412 NAG	1,2																															
		VCVT 220530 NAG	3,0																															
		VCVT 110301M NSI	<0,1																															
Light Cut	NSI	VCVT 110302M NSI	<0,2																															
		VCVT 110304M NSI	<0,4																															
		VCVT 110308M NSI	<0,8																															
		VCVT 160401M NSI	<0,1																															
		VCVT 160402M NSI	<0,2																															
		VCVT 160404M NSI	<0,4																															
		VCVT 160408M NSI	<0,8																															

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

35° Diamond Type 7° Relief
With Insert Hole



Dimensions (mm)					
VC	L	IC	S	D ₁	
0802..	8,3	4,76	2,38	2,3	
1103..	11,1	6,35	3,18	2,8	
1604..	16,6	9,525	4,76	4,4	



⇒ D39

"S...- SV...C" - Type
 (⇒ Stock in Japan)

- P Steel
- M Stainless Steel
- K Cast Iron
- N Non-Ferrous Metals
- S Super Alloy
- H Hardened Steel

VCMT

Carbide													Cermets		Carbide
Coated													Coated	Uncoated	Uncoated
P	M	K	H	S	K _s	M _s	P _M	P	K	S	N				

● M-Class

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC420K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1	
Finishing		VCMT 080202 NFB	0,2																															
		VCMT 080204 NFB	0,4																															
Finishing		VCMT 160404 NLU	0,4	○	○						○	○															○	○	○	○				
		VCMT 160408 NLU	0,8	○	○							○	○														○	○	○	○				
Light Cut		VCMT 080202 NLB	0,2	○	○			▲	▲	○	○	○														○	○							
		VCMT 080204 NLB	0,4	○	○			▲	▲	○	○	○															○	○						
Light Cut		VCMT 160404 NLB	0,4	○	○			▲	▲	○	○	○														○	○							
		VCMT 160408 NLB	0,8	○	○			▲	▲	○	○	○															○	○						
Light Cut		VCMT 080204 NSU	0,4							○	○	●	○												○									
		VCMT 110302 NSU	0,2							●	●	●	●																					
Light Cut		VCMT 110304 NSU	0,4	○				▲		●	●	●	●																					
		VCMT 110308 NSU	0,8	○				▲		●	●	●	○	●																				
Light Cut		VCMT 160404 NSU	0,4	●	●	●	▲	▲	▲	●	●	●	○	●		▲	▲			●	●	▲	▲		●									
		VCMT 160408 NSU	0,8	●	●	●	▲	▲	▲	●	●	●	●	●	●		▲	▲			●	●	▲	▲		●								
Light Cut		VCMT 160404 NSK	0,4	●	●	▲	▲														●	●												
		VCMT 160408 NSK	0,8	●	●	▲	▲															●	●											

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

- Pos. Inserts
- -
 -
 -
 -
 -
 -
 -

W TRIGON TYPE

INSERTS FOR TURNING


5° Positive Inserts



⇒ E23

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

80° Trigon Type 5° Relief
With Insert Hole



Dimensions (mm)					
WB	L	IC	S	D ₁	
0601..	3,2	3,97	1,59	2,2	
0802..	4,6	4,76	2,38	2,4	

WBGT

Carbide														Cermets		Carbide		
Coated														Coated		Uncoated		
P	M	K	N	S	H	S	K	S	M	P	P	K	S	N	P	K	S	N

● G-Class Handed Chipbreaker

Application	Shape	ISO Cat. No.	RE	AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC420K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510J	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1			
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFW	WBGT 060102 LFW WBGT 060104 LFW	0,2 0,4																																	
		WBGT 080202 LFW WBGT 080204 LFW	0,2 0,4																																	
		WBGT 060102 RFW WBGT 060104 RFW	0,2 0,4																																	
		WBGT 080202 RFW WBGT 080204 RFW	0,2 0,4																																	
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFX	WBGT 060102 LFX WBGT 060104 LFX	0,2 0,4																						●	●										
		WBGT 080202 LFX WBGT 080204 LFX	0,2 0,4																						○	○										
		WBGT 060102 RFX WBGT 060104 RFX	0,2 0,4																						●	○										
		WBGT 080202 RFX WBGT 080204 RFX	0,2 0,4																						○	○										
Finishing Depth of cut (mm) Feed rate (mm/rev)	 L/RFY	WBGT 0601003 LFY	0,03																																	
		WBGT 060101 LFY WBGT 060102 LFY WBGT 060104 LFY	0,1 0,2 0,4																																	
		WBGT 080201 LFY WBGT 080202 LFY WBGT 080204 LFY	0,1 0,2 0,4																																	
		WBGT 060101 RFY WBGT 060102 RFY WBGT 060104 RFY	0,1 0,2 0,4																																	
		WBGT 080201 RFY WBGT 080202 RFY WBGT 080204 RFY	0,1 0,2 0,4																																	
		WBGT 060102 LW WBGT 060104 LW	0,2 0,4																								●	●								
Finishing ~ Light Cut Depth of cut (mm) Feed rate (mm/rev)	 L/RW	WBGT 060102 RW WBGT 060104 RW	0,2 0,4																						●	●										
		WBGT 060102 RW WBGT 060104 RW	0,2 0,4																							●	●									

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

Pos. Inserts

C

D

K

R


S

T

V

W

80° Trigon Type 11° Relief
With Insert Hole



Dimensions (mm)				
WP	L	IC	S	D ₁
1102..	4,3	6,35	2,38	2,8
1603..	6,5	9,525	3,18	4,4



- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Non-Ferrous Metals
- S** Super Alloy
- H** Hardened Steel

WPMT NLB

● M-Class

Application	Shape	ISO Cat. No.	RE	Carbide												Cermet		Carbide														
				Coated												Coated	Uncoated	Uncoated														
				P	M	M	K	H	S	K	M	S	P	P	P	K	S	N														
Light Cut Depth of cut (mm) Feed rate (mm/rev) NLB	WPMT 110204 NLB WPMT 160308 NLB	0,4 0,8		AC8015P	AC8025P	AC8035P	AC810P	AC820P	AC830P	AC6020M	AC6030M	AC6040M	AC630M	AC4010K	AC4015K	AC405K	AC415K	AC503U	AC5015S	AC5025S	AC510U	AC520U	AC1030U	AC530U	T1500Z	T3000Z	T1000A	T1500A	G10E	EH510	EH520	H1
				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

- = Euro stock
- = Japan stock
- ▲ = To be replaced by new item

Pos. Inserts

-
-
-
-
-
-
-
-

External Holders

D



D1–D46



External Holders


Selection	Turning Holder Series	D2–7
ISO	Turning Holder Identification Table	D8
	Calculation of The Cutting Edge Position	D9
T-REX Tool Holders	SumiTurn T-REX Tool Holders	D10–11
For High Performance Turning	D Type Double Clamp Holders	
	DC Type Holders	D12
	DD Type Holders	D13
	DS Type Holders	D14
	DT Type Holders	D15
	DV Type Holders	D16
	DW Type Holders	D17
For General Turning	P Type Lever Lock and M Type Top & Hole Clamp Holders	
	PC Type Holders	D18
	PD Type Holders	D19
	PS Type Holders	D20–21
	PT / MT Type Holders	D22–23
	PW / MW Type Holders	D24
For Solid CBN Inserts	C Type Clamp On Holders	D25–26
	X Type Dimple Lock Holders	D27
Selection	Mini Holders Series	D28–29
Special for Back Facing	SBT Type Mini Holders	D30
Small Product Turning	PC / SC Type Mini Holders	D31
	PD / SD Type Mini Holders	D32–33
	PR Type Holders	D34
	SR Type Holders	D35
	SS Type Mini Holders	D36
	ST Type Mini Holders	D37
	SV Type Copying Holders	D38–39
For High Performance Turning	Polygon-Shank Holders	D40
	D Type Double Clamp Holders	
	PSC**DC Type Holders	D41
	PSC**DD Type Holders	D41
	PSC**DS Type Holders	D41
	PSC**DT Type Holders	D42
	PSC**DW Type Holders	D42
For General Turning	S Type Screw Clamp	
	PSC**SC Type Holders	D43
	PSC**SD Type Holders	D43
	PSC**SS Type Holders	D43
	PSC**ST Type Holders	D44
	PSC**SV Type Holders	D44–45

External Tool Holder Series

According to Applications

Application	For Neg. Inserts	For Pos. Inserts	Special Type for Hardened Steel
General Turning	P Type Lever Lock Type  ⇒ D18–D22	P Type Lever Lock Type  ⇒ D31, D32	D Type Double Lock Type  ⇒ D12–D17 ⇒ D41–D42
	M Type Double Lock Type  ⇒ D23–D24	S Type Screw On Type  D31–D33 D35–D37 ⇒ D43–D45	C Type Top Clamp Type  ⇒ D25–D26
	T-REX  ⇒ D10–D11	S Type Screw On Type  ⇒ D38–D39 ⇒ D43–D45	D Type Double Lock Type  ⇒ D13, D16 ⇒ D41
	GNDS, GNDM, GNDMS Type General Grooving  ⇒ F16, F18, F20 ⇒ F36–F39	GNDL, GNDLS Type Deep Grooving  ⇒ F16, F24 ⇒ F36–F39	GNDF, GNDFS Type Axial Grooving  ⇒ F32, F34 ⇒ F36–F39
SCT and GWC Type  ⇒ F40–F44 ⇒ F41	Sumi Grip and Sumi Grip Jr.  ⇒ F45–F50	GWB Type Hard Grooving  ⇒ M42 ⇒ M43	
LTE and STE Type Pitch { 1–4 mm / 24–8 Threads/inch }  ⇒ F54	THE Type Pitch { 0,8–3 mm / 24–10 Threads/inch }  ⇒ Stock in Jp.	BNGG-TT Type Hard Threading Pitch 1–3 mm  ⇒ M44	

External Turning

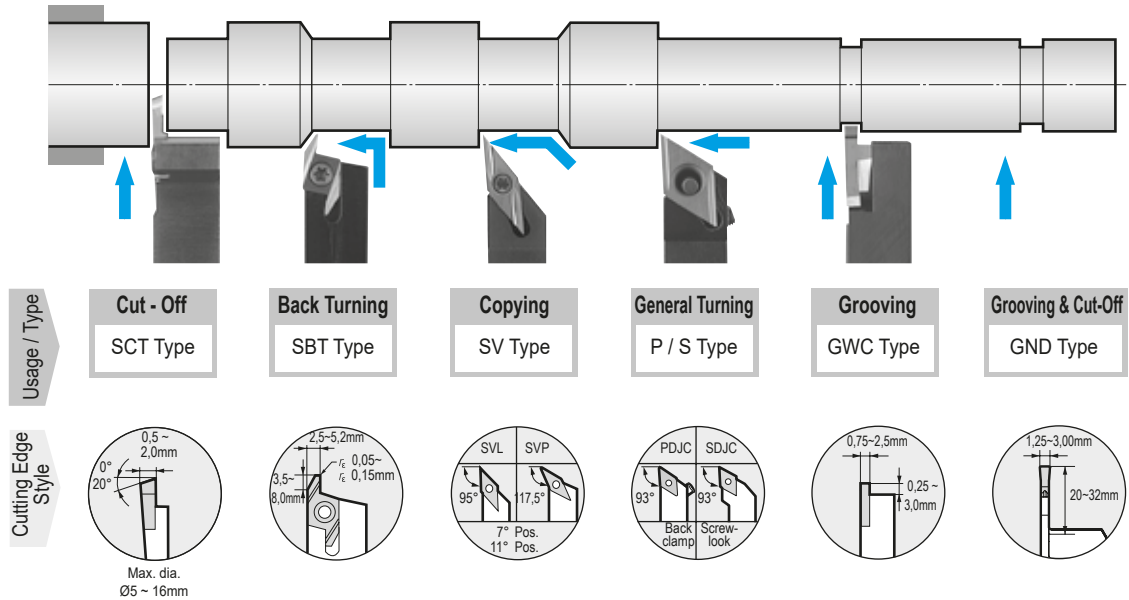

Holder Selection for Autolathe

	Offset - 0 mm Type Holders	Offset - 0,5 mm Type Holders
Tooling		
Features	Program correction is not necessary.	The position of cutting edge can be put in near guide bush through a program correction.
Holder Types	SDJC-X, SDAC-X, SDLC-X, SCAC-X, SVJC-X (⇒ Stock in Japan)	PDJC, SDJC, SDAC, PCLC, SCAC, STAC, SVLC




External Tool Holder Series

Lever Lock System






























Double Lock (D)



D Type "Double Clamp" Holders for high performance machining

TOOLING SELECTION

Application		General Turning & Facing	General Turning & Copying		General Turning			
			80° Diamond Type	55° Diamond Type	T-REX 55°	90° Square Type		
System		Insert Type		System		System		
Screw Lock System	S Type Mini Holder	 SCLC ⇨ D31	 SCAC ⇨ D31	 SDJC ⇨ D32	 SDAC ⇨ D33	—	 SSBC ⇨ D36	
		—	—	 SDNC ⇨ D33	—	—	—	
Lever Lock System	P Type (* Side Lever Lock Type)	 PCLC (*) ⇨ D31	—	 PDJC (*) ⇨ D32	—	—	 PSBN ⇨ D20	 PSDN ⇨ D20
		 PCBN ⇨ D18	 PCLN ⇨ D18	 PDJN ⇨ D19	—	—	 PSKN ⇨ D21	 PSSN ⇨ D21
Top-On Clamp System	C & M Type	 CCLN ⇨ D25	—	—	—	—	 CSBN ⇨ D25	 CSKN ⇨ D25
Double Lock (D) Dimple Lock (X)	D & X Type	 DCLN ⇨ D12	 XCLN ⇨ D27	 DDJN ⇨ D13	—	 DTR ⇨ D11	 XSBN ⇨ D27	—
		—	—	 DDHN ⇨ D13	 DDNN ⇨ D13	—	 DSBN ⇨ D14	 DSDN ⇨ D14



























Top-On Clamp System



Screw Lock System



TOOLING SELECTION

Application		General Turning			Copying		General Turning	Special Turning	
Insert Type		60° Triangle Type			35° Diamond Type		80° Trigon Type	Round and Special Purpose Inserts	
System									
Screw Lock System	S Type Mini Holder	 STAC ⇨ D37	 STGC ⇨ D37	—	 SVJB ⇨ D38 SVLC ⇨ D39	 SVVB ⇨ D38	—	 SRDC ⇨ D35	 SRSC ⇨ D35
		—	—	—	 SVPB ⇨ D38 SVPC ⇨ D39	—	—	 SBT ⇨ D30	—
Lever Lock System	P Type	 PTGN ⇨ D22	 PTFN ⇨ D22	 PTTN ⇨ D22	—	—	 PWLN ⇨ D24	 PRDC ⇨ D34	 PRGC ⇨ D34
		—	—	—	—	—	—	—	—
Top-On Clamp System	C & M Type	 MTJN ⇨ D23	 MTXN ⇨ D23	—	—	—	 MWLN ⇨ D24	 CRDN ⇨ D26	 CRSN ⇨ D26
Double Lock (D) Dimple Lock (X)	D & X Type	 DTJN ⇨ D15	 DTFN ⇨ D15	—	 DVJN ⇨ D16	—	 DWLN ⇨ D17	—	—
		 DTGN ⇨ D15	—	—	 DVQN ⇨ D16	 DVVN ⇨ D16	—	—	—

External Tool Holder Series



Polygon - Shank Holder - Produced According to ISO 26623-1




Negative Insert Type

TOOLING SELECTION

Application			General Turning & Facing		General Turning & Copying			General Turning	
Insert Type System			80° Diamond Type		55° Diamond Type		T-REX 55°	90° Square Type	
Screw Lock System	S Type Mini Holder		SCLC ⇒ D43	—	SDJC ⇒ D43	—	—	—	SSBC ⇒ D43
			—	—	SDHC ⇒ D43	—	—	SRSCR	—
Double Lock (D)	D Type		DCLN ⇒ D41	—	DDJN ⇒ D41	—	—	—	—
			—	—	DDHN ⇒ D41	—	—	DSBN ⇒ D41	—

Classification System for Polygon - Shank Holder

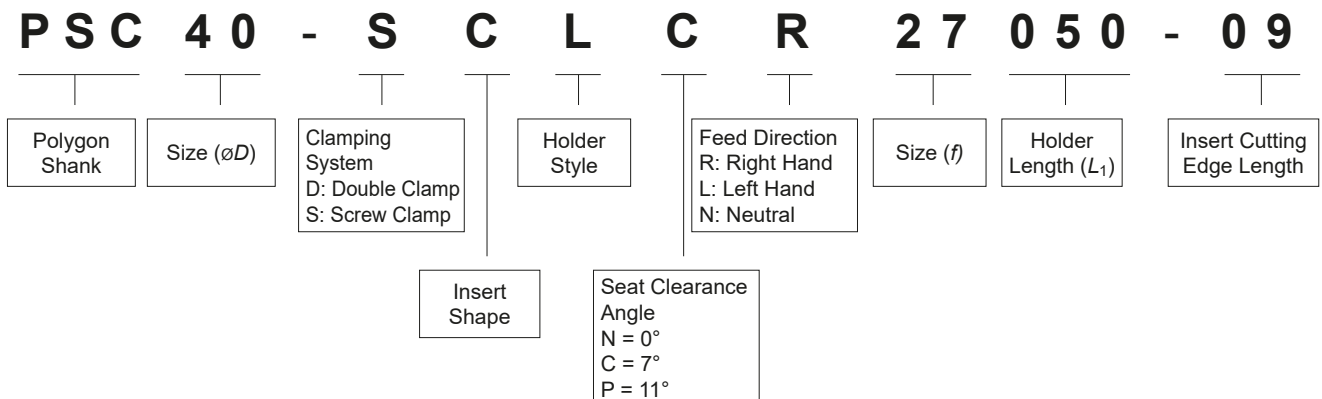








External Holders




Positive Insert Type

TOOLING SELECTION

Application		General Turning			Copying		General Turning	Special Turning	
Insert Type		60° Triangle Type			35° Diamond Type		80° Trigon Type	Round and Special Purpose Inserts	
System									
Screw Lock System	S Type Mini Holder	 STJC ⇨ D44	-	-	 SVJB ⇨ D44 SVHB ⇨ D44	 SVJC ⇨ D45 SVHC ⇨ D45	-	-	-
		-	-	-	 SVVB ⇨ D44	 SVVC ⇨ D45	-	-	-
Double Lock (D)	D Type	 DTJN ⇨ D42	-	-	-	-	 DWLN ⇨ D42	-	-
		-	-	-	-	-	-	-	-

External Holders

Classification System for Polygon - Shank Holder

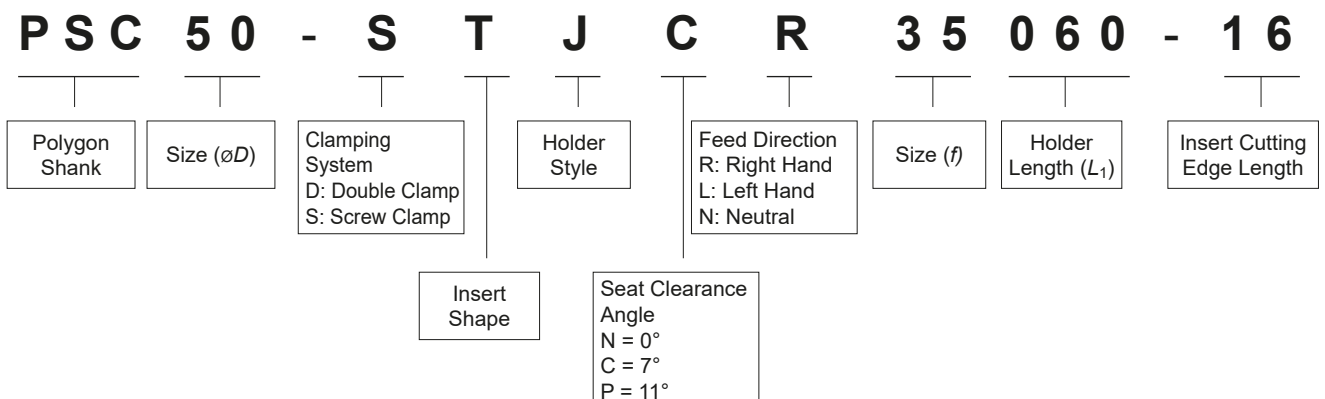

ISO Holders Identification

■ Catalogue Classification System for Tool Holders

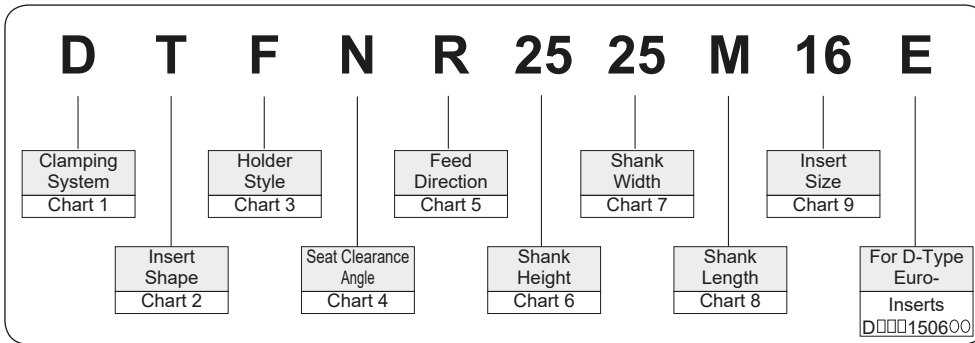


Chart 1

Clamping System					
Symbol	Clamp Types	Example of Structure	Symbol	Clamp Types	Example of Structure
C	Top Clamp		M	Top & Hole Clamp Type	
D	Double Clamp		P	Lever Lock Type (Insert is Supported by 1 face)	
E	Pin Lock Type (Insert is supported by 1 face)		S	Screw Clamp Type	

Chart 5

Feed Direction					
Symbol	Right Hand Feed	Symbol	Neutral Feed	Symbol	Left Hand Feed
R		N		L	

Chart 3

Holder Style					
Symbol	Shape	Offset	Symbol	Shape	Offset
A		Nil	L		With Offset
B		Nil	N		Nil
D		Nil	R		With Offset
E		Nil	S		With Offset
F		With Offset	T		With Offset
G		With Offset	U		With Offset
J		With Offset	W		With Offset
K		With Offset	Y		With Offset

Chart 2

Insert Shape					
Symbol	Insert Shape	Symbol	Insert Shape	Symbol	Insert Shape
A	Parallelogram 85°	M	Rhombic 86°		
B	Parallelogram 82°	O	Octagonal		
C	Diamond 80°	P	Pentagonal		
D	Diamond 55°	R	Round		
E	Diamond 75°	S	Square		
F	Diamond 50°	T	Triangular		
H	Hexagonal	V	Diamond 35°		
K	Parallelogram 55°	W	Trigon		
L	Rectangular				

Chart 4

Seat Clearance Angle	
Symbol	Relief Angle
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°
O	Special Angle

Chart 6

Shank Height		Shank Width	
Symbol	Height (mm)	Symbol	Width (mm)
	12		12
	16		16
	20		20
	25		25
	32		32
	40		40
	50		50
00	Round shank,		Shank Diameter is Shown for Round Shank,

2 digits are used for each dimension in mm.

Chart 7

Shank Length	
Symbol	Length (mm)
F	80
H	100
K	125
M	150
N	160
P	170
Q	180
S	250
T	300
U	350

For some Products, a Hyphen is used Instead of an alphabet.

Chart 8

Cutting Edge	
Symbol	Length (mm)
06	6,9
08	8,2
09	9,6
11	11,0
16	16,5
22	22,0
27	27,5
33	33,0

Chart 9

Cutting Edge		For Round Inserts:	
Symbol	Length (mm)		
		10	10
		12	12
		16	16
		20	20
		25	25
		32	32

■ Cutting Edge Dimensions by Corner Radius

(This table shows X and Y dimensions based on 0° approach angle cutting edge inclination)

Holders			Dimensions(mm)			Holders			Dimensions(mm)		
Symbol	Shapes	Corner Shapes	RE	X	Y	Symbol	Shapes	Corner Shapes	RE	X	Y
A			0,4	0,291	–	K			0,4	0,024	0,089
			0,8	0,581	–				0,8	0,048	0,178
			1,2	0,872	–				1,2	0,072	0,268
			1,6	1,162	–				1,6	0,096	0,357
			2,4	1,743	–				2,4	0,143	0,535
B			0,4	0,089	0,024	L			0,4	0,040	0,040
			0,8	0,178	0,048				0,8	0,079	0,079
			1,2	0,268	0,072				1,2	0,119	0,119
			1,6	0,357	0,096				1,6	0,159	0,159
			2,4	0,535	0,143				2,4	0,238	0,238
D			0,4	0,164	0,164	N			0,4	0,463	0,263
			0,8	0,329	0,329				0,8	0,925	0,471
			1,2	0,493	0,493				1,2	1,388	0,707
			1,6	0,658	0,658				1,6	1,850	0,943
			2,4	0,986	0,986				2,4	2,776	1,414
E			0,4	0,396	0,229	S			0,4	0,164	0,164
			0,8	0,793	0,458				0,8	0,329	0,329
			1,2	1,190	0,687				1,2	0,493	0,493
			1,6	1,587	0,916				1,6	0,658	0,658
			2,4	2,381	1,374				2,4	0,986	0,986
F			0,4	–	0,291	T			0,4	0,396	0,229
			0,8	–	0,581				0,8	0,793	0,458
			1,2	–	0,872				1,2	1,190	0,687
			1,6	–	1,162				1,6	1,587	0,916
			2,4	–	1,743				2,4	2,381	1,374
G			0,4	0,291	–	U			0,4	0,253	0,058
			0,8	0,581	–				0,8	0,506	0,116
			1,2	0,872	–				1,2	0,759	0,175
			1,6	1,162	–				1,6	1,013	0,233
			2,4	1,743	–				2,4	1,519	0,350
J			0,4	0,344	0,033	Y			0,4	0,002	0,033
			0,8	0,687	0,079				0,8	0,005	0,066
			1,2	1,031	0,118				1,2	0,008	0,099
			1,6	1,375	0,157				1,6	0,011	0,132
			2,4	2,062	0,236				2,4	0,017	0,198

External Holders

● Calculation of the Nose Radius Dimensions

(Unit in mm)

Insert Shape	Calculation
	$B = \frac{3}{2}A - RE$
	$B = (\sqrt{2}-1) \times (\frac{A}{2} - RE)$
	$B = \{ \frac{1}{\sin(\theta/2)} - 1 \} \times (\frac{A}{2} - RE)$

Figures of „A“ and „RE“ to calculate Figure „B“

I.C. size (inch)	„A“ dimensions (mm)	Nose symbol	Size (inch)	„RE“ dimension (mm)
–	5/32	02	(0)	0,203
–	6/32	04	1/64	0,397
–	7/32	08	2/64	0,794
2/8	8/32	12	3/64	1,191
–	(0)	16	4/64	1,588
3/8	–	24	6/64	2,389
4/8	–			
5/8	–			
6/8	–			
8/8	–			


SumiTurn T-REX Tool Holders

RIGIDITY - ECONOMY - PRECISION

External Holders
for neg. Inserts



- T-REX clamping for maximum rigidity 50 % more cutting edges than a DNMG Insert

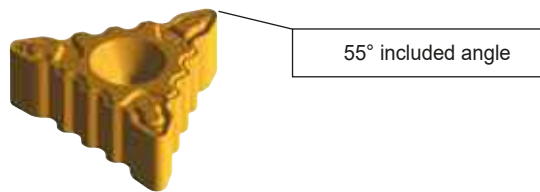

Advantages



● T-REX Inserts for Maximum Economy

With 6 cutting edges and a 55 degree included angle - T-Rex is the intelligent alternative to profile turning with a traditional 4 edge DNMG insert.

● Biting Performance from T-REX Teeth


The double clamp tool holder and powerful teeth of T-REX lock the insert to eliminate movement, dramatically improving tool life, machining accuracy, and cutting edge security.

Application Range

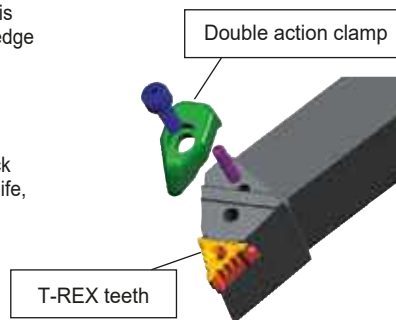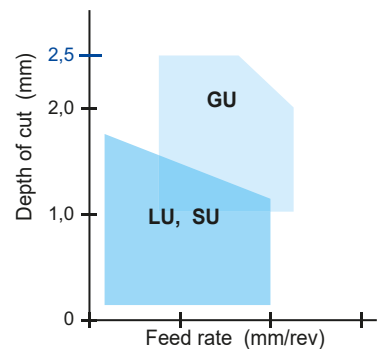


Application Examples

● 20Cr4 Shaft

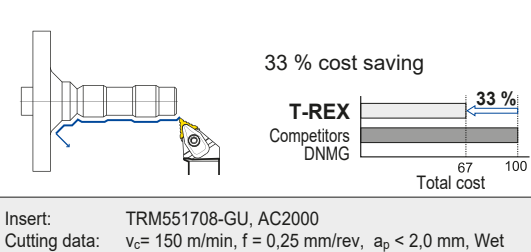

● 25CrMo4 Gear

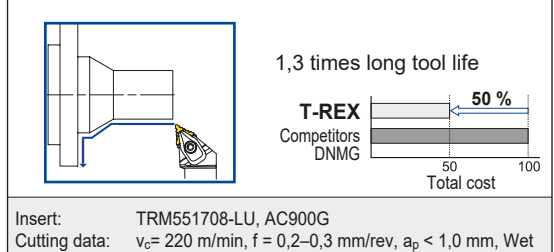


Recommendations

● Depth of Cut



Max. $a_p = 2,5$ mm


● Approach Angle

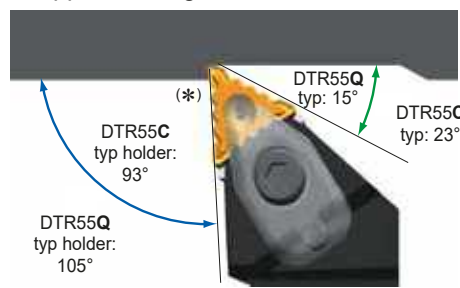

(*) Angle of major cutting edge

C-Type: 95,5°
Q-Type: 107,5°



● Insert Clamping



Recommended Tightening Torque (N·m)

● = Euro stock
○ = Japan stock

External Turning & Copying

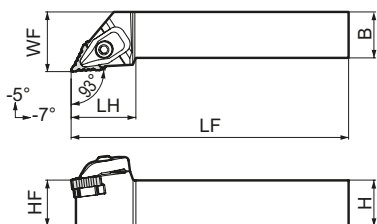

■ Holders



Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)					
	R	L	H	HF	B	LF	LH	WF
DTR 55C-R/L 2020-K17	●	●	20	20	20	125	35	25
DTR 55C-R/L 2525-M17	●	●	25	25	25	150	35	32

■ Spare Parts

Clamp	Spring	Screw	Shim	Screw	Wrench	Wrench
TRCP3	S-SP4-20	BX0520 3,5-4,5 (Nm)	TRW5505	BFTX0307N 2,0 (Nm)	TSW040	TRX10(*)

(*) Note: Wrench (TRX) for shim clamp screw is not included.

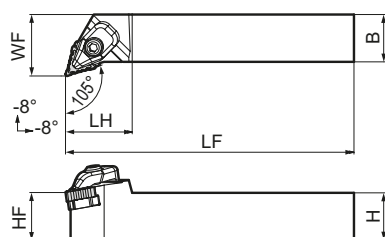

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)					
	R	L	H	HF	B	LF	LH	WF
DTR 55Q-R/L 2020-K17	●	●	20	20	20	125	35	28,5
DTR 55Q-R/L 2525-M17	●	●	25	25	25	150	35	32


■ Spare Parts

Clamp	Spring	Screw	Shim	Screw	Wrench	Wrench
TRCP3	S-SP4-20	BX0520 3,5-4,5 (Nm)	TRW5505	BFTX0307N 2,0 (Nm)	TSW040	TRX10(*)

(*) Note: Wrench (TRX) for shim clamp screw is not included.

■ Inserts

Applic.	Shape	Ordering No.	RE	Coated Carbide						Coated Cermet
				AC8015P	AC8025P	AC810P	AC820P	AC830P	AC630M	T3000Z
Fine Finishing	FL	TRM 551704-FL	0,4		○					○
		551708-FL	0,8		○					○
Finishing	LU	TRM 551704-LU	0,4	●	○	▲	▲	▲		○
		551708-LU	0,8	●	○	▲	▲	▲		○
		551712-LU	1,2	○	○	▲	▲			○
Finishing	SU	TRM 551704-SU	0,4		○		▲		○	○
		551708-SU	0,8		○	▲	▲		○	○
		551712-SU	1,2		○		▲		○	○
Light Cut	GU	TRM 551704-GU	0,4	○	○	▲	▲	▲	○	
		551708-GU	0,8	○	○	▲	▲	▲	○	
		551712-GU	1,2	○	○	▲	▲	▲		



Application **P** Steel
M Stainless steel

● Recommended Cutting Conditions

— Cutting speed (m/min)

Grade		Coated Carbide					Coated Cermet
		AC810P	AC8025P	AC820P	AC830P	AC630M	T3000Z
Work materials	Low carbon steel	220 400	150 350	150 350	120 300	120 300	100 400
	Alloy steel	150 300	100 250	100 250	80 200	80 230	100 250
	Stainless steel				50 150	100 160	
Application range	Finishing	○	○	○	○	○	◎
	Medium cutting	○	◎	◎	○	◎	○
	Interrupted cutting		○	○	◎	○	○

◎ Preferred choice ○ Suitable

External Tool Holders D Type (Double Clamp)

Tool Holders for neg. Inserts CN




■ Characteristics

Insert is clamping firmly for improved fracture resistance.
High indexing accuracy improves machining accuracy.
Insert can be changed from below the holder.
Suitable for high efficiency machining and interrupted cutting in hardened steel.

■ Clamp Mechanism


Secured in two directions and supported by two faces.

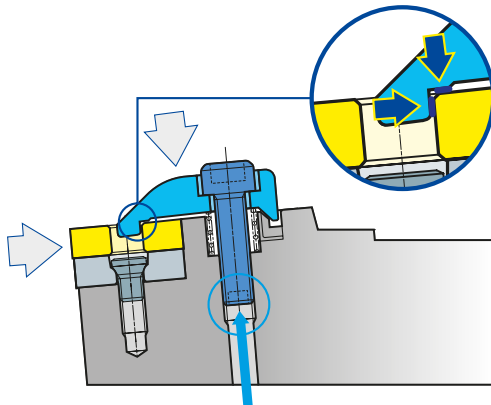


Insert can be changed from below the holder.

■ Index Accuracy Comparison (Length Wise)

D Type Tool Holders

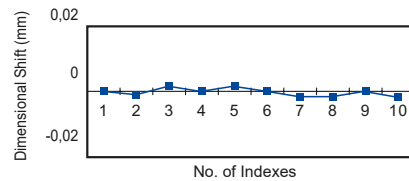

Lever Lock

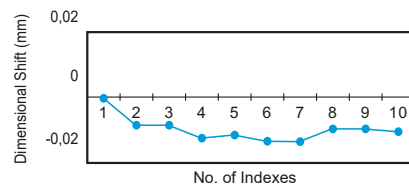

General Turning and Facing



■ Inserts

Eg.



N-GU

- ① CNMG 120408 N-GU
- ② CNMG 160608 N-GU
- ③ CNMM 190612 N-HG
- ④ CNMM 250924 N-HU

■ Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
	SCP2	5,0 (Nm)	CNS1204	BFTX0409N 3,4 (Nm)	TRX15 ^(*)	LH040 LH025	①
	SCP3	5,0 (Nm)	CNS1606	BFTX0509N 5,0 (Nm)	TRX20 ^(*)	LH040 LH025	②
	SCP5	5,0 (Nm)	CNS1906	BFTX0511N 5,0 (Nm)	TRX20 ^(*)	LH040 LH025	③
	SCP6	6,0 (Nm)	CNS2509	BFTX0615N 7,5 (Nm)	TRD25 ^(*)	LH060	④

(*) Note: Wrench (TRX / TRD) for shim clamp screw is not included.

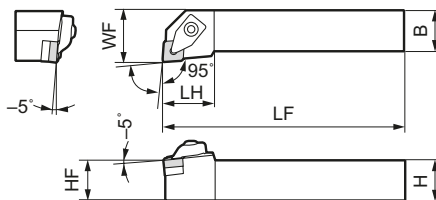



■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)					
	R	L	H	HF	B	LF	LH	WF
DCLN R/L 2020 K12	●	●	20	20	20	125	32	25
DCLN R/L 2525 M12	●	●	25	25	25	150	32	32
DCLN R/L 2525 M16	●	●	25	25	25	150	32	32
DCLN R/L 3232 P16	●	●	32	32	32	170	32	40
DCLN R/L 3232 P19	●	●	32	32	32	170	42	40
DCLN R/L 4040 S19	●	●	40	40	40	250	42	50
DCLN R/L 4040 S25	●	●	40	40	40	250	53	50

General Turning and Copying

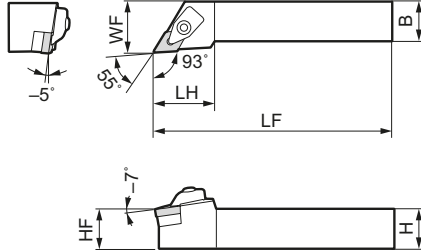

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)						Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF								
DDJN R/L 2020 K15			20	20	20	125	38	25	SCP2	5,0 (Nm)	DNS1504	BFTX0409N	TRX15 ^(*)	LH040		①
DDJN R/L 2020 K15E	●	●	20	20	20	125	38	25			DNS1506					②
DDJN R/L 2525 M15	□		25	25	25	150	38	32			DNS1504					①
DDJN R/L 2525 M15E	●	●	25	25	25	150	38	32			DNS1506					②



(*) Note: Wrench (TRX) for shim clamp screw is not included.

■ Inserts



■ Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert

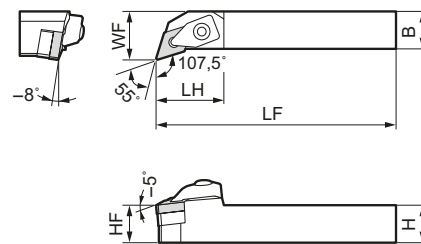


■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)						Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF								
DDHN R/L 2020 K15E	●	●	20	20	20	125	35	25	SCP2	5,0 (Nm)	DNS1506	BFTX0409N	TRX15 ^(*)	LH040		②
DDHN R/L 2525 M15E	●	●	25	25	25	150	35	32								②



(*) Note: Wrench (TRX) for shim clamp screw is not included.

■ Inserts

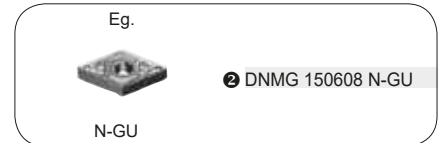

■ Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert

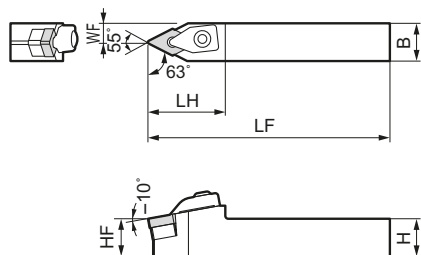

■ Holders

Above figures show right hand tools.

Cat. No.	Stock	Dimensions (mm)						Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
		H	HF	B	LF	LH	WF								
DDNN R/L 2020 K15E	●	20	20	20	125	40	10,5	SCP2	5,0 (Nm)	DNS1506	BFTX0409N	TRX15 ^(*)	LH040		②
DDNN R/L 2525 M15E	●	25	25	25	150	40	13,0								②

(*) Note: Wrench (TRX) for shim clamp screw is not included.

■ Inserts



■ Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert

External Tool Holders D Type (Double Clamp)

Tool Holders for neg. Inserts SN

General Turning and Facing



■ Inserts

Eg.

N-UZ, N-HU

- ① SNMG 190612 N-UZ
- ② SNMM 250724 N-HU
- ③ SNMM 250924 N-HU

■ Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
SCP5		5,0 ^(Nm)	SNS1906	BFTX0511N 5,0 ^(Nm)	TRX20 ^(*)	LH040, LH025	①
SCP6		6,0 ^(Nm)	SNS2507 SNS2509	BFTX0615N 7,5 ^(Nm)	TRD25 ^(*)	LH060	② ③

^(*) Note: Wrench (TRX / TRD) for shim clamp screw is not included.

■ Inserts

Eg.



N-UZ, N-HU

- ① SNMG 190612 N-UZ
- ② SNMM 250724 N-HU
- ③ SNMM 250924 N-HU

■ Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
SCP5		5,0 ^(Nm)	SNS1906	BFTX0511N 5,0 ^(Nm)	TRX20 ^(*)	LH040, LH025	①
SCP6		6,0 ^(Nm)	SNS2507 SNS2509	BFTX0615N 7,5 ^(Nm)	TRD25 ^(*)	LH060	② ③



^(*) Note: Wrench (TRX / TRD) for shim clamp screw is not included.

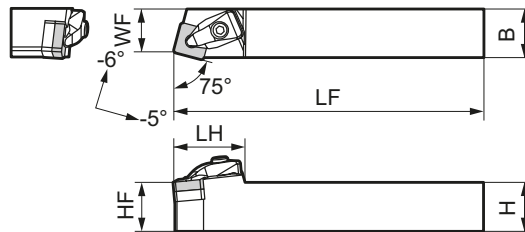

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)					
	R	L	H	HF	B	LF	LH	WF
DSBN R/L 3232 P19	●	●	32	32	32	170	45	27
DSBN R/L 4040 S2507	●	●	40	40	40	250	58	35
DSBN R/L 4040 S2509	●	●	40	40	40	250	58	35

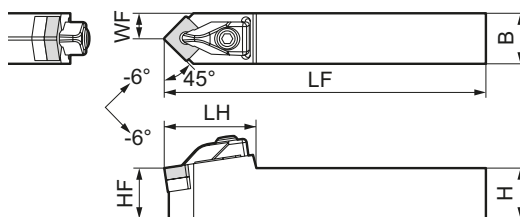




■ Holders

Above figures show right hand tools.

Cat. No.	Stock	Dimensions (mm)					
		H	HF	B	LF	LH	WF
DSDN N 3232 P19	●	32	32	32	170	50	16
DSDN N 4040 S2507	●	40	40	40	250	63	20
DSDN N 4040 S2509	●	40	40	40	250	63	20

External Holders for neg. Inserts

General Turning and Facing

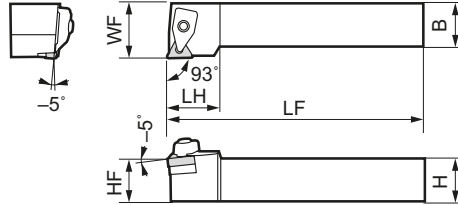

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)					Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
	R	L	H	HF	B	LF	LH								
DTGN R/L 2020 K16	●		20	20	20	125	31	25	SCP1	5,0 ^(Nm)	TNS1604	BFTX0307N 2,0 ^(Nm)	TRX10 ^(*)	LH040	①
DTGN R/L 2525 M16	●	●	25	25	25	150	31	32							



(*) Note: Wrench (TRX) for shim clamp screw is not included.

■ Inserts



■ Spare Parts

							Insert

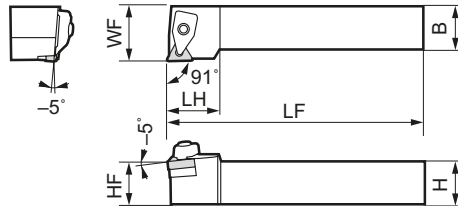

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)					Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
	R	L	H	HF	B	LF	LH								
DTGN R/L 2020 K16	□		20	20	20	125	31	25	SCP1	5,0 ^(Nm)	TNS1604	BFTX0307N 2,0 ^(Nm)	TRX10 ^(*)	LH040	①
DTGN R/L 2525 M16	●	●	25	25	25	150	31	32							



(*) Note: Wrench (TRX) for shim clamp screw is not included.

■ Inserts



■ Spare Parts

							Insert

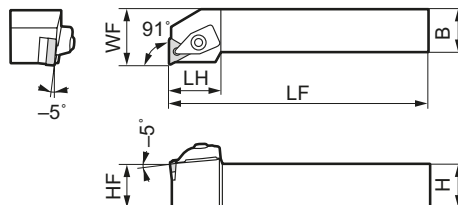

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)					Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
	R	L	H	HF	B	LF	LH								
DTFN R/L 2020 K16	□		20	20	20	125	30	25	SCP1	5,0 ^(Nm)	TNS1604	BFTX0307N 2,0 ^(Nm)	TRX10 ^(*)	LH040	①
DTFN R/L 2525 M16	●	●	25	25	25	150	30	32							

(*) Note: Wrench (TRX) for shim clamp screw is not included.

■ Inserts



■ Spare Parts

							Insert



External Holders
for neg. Inserts

External Tool Holders D Type (Double Clamp)

Tool Holders for neg. Inserts VN



General Turning and Copying

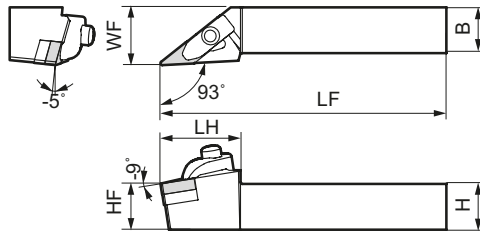

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)					
	R	L	H	HF	B	LF	LH	WF
DVJN R/L 2020 K16	●	●	20	20	20	125	35	25
DVJN R/L 2525 M16	●	●	25	25	25	150	35	32



■ Inserts



■ Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
SCP4		5,0 ^(Nm)	VNS1604	BFTX0307N 2,0 ^(Nm)	TRX10 ^(*)	LH040 LH025	

(*) Note: Wrench (TRX) for shim clamp screw is not included.

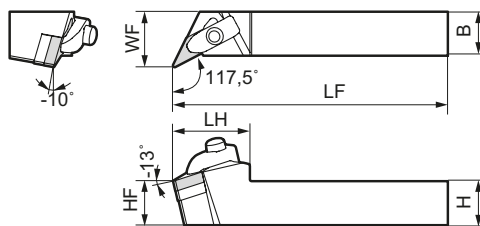


■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)					
	R	L	H	HF	B	LF	LH	WF
DVQN R/L 2020 K16	●	●	20	20	20	125	35	25
DVQN R/L 2525 M16	●	●	25	25	25	150	35	32



■ Inserts

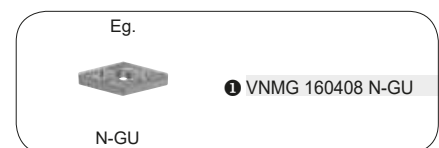

■ Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
SCP4		5,0 ^(Nm)	VNS1604	BFTX0307N 2,0 ^(Nm)	TRX10 ^(*)	LH040 LH025	

(*) Note: Wrench (TRX) for shim clamp screw is not included.

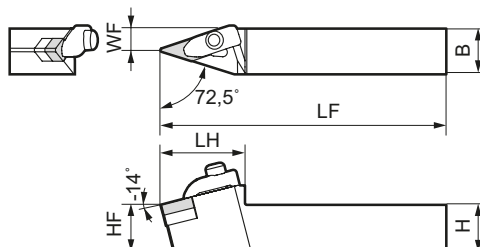

■ Holders

Above figures show right hand tools.

Cat. No.	Stock	Dimensions (mm)					
		H	HF	B	LF	LH	WF
DVVN N 2020 K16	●	20	20	20	125	37	10,0
DVVN N 2525 M16	●	25	25	25	150	37	12,5



■ Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	Insert
SCP4		5,0 ^(Nm)	VNS1604	BFTX0307N 2,0 ^(Nm)	TRX10 ^(*)	LH040 LH025	

(*) Note: Wrench (TRX) for shim clamp screw is not included.



General Turning and Facing

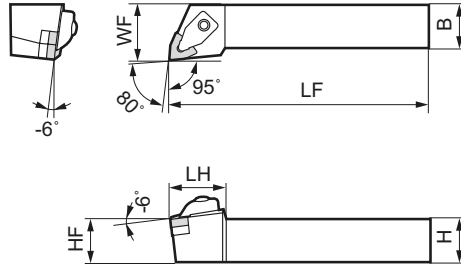

■ Inserts



■ Spare Parts

							Insert
Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench	
	SCP2	5,0 ^(NEM)	WNS0804	BFTX0409N 3,4 ^(NEM)	TRX15 ^(*)	LH040 LH025	①

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LH	WF	
DWLN R/L 2020 K08	●	●	20	20	20	125	32	25	
DWLN R/L 2525 M08	●	●	25	25	25	150	32	32	



(*) Note: Wrench (TRX) for shim clamp screw is not included.

External Tool Holders P Type (Lever Lock)


Tool Holders for neg. Inserts CN



General Turning and Facing

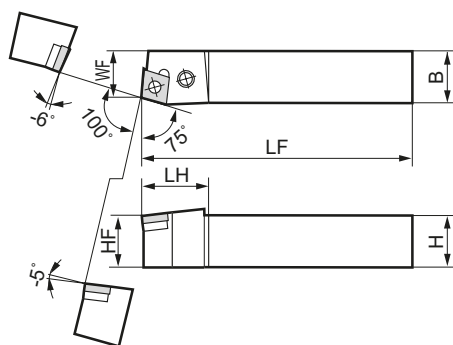

■ Inserts

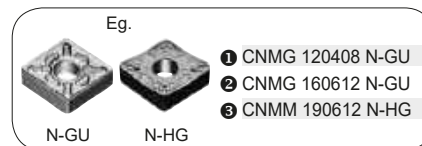


■ Spare Parts

Cat. No.	Stock		Dimensions (mm)							Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF							
PCBN R/L 2020 K12	●	□	20	20	20	125	27	17							
PCBN R/L 2525 M12	●	●	25	25	25	150	27,7	22		LCL4SD	LCS42BS-SD	LSC42SD	LSP4SD	LH030	1
PCBN R/L 3225 P12	□	●	32	32	25	170	27,7	22							
PCBN R/L 2525 M16	□	●	25	25	25	150	31,7	22		LCL5SD	LCS5B-SD	LSC53SD	LSP5SD	LH030	2
PCBN R/L 3225 P16	□	●	32	32	25	170	31,7	22							
PCBN R/L 3232 P19	●	●	32	32	32	170	37,9	27		LCL6SD	LCS6B-SD	LSC63SD	LSP6SD	LH040	3

■ Holders

Above figures show right hand tools.

■ Inserts


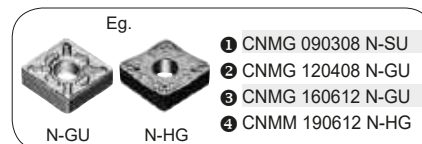


■ Spare Parts



Cat. No.	Stock		Dimensions (mm)							Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF							
PCLN R/L 1616 H09	●	●	16	16	16	100	25,7	20							
PCLN R/L 2020 K09	●	□	20	20	20	125	27	25		LCL3SD	LCS3TB-SD	LSC32SD	LSP3SD	LH025	1
PCLN R/L 2525 M09	□	□	25	25	25	150	27	32							
PCLN R/L 1616 H12	●	●	16	16	16	100	26,1	20			LCS 4CA				
PCLN R/L 2020 K12	●	□	20	20	20	125	27,4	25		LCL4SD	LCS42BS-SD	LSC42SD	LSP4SD	LH030	2
PCLN R/L 2525 M12	●	●	25	25	25	150	28	32							
PCLN R/L 3225 P12	●	●	32	32	25	170	28	32							
PCLN R/L 2525 M16	●	□	25	25	25	150	32,6	32		LCL5SD	LCS5B-SD	LSC53SD	LSP5SD	LH030	3
PCLN R/L 3225 P16	●	□	32	32	25	170	32,6	32							
PCLN R/L 3232 P16	●	●	32	32	32	170	32,6	40							
PCLN R/L 2525 M19	□	●	25	25	25	150	37	32							
PCLN R/L 3225 P19	□	□	32	32	32	170	38	32		LCL6SD	LCS6B-SD	LSC63SD	LSP6SD	LH040	4
PCLN R/L 3232 P19	□	□	32	32	32	170	38	40							
PCLN R/L 4040 S19	□	□	40	40	40	250	37,8	50							

■ Holders


Above figures show right hand tools.

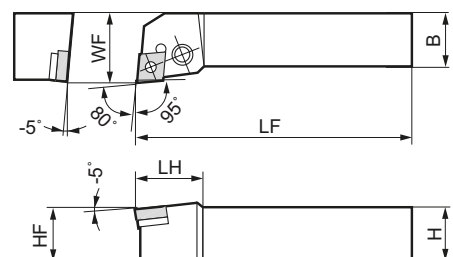

General Turning and Facing

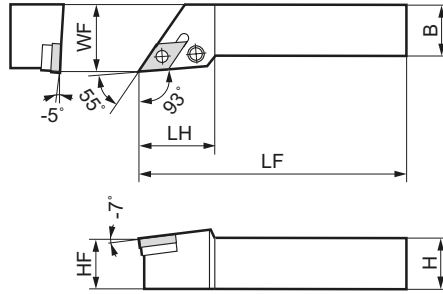

■ Inserts

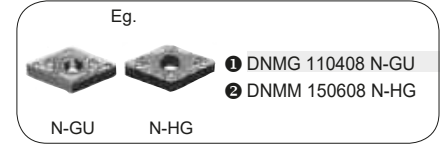

■ Spare Parts

Cat. No.	Stock		Dimensions (mm)							Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF							
PDJN R/L 1616 H11	●	●	16	16	16	100	30	20							
PDJN R/L 2020 K11	●	●	20	20	20	125	30	25	LCL3D-SD	LCS3TB-SD	LSD32SD	LSP3SD	LH025	1	
PDLN R/L 2525 M11	●	●	25	25	25	150	30	32							
PDJN R/L 2020 K15	●	●	20	20	20	125	34,7	25							
PDJN R/L 2525 M15	●	●	25	25	25	150	34,7	32	LCL4D-SD	LCS5DB-SD	LSD42SD	LSP4SD	LH030	2	
PDJN R/L 3225 P15	●	●	32	32	25	170	34,7	32							

Above figures show right hand tools.



External Holders
for neg. Inserts

External Tool Holders P Type (Lever Lock)

Tool Holders for neg. Inserts SN



General Turning and Chamfering

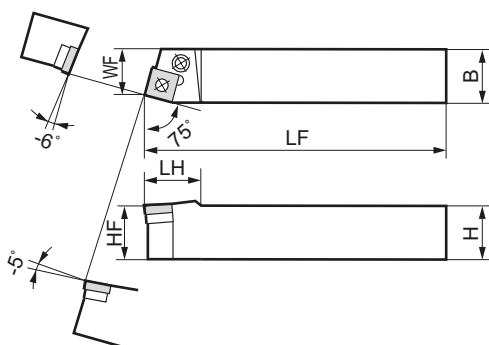

■ Inserts





■ Spare Parts

Cat. No.	Stock		Dimensions (mm)							Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF							
PSBN R/L 2020 K12	●	●	20	20	20	125	27,5	17	LCL4SD	LCS42BS-SD	LSS42SD	LSP4SD	LH030	1	
PSBN R/L 2525 M12	●	●	25	25	25	150	27,5	22	LCL5SD	LCS5B-SD	LSS53SD	LSP5SD	LH030	2	
PSBN R/L 2525 M15	●	●	25	25	25	150	32	22	LCL5SD	LCS5B-SD	LSS53SD	LSP5SD	LH030	2	
PSBN R/L 3225 P15	●	●	32	32	25	170	32	22	LCL6SD	LCS6B-SD	LSS63SD	LSP6SD	LH040	3	
PSBN R/L 3232 P19	●	●	32	32	32	170	39,2	27	LCL6SD	LCS6B-SD	LSS63SD	LSP6SD	LH040	3	

■ Holders

Above figures show right hand tools.

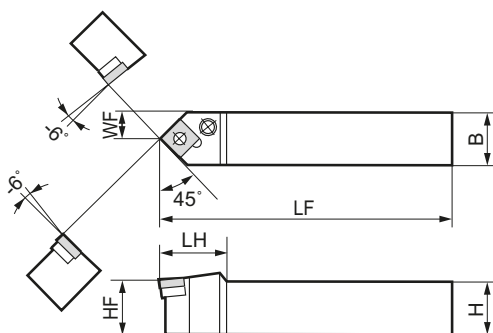

■ Inserts



■ Spare Parts



Cat. No.	Stock		Dimensions (mm)							Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
	H	HF	B	LF	LH	WF									
PSDN N 1616 H09	●	●	16	16	16	100	21	8,3	LCL3SD	LCS 3TB-SD	LSS32SD	LSP3SD	LH025	1	
PSDN N 2020 K12	●	●	20	20	20	125	27,6	10,3	LCL4SD	LCS42BS-SD	LSS42SD	LSP4SD	LH030	2	
PSDN N 2525 M12	●	●	25	25	25	150	27,6	12,8	LCL4SD	LCS42BS-SD	LSS42SD	LSP4SD	LH030	2	
PSDN N 3225 P12	●	●	32	32	25	170	27,6	12,8	LCL4SD	LCS42BS-SD	LSS42SD	LSP4SD	LH030	2	
PSDN N 3225 P19	□	□	32	32	25	170	40,6	13	LCL6SD	LCS6B-SD	LSS63SD	LSP6SD	LH040	3	
PSDN N 3232 P19	●	●	32	32	32	170	40,6	16,5	LCL6SD	LCS6B-SD	LSS63SD	LSP6SD	LH040	3	

■ Holders

● = Euro stock

□ = Delivery on request

General Turning and Facing

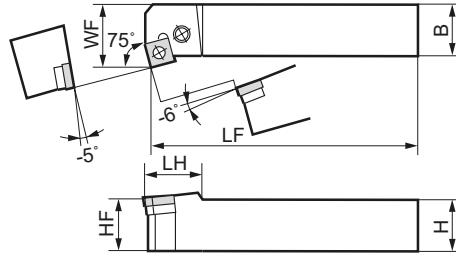

■ Holders

Above figures show right hand tools.



Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LH	WF	
PSKN R/L 2020 K12	●	□	20	20	20	125	22,7	17	
PSKN R/L 2525 M12	●	●	25	25	25	150	22,7	32	
PSKN R/L 2525 M15	□		25	25	25	150	32	32	
PSKN R/L 3225 P15		●	32	32	25	170	32	32	
PSKN R/L 3232 P19	□		32	32	32	170	33,7	40	

■ Inserts



■ Spare Parts

Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
LCL4SD	LCS42BS-SD	LSS42SD	LSP4SD	LH030	1
LCL5SD	LCS5B-SD	LSS53SD	LSP5SD	LH030	2
LCL6SD	LCS6B-SD	LSS63SD	LSP6SD	LH040	3

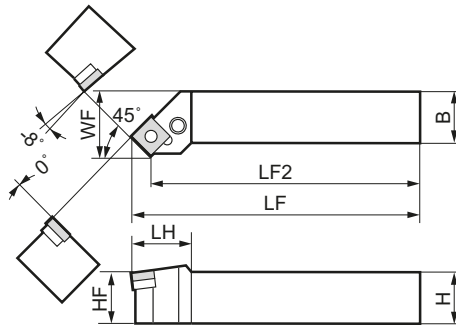

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LF2	LH	WF
PSSN R/L 2020 K12	●	●	20	20	20	125	116,7	29,3	25
PSSN R/L 2525 M12	●	●	25	25	25	150	141,7	29,3	32
PSSN R/L 3225 P12	●	□	32	32	25	170	161,7	29,3	32
PSSN R/L 2525 M15	●	●	25	25	25	150	139,8	32	32
PSSN R/L 3225 P15	□		32	32	25	170	159,8	32	32
PSSN R/L 3232 P15	●	□	32	32	32	170	159,8	32	40
PSSN R/L 3232 P19	●	●	32	32	32	170	157,5	40,2	40

■ Inserts




■ Spare Parts



Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
LCL4SD	LCS42BS-SD	LSS42SD	LSP4SD	LH030	1
LCL5SD	LCS5B-SD	LSS53SD	LSP5SD	LH030	2
LCL6SD	LCS6B-SD	LSS63SD	LSP6SD	LH040	3

External Tool Holders P Type (Lever Lock)

Tool Holders for neg. Inserts TN



General Turning and Facing

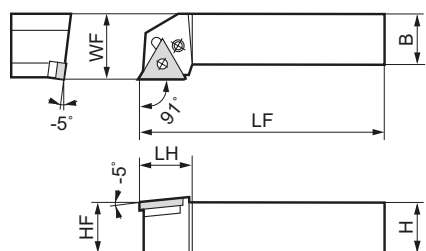

■ Holders

Above figures show right hand tools.



Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LH	WF	
PTGN R/L 1616 H16	●	●	16	16	16	100	20	20	
PTGN R/L 2020 K16	●	●	20	20	20	125	20	25	
PTGN R/L 2525 M16	●	●	25	25	25	150	22,2	32	
PTGN R/L 2525 M22	●	●	25	25	25	150	28,7	32	
PTGN R/L 3225 P22	●	●	32	32	25	170	28,7	32	
PTGN R/L 3232 P22	●	●	32	32	32	170	28,7	32	

■ Inserts



■ Spare Parts

Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
LCL3SD	LCS3TB-SD	LST317SD	LSP3SD	LH025	①
LCL4SD	LCS42BS-SD	LST42SD	LSP4SD	LH030	②

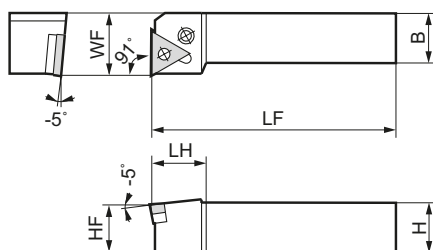

■ Holders

Above figures show right hand tools.



Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LH	WF	
PTFN R/L 1616 H16	●	●	16	16	16	100	19,7	20	
PTFN R/L 2020 K16	●	●	20	20	20	125	20,2	25	
PTFN R/L 2525 M16	●	●	25	25	25	150	20,2	32	
PTFN R/L 2525 M22	●	□	25	25	25	150	25,2	32	
PTFN R/L 3225 P22	●	●	32	32	25	170	25,2	32	

■ Inserts



■ Spare Parts

Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
LCL3SD	LCS3TB-SD	LST317SD	LSP3SD	LH025	①
LCL4SD	LCS42BS-SD	LST42SD	LSP4SD	LH030	②

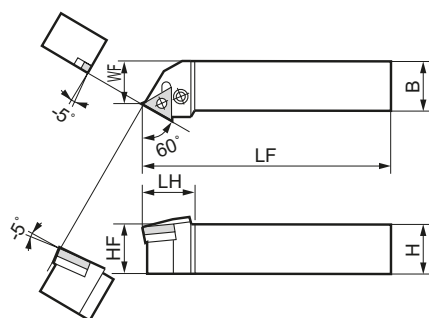

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LH	WF	
PTTN R/L 2020 K16	□	□	20	20	20	125	25,9	17	
PTTN R/L 2525 M16	●	●	25	25	25	150	25,9	22	
PTTN R/L 3225 P22	●	●	31	32	25	170	31,9	22	



■ Inserts



■ Spare Parts

Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
LCL3SD	LCS3TB-SD	LST317SD	LSP3SD	LH025	①
LCL4SD	LCS42BS-SD	LST42SD	LSP4SD	LH030	②

General Turning and Copying

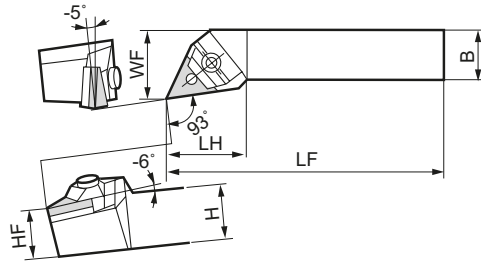

■ Holders

Above figures show right hand tools.



Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LH	WF	
MTJN R/L 2020-33 (K16)	●	●	20	20	20	125	37	25	
MTJN R/L 2525-33 (M16)	●	●	25	25	25	150	37	32	
MTJN R/L 2525-43 (M22)	●	●	25	25	25	150	37	32	
MTJN R/L 3225-43 (P22)	○	○	32	32	25	170	37	32	

■ Inserts



■ Spare Parts

Wedge	Shim pin	Shim	Clamp bolt	Nut	Ring	Wrench	Insert
MMW30	MP317 MP320	STW323	BHA0525 4,0 _(mm)	CPM32N	ER04	LH030	
MMW40	MP420	STW434	BHA0625 4,5 _(mm)	CPM43N	ER05	LH030 LH040	2



■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LH	WF	
MTXN R/L 2020-33 (K16)	○	○	20	20	20	125	32	25	
MTXN R/L 2525-33 (M16)	○	○	25	25	25	150	32	32	
MTXN R/L 2525-43 (M22)	○		25	25	25	150	38	32	

■ Inserts



■ Spare Parts



Wedge	Shim pin	Shim	Clamp bolt	Nut	Ring	Wrench	Insert
MMW30	MP317 MP320	STW323	BHA0525 4,0 _(mm)	CPM32N	ER04	LH030	
MMW40	MP420	STW434	BHA0625 4,5 _(mm)	CPM43N	ER05	LH030, 040	2

External Tool Holders M Type (Wedge Clamp)

Tool Holders for neg. Inserts WN



General Turning and Facing

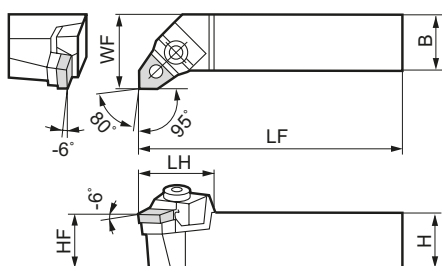

■ Inserts



■ Spare Parts



Wedge	Shim pin	Shim	Clamp bolt	Nut	Ring	Wrench	Insert
MWW40	MP416 MP420	SWW433	BHA0625 4,5 ^(Nm)	CPM43S CPM43N	ER04	LH030 LH040	1, 2

■ Holders


Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LH	WF	
MWLN R/L 2020-43 (K08)	○	□	20	20	20	125	32	25	
MWLN R/L 2525-43 (M08)	●	●	25	25	25	150	32	32	
MWLN R/L 3225-43 (P08)	□	○	32	32	25	170	32	32	

P Type Lever Lock Holders

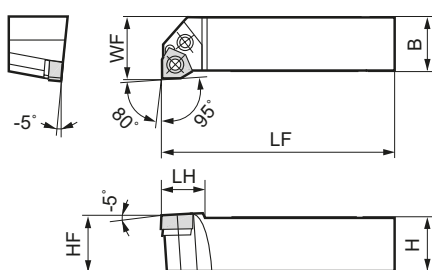

■ Inserts

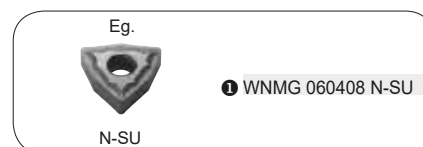

■ Spare Parts

Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Insert
LCL3SD	LCS3TB-SD	LSW317	LSP3SD	LH025	1




■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LH	WF	
PWLN R/L 2020 K06 (PWLN R/L 2020-33)	●	□	20	20	20	125	27	25	
PWLN R/L 2525 M06	●	□	25	25	25	150	27	32	

External Tool Holders for Solid SUMIBORON

C Type Top Clamp Holders

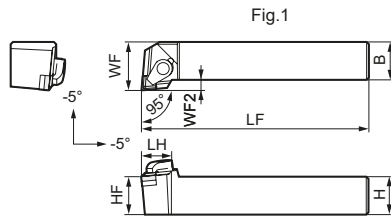




■ Inserts



■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)								Fig.	Clamp	Insert protector	Clamp bolt	Shim	Shim pin	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF	WF2									
CCLN R/L 2525 M09	□		25	25	25	150	25	32	7	1	CCM8UL	CBC0903 CBC4	WB8-22T	SSN0903 SSND433	SPP3	LT27		1
CCLN R/L 2525 M12-03			25	25	25	150	30	32	7	1								2
CCLN R/L 2525 M12-04	□		25	25	25	150	30	32	7	2	CCM8-LONG	CBC4	WB8-30	SSND433	SPP3	LH040		3

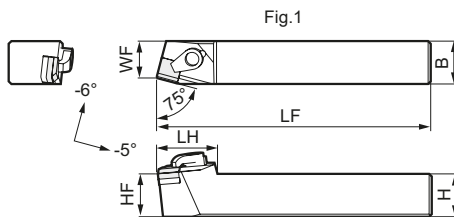




■ Inserts



■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)								Fig.	Clamp	Insert protector	Clamp bolt	Shim	Shim pin	Spring	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF	WF2										
CSBN R/L 2525 N09	□		25	25	25	160	30	21,5	-	1	CCM8UL	CBS13 CBS14	WB8-22T	SSN0903 SSND423	-	-	LH040		1
CSBN R/L 2525 N12-03	□		25	25	25	160	35	21,5	-	1							LH040		2
CSBN R/L 2525 N12-04	□		25	25	25	160	33	21,5	-	2	DC-R/L 1	CBD 4 R/L	BH 0830 R/L	SSND423	SPP3	DSP5	LH040		3

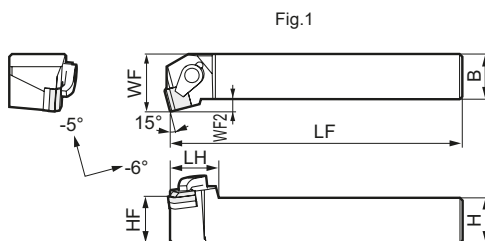

■ Inserts



■ Holders



Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)								Fig.	Clamp	Insert protector	Clamp bolt	Shim	Shim pin	Spring	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF	WF2										
CSKN R/L 2525 N09	□		25	25	25	160	25	32	7	1	CCM8UL	CBS13 CBS14	WB8-22T	SSN0903 SSND423	-	-	LH040		1
CSKN R/L 2525 N12-03	□		25	25	25	160	25	32	7	1							LH040		2
CSKN R/L 2525 N12-04	□		25	25	25	160	21	32	7	2	DC-R/L 1	CBD 4 R/L	BH 0830 R/L	SSND423	SPP3	DSP5	LH040		3

External Holders for neg. Inserts

External Tool Holders for Solid SUMIBORON

C Type Top Clamp Holders

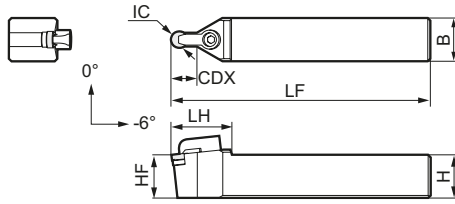

■ Inserts





■ Holders

Cat. No.	Stock	Dimensions (mm)						
		H	HF	B	LF	LH	WF	CDX
CRDNN 2525 M09	●	25	25	25	150	35	-	15
CRDNN 2525 M12-03	●	25	25	25	150	35	-	20
CRDNN 2525 M12-04	●	25	25	25	150	35	-	20

■ Spare Parts

Clamp	Double screw	Shim	Shim pin	Wrench	Insert
CCM8-LONG	WB8-22T	SRND32	SPP3	LT27	1
		SRND42			2
					3

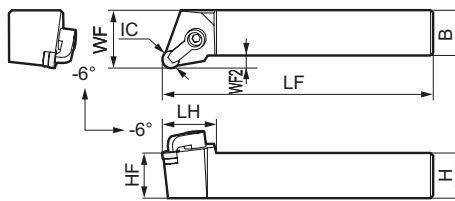

■ Inserts



■ Holders



Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)						
	R	L	H	HF	B	LF	LH	WF	WF2
CRSN R/L 2525 M09	●	●	25	25	25	150	30	32	7
CRSN R/L 2525 M12-03	●	●	25	25	25	150	30	32	7
CRSN R/L 2525 M12-04	●	●	25	25	25	150	30	32	7

■ Spare Parts

Clamp	Double screw	Shim	Shim pin	Wrench	Insert
CCM8-LONG	WB8-22T	SRND32	SPP3	LT27	1
		SRND42			2
					3

X Type Dimple Lock Holders

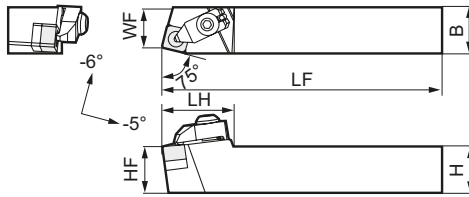

■ Inserts





■ Spare Parts

Clamp	Clamp bolt	Shim	Shim pin	Spring	Wrench	Insert
DSLX8	BH0825	SSND423	SPP3	GSP10	LH050	①

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Clamp	Clamp bolt	Shim	Shim pin	Spring	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF								
XSBN R/L 2525 N12	●		25	25	25	160	38	21,5	DSLX8	BH0825	SSND423	SPP3	GSP10	LH050	①	

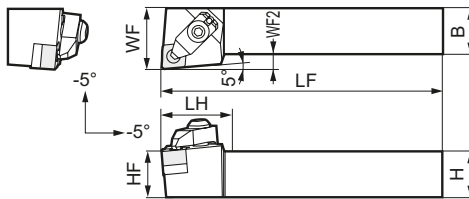

■ Inserts



■ Spare Parts

Clamp	Clamp bolt	Shim	Shim pin	Spring	Wrench	Insert
DSLX8	BH0825	SCND433	SPP3	GSP10	LH050	①

■ Holders



Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Clamp	Clamp bolt	Shim	Shim pin	Spring	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF	WF2							
XCLN R/L 2525 N12	●		25	25	25	150	33	32	7	DSLX8	BH0825	SCND433	SPP3	GSP10	LH050	①

External Holders for neg. Inserts

External Mini Holders

External Holders
for pos. Inserts

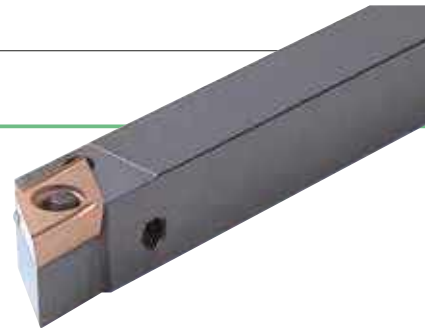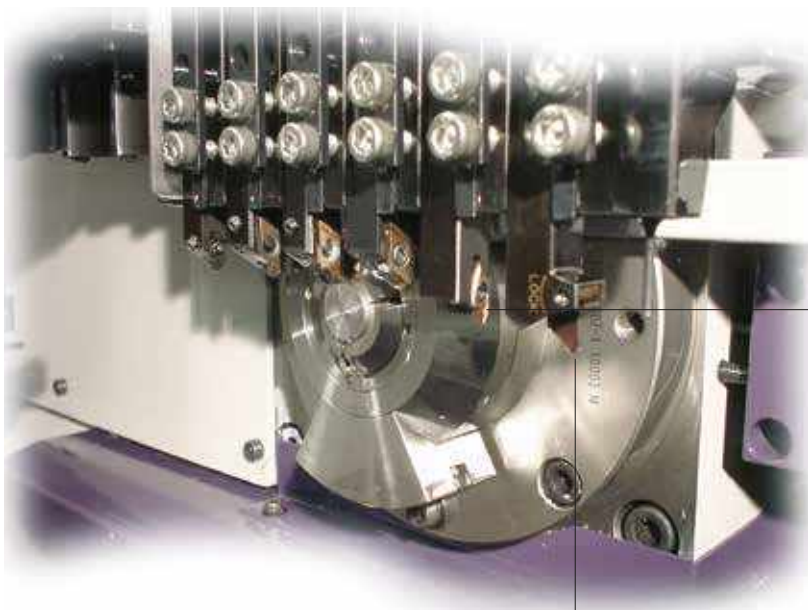

Cut-off Tool Holder SCT Type

Easy insert change by just loosening the screw from the back.

Max. cut-off dia. \varnothing 5 mm, \varnothing 12 mm, \varnothing 16 mm


Back-Turning Tool Holder SBT Type

Sharp cutting edges with good surface finish.
Max. reach of insert 8,0 mm, edge width 2,5 mm




PDJCR type
lever lock holder

Wear-resistant tool materials;
T1500A (Cermet) and
AC530U (2000 layers
coated carbide grade)




Sharp cutting edge
(RE = 0,03
0,1 and 0,2 mm)

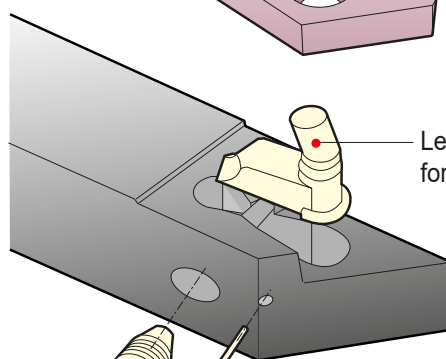

Lever lock clamping
for 7° positive inserts

Easy access
side locking screw

External Mini Holders

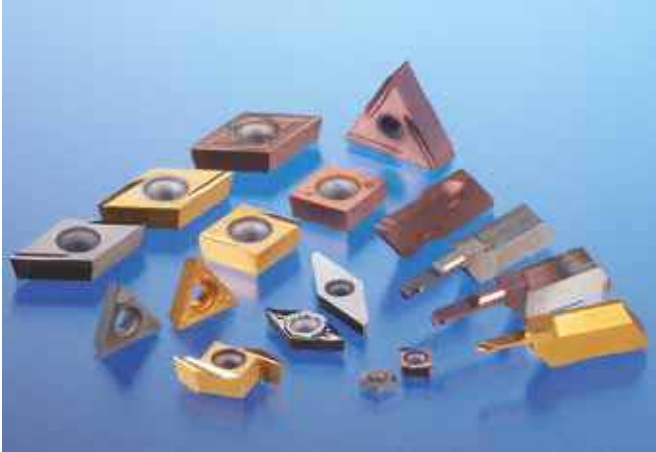

In 1984, Sumitomo Electric Hardmetal first released the Mini Tool Holder series for the machining of small components in small NC autolathes.

A full range of insert grades comprising of the Cermet T1500A, SUMIBORON BN2000, SUMIDIA DA1000 and especially AC530U, was also introduced to meet a variety of machining requirements.

External Holders
for pos. Inserts

Grade Selection

Category	Application Range			Work Material					
	High Precision	Finish-Light Cut	Medium Cut	P General Steel	M Stainless Steel	K Cast Iron	S Heat Resistant Alloy	H Hardenend Steel	N Non-Ferrous Metal
Coated Carbide (PVD)	ACZ150			○	○				○
	New AC5015S			○	○		○		
	New AC5025S			○	○		○		
	AC530U			○	○		○		○
	AC1030U			○	○		○		○
Cermet/Coated Cermet	T1000A			○	○	○			○
	T1500A / T1500Z			○	○	○			○
Carbide	BL130			○	○				○
	H1			○	○		○		○
	EH510			○	○		○		○
CBN (SUMIBORON)	BN1000 / BN2000							○	
	BN7000					○			
SUMIDIA	DA1000								○

○ Preferred Choice ○ Suitable



Recommended Cutting Conditions

Work Material	P Free Cutting Steel		P Carbon Steel		M Stainless Steel		S Heat Resistant Alloy		H Hardened Steel		N Aluminium		N Brass	
	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)	v _c (m/min)	f (mm/rev)
ACZ150	50-200	0,02-0,10	50-150	0,01-0,08	50-150	0,01-0,05					70-300	0,05-0,20	70-300	0,05-0,20
AC5015S	50-200	0,02-0,15	50-200	0,02-0,10	*50-200	*0,02-0,10							70-300	0,05-0,20
AC5025S	50-200	0,02-0,15	50-200	0,02-0,10	*50-200	*0,02-0,10	30-100	0,02-0,10					70-300	0,05-0,20
AC530U	50-200	0,02-0,15	50-200	0,02-0,10	*50-200	*0,02-0,10	30-100	0,02-0,10					70-300	0,05-0,20
AC1030U	50-200	0,02-0,15	50-200	0,02-0,10	*50-200	*0,02-0,10							70-300	0,05-0,20
T1000A	50-200	0,02-0,15	50-200	0,02-0,10	*50-150	*0,02-0,10					70-300	0,05-0,20	70-300	0,05-0,20
T1500A	50-200	0,02-0,15	50-200	0,02-0,10	*50-150	*0,02-0,10					70-300	0,05-0,20	70-300	0,05-0,20
T1500Z	50-200	0,02-0,15	50-200	0,02-0,10	*50-150	*0,02-0,10					70-300	0,05-0,20	70-300	0,05-0,20
BN1000									120-300	0,03-0,15				
BN2000									50-200	0,03-0,20				
BN7000							50-200	0,05-0,20						
DA1000											70-300	0,02-0,10	70-300	0,02-0,10


* Please use maximal possible C/speed

External Mini Tool Holders SBT Type

Special Mini Holders for Back Facing

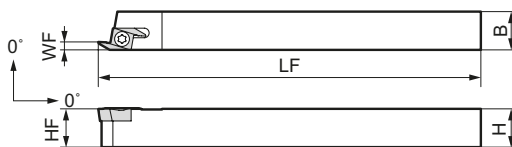

SBT35 R1010:



■ Spare Parts

■ Holders

Above figures show right hand tools.



Cat. No.	Stock	Dimensions (mm)						Screw	Wrench	Insert	
		H	HF	B	LF	WF					
SBT 35-R 1010	●	10	10	10	120	7,5					
SBT 35-R 1212	●	12	12	12	120	9,5		BFTX0307N	2,0	TRX10	BTR 35_ _
SBT 35-R 1616	●	16	16	16	120	13,5					

■ Inserts


Coated carbide

Uncoated Cermet

BTR	Cat. No.	Stock				Dimensions (mm)			
		AC1030U	AC530U	ACZ310	T 1500A	L	CDX	CW	RE
	BTR 3505	○	○	▲	○	15	3,5	2,5	0,05
	BTR 3515	○	○	▲	○	15	3,5	2,5	0,15




Sharp cutting edge with 15° rake angle



Wide groove breaker for smooth chip evacuation



● Surface roughness comparison

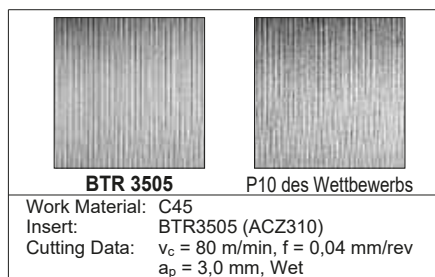

■ Recommended Cutting Data (SBT type)

Work Material	Tooling	v_c (m/min)	f (mm/rev)
General steel	Grooving	50–150	0,02–0,05
	Back facing		0,02–0,10
Free-cutting steel	Grooving	50–150	0,02–0,10
	Back facing		0,02–0,15
Stainless steel	Grooving	50–150	0,02–0,04
	Back facing		0,02–0,06

P Type Lever Lock Holders

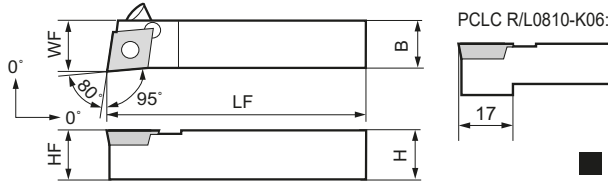

Inserts





Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Lever pin	Clamp screw	Side pin	Wrench	Insert
	R	L	H	HF	B	LF	WF							
PCLC R/L 0810 K06	☐		8	8	10	125	10,5			LCL 06	BTT 0407	LP 07	TH 020	1
PCLC R/L 1010 K06	●	☐	10	10	10	125	10,5					LP 06		2
PCLC R/L 1212 K09	●	●	12	12	12	150	12,5			LCL 09	BTT 0411			
PCLC R/L 1616 K09	●		16	16	16	150	16,5							

S Type Screw Lock Holders

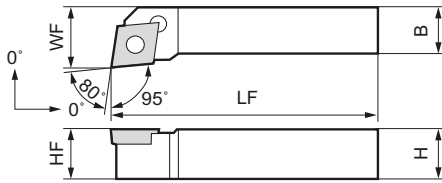



Inserts



Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Screw	Wrench	Insert	
	R	L	H	HF	B	LF	WF						
SCLC R/L 0808 D06	●	●	8	8	8	60	10			BFTX02506N	1,5	TRX08	1
SCLC R/L 1010 E06	●	●	10	10	10	70	12			BFTX0409N	3,4	TRX15	2
SCLC R/L 1212 F09	●	●	12	12	12	80	16						
SCLC R/L 1616 H09	☐	●	16	16	16	100	20			BFTX0511N	5,0	TRX20	3
SCLC R/L 2020 H09	●	☐	20	20	20	100	25						
SCLC R/L 2020 K09	●	●	20	20	20	125	25						
SCLC R/L 2020 K12	●	●	20	20	20	125	25						
SCLC R/L 2525 M12	●	●	20	25	25	150	32						

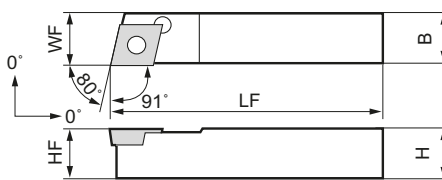

Inserts



Holders

Above figures show right hand tools.



Cat. No.	Stock		Dimensions (mm)							Screw	Wrench	Insert	
	R	L	H	HF	B	LF	WF						
SCAC R/L 0808 D06	●	☐	8	8	8	60	8,5			BFTX02506N	1,5	TRX08	1
SCAC R/L 1010 E06	●	☐	10	10	10	70	10,5			BFTX0409N	3,4	TRX15	2
SCAC R/L 1212 F09	●	☐	12	12	12	80	12,5						

External Mini Tool Holders PD/SD Type

Mini Holders for 7° DC ___ pos. Inserts



P Type Lever Lock Holders

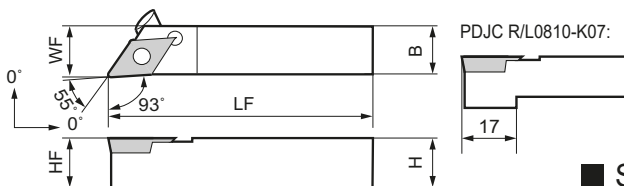

■ Inserts





■ Spare Parts

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Lever pin	Clamp screw	Side pin	Wrench	Insert
	R	L	H	HF	B	LF	WF							
PDJC R/L 0810 K07	●		8	8	10	125	10,5			LCL 06	BTT 0407	LP 04	TH 020	1
PDJC R/L 1010 K07	●	●	10	10	10	125	10,5					LP 07		
PDJC R/L 1212 M11	●	●	12	12	12	150	12,5			LCL 09	BTT 0411	LP 07		2
PDJC R/L 1616 M11	●	○	16	16	16	150	16,5							

S Type Screw Lock Holders

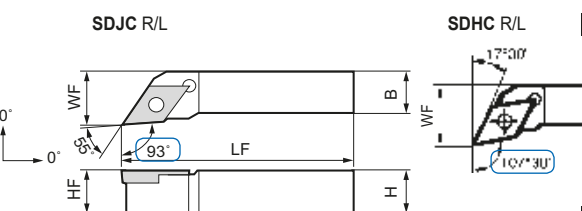

■ Inserts





■ Spare Parts

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Screw	Nm	Wrench	Insert
	R	L	H	HF	B	LF	WF						
SDJC R/L 0808 D07	●	●	8	8	8	60	10			BFTX02506N	1,5	TRX08	1
SDJC R/L 1010 E07	●		10	10	10	70	12						
SDJC R/L 1212 F07	●	●	12	12	12	80	16						
SDJC R/L 1616 H07	●	●	16	16	16	100	20						
SDJC R/L 2020 K07	●	●	20	20	20	125	25			BFTX0409N	3,4	TRX15	2
SDJC R/L 1212 F11	●	●	12	12	12	80	16						
SDJC R/L 1616 H11	●	●	16	16	16	100	20						
SDJC R/L 2020 K11	●	●	20	20	20	125	25						
SDJC R/L 2525 M11	●	●	25	25	25	150	32						
SDHC R/L 1616 H11	●	●	16	16	16	100	20			BFTX0409N	3,4	TRX15	2
SDHC R/L 2020 K11	●	●	20	20	20	125	25						
SDHC R/L 2525 M11	●	●	25	25	25	150	32						

S Type Screw Lock Holders

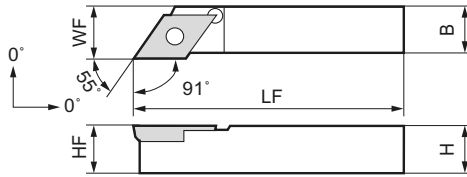

■ Holders

Above figures show right hand tools.



Cat. No.	Stock		Dimensions (mm)							Screw	N·m	Wrench	Insert
	R	L	H	HF	B	LF	WF						
SDAC R/L 0808 D07	□	●	8	8	8	60	8,5			BFTX02506N	1,5	TRX08	①
SDAC R/L 1010 E07	●	●	10	10	10	70	10,5						
SDAC R/L 1212 F11	●	●	12	12	12	80	12,5			BFTX0409N	3,4	TRX15	②

■ Inserts



■ Spare Parts

Screw	N·m	Wrench	Insert
BFTX02506N	1,5	TRX08	①
BFTX0409N	3,4	TRX15	②

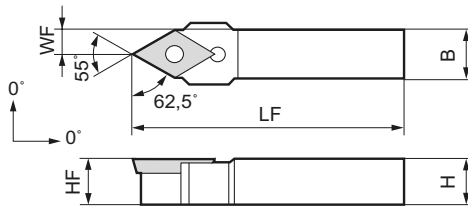

■ Holders

Cat. No.	Stock	Dimensions (mm)							Screw	N·m	Wrench	Insert
		H	HF	B	LF	WF						
SDNCN 0808 D07	●	8	8	8	60	4,2			BFTX02506N	1,5	TRX08	①
SDNCN 1010 E07	●	10	10	10	70	5,2						
SDNCN 1212 F07	●	12	12	12	80	6,2						
SDNCN 1616 H07	●	16	16	16	100	8,2						
SDNCN 2020 K07	●	20	20	20	125	10,2			BFTX0409N	3,4	TRX15	②
SDNCN 1212 F11	●	12	12	12	80	6,5						
SDNCN 1616 H11	●	16	16	16	100	8,5						
SDNCN 2020 K11	●	20	20	20	125	10,5						
SDNCN 2525 M11	●	25	25	25	150	13						

■ Inserts



■ Spare Parts



Screw	N·m	Wrench	Insert
BFTX02506N	1,5	TRX08	①
BFTX0409N	3,4	TRX15	②

External Tool Holders PR Type

External Holders for 7° RC ___ pos. Inserts



P Type Lever Lock Holders

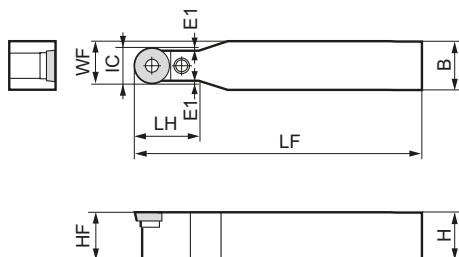

■ Inserts

Eg.

N-RP



- ① RCOO1003M0 N-RO
- ② RCOO1204M0 N-RO
- ③ RCOO1606M0 N-RO
- ④ RCOO2006M0 N-RO

■ Spare Parts

						Insert
	LCL10	LCS10	LSR10	LSP10	LH020	①
	LCL12	LCS12	LSR12	LSP10	LH025	②
	LCL16	LCS16	LSR16	LSP16	LH025	③
	LCL20	LCS20	LSR20	LSP20	LH030	④

■ Holders

Cat. No.	Stock	Dimensions (mm)								Lever pin	Clamp screw	Shim	Shim pin	Wrench	Insert
		H	HF	B	LF	LH	WF	E1	IC						
PRDC N 2020 M10	●	20	20	20	150	22	15,0	1,0	10	LCL10	LCS10	LSR10	LSP10	LH020	①
PRDC N 2525 M10	●	25	25	25	150	22	17,5	1,0	10	LCL12	LCS12	LSR12	LSP10	LH025	②
PRDC N 2525 M12	●	25	25	25	150	24	18,5	1,2	12	LCL16	LCS16	LSR16	LSP16	LH025	③
PRDC N 3225 Q12	●	32	32	25	180	24	18,5	1,2	12	LCL20	LCS20	LSR20	LSP20	LH030	④
PRDC N 3225 Q16	●	32	32	25	180	28	20,5	1,5	16						
PRDC N 3232 Q20	●	32	32	32	180	32	26,5	1,7	20						

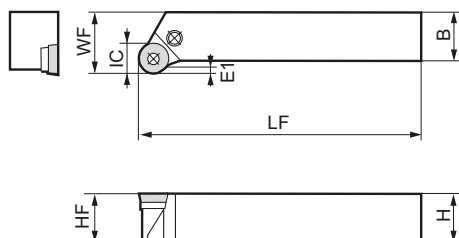

■ Inserts

Eg.

N-RP

- ① RCOO 1003M0 N-RO
- ② RCOO 1204M0 N-RO
- ③ RCOO 1606M0 N-RO
- ④ RCOO 2006M0 N-RO

■ Spare Parts



						Insert
	LCL10	LCS10	LSR10	LSP10	LH020	①
	LCL12	LCS12	LSR12	LSP10	LH025	②
	LCL16	LCS16	LSR16	LSP16	LH025	③
	LCL20	LCS20	LSR20	LSP20	LH030	④

■ Holders

Above figures show right hand tools.



Cat. No.	Stock		Dimensions (mm)								Lever pin	Clamp screw	Shim	Shim pin	Wrench	Insert
	R	L	H	HF	B	LF	WF	E1	IC							
PRGC R/L 2020 K10	●	○	20	20	20	125	25	1,5	10	LCL10	LCS10	LSR10	LSP10	LH020	①	
PRGC R/L 2525 M10	●	●	25	25	25	150	32	1,5	10	LCL12	LCS12	LSR12	LSP10	LH025	②	
PRGC R/L 2020 K12	●	□	20	20	20	125	25	2,5	12	LCL16	LCS16	LSR16	LSP16	LH025	③	
PRGC R/L 2525 M12	□	●	25	25	25	150	32	2,5	12	LCL20	LCS20	LSR20	LSP20	LH030	④	
PRGC R/L 3225 P12		□	32	32	25	170	32	2,5	12							
PRGC R/L 2525 M16	●	□	25	25	25	150	32	3,0	16							
PRGC R/L 3225 P16	●	□	32	32	25	170	32	3,0	16							
PRGC R/L 3232 P20	●	□	32	32	32	170	40	4,0	20							

S Type Screw Lock Holders

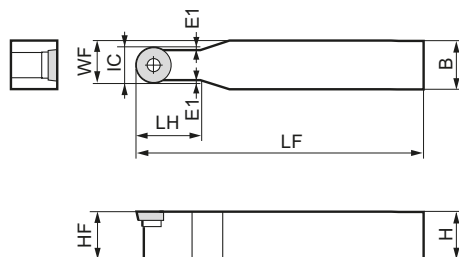

■ Holders

Cat. No.	Stock	Dimensions (mm)								Screw	Shim	Screw	Wrench	Wrench	Insert
		H	HF	B	LF	LH	WF	E1	IC						
SRDC N 2020 K10T3	●	20	20	20	125	25	15,0	1,0	10	BFTX03510-SD	SRNS 103-SD	BW 0508F-SD	TRX 15 IP-35	LH 035	①
SRDC N 2525 M10T3	●	25	25	25	150	25	17,5	1,0	10	2,0 $\text{N}\cdot\text{m}$	SRNS 123-SD				
SRDC N 2525 M12	●	25	25	25	150	28	18,5	1,2	12	BFTX03512-SD	SRNS 123-SD	BW 0810F-SD	LT 20 IP	LH 050	②
SRDC N 3225 P12	●	32	32	25	170	28	18,5	1,2	12	2,0 $\text{N}\cdot\text{m}$	BFTX0517-SD				
SRDC N 2525 M16	□	25	25	25	150	35	20,5	1,5	16	BFTX0517-SD	SRNS 164-SD	BW 0810F-SD	LT 20 IP	LH 050	③
SRDC N 3225 P16	●	32	32	25	170	35	20,5	1,5	16	5,0 $\text{N}\cdot\text{m}$	BFTX0618-SD				
SRDC N 3232 P20	●	32	32	32	170	40	26,0	1,7	20	7,5 $\text{N}\cdot\text{m}$	SRNS 204-SD	BW 0912F-SD	LT 25 IP	LH 060	④

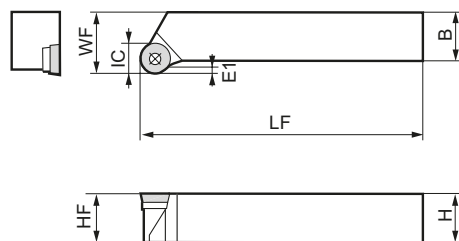

■ Holders

Cat. No.	Stock		Dimensions (mm)								Screw	Shim	Screw	Wrench	Wrench	Insert
	R	L	H	HF	B	LF	WF	E1	IC							
SRSC R/L 2020 K10T3	●	●	20	20	20	125	25	1,5	10	BFTX 03510-SD	SRNS 103-SD	BW 0508F-SD	TRX 15 IP-35	LH 035	①	
SRSC R/L 2525 M10T3	●	●	25	25	25	150	32	1,5	10	2,0 $\text{N}\cdot\text{m}$	SRNS 123-SD					
SRSC R/L 2525 M12	●	●	25	25	25	150	32	2,5	12	BFTX 03512-SD	SRNS 123-SD	BW 0810F-SD	LT 20 IP	LH 050	②	
SRSC R/L 3225 P12	●	●	32	32	25	170	32	2,5	12	2,0 $\text{N}\cdot\text{m}$	BFTX 0517-SD					
SRSC R/L 3225 P16	●	●	32	32	25	170	32	3,0	16	5,0 $\text{N}\cdot\text{m}$	SRNS 164-SD	BW 0810F-SD	LT 20 IP	LH 050	③	
SRSC R/L 3232 P20	●	●	32	32	32	170	40	4,0	20	7,5 $\text{N}\cdot\text{m}$	SRNS 204-SD				BW 0912F-SD	LT 25 IP

■ Inserts



Eg.



N-RX

- RCO01003M0
- ① RCO010T3M0 N-R0
- ② RCO01204M0 N-R0
- ③ RCO01606M0 N-R0
- ④ RCO02006M0 N-R0

■ Spare Parts

					Insert
BFTX03510-SD	SRNS 103-SD	BW 0508F-SD	TRX 15 IP-35	LH 035	①
BFTX03512-SD	SRNS 123-SD	BW 0810F-SD	LT 20 IP	LH 050	③
BFTX0517-SD	SRNS 164-SD	BW 0810F-SD	LT 20 IP	LH 050	③
BFTX0618-SD	SRNS 204-SD	BW 0912F-SD	LT 25 IP	LH 060	④

■ Inserts

Eg.



N-RX


- RCO01003M0
- ① RCO010T3M0 N-R0
- ② RCO01204M0 N-R0
- ③ RCO01606M0 N-R0
- ④ RCO02006M0 N-R0

■ Spare Parts



					Insert
BFTX 03510-SD	SRNS 103-SD	BW 0508F-SD	TRX 15 IP-35	LH 035	①
BFTX 03512-SD	SRNS 123-SD	BW 0810F-SD	LT 20 IP	LH 050	③
BFTX 0517-SD	SRNS 164-SD	BW 0810F-SD	LT 20 IP	LH 050	③
BFTX 0618-SD	SRNS 204-SD	BW 0912F-SD	LT 25 IP	LH 060	④

External Mini Tool Holders SS Type

Mini Holders for 7° SC__ pos. Inserts



S Type Screw Lock Holders

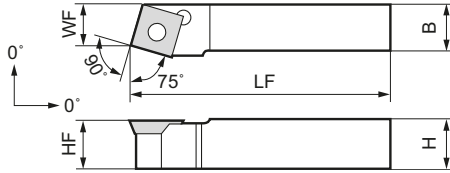

■ Inserts



■ Spare Parts

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Screw	⌚ (N·m)	Wrench	Insert
	R	L	H	HF	B	LF	WF						
SSBC R/L 1010 E07	☐	☐	10	10	10	70	9			BFTX0307N	2,0	TRX10	①
SSBC R/L 1212 F09	☐	☐	12	12	12	80	11			BFTX0409N	3,4	TRX15	②
SSBC R/L 1616 H09	☐	☐	16	16	16	100	13						
SSBC R/L 2020 K12	☐	☐	20	20	20	125	17			BFTX0511N	5,0	TRX20	③
SSBC R/L 2525 M12	▲	▲	25	25	25	150	22						



External Holders for pos. Inserts

● = Euro stock

☐ = Delivery on request
▲ = To be replaced by new item

⌚ Recommended Tightening Torque (N·m)

S Type Screw Lock Holders

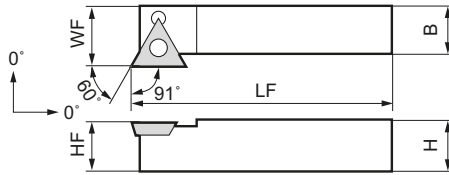

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Screw	Nm	Wrench	Insert
	R	L	H	HF	B	LF	WF						
STAC R/L 0808 D09	●		8	8	8	60	8,5			BFTX02205N	1,1	TRX06	①
STAC R/L 1212 F11	●		12	12	12	80	12,5			BFTX02506N	1,5	TRX08	②





■ Inserts



■ Spare Parts

Screw	Nm	Wrench	Insert
BFTX02205N	1,1	TRX06	①
BFTX02506N	1,5	TRX08	②

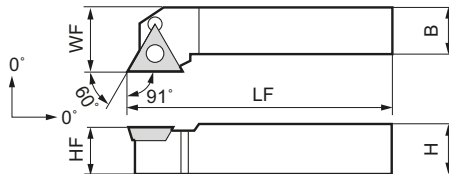

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Screw	Nm	Wrench	Insert
	R	L	H	HF	B	LF	WF						
STGC R/L 0808 D09			8	8	8	60	10			BFTX02205N	1,1	TRX06	①
STGC R/L 1010 E09	●	●	10	10	10	70	12			BFTX02506N	1,5	TRX08	②
STGC R/L 1212 F11	●	●	12	12	12	80	16						
STGC R/L 1616 H11	●	●	16	16	16	100	20			BFTX0409N	3,4	TRX15	③
STGC R/L 1616 H16	●	●	16	16	16	100	20						
STGC R/L 2020 K16	●	●	20	20	20	125	25						
STGC R/L 2525 M16	□	□	25	25	25	150	32						

■ Inserts





■ Spare Parts

Screw	Nm	Wrench	Insert
BFTX02205N	1,1	TRX06	①
BFTX02506N	1,5	TRX08	②
BFTX0409N	3,4	TRX15	③

External Mini Tool Holders SV Type

Mini Holders for 5° VB_ _ pos. Inserts

S Type Screw Lock Holders

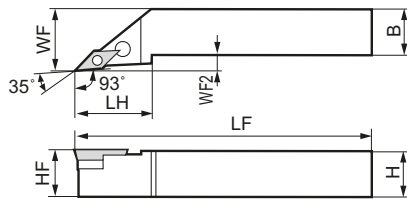

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Stopper	Nut	Shim	Wrench	Scew	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF	WF2							
SVJB R/L 1212 F11	●	●	12	12	12	80	25	16	4,5	-	-	-	-	BFTX02508NV 1,5 ^(N·m)	TRX08	①
SVJB R/L 1616 H11	●	●	16	16	16	100	25	20	4,5	-	-	-	-	BFTX03508	TRX10	②
SVJB R/L 2020 K16	●	●	20	20	20	125	41	25	5,0	VP20	-	-	-	BFTX03508	TRX10	②
SVJB R/L 2525 M16	●	●	25	25	25	150	41	32	7,0	VP25	CPV33N	SVP32	LH025	BFTX03508	TRX10	②
SVJB R/L 3225 P16	●	●	32	32	25	170	41	32	7,0	VP32	-	-	-	2,0 ^(N·m)	-	-

■ Inserts



Eg.



- ① VBMT 110202 N-FP
- ② VBMT 160404 N-SU

■ Spare Parts

Stopper	Nut	Shim	Wrench	Scew	Wrench	Insert
-	-	-	-	BFTX02508NV 1,5 ^(N·m)	TRX08	①
VP20	CPV33N	SVP32	LH025	BFTX03508	TRX10	②
VP25	-	-	-	-	-	-
VP32	-	-	-	2,0 ^(N·m)	-	-

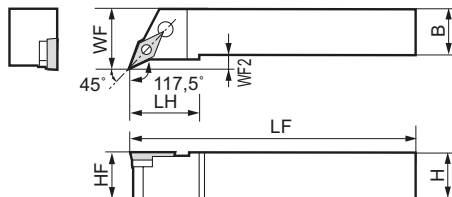

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Stopper	Nut	Shim	Wrench	Scew	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF	WF2							
SVPB R/L 1212 F11	●	□	12	12	12	80	25	16	4,5	-	-	-	-	BFTX02508NV 1,5 ^(N·m)	TRX08	①
SVPB R/L 1616 H11	●	●	16	16	16	100	25	20	4,5	-	-	-	-	BFTX03508	TRX10	②
SVPB R/L 2020 K16	●	●	20	20	20	125	36	25	5,0	VP20	-	-	-	BFTX03508	TRX10	②
SVPB R/L 2525 M16	●	●	25	25	25	150	36	32	7,0	VP25	CPV33N	SVP32	LH025	BFTX03508	TRX10	②
SVPB R/L 3225 P16	●	●	32	32	25	170	36	32	7,0	VP32	-	-	-	2,0 ^(N·m)	-	-

■ Inserts



Eg.



- ① VBMT 110202 N-FP
- ② VBMT 160404 N-SU

■ Spare Parts

Stopper	Nut	Shim	Wrench	Scew	Wrench	Insert
-	-	-	-	BFTX02508NV 1,5 ^(N·m)	TRX08	①
VP20	CPV33N	SVP32	LH025	BFTX03508	TRX10	②
VP25	-	-	-	-	-	-
VP32	-	-	-	2,0 ^(N·m)	-	-

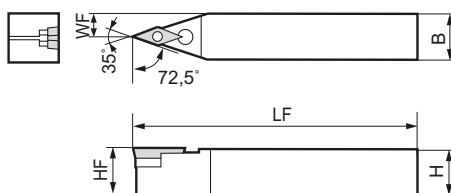

■ Holders

Cat. No.	Stock	Dimensions (mm)							Stopper	Nut	Shim	Wrench	Scew	Wrench	Insert
		H	HF	B	LF	LH	WF	WF2							
SVVB M 1212 F11	●	12	12	12	80	-	6	-	-	-	-	-	BFTX02508NV 1,5 ^(N·m)	TRX08	①
SVVB N 1616 H11	●	16	16	16	100	-	8	-	-	-	-	-	BFTX03508	TRX10	②
SVVB N 2020 K16	●	20	20	20	125	-	10	-	VP20	-	-	-	BFTX03508	TRX10	②
SVVB N 2525 M16	●	25	25	25	150	-	12,5	-	VP25	CPV33N	SVP32	LH025	BFTX03508	TRX10	②
SVVB N 3225 P16	●	32	32	25	170	-	12,5	-	VP32	-	-	-	2,0 ^(N·m)	-	-

■ Inserts

Eg.





- ① VBMT 110202 N-FP
- ② VBMT 160404 N-SU

■ Spare Parts

Stopper	Nut	Shim	Wrench	Scew	Wrench	Insert
-	-	-	-	BFTX02508NV 1,5 ^(N·m)	TRX08	①
VP20	CPV33N	SVP32	LH025	BFTX03508	TRX10	②
VP25	-	-	-	-	-	-
VP32	-	-	-	2,0 ^(N·m)	-	-

S Type Screw Lock Holders

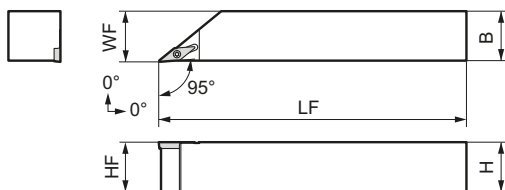

■ Holders

Above figures show right hand tools.



Cat. No.	Stock		Dimensions (mm)							Screw	Nm	Wrench	Insert
	R	L	H	HF	B	LF	WF						
SVLC R/L 1010 H11	●	●	10	10	10	100	10,5			BFTX02508NV	1,5	TRX08	①
SVLC R/L 1212 H11	●	●	12	12	12	100	12,5						
SVLC R/L 1616 H11	●	●	16	16	16	100	16,5						
SVLC R/L 2525 M11	●		20	20	20	150	25,5						

■ Inserts



■ Spare Parts

Screw	Nm	Wrench	Insert
BFTX02508NV	1,5	TRX08	①

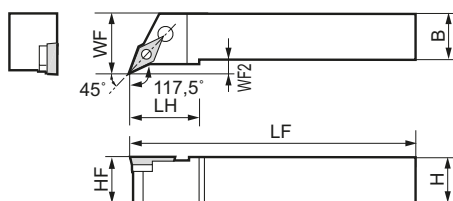

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							Screw	Nm	Wrench	Insert
	R	L	H	HF	B	LF	LH	WF	WF2				
SVPC R/L 1010 H11	□	□	10	10	10	100	-	14,5	4,5	BFTX02508NV	1,5	TRX08	①
SVPC R/L 1212 H11	●	●	12	12	12	100	-	16,5	4,5				
SVPC R/L 1616 H11	●	●	16	16	16	100	-	20,5	4,5				

■ Inserts



■ Spare Parts

Screw	Nm	Wrench	Insert
BFTX02508NV	1,5	TRX08	①

External Tool Holders

Polygon - Shank Holder



■ Features

The Sumitomo polygon shank holders enable an extremely high stiffness connection between machine and tool. The conical polygon can take high bending and torque moments based on the combination of the face contact to the spindle.

This self-guiding coupling system offers high precision and a repeatability of $\pm 2 \mu\text{m}$ in X, Y and Z axis.

While using this easy and quick coupling system it is possible to gain higher machine utilization time as the set-up and tool change times are reduced.

The compact design and the high stiffness connection to the spindle offer a versatile use e.g. on multi-task machines, machining centers and turning-milling centers.



■ Characteristics

- original SUMITOMO D-type double clamping system
- compact design
- monoblock system - no additional interfaces
- precise positioning; self-guiding with high repeatability
- high stiffness supported by face contact of holder
- carbide shims to prevent holders from damage
- simple tool holder change and low-maintenance operation
- internal coolant supply directly to the cutting edge
- Polygon shank and insert seat hardened for long holder life

Polygon - shank holder - produced according to ISO 26623-1


Negative Insert Type





Positive Insert Type



■ Classification System for Polygon - Shank Holder

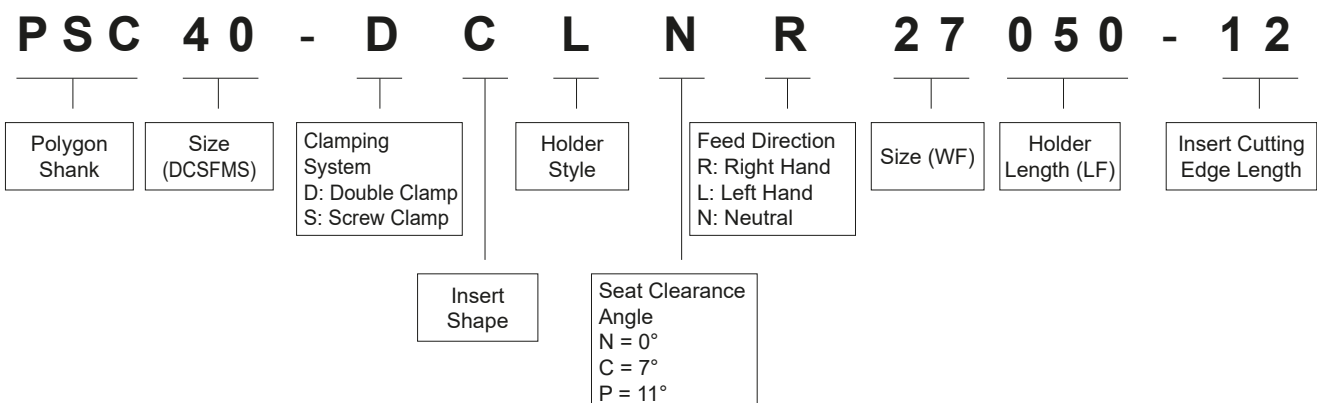

General Turning, Copying and Facing

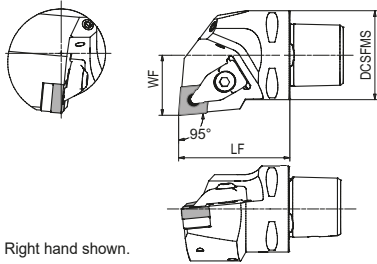


Right hand shown.

■ Holders



Cat. No.	Stock		Dimensions (mm)			Applicable Insert
	R	L	LF	WF	DCSFMS	
PSC40 DCLN R/L 27050-12	●	●	50	27	40	CN□□ 1204
PSC50 DCLN R/L 35060-12	●	●	60	35	50	

■ Inserts



■ Spare Parts

Clamp Set	\curvearrowright (N·m)	Shim	Shim Screw	Shim Wrench	Wrench
SCP-2	5,0	CNS1204	BFTX0409N	TRX15 (*)	LH040

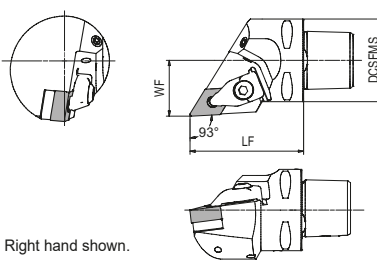

Right hand shown.

■ Holders



Cat. No.	Stock		Dimensions (mm)			Applicable Insert
	R	L	LF	WF	DCSFMS	
PSC40 DDJN R/L 27055-15	●	●	55	27	40	DN□□ 1506
PSC50 DDJN R/L 35060-15	●	●	60	35	50	

■ Inserts



■ Spare Parts

Clamp Set	\curvearrowright (N·m)	Shim	Shim Screw	Shim Wrench	Wrench
SCP-2	5,0	DNS1506	BFTX0409N	TRX15 (*)	LH040

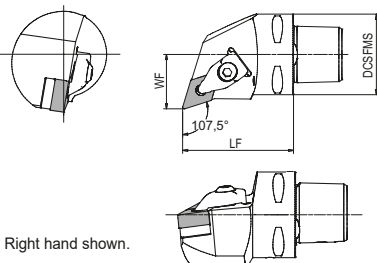

Right hand shown.

■ Holders



Cat. No.	Stock		Dimensions (mm)			Applicable Insert
	R	L	LF	WF	DCSFMS	
PSC40 DDHN R/L 27055-15	●	●	55	27	40	DN□□ 1506
PSC50 DDHN R/L 35060-15	●	●	60	35	50	

■ Inserts



■ Spare Parts

Clamp Set	\curvearrowright (N·m)	Shim	Shim Screw	Shim Wrench	Wrench
SCP-2	5,0	DNS1506	BFTX0409N	TRX15 (*)	LH040

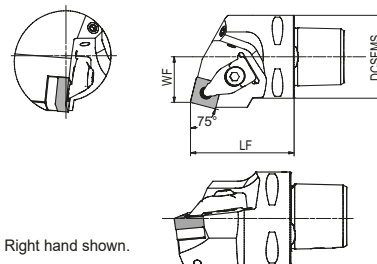


Right hand shown.

■ Holders

Cat. No.	Stock		Dimensions (mm)			Applicable Insert
	R	L	LF	WF	DCSFMS	
PSC40 DSBN R/L 22050-12	●	●	50	22	40	SN□□ 1204
PSC50 DSBN R/L 27060-12	●	●	60	27	50	

■ Inserts



■ Spare Parts



Clamp Set	\curvearrowright (N·m)	Shim	Shim Screw	Shim Wrench	Wrench
SCP-2	5,0	SNS1204	BFTX0409N	TRX15 (*)	LH040

(*) Item is sold separately.

External Tool Holders Polygon - Shank Holder

Negative Insert Type

General Turning and Facing

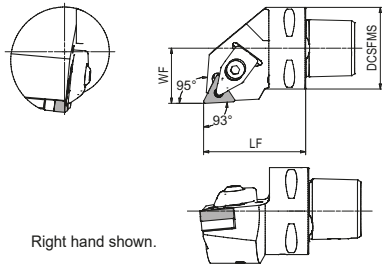


Right hand shown.

■ Holders



Cat. No.	Stock		Dimensions (mm)			Applicable Insert
	R	L	LF	WF	DCSFMS	
PSC40 DTJN R/L 27050-16	●	●	50	27	40	TN□□ 1604
PSC50 DTJN R/L 35060-16	●	●	60	35	50	

■ Inserts



■ Spare Parts

Clamp Set	\curvearrowright (N·m)	Shim	Shim Screw	Shim Wrench	Wrench
SCP-1	5,0	TNS1604	BFTX0307N	TRX15 (*)	LH040

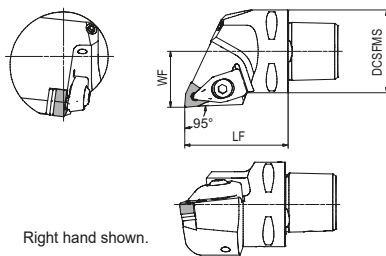


Right hand shown.

■ Holders

Cat. No.	Stock		Dimensions (mm)			Applicable Insert
	R	L	LF	WF	DCSFMS	
PSC40 DWLN R/L 27050-06	●	●	50	27	40	WN□□ 06
PSC50 DWLN R/L 35060-06	●	●	60	35	50	
PSC40 DWLN R/L 27050-08	●	●	50	27	40	WN□□ 08
PSC50 DWLN R/L 35060-08	●	●	60	35	50	

■ Inserts





■ Spare Parts

Clamp Set	\curvearrowright (N·m)	Shim	Shim Screw	Shim Wrench	Wrench
SCP-1	5,0	WNS0604	BFTX0307N	TRX15 (*)	LH040
SCP-2	5,0	WNS0804	BFTX0409N	TRX15 (*)	LH040

(*) Item is sold separately.

External Holders
for neg. Inserts

General Turning, Copying and Facing

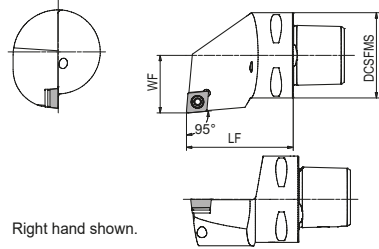


Right hand shown.

■ Holders



Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	L ₁	f	DCSFMS	
PSC40 SCLC R/L 27050-09	●	●		50	27	40	CC□□ 09T3
PSC50 SCLC R/L 35060-09	●	●		60	35	50	

■ Inserts



■ Spare Parts

Shim	Shim Screw	Insert Screw	Wrench	Shim Wrench
CCS09T3	KGBS1111	KSS1111	3,5	LT15K
				LH035K*

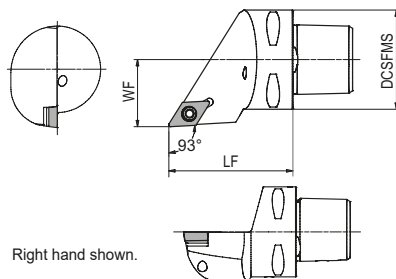

Right hand shown.

■ Holders


Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	LF	WF	DCSFMS	
PSC40 SDJC R/L 27050-11	●	●		50	27	40	DC□□ 11T3
PSC50 SDJC R/L 35060-11	●	●		60	35	50	

■ Inserts



■ Spare Parts

Shim	Shim Screw	Insert Screw	Wrench	Shim Wrench
DCS11T3	KGBS1111	KSS1111	3,5	LT15K
				LH035K*

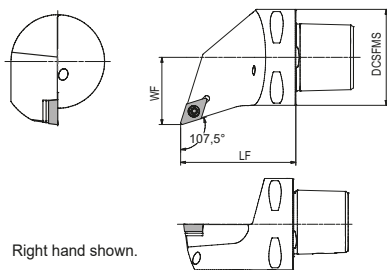

Right hand shown.

■ Holders



Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	LF	WF	DCSFMS	
PSC40 SDHC R/L 27050-11	●	●		50	27	40	DC□□ 11T3
PSC50 SDHC R/L 35060-11	●	●		60	35	50	

■ Inserts



■ Spare Parts

Shim	Shim Screw	Insert Screw	Wrench	Shim Wrench
DCS11T3	KGBS1111	KSS1111	3,5	LT15K
				LH035K*

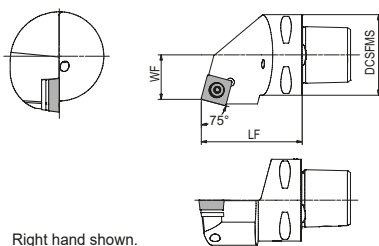


Right hand shown.

■ Holders

Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	LF	WF	DCSFMS	
PSC40 SSBC R/L 22050-12	●	●		50	22	40	SC□□ 1204
PSC50 SSBC R/L 27060-12	●	●		60	27	50	

■ Inserts



■ Spare Parts



Shim	Shim Screw	Insert Screw	Wrench	Shim Wrench
SCS1204	KGBS1221	KSS1221	4,5	LT15K
				LH045K*

(*) Item is sold separately.

External Tool Holders Polygon - Shank Holder

Positive Insert Type

General Turning, Copying and Facing

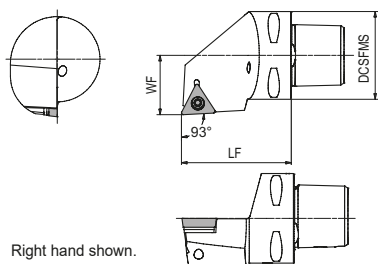


Right hand shown.

■ Holders



Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	LF	WF	DCSFMS	
PSC40 STJC R/L 27050-16	●	●		50	27	40	TC□□ 16T3
PSC50 STJC R/L 35060-16	●	●		60	35	50	

■ Inserts



■ Spare Parts

--	--	--	--	--

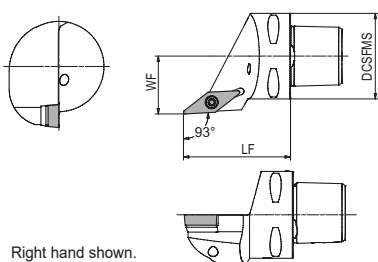


Right hand shown.

■ Holders



Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	LF	WF	DCSFMS	
PSC40 SVJB R/L 27050-16	●	●		50	27	40	VB□□ 1604
PSC50 SVJB R/L 35060-16	●	●		60	35	50	

■ Inserts



■ Spare Parts

--	--	--	--	--

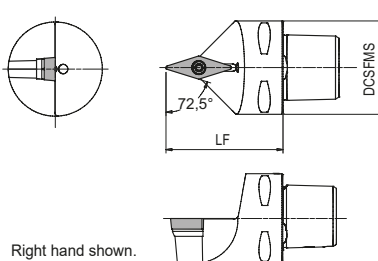


Right hand shown.

■ Holders



Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	LF	WF	DCSFMS	
PSC40 SVVB N 00050-16			●	50		40	VB□□ 1604
PSC50 SVVB N 00060-16			●	60		50	

■ Inserts



■ Spare Parts

--	--	--	--	--

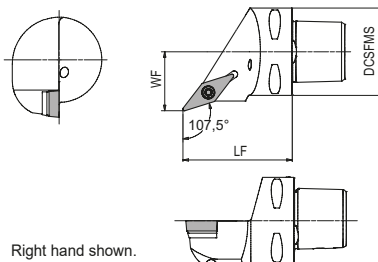


Right hand shown.

■ Holders

Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	LF	WF	DCSFMS	
PSC40 SVHB R/L 27050-16	●	●		50	27	40	VB□□ 1604
PSC50 SVHB R/L 35060-16	●	●		60	35	50	

■ Inserts





■ Spare Parts

--	--	--	--	--

(*) Item is sold separately.

External Holders
for pos. Inserts


General Turning, Copying and Facing

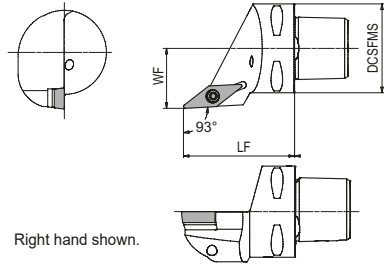

■ Holders



Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	LF	WF	DCSFMS	
PSC40 SVJC R/L 27050-16	●	●		50	27	40	VC□□ 1604
PSC50 SVJC R/L 35060-16	●	●		60	35	50	

■ Inserts



■ Spare Parts

Shim	Shim Screw	Insert Screw	(N·m)	Wrench
VCS1604	KGBS1111	KSS1111	3,5	LT15K
				LH035K*

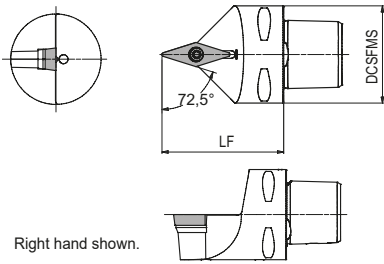

■ Holders


Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	LF	WF	DCSFMS	
PSC40 SVVC N 00050-16			●	50		40	VC□□ 1604
PSC50 SVVC N 00060-16			●	60		50	

■ Inserts



■ Spare Parts


Shim	Shim Screw	Insert Screw	(N·m)	Wrench
VCS1604	KGBS1111	KSS1111	3,5	LT15K
				LH035K*

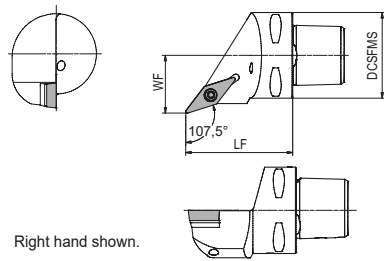

■ Holders

Cat. No.	Stock			Dimensions (mm)			Applicable Insert
	R	L	N	LF	WF	DCSFMS	
PSC40 SVHC R/L 27050-16	●	●		50	27	40	VC□□ 1604
PSC50 SVHC R/L 35060-16	●	●		60	35	50	

■ Inserts



■ Spare Parts

Shim	Shim Screw	Insert Screw	(N·m)	Wrench
VCS1604	KGBS1111	KSS1111	3,5	LT15K
				LH035K*

(*) Item is sold separately.

Boring Bars

E1-E24



Boring Bars

Selection	Boring Tool Selection Table	E2-4
ISO	Boring Tool Identification Table	E5
Features	Boring Tool Series	E6-7

Boring Bars for Negative Insert Type :

CN_ _ :	D...DCLN / S...PCLN	E8
DN_ _ :	D...DDUN / S...PDUN	E9
SN_ _ :	S...PSKN	E10
SumiTurn T-Rex	S...DTR	E11
TN_ _ :	D...DTFN / S...PTFN	E12
WN_ _ :	D...DWLN / S...WMLN	E13

Boring Bars for Positive Insert Type :

X-Bar for CC_ _ :	B/D...SCLC	E14
CC_ _ :	S ... SCLC	E14
CP_ _ :	S/C...SCLP	E15
X-Bar for DC_ _ :	B/D...SDUC / SDQC	E16-17
DC_ _ :	S ... SDQC / SDUC	E16-17
SP_ _ :	S/C...SSKP	E18
TC_ _ :	S ... STFC	E19
X-Bar for TP_ _ :	B/D...STUP	E20
TP_ _ :	S/C...STUP	E20
X-Bar for VB_ _ :	D ... SVUB / SVZB	E21
VB_ _ :	S ... SVQB / SVUB / SVZB	E22
WB_ _ :	S/C...SWUB	E23

Very Small Dia. Boring	BXBR...R(-NB)	E24
------------------------	----------------------------	-----

Boring Tools Selection

According to Applications / Bore Diameter

BORING TOOLS

Coloured boxes indicate available size.

Application	Type	Boring Depth (L/D)			Applicable Insert	Tooling	Min. Bore Diameter (mm)																								
		Shank					(Min. cutting diameter is shown when not matched in this table.)																								
		Steel	Carbide	X-Bar (Steel)			2	2.5	3	3.5	4	4.5	5	6	7	8	10	12	13	14	16	18	20	22	25	28	35	44	54	70	
Very Small Dia. Boring	BXBR ⇒ E24			-5	Special boring bar		○	○	○	○	○	○																			
	DABB ⇒ M45			-2	Sumidia brazed				●	●	●	●	●																		
Stop Boring	BSME ⇒ M36-M38			-4	Sumiboron brazed		●	●	●	●	●																				
	SEXC ⇒ M36,37,39			-3	Sumiboron insert					●	●	●																			
	BNBB ⇒ M40			-5	Sumiboron brazed				●	●	●	●	●																		
	BNB ⇒ M41			-4	Sumiboron insert									●	●	●	●	●													
	S/C-SWUB ⇒ E23			-3	-8	Trigon Type 5° Pos.							●																		
	S-STFC ⇒ E19			-3													●	●	●	●	●			●	●	●	●				
	B/D-STUP ⇒ E20			-6													●	●	●	●	●	●	●	●	●	●	●				
	S-STUP(B) ⇒ E20			-3		Triangle Type 5° & 11° Pos.											●	●	●	●	●	●	●	●	●	●	●				
	C-STUP ⇒ E20			-8													●	●	●	●	●	●	●	●	●	●	●				
	CTFP ⇒ Stock in Japan			-3		Triangle 11° Pos.														○	○	○	○			○	○				
	D-DTFN ⇒ E12			-3	-6																					●	●	●			
	S-PTFN ⇒ E12					Triangle Neg. Type																				●	●	●			
	Bottom Facing	BNZ ⇒ M33			-5		Sumiboron insert													●	●	●	●	●	●						
		S-SCLP ⇒ E15			-3																						●	●	●		
B-SCLP ⇒ Stock in Japan				-6		80° Diamond 11° Pos. Type														○	○	○	○								
C-SCLP ⇒ E15				-8																											
B/D-SCLC ⇒ E14				-6																						●	●	●			
S-SCLC ⇒ E14				-3		80° Diamond 7° Pos. Type																					●	●	●		
C-SCLC ⇒ Stock in Japan				-8																											
D-DCLN ⇒ E8				-6																							●	●	●		
S-PCLN ⇒ E8				-3		80° Diamond Neg. Type																						●	●	●	
D-DWLN ⇒ E13				-6																								●	●	●	
S-MWLN ⇒ E13			-3		Trigon Neg. Type																							●	●	●	

Boring Bars

Boring Tools Selection

■ BORING TOOLS

Coloured boxes indicate available size.

Application	Type	Boring Depth (L/D)			Applicable Insert	Tooling	Min. Bore Diameter (mm)																				
		Shank		X-Bar (Steel)			6	8	10	12	13	14	16	18	20	22	25	28	32	34	35	40	44	50	54	70	
		Steel	Carbide																								
Copying	B/D-SDUC	⇒ E16			-6	55° Diamond 7° Pos. Type																					
	S-SDUC	⇒ E16	-3																								
	C-SDUC	⇒ Stock in Japan		-8		55° Diamond 7° Pos. Type																					
	B/D-SDQC	⇒ E17			-6																						
	S-SDQC	⇒ E17	-3			55° Diamond 7° Pos. Type																					
	D-SVUB	⇒ E21			-6																						
	S-SVUB	⇒ E22	-3			35° Diamond Type 5° & 7° Pos.																					
	S-SVQB	⇒ E22	-3																								
	B/C-SVQB	⇒ Stock in Japan		-8	-6	35° Diamond Type 5° & 7° Pos.																					
	D-SVZB	⇒ E21			-6																						
	S-SVZB	⇒ E22				55° Diamond Neg. Type																					
	D-DDUN	⇒ E9			-6																						
	S-PDUN	⇒ E9	-3																								
	Through Boring	S-SSKP	⇒ E18	-3			55° Diamond Neg. Type																				
C-SSKP		⇒ E18		-8																							
SSKC		⇒ Stock in Japan	-3			Square Type 7° Pos.																					
CSKP		⇒ Stock in Japan	-3			Square Type 11° Pos.																					
S-PSKN		⇒ E10	-3			Square Neg. Type																					
Grooving	GNDI	⇒ F11/F28																									
	GNDIS	⇒ F11/F30																									

Boring Bars

Boring Tool Series


TOOLING SELECTION

Application		Stop Boring		Bottom Facing		Trough Boring	Copying		
Insert Type System	Triangle	Poligon / Others	80° Diamond		Square	55° T-REX	55° Diamond	35° Diamond	
	Screw Lock	Steel	 S-STFC ⇨ E19 S-STUP (B) ⇨ E20	 S-SWUB ⇨ E23	 S-SCLC ⇨ E14	 S-SCLP ⇨ E15	 S-SSKP ⇨ E18	—	 S-SDUC ⇨ E16 S-SDQC ⇨ E17
Anti-vibration		 B-STUP ⇨ E20	—	 B-SCLC ⇨ E14	—	—	—	 B-SDUC ⇨ E16 B-SDQC ⇨ E17	—
Anti-vibration with Oil Hole		 D-STUP ⇨ E20	—	 D-SCLC ⇨ E14	—	—	—	 D-SDUC ⇨ E16 D-SDQC ⇨ E17	 D-SVUB ⇨ E21 D-SVZB ⇨ E21
Carbide		 C-STUP (C-STUB) ⇨ E20	 C-SWUB ⇨ E23	—	 C-SCLP ⇨ E15	 C-SSKP ⇨ E18	—	—	—
Lever Lock	Steel	 S-PTFN ⇨ E12	—	 S-PCLN ⇨ E8	—	 S-PSKN ⇨ E10	—	 S-PDUN ⇨ E9	—
	Anti-vibration with Oil Hole	 D-DTFN ⇨ E12	 D-DWLN ⇨ E13	 D-DCLN ⇨ E8	—	—	—	 D-DDUN ⇨ E9	—
Top Clamp	Steel	—	 S-MWLN ⇨ E13	—	—	—	 S-DTR ⇨ E11	—	
	Carbide	 BNB ⇨ M41	 BNBB ⇨ M40	 BNZ ⇨ M41	—	 BXBR ⇨ E24			
CBN	Carbide	 BSME ⇨ M38	 SEXC ⇨ M39	—	—	—	—	—	

Boring Bars

Boring Tools Identification

■ Catalogue Classification System For Boring Holders

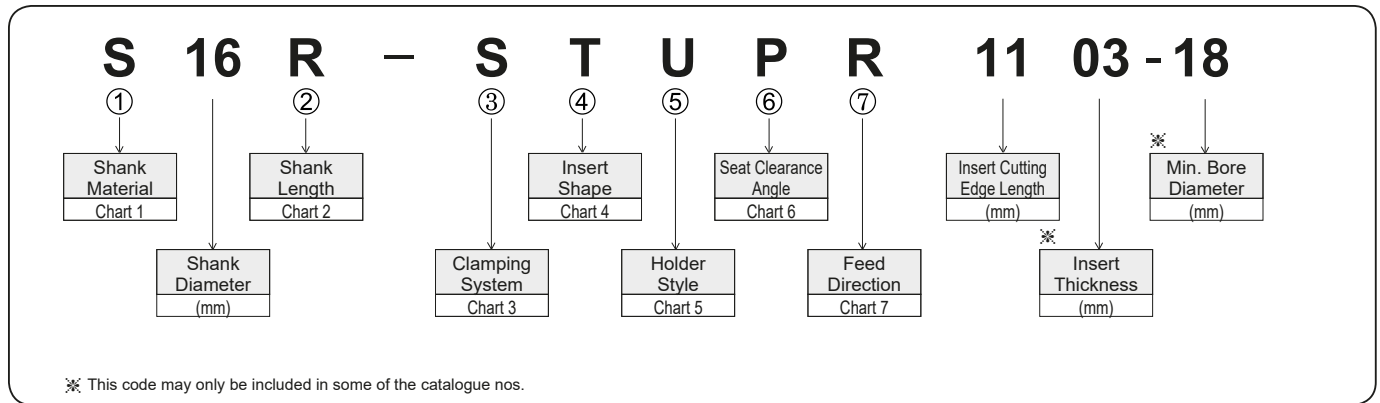

① Chart 1

Shank Material	
S	Steel
B	Steel with Anti-vibration Mechanism without Oil Hole
C	Carbide
D	Steel with Anti-vibration Mechanism with Oil Hole
E	Carbide with Oil Hole

② Chart 2

Shank Length			
Symbol	Length (mm)	Symbol	Length (mm)
F	80	P	170
G	90	Q	180
H	100	R	200
J	110	S	250
K	125	T	300
L	140	U	350
M	150	V	400
N	160	W	450

③ Chart 3

Clamping System					
Symbol	System	Structure	Symbol	System	Structure
C	Top Clamp		M	Top & Hole Clamp Type	
D	Double Clamp		P	Lever Lock Type (Insert is Supported by 1 face)	
E	Pin Lock Type (Insert is supported by 1 face)		S	Screw Clamp Type	

⑦ Chart 7

Feed Direction	
Symbol	Feed Direction
R	Right Hand Feed
L	Left Hand Feed
N	Neutral Feed

④ Chart 4

Insert Shape			
Symbol	Insert Shape	Symbol	Insert Shape
A	Parallelogram 85°	M	Rhombic 86°
B	Parallelogram 82°	O	Octagonal
C	Diamond 80°	P	Pentagonal
D	Diamond 55°	R	Round
E	Diamond 75°	S	Square
F	Diamond 50°	T	Triangular
H	Hexagonal	V	Diamond 35°
K	Parallelogram 55°	W	Trigon
L	Rectangular		

⑤ Chart 5

Holder Style					
Symbol	Shape	Offset	Symbol	Shape	Offset
A		Nil	N		Nil
B		Nil	Q		With Offset
D		Nil	R		With Offset
E		Nil	S		With Offset
F		With Offset	T		With Offset
G		With Offset	U		With Offset
J		With Offset	W		With Offset
K		With Offset	Y		With Offset
L		With Offset	Z		With Offset

⑥ Chart 6

Seat Clearance Angle	
Symbol	Relief Angle
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°
O	Special Angle

Boring Tool Series





General Features

Since being the first in 1976 to introduce indexable boring bars, Sumitomo Electric has been continuously developing a comprehensive range which includes the SEC-Small Hole boring bar series, high rigidity boring head series, with either steel / carbide shanks, and the latest anti-vibration mechanism - SumiTurn X-Bar series coupled with a wide variety of insert grades and chipbreakers, cover a whole range of process requirements.


Features

- Wide selection for various boring operations
- Minimum bore diameter from \varnothing 5,5 mm onwards
- New anti-vibration boring bars, SumiTurn X-Bar.
- High rigidity head-design for small boring bars
- Wide selection of grades and chipbreakers available for various processes and work materials

Series SumiTurn X Bar

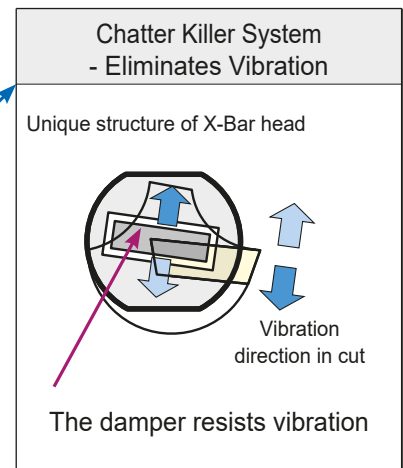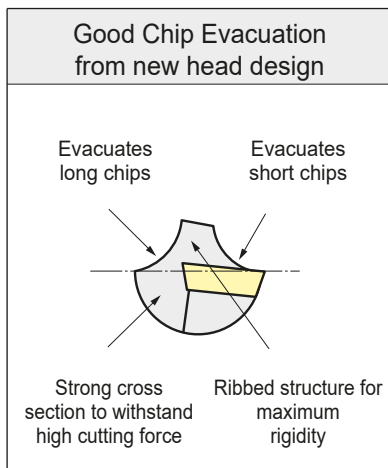

- New negative type "X Bar" with high performance double clamping system




SumiTurn X Bar

ATTENTION:

Please keep this area free to get the effect of "X Bar" chattering killer system

Min. over hang length = $3,5 \times \varnothing d$




Application Guide

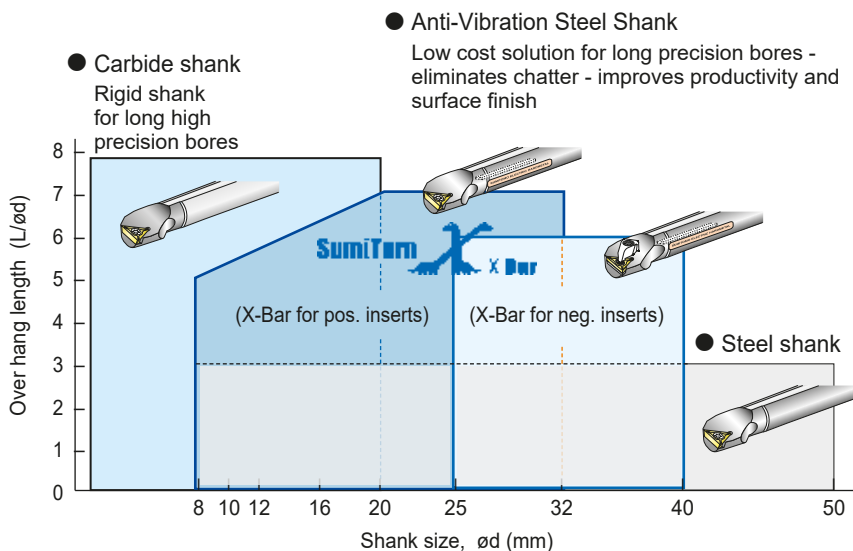

Boring Bars

Boring Tool Series

Recommended Over Hang Length / Shank Diameter (L/D)

Type of boring bar		Over hang length (L/D)									
		1	2	3	4	5	6	7	8	9	10
<ul style="list-style-type: none"> ● Steel Shank Rigid head design for low cost hole boring.											
<ul style="list-style-type: none"> ● Anti-Vibration Type Shank Chatter killer system eliminates vibration - improves productivity - improves quality					(X-Bar for pos. inserts) (X-Bar for neg. inserts)						
<ul style="list-style-type: none"> ● Carbide Shank High rigidity shank for high accuracy hole boring.											

Grades

Tool Material		Process			Work Material							
		High Precision	Finish~Light Cut	Medium Cut	P General Steel	M Stainless Steel	K Cast Iron	S Heat Resistant Alloy	H Hardened Steel	N Non-Ferrous Metal	P Powder Metal	
Coated Carbide	CVD	New AC8015P			○							
		AC8025P			○							
		New AC8035P			○							
		AC6020M			○	○						
		AC6030M			○	○						
		New AC4010K			○							
		New AC4015K			○							
	AC420K			○								
	PVD	ACZ150			○	○						
		New AC5015S			○							
		New AC5025S			○							
		AC530U			○	○						
		AC1030U			○	○						
	AC6040M			○	○							
Cermet	T1000A			○								
Coated Cermet	T1500A/T1500Z			○								
Cermet	T3000Z			○								
Carbide	G10E			○								
SumiBoron	BN1000											
	BN2000											
	BNC2010											
	BNC2020											
	BN7000											
SumiDia	BN7500											
	DA1000											
	DA150											

○ Preferred choice

○ Suitable





Recommended Chip Breakers

● M-Class Finish-Light-Cut

● M-Class Light-Medium-Cut

● G-Class Ground Typ


● G-Class Breaker



D...DCLN / S...PCLN Type




SumiTern X Bar



Insert (eg.)




N-GU



D-DCLN

Bottom facing

Anti-vibration D type with oil hole

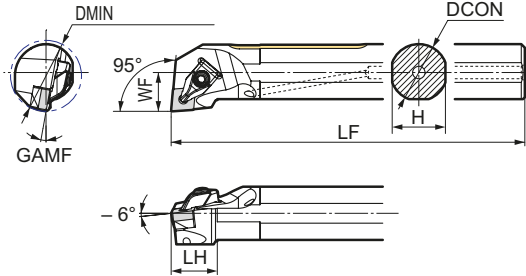

Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim screw	Wrench	Wrench
SCP-2			CNS1203B	BFTX0307N	TRX10 ^(*)	LH040
			CNS1204B	BFTX0409N 3.4	TRX15 ^(*)	LH025

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		ϕD_{min}	Dimensions (mm)							Insert (eg.)
	R	L		ϕd	h	l_1	l_2	f	γ		
D25T - DCLN R/L 1204-32	●	●	32	25	23	300	26	17	-12°	CN□□1204□□	
D32T - DCLN R/L 1204-40	●	●	40	32	30	300	26	22	-10°		
D40U - DCLN R/L 1204-50	●	●	50	40	37	350	26	27	-10°		

(*) Note: Wrench (TRX type) for shim screw is not included.

Remarks: Right handed tool holders are applicable with left handed or neutral inserts.
Left handed tool holders are applicable with right handed or neutral inserts.

■ Holders

Tool holders (P type) with lever-lock system	Cat. No.	Stock		Dimensions (mm)							Image
		R	L	ϕD_{min}	d	h	l_1	l_2	f	γ	
<p>S - PCLN R/L</p>	S20S - PCLN R/L09	●	●	25	20	18	250	29	13	-11°	CN__0903__
	S25T - PCLN R/L09	●	●	30	25	23	300	33	17	-10°	
	S25T - PCLN R/L12	●	●	32	25	23	300	42	17	-10°	CN__1204__
	S32U - PCLN R/L12	●	●	40	32	30	350	49	22	-11°	
	S40V - PCLN R/L12	●	●	50	40	37	400	56	27	-10°	
	S32U - PCLN R/L16	●	●	40	32	30	350	56	22	-11°	CN__1606__
	S40V - PCLN R/L16	●	●	50	40	37	400	56	27	-10°	
	S50W - PCLN R/L16	□	□	63	50	47	450	56	35	-11°	
	S50W - PCLN R/L19	□	□	63	50	47	450	63	35	-11°	CN__1906__

All figures show right hand tools.


■ Applicable Inserts

■ Spare Parts


Holder	Carbides, Cermets		CBN, PCD	Lever pin	Clamp bolt	Shim	Shim pin	Wrench
	Double sided	One sided						
S - PCLN R/L								
S.....09	CNMG 0903__ NGU	-	-	LCL3C-SD	LCS3B-SD	-	-	LH020
S25T.....12	CNMG 1204__ NGU	CNMM 1204__ NMP	CNGA 1204__	LCL4C-SD	LCS4B-SD	-	-	LH025
S32U.....12	CNMG 1204__ NGU	CNMM 1204__ NMP	CNGA 1204__	LCL4T-SD	LCS41BS-SD	LSC42SD	LSP4SD	LH030
S40V.....12	CNMG 1204__ NGU	CNMM 1204__ NMP	CNGA 1204__	LCL4SD	LCS42BS-SD	LSC42SD	LSP4SD	LH030
S.....16	CNMG 1606__ NGU	CNMM 1606__ NMP	-	LCL5SD	LCS5B-SD	LSC53SD	LSP5SD	LH030
S.....19	CNMG 1906__ NGU	CNMM 1906__ NMP	-	LCL5C-SD	LCS6B-SD	LSC63SD	LSP6SD	LH040

● = Euro stock
□ = Delivery on request


Recommended Tightening Torque (N·m)



Anti-vibration D type with oil hole

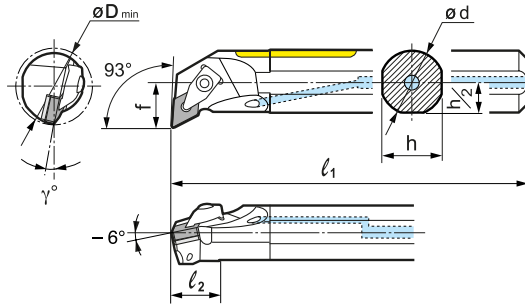

SumiTurn X Bar



Insert (eg.)



N-GU

■ Holders

Above figures show right hand tools.

Cat. No..	Stock		ϕD_{min}	Dimensions (mm)							Insert (eg.)	Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench
	R	L		ϕd	h	l_1	l_2	f	γ									
D32T - DDUN R/L 1104-40	●	●	40	32	30	300	26	22	-10°	DN□□1104□□		SCP-1		DNS1104B	BFTX0307N	TRX10 (*)		
D32T - DDUN R/L 1506-40	●	●	40	32	30	300	26	22	-12°	DN□□1506□□		SCP-2		DNS1506B	BFTX0409N ③ 3.4	TRX15 (*)	LH040	LH025
D40U - DDUN R/L 1506-50	●	●	50	40	37	350	26	27	-12°	DN□□1506□□		SCP-2		DNS1506B	BFTX0409N ③ 3.4	TRX15 (*)	LH040	LH025

(*) Note: Wrench (TRX type) for shim screw is not included.

Remarks: Right handed tool holders are applicable with left handed or neutral inserts.
Left handed tool holders are applicable with right handed or neutral inserts.

■ Holders

Tool holders (P type) with lever-lock system	Cat. No.	Stock		Dimensions (mm)							Image	
		R	L	ϕD_{min}	d	h	l_1	l_2	f	γ		
	S25T - PDUN R/L 11	●	●	32	25	23	300	35	17	-11°	DN__ 1104__	
	S32U - PDUN R/L 15 04	●	●	40	32	30	350	40	22	-11°	DN__ 1504__	
	S40V - PDUN R/L 15	●	●	50	40	37	400	56	27	-11°	DN__ 1506__	
	S50W - PDUN R/L 15	□	□	63	50	47	450	63	35	-10°	DN__ 1506__	

All figures show right hand tools.

■ Applicable Inserts

■ Spare Parts





Holder	Carbides, Cermets		CBN, PCD	Lever pin	Clamp bolt	Shim	Shim pin	Wrench	Image
	Double sided	One sided							
S - PDUN R/L									
S25T11	DNMG 1104__ NGU	-	DNGA 1104__	LCL3DB-SD	LCS3DB-SD	-	-	LH020	
S32U15 04	DNMG 1504__ NGU	DNMM 1504__ NMP	DNGA 1504__	LCL4D-SD	LCS5DB-SD	LSD42SD	LSP4SD	LH030	
S40V15	DNMG 1506__ NGU	DNMM 1506__ NMP	DNGA 1506__	LCL4D-SD	LCS5DB-SD	LSD42SD	LSP4SD	LH030	
S50W15	DNMG 1506__ NGU	DNMM 1506__ NMP	DNGA 1506__	LCL4D-SD	LCS5DB-SD	LSD42SD	LSP4SD	LH030	

Boring Bars S...PSKN Type

For Negative SN __ - Inserts ($\alpha = 0^\circ$)



■ Holders

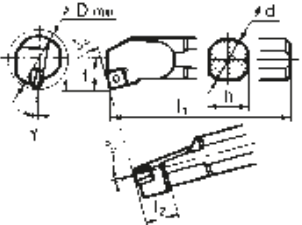







	Tool holders (P type) with lever-lock system	Cat. No.	Stock		Dimensions (mm)							
			R	L	ϕD_{min}	d	h	l_1	l_2	f		γ
S - PSKN R/L 		S25T - PSKN R/L 12	●	●	32	25	23	300	42	17	-11°	SN __ 1204 __
		S32U - PSKN R/L 12	●	●	40	32	30	350	45	22	-10°	
		S40V - PSKN R/L 12	●	●	50	40	37	400	50	27	-10°	
		S40V - PSKN R/L 15	●	○	63	40	47	400	60	35	-10°	SN __ 1506 __
		S50W - PSKN R/L 15	□	□	63	50	47	450	60	35	-10°	
		S50W - PSKN R/L 19	□	□	63	50	47	450	60	35	-9°	SN __ 1906 __

All figures show right hand tools.



Boring Bars for neg. insert

■ Applicable Inserts

■ Spare Parts

Holder	Carbides, Cermets		CBN	Lever pin	Clamp bolt	Shim	Shim pin	Wrench	
	Double sided	One sided							
S - PSKN R/L									
S25T...12	SNMG 0903 __ NGU	-	-	LCL4C-SD	LCS4B-SD	-	-	LH025	
S32U...12	SNMG 1204 __ NGU	SNMM 1204 __ NMP	SNGA 1204 __	LCL4T-SD	LCS41BS-SD	LSS42SD	LSP4SD	LH030	
S40V...12	SNMG 1204 __ NGU	SNMM 1204 __ NMP	SNGA 1204 __	LCL4SD	LCS42BS-SD	LSS42SD	LSP4SD	LH030	
S...15	SNMG 1506 __ NGU	SNMM 1506 __ NMP	-	LCL5SD	LCS5B-SD	LSS53SD	LSP5SD	LH030	
S...19	SNMG 1906 __ NGU	SNMM 1906 __ NMP	-	LCL5C-SD	LCS6B-SD	LSS63SD	LSP6SD	LH040	

Internal Turning & Copying

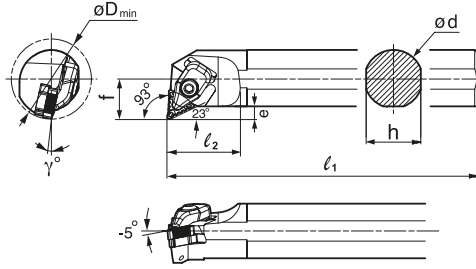

Spare Parts

Clamp	Spring	Screw	Shim	Screw	Wrench	Wrench
TRCP3	S-SP4-20	BX0520	TRW5505	BFTX0307N 2.0	TSW040	TRX10 ^(*)

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)							
	R	L	ϕD_{min}	ϕd	h	l_1	l_2	f	γ	e
S32S-DTR55C R/L-17	●	○	44	32	30	250	40	22	-12°	7
S40T-DTR55C R/L-17	●	○	50	40	37	300	40	25	-10°	6,2

(*) Note: Wrench (TRX10) for shim is not included.


■ Advantages

● T-REX Inserts for Maximum Economy

With 6 cutting edges and a 55 degree included angle - T-Rex is the intelligent alternative to profile turning with a traditional 4 edge DNMG insert.

■ Inserts

Applic.	Shape	Cat. No.	r	Coated Carbide						Coated Cermet
				AC8015P	AC8025P	AC810P	AC820P	AC830P	AC630M	T3000Z
Fine Finishing		TRM 551704-FL	0,4				○			○
		551708-FL	0,8				○			○
Finishing		TRM 551704-LU	0,4	●	○	▲	▲	▲		○
		551708-LU	0,8	●	○	▲	▲	▲		○
		551712-LU	1,2	○	○	▲	▲			○
		TRM 551704-SU	0,4		○		▲			○
		551708-SU	0,8		○		▲			○
551712-SU	1,2		○		▲			○		
Light Cut		TRM 551704-GU	0,4	○	○	▲	▲	▲		○
		551708-GU	0,8	○	○	▲	▲	▲		○
		551712-GU	1,2	○	○	▲	▲	▲		○



Application P Steel
 M Stainless steel

● Recommended Cutting Conditions

— Cutting speed (m/min)

Grade		Coated Carbide					Coated Cermet
		AC810P	AC8025P	AC820P	AC830P	AC630M	T3000Z
Work materials	Low carbon steel	220 400	150 350	150 350	120 300	120 300	100 400
	Alloy steel	150 300	100 250	100 250	80 200	80 230	100 250
	Stainless steel				50 150	100 160	
Application range	Finishing	◎	○	○	○	○	◎
	Medium cutting	○	◎	◎	○	◎	○
	Interrupted cutting		○	○	◎	○	○


◎ Preferred choice ○ Suitable

Boring Bars D...DTFN / S...PTFN Type

For Negative TN__ - Inserts ($\alpha = 0^\circ$)




SumiTurn X Bar



Insert (eg.)




N-GU



D-DTFN

Stop boring

Anti-vibration D type with oil hole

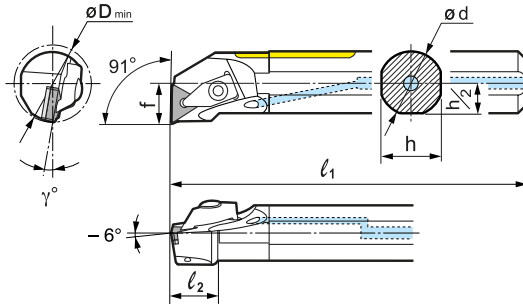

Spare Parts

Cat. No.	Stock	Dimensions (mm)							Insert (eg.)	Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench
	R L	ϕD_{min}	ϕd	h	l_1	l_2	f	γ								
D25T - DTFN R/L 1604-32	● ●	32	25	23	300	21	17	-12°	TNS□□1604□□	SCP-1		TNS1603B	BFTX0307N Ⓜ 2.0	TRX10 ^(*)	LH040	LH025
D32T - DTFN R/L 1604-40	● ●	40	32	30	300	26	22	-10°				TNS1604B				
D40U - DTFN R/L 1604-50	● ●	50	40	37	350	26	27	-10°								

(*) Note: Wrench (TRX type) for shim screw is not included.

Holdings

Above figures show right hand tools.

Holdings

Tool holders (P type) with lever-lock system	Cat. No.	Stock		Dimensions (mm)							Image	
		R	L	ϕD_{min}	d	h	l_1	l_2	f	γ		
<p>S - PTFN R/L</p>	S20S - PTFN R/L 11			25	20	18	250	30	13	-12°	TN__1103__	
	S25T - PTFN R/L 16	● ●		32	25	23	300	43,3	17	-13°	TN__1604__	
	S32U - PTFN R/L 16	● ●		40	32	30	350	49,6	27	-12°		
	S40V - PTFN R/L 16	● ●		50	40	37	400	49,5	27	-11°		
	S50W - PTFN R/L 16	□ □			63	50	47	450	56	35	-10°	
	S40V - PTFN R/L 22	● ●			50	40	37	400	59	27	-11°	TN__2204__
	S50W - PTFN R/L 22	□ □			63	50	47	450	66	35	-10°	

All figures show right hand tools.


Applicable Inserts

Spare Parts


Holder	Carbides, Cermets		CBN	Lever pin	Clamp bolt	Shim	Shim pin	Wrench
	Double sided	One sided						
S - PTFN R/L								
S...11	-	-	-	LCL3T-SD	LCS3B-SD	-	-	LH020
S...16	TNMG 1604__ NGU	TNMM 1604__ NMP	TNGA 1604__	LCL3SD	LCS3TB-SD	LST317SD	LSP3SD	LH025
S...22	TNMG 2204__ NGU	TNMM 2204__ NMP	TNGA 2204__	LCL4SD	LCS42BS-SD	LST42SD	LSP4SD	LH030

● = Euro stock
□ = Delivery on request


Recommended Tightening Torque (N·m)



Anti-vibration D type with oil hole

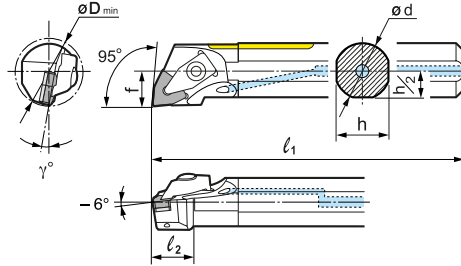

Sumitomo X Bar



Insert (eg.)



N-GU

Spare Parts

Clamp	Spring	Clamp bolt	Shim	Shim Screw	Wrench	Wrench
SCP-2			WNS0803B	BFTX0307N	TRX10 (*)	LH040 LH025
			WNS0804B	BFTX0409N 3, 4	TRX15 (*)	

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		ϕD_{min}	Dimensions (mm)							Insert (eg.)
	R	L		ϕd	h	l_1	l_2	f	γ		
D25T - DWLN R/L 0804-32	●	●	32	25	23	300	26	17	-12°	WN□□0804□□	
D32T - DWLN R/L 0804-40	●	●	40	32	30	300	26	22	-10°		
D40U - DWLN R/L 0804-50	●	●	50	40	37	350	26	27	-10°		

(*) Note: Wrench (TRX type) for shim screw is not included.

■ Holders

Tool holders (M type) with wedge clamp system	Cat. No.	Stock		Dimensions (mm)							Image
		R	L	ϕD_{min}	d	h	l_1	l_2	f	γ	
<p>S - MWLN R/L</p>	S25R - MWLN R/L 08	●	●	32	25	23	200	28	17	-15°	WNMG 0804__
	S32S - MWLN R/L 08	●	●	40	32	30	250	28	22	-14°	
	S40T - MWLN R/L 08	●	●	50	40	37	300	28	27	-12°	

All figures show right hand tools.


■ Applicable Inserts

■ Spare Parts


Holder	Carbides, Cermets		Clamp	Double screw	Pin	Shim	Wrench
	Double sided	One sided					
S - MWLN R/L							
S...08	WNMG 0804__NGU	WNMM 0804__NMP	HE060011W	WB 6-16	HE060011P	HE060011E	LH025, LH030

Boring Bars B/D/S...SCLC Type


For Positive CC__ - Inserts ($\alpha = 7^\circ$)



B Type (Fig.1)
Min. Bore Dia.



D Type (Fig.2)

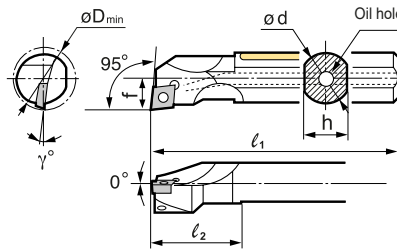

Insert (ex.)



■ Spare Parts

Screw	Wrench

■ Holders

Steel shank	Cat. No.	Stock		ϕD_{min}	Dimensions (mm)						Fig.	Insert (ex.)	Screw	Wrench
		R	L		ϕd	h	l_1	f	l_2	γ				
Anti-vibration B type	B08H - SCLC R/L 0602-10	●	●	10	8	7	100	5,5	19	-13°	1.	CC□T 0602□□	BFTX02505N	TRX08
	B10K - SCLC R/L 0602-12	●	●	12	10	9	125	6	21	-12°			BFTX02506N	
Anti-vibration D type with oil hole	D12M - SCLC R/L 0602-14	●	●	14	12	11	150	7	25	-10°	2.	CC□T 09T3□□	BFTX0407N	TRX15
	D16R - SCLC R/L 09T3-18	●	●	18	16	15	200	11	30	-8°			BFTX0409N	
	D20S - SCLC R/L 09T3-22	●	●	22	20	18	250	13	30	-7°			BFTX0511N	
	D25T - SCLC R/L 1204-32	●	●	32	25	23	300	17	38	-6°				
	D32T - SCLC R/L 1204-40	●	●	40	32	30	300	20	53	-6°				

All figures show right hand tools.

Remarks: Right handed tool holders are applicable with left handed or neutral inserts.
Left handed tool holders are applicable with right handed or neutral inserts.

■ Holders

	Tool holders (S type) with screw-lock system	Cat. No.	Stock		Dimensions (mm)							
			R	L	ϕD_{min}	d	h	l_1	l_2	f	γ	
S - SCLC R/L		S10K - SCLC R/L 06	▲	▲	13	10	9	125	9	7	-12°	CC__ 0602__
		S12M - SCLC R/L 06	▲	▲	16	12	11	150	11	9	-10°	
		S16R - SCLC R/L 06	●	●	20	16	15	200	15	11	-8°	
		S16R - SCLC R/L 09	▲	▲	20	16	15	200	15	11	-8°	CC__ 09T3__
		S20S - SCLC R/L 09	▲	▲	25	20	18	250	20	13	-7°	
		S25T - SCLC R/L 12	▲	▲	32	25	23	300	20	17	-6°	CC__ 1204__
		S32U - SCLC R/L 12	●	●	40	32	30	350	25	22	-10°	
		S40V - SCLC R/L 12	●	●	50	40	37	400	25	27	-8°	

All figures show right hand tools.

■ Applicable Inserts







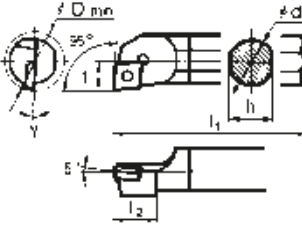
■ Spare Parts

Holder	Carbides, Cermets		Screw	$\overset{N\cdot m}{\curvearrowright}$	Wrench	
S - SCLC R/L						
S.....06	CCMT 0602__ NFP	CCGW 0602__	-	BFTX02505N	1,1	TRX08
S16R.....09	CCMT 09T3__ NFP	CCGW 09T3__	-	BFTX0407N	3,0	TRX15
S20S.....09	CCMT 09T3__ NFP	CCGW 09T3__	-	BFTX0409N	3,4	TRX15
S.....12	CCMT 1204__ NFP	CCGW 1204__	-	BFTX0511N	5,0	TRX20

Boring Bars for pos. insert





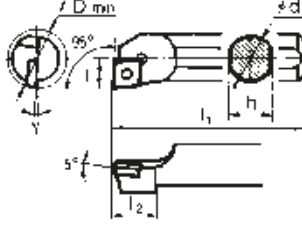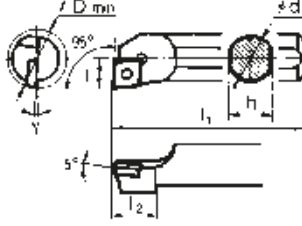

■ Holders

 Tool holders (S type) with screw-lock system		Cat. No.	Stock		Dimensions (mm)							
			R	L	ϕD_{min}	d	h	l_1	l_2	f	γ	
S - SCLP R/L Steel shank 		S10K - SCLP R/L 08	●	●	12	10	9	125	12	6	-5°	CP_T 0802__
		S12M - SCLP R/L 08	●	●	16	12	11	150	15	8	-3°	
		S16R - SCLP R/L 09		●	20	16	15	200	18	10	-3°	CP_T 0903__
		S20S - SCLP R/L 09	●	●	25	20	18	250	18	12,5	0	
		S25T - SCLP R/L 12	●	●	28	25	22	300	17,4	14	-3°	CP_T 1204__
C - SCLP R/L Carbide shank 		C10Q - SCLP R/L 08	●	□	12	10	9	180	15	6	-5°	CP_T 0802__
		C12R - SCLP R/L 08	□	□	16	12	11	200	15	8	-2°	
		C16S - SCLP R/L 09	●	□	20	16	15	250	15	10	-2°	CP_T 0903__

All figures show right hand tools.


■ Applicable Inserts

■ Spare Parts


Holder	Carbides, Cermets	CBN	Screw	N·m	Wrench				
S/C-SCLP R/L									
S/C 10.....08	CPGT 0802__ NSD	CPMW 0802__	BFTX 0305 A	-	TRX 10				
S/C 12.....08	CPGT 0802__ NSD	CPMW 0802__	BFTX 0305 A	-	TRX 10				
S/C 16.....09	CPGT 0903__ NSD	CPMW 0903__	BFTX 0407 A	3,4	TRX 15				
S 20.....09	CPGT 0903__ NSD	CPMW 0903__	BFTX 0407 A	3,4	TRX 15				
S 25.....12	CPGT 1204__ NSD	-	BFTX 0509 A	5,0	TRX 20				

Boring Bars B/D/S...SDUC Type


For Positive DC __ - Inserts ($\alpha = 7^\circ$)



B Type (Fig.1)
Min. Bore Dia.



D Type (Fig.2)

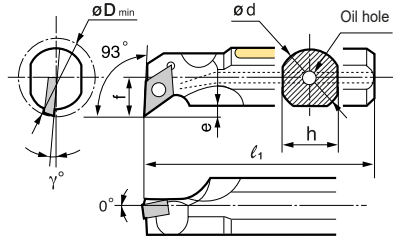

Insert (ex.)



■ Spare Parts

DC□T 0702□□	BFTX02506N 1,5 (N·m) TRX08
DC□T 11T3□□	BFTX0409N 3,4 (N·m) TRX15

■ Holders

Steel shank	Cat. No.	Stock		ϕD_{min}	Dimensions (mm)						Fig.	Insert (ex.)	Screw	Wrench
		R	L		ϕd	h	ℓ_1	f	e	γ				
Anti-vibration B type	B10M - SDUC R/L 0702-13	●	●	13	10	9	150	7	2,5	-8°	1.	DC□T 0702□□	BFTX02506N 1,5 (N·m) TRX08	
	D12M - SDUC R/L 0702-16	●	●	16	12	11	150	9	3,5	-8°	2.			
Anti-vibration D type with oil hole	D16R - SDUC R/L 0702-20	●	●	20	16	15	200	11	4,0	-6°				
	D20S - SDUC R/L 11T3-25	●	●	25	20	18	250	13	4,5	-6°				
	D25S - SDUC R/L 11T3-32	●	●	32	25	22	250	17	7,0	-6°				
	D32T - SDUC R/L 11T3-40	●	●	40	32	30	300	22	8,0	-6°				

All figures show right hand tools.

Remarks: Right handed tool holders are applicable with left handed or neutral inserts.
Left handed tool holders are applicable with right handed or neutral inserts.

■ Holders

	Tool holders (S type) with screw-lock system	Cat. No.	Stock		Dimensions (mm)							
			R	L	ϕD_{min}	d	h	ℓ_1	f	e		γ
S - SDUC R/L		S10K - SDUC R/L 07	●	●	13	10	9	125	7	2,5	-8°	DC__ 0702__
		S12M - SDUC R/L 07	●	●	16	12	11	150	9	3,5	-8°	
		S16R - SDUC R/L 07	●	●	20	16	15	200	11	4	-6°	
		S20S - SDUC R/L 11	●	●	25	20	18	250	13	4,5	-6°	DC__ 11T3__
		S25T - SDUC R/L 11	●	●	32	25	22	300	17	7,5	-6°	
		S32U - SDUC R/L 11	●	●	40	32	30	350	22	11	-6°	


All figures show right hand tools.

■ Applicable Inserts


■ Spare Parts

Holder	Carbides, Cermets		CBN, PCD	Screw	(N·m)	Wrench			
S - SDUC R/L S - SDQC R/L									
S10K.....07	DCMT 0702__ NFP	DCMT 0702__ NSK	DCGW 0702__	BFTX02506N	1,5	TRX08			
S12M.....07	DCMT 0702__ NFP	DCMT 0702__ NSK	DCGW 0702__	BFTX02506N	1,5	TRX08			
S16R.....07	DCMT 0702__ NFP	DCMT 0702__ NSK	DCGW 0702__	BFTX02506N	1,5	TRX08			
S.....11	DCMT 11T3__ NFP	DCMT 11T3__ NSK	DCGW 11T3__	BFTX0409N	3,4	TRX15			


Boring Bars for pos. insert



B Type (Fig.1)
Min. Bore Dia.



D Type (Fig.2)

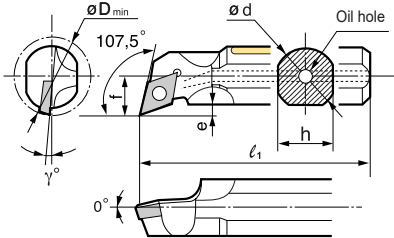

Insert (ex.)



■ Spare Parts

Image	Screw	Wrench
	BFTX02506N 1,5 (Nm)	TRX08
	BFTX0409N 3,4 (Nm)	TRX15

■ Holders

Steel shank	Cat. No.	Stock		Dimensions (mm)							Fig.	Insert (ex.)	Screw	Wrench
		R	L	ϕD_{min}	ϕd	h	ℓ_1	f	e	γ				
Anti-vibration B type	B10M - SDQC R/L 0702-13	●	●	13	10	9	150	7	2,5	-8°	1.	DCIT 070200	BFTX02506N 1,5 (Nm)	TRX08
Anti-vibration D type with oil hole	D12M - SDQC R/L 0702-16	●	●	16	12	11	150	9	3,5	-8°	2.			
	D16R - SDQC R/L 0702-20	●	●	20	16	15	200	11	4,0	-6°				
	D20S - SDQC R/L 11T3-25	●	●	25	20	18	250	13	4,5	-6°				
	D25S - SDQC R/L 11T3-32	●	●	32	25	22	250	17	7,0	-6°				
	D32T - SDQC R/L 11T3-40	●	●	40	32	30	300	22	7,0	-10°				

All figures show right hand tools.

Remarks: Right handed tool holders are applicable with left handed or neutral inserts.
Left handed tool holders are applicable with right handed or neutral inserts.

■ Holders

Image	Tool holders (S type) with screw-lock system	Cat. No.	Stock		Dimensions (mm)							Image
			R	L	ϕD_{min}	d	h	ℓ_1	f	e	γ	
		S10K - SDQC R/L-07	●	●	13	10	9	125	7	2,5	-8°	DC__ 0702__
		S12M - SDQC R/L-07	●	●	16	12	11	150	9	3,5	-8°	
		S16R - SDQC R/L-07	●	●	20	16	15	200	11	4	-6°	
		S20S - SDQC R/L-11	●	●	25	20	18	250	13	4,5	-6°	DC__ 11T3__
		S25T - SDQC R/L-11	●	●	32	25	22	300	17	7	-6°	

All figures show right hand tools.

■ Applicable Inserts


■ Spare Parts

Holder	Carbides, Cermets		CBN, PCD	Screw	(Nm)	Wrench			
S - SDUC R/L S - SDQC R/L									
S10K.....07	DCMT 0702__ NFP	DCMT 0702__ NSK	DCGW 0702__	BFTX02506N	1,5	TRX08			
S12M.....07	DCMT 0702__ NFP	DCMT 0702__ NSK	DCGW 0702__	BFTX02506N	1,5	TRX08			
S16R.....07	DCMT 0702__ NFP	DCMT 0702__ NSK	DCGW 0702__	BFTX02506N	1,5	TRX08			
S.....11	DCMT 11T3__ NFP	DCMT 11T3__ NSK	DCGW 11T3__	BFTX0409N	3,4	TRX15			





Boring Bars
for pos. Insert

Boring Bars S/C...SSKP Type

For Positive SP__ - Inserts ($\alpha = 11^\circ$)



■ Holders

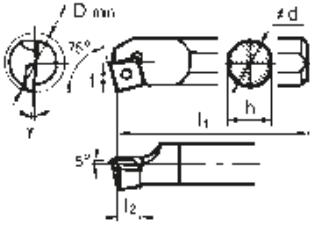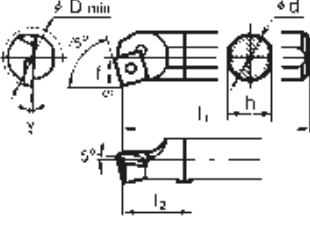



 Tool holders (S type) with screw-lock system	Cat. No.	Stock		Dimensions (mm)							
		R	L	ϕD_{min}	d	h	l_1	l_2	f	γ	
S - SSKP R/L Steel shank 	S12M - SSKP R/L 09	●		16	12	11	150	9	8	-6°	SP_T 0903__
	S16R - SSKP R/L 09	●	●	20	16	15	200	6,8	10	-4°	
	S20S - SSKP R/L 09	●	□	25	20	18	250	8,5	12,5	-2°	
	S25T - SSKP R/L 09	●		28	25	22	300	5	14	0	
C - SSKP R/L Carbide shank 	C12R - SSKP R/L 09	●		16	12	11	200	25	8	-6°	SP_T 0903__
	C16S - SSKP R/L 09	●		20	16	15	250	30	10	-4°	

All figures show right hand tools.

Remarks: Right handed tool holders are applicable with left handed or neutral inserts.
Left handed tool holders are applicable with right handed or neutral inserts.
SPGT figure shows left hand tool.

■ Applicable Inserts

■ Spare Parts




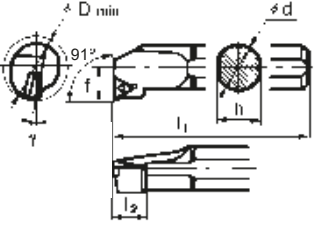
Holder	Carbides, Cermets	CBN	Screw	$(N \cdot m)$	Wrench			
S/C-SSKP R/L								
S/C 12.....09	SPGT 0903__ L/R-SD	SPGW 0903__	BFTX 0307 A	2,0	TRX 10			
S/C 16.....09								
S 20.....09								
S 25.....09								

● = Euro stock
□ = Delivery on request

$(N \cdot m)$ Recommended Tightening Torque (N·m)





■ Holders

 Tool holders (S type) with screw-lock system	Cat. No.	Stock		Dimensions (mm)							
		R	L	ϕD_{min}	d	h	l_1	l_2	f	γ	
S - STFC R/L  	S10K - STFC R/L 09	●	●	13	10	9	125	-	10,5	-12°	TC __ 0902 __
	S12M - STFC R/L 11	●	●	16	12	11	150	10	9	-10°	TC __ 1102 __
	S16R - STFC R/L 11	●	●	20	16	15	200	12	11	-6°	
	S20S - STFC R/L 11	●	●	25	20	18	250	14	13	-3°	
	S25T - STFC R/L 16	●	□	32	25	23	300	18	17	-6°	TC __ 16T3 __
	S32U - STFC R/L 16	●		40	32	30	350	20	22	-10°	
	S40V - STFC R/L 16	□		50	40	37	400	25	27	-8°	

All figures show right hand tools.


■ Applicable Inserts

■ Spare Parts


Holder	Carbides, Cermets		CBN, PCD	Screw	\curvearrowright (N·m)	Wrench			
S - STFC R/L									
S.....09	TCMT 0902 __ NFP	-	TCGW 0902 __	BFTX02205N	0,5	TRX06			
S.....11	TCMT 1102 __ NFP	TCMT 1102 __ NSK	TCGW 1102 __	BFTX02506N	1,5	TRX08			
S.....16	TCMT 16T3 __ NFP	TCMT 16T3 __ NSK	TCGW 16T3 __	BFTX0409N	3,4	TRX15			

Boring Bars B/D/S/C...STUP(B) Type


For Positive TB / TP ___ - Inserts ($\alpha = 5, 11^\circ$)



B Type (Fig.1)
Min. Bore Dia.



D Type (Fig.2)

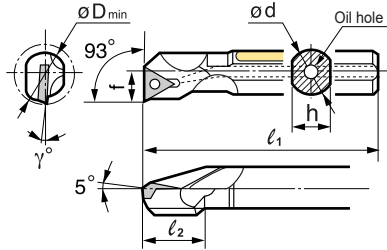

Insert (ex.)



■ Spare Parts

--	--

■ Holders

Steel shank	Cat. No.	Stock		ϕD_{min}	Dimensions (mm)						Fig.	Insert (ex.)	Screw	Wrench
		R	L		ϕd	h	l_1	f	l_2	γ				
Anti-vibration B type	B08H - STUP R/L 0802-10	●	●	10	8	7	100	5	13	-10°	1.	TP□T 0802□□	BFTX0204A ≤ 0.5	TRX06
	B10K - STUP R/L 1103-12	●	●	12	10	9	125	6	15	-8°				
Anti-vibration D type with oil hole	D12M - STUP R/L 1103-14	●	●	14	12	11	150	7	17	-7°	2.	TP□T 1103□□	BFTX0306A ≤ 2.0	TRX10
	D16R - STUP R/L 1103-18	●	●	18	16	15	200	9	18	-4°				
	D20S - STUP R/L 1103-22	●	●	22	20	18	250	11	18	-3°				
	D25T - STUP R/L 1604-28	●	●	28	25	22	300	14	18	-2°				
	D32T - STUP R/L 1604-40	●	●	40	32	30	300	20	13	-2°				
											TP□T 1604□□	BFTX0307A ≤ 2.0		
												BFTX0410A ≤ 3.4	TRX15	

All figures show right hand tools.

Remarks: Right handed tool holders are applicable with left handed or neutral inserts.
Left handed tool holders are applicable with right handed or neutral inserts.

■ Holders

Tool holders (S type) with screw-lock system	Cat. No.	Stock		Dimensions (mm)							
		R	L	ϕD_{min}	d	h	l_1	l_2	f	γ	
S - STUP/B R/L Steel shank	S08H - STUP R/L 06-01	●	●	8	8	7	100	30	4	-12°	TB_T 0601__
	S08H - STUP R/L 08-02	●	●	10	8	7	100	13	5	-10°	TP_T 0802__
	S10K - STUP R/L 11-03	●	●	12	10	9	125	15	6	-8°	TP_T 1103__
	S12M - STUP R/L 11-03	●	●	16	12	11	150	17	8	-6°	
	S16R - STUP R/L 11-03	●	●	20	16	15	200	18	10	-2°	TP_T 1604__
	S20S - STUP R/L 16	●	●	25	20	18	250	18	12,5	-3°	
S25T - STUP R/L 16	●	●	28	25	22	300	18	14	-2°		
C - STUP/B R/L Carbide shank	C08M - STUP R/L 06	●	●	8	8	7	150	50	4	-12°	TB_T 0601__
	C08M - STUP R/L 08	●	●	10	8	7	150	18	5	-10°	TP_T 0802__
	C10Q - STUP R/L 11	●	●	12	10	9	180	19	6	-8°	TP_T 1103__
	C12R - STUP R/L 11	●	●	16	12	11	200	25	8	-6°	
	C16S - STUP R/L 11	●	□	20	16	15	250	30	10	-4°	

■ Applicable Inserts

■ Spare Parts

Holder	Carbides, Cermets	CBN, PCD	Screw	\leq (N·m)	Wrench
S/C-STU_ R/L					
S/C 08.....06-01	TBGT 0601__L/R-W	-	BFTX 0204 A	0,5	TRX 06
S/C 08.....08-02	TPGT 0802__L/R-W	TPMW 0802__	BFTX 0204 A	0,5	TRX 06
S/C 10.....11-03	TPGT 1103__L/R-W	TPGW 1103__	BFTX 0306 A	2,0	TRX 10
S/C 12/16.....11-03	TPGT 1103__L/R-W	TPGW 1103__	BFTX 0307 A	2,0	TRX 10
S 20/25.....16	TPGT 1604__L/R-W	TPGW 1604__	BFTX 0410 A	3,4	TRX 15

Boring Bars for pos. insert



Anti-vibration D type
with oil hole




Fig.1


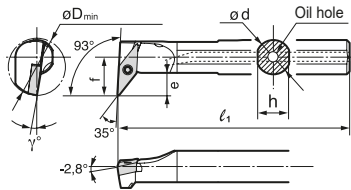


Fig.2



Insert (ex.)

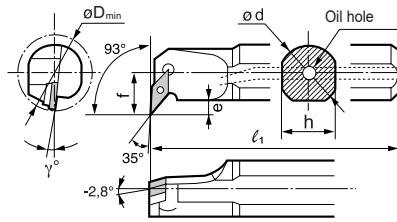

■ Spare Parts

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		ϕD_{min}	Dimensions (mm)					Fig.	Insert (ex.)	Pin	Clamp screw	Shim	Screw	Wrench	Wrench	
	R	L		ϕd	h	ℓ_1	f	e									γ
D16R - SVUB R/L 1103-22	●	●	22	16	15	200	13	5	-7°	1.	VB□□ 1103○○	-	-	-	BFTX02506	TRX08	-
D20S - SVUB R/L 1103-27	●	●	27	20	18	250	15	5	-5°								
D25T - SVUB R/L 1604-35	●	●	35	25	23	300	20,5	9	-7,5°	2.	VB□□ 1604○○	VP32B	BH03504	SVP32	BFTX03508 2.0	TRX10	LH020
D32T - SVUB R/L 1604-40	●	●	40	32	30	300	22	9	-7,5°								

Remarks: Right handed tool holders are applicable with left handed or neutral inserts.
Left handed tool holders are applicable with right handed or neutral inserts.



Anti-vibration D type
with oil hole




Fig.1


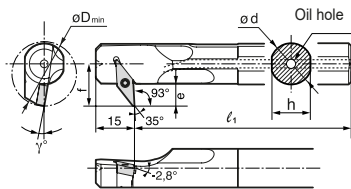


Fig.2



Insert (ex.)

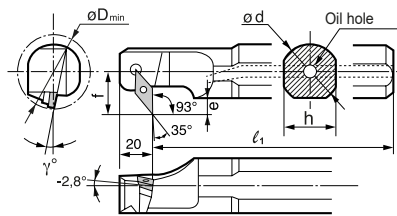

■ Spare Parts

■ Holders

Above figures show right hand tools.

Cat. No.	Stock		ϕD_{min}	Dimensions (mm)					Fig.	Insert (ex.)	Pin	Clamp screw	Shim	Screw	Wrench	Wrench	
	R	L		ϕd	h	ℓ_1	f	e									γ
D16R - SVZB R/L 1103-22	●	●	22	16	15	200	13	5	-7°	1.	VB□□ 1103○○	-	-	-	BFTX02506	TRX08	-
D20S - SVZB R/L 1103-27	●	●	27	20	18	250	15	5	-5°								
D25T - SVZB R/L 1604-35	●	●	35	25	23	300	20,5	9	-7,5°	2.	VB□□ 1604○○	VP32B	BH03504	SVP32	BFTX03508 2.0	TRX10	LH020
D32T - SVZB R/L 1604-40	●	●	40	32	30	300	22	9	-7,5°								




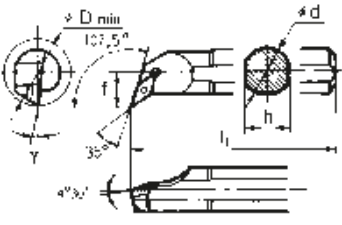

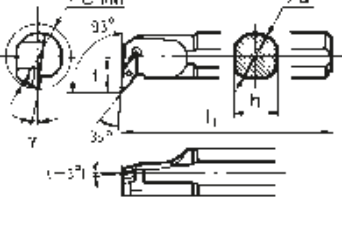

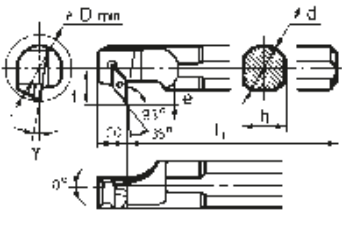
Boring Bars
for pos. Insert

Boring Bars S...SVQB / SVUB, SVZB Type

For Positive VB__ - Inserts ($\alpha = 5^\circ$)












■ Holders

	Tool holders (S type) with screw-lock system	Cat. No.	Stock		Dimensions (mm)							
			R	L	ϕD_{min}	d	h	l_1	f	γ	e	
S - SVQB R/L 		S16R - SVQB R/L 11	●	●	22	16	15	200	13	-6,5°		VB__ 1102__
		S20S - SVQB R/L 11	●	●	27	20	18	250	15	-6,5°		
		S25T - SVQB R/L 16	●	●	35	25	23	300	20,5	-6,5°		VB__ 1604__
		S32U - SVQB R/L 16	●	●	40	32	30	350	22	-6,5°		
		S40V - SVQB R/L 16	□	□	50	40	37	400	27	-6,5°		
S - SVUB R/L 		S16R - SVUB R/L 11	●	●	22	16	15	200	13	-7,5°		VB__ 1102__
		S20S - SVUB R/L 11	●	●	27	20	18	250	15	-7,5°		
		S25T - SVUB R/L 16	●	●	35	25	23	300	20,5	-7,5°		VB__ 1604__
		S32U - SVUB R/L 16	●	●	40	32	30	350	22	-7,5°		
		S40V - SVUB R/L 16	□	□	50	40	37	400	27	-7,5°		
S - SVZB R/L 		S16R - SVZB R/L 11	●	●	22	16	15	200	13	-7,5°	5	VB__ 1102__
		S20S - SVZB R/L 11	●	●	27	20	18	250	15	-7,5°	5	
		S25T - SVZB R/L 16	●	●	35	25	23	300	20,5	-7,5°	9	VB__ 1604__
		S32U - SVZB R/L 16	●	●	40	32	30	350	22	-7,5°	9	
		S40V - SVZB R/L 16	□	□	50	40	37	400	27	-7,5°	10	

All figures show right hand tools.





■ Applicable Inserts

■ Spare Parts

Holder	Carbides, Cermets		CBN	Pin	Clamp bolt	Shim	Screw	Wrench	Wrench
									
S16R	VBMT 1102__ NFP	VBMT 1102__ NSK	-	-	-	-	BFTX02506N	TRX08	-
S20S	VBMT 1102__ NFP	VBMT 1102__ NSK	-	-	-	-	⊕ 1,5	TRX08	-
S25T	VBMT 1604__ NFP	VBMT 1604__ NSK	VBGW 1604__	-	-	-	BFTX03508 ⊕ 2,0	TRX10	-
S32U	VBMT 1604__ NFP	VBMT 1604__ NSK	VBGW 1604__	VP32B	BH03504	SVP32		TRX10	LH020
S40V	VBMT 1604__ NFP	VBMT 1604__ NSK	VBGW 1604__	VP40B	BH03504	SVP32		TRX10	LH020



■ Holders



 Tool holders (S type) with screw-lock system	Cat. No.	Stock		Dimensions (mm)							
		R	L	ϕD_{min}	d	h	l_1	l_2	f	γ	
S - SWUB R/L Steel shank 	S08H - SWUB R/L 06-01	●	●	5,5	8	7	100	18	3	-12°	WBGT 0601__
C - SWUB R/L Carbide shank 	C08K - SWUB R/L 06	●	●	5,5	8	7	125	30	3	-12°	WBGT 0601__

All figures show right hand tools.


Remarks: Right handed tool holders are applicable with left handed or neutral inserts.
 Left handed tool holders are applicable with right handed or neutral inserts.

■ Applicable Inserts

■ Spare Parts

Holder	Carbides, Cermets	CBN	Screw	N·m	Wrench				
S/C-SWUBR/L									
S/C 08.....R 06	WBGT 0601__ LW	-	BFTX 0203 N	0,5	TRX 06				
S/C 08.....L 06	WBGT 0601__ RW	-	BFTX 0203 N	0,5	TRX 06				

Solid Carbide Boring Bars BXBR Type

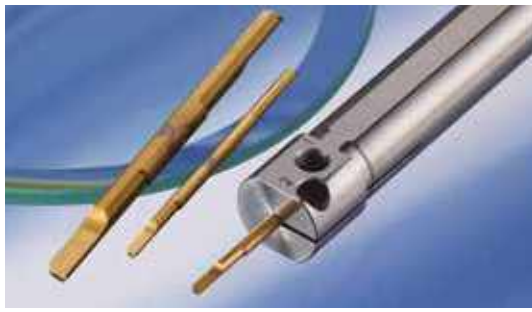

SumiSmall

■ Characteristics

- Economical, two-cornered insert.
- Maximum boring depth 5D (5 times the shank diameter)
- Usable at any desired overhang.
- Shank size = min. bore diameter for easy selection.
(Available from \varnothing 2 mm to \varnothing 5 mm in 0,5 mm increments.)
- KBMX Type cutting edge used, no breaker versions also available in stock.

Small Hole Finishing

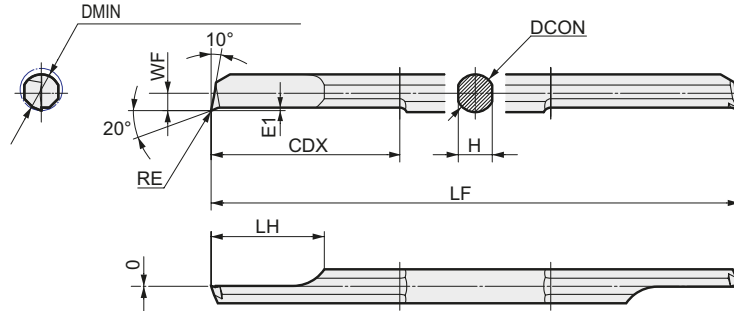



Figure shows tool with breaker.

■ Solid Carbide Bar

	Cat. No.	Stock		DMIN	Dimensions (mm)							Applicable Sleeve	
		ACZ150	AC530U		DCON	H	LF	WF	LH	CDX	E1		RE
With Breaker	BXBR 02005 R	○		2,0	2,0	1,8	50	0,80	6,0	10,0	0,20	0,05	HBX 2016
	02020 R	○		2,0	2,0	1,8	50	0,80	6,0	10,0	0,20	0,20	HBX 2016
	BXBR 02505 R	○		2,5	2,5	2,2	50	1,05	7,5	12,5	0,20	0,05	HBX 2516
	02520 R	○		2,5	2,5	2,2	50	1,05	7,5	12,5	0,20	0,20	HBX 2516
	BXBR 03005 R	○		3,0	3,0	2,7	50	1,30	9,0	15,0	0,25	0,05	HBX 3016
	03020 R	○		3,0	3,0	2,7	50	1,30	9,0	15,0	0,25	0,20	HBX 3016
	BXBR 03505 R	○		3,5	3,5	3,1	60	1,55	10,5	17,5	0,25	0,05	HBX 3516
	03520 R	○		3,5	3,5	3,1	60	1,55	10,5	17,5	0,25	0,20	HBX 3516
	BXBR 04005 R	○		4,0	4,0	3,6	60	1,80	12,0	20,0	0,35	0,05	HBX 4016
	04020 R	○		4,0	4,0	3,6	60	1,80	12,0	20,0	0,35	0,20	HBX 4016
BXBR 04505 R	○		4,5	4,5	4,1	70	2,05	13,5	22,5	0,35	0,05	HBX 4516	
04520 R	○		4,5	4,5	4,1	70	2,05	13,5	22,5	0,35	0,20	HBX 4516	
BXBR 05005 R	○		5,0	5,0	4,5	70	2,30	15,0	25,0	0,40	0,05	HBX 5016	
05020 R	○		5,0	5,0	4,5	70	2,30	15,0	25,0	0,40	0,20	HBX 5016	
No Breaker	BXBR 02005 R-NB	○		2,0	2,0	1,8	50	0,80	6,0	10,0	0,20	0,05	HBX 2016
	02020 R-NB	□		2,0	2,0	1,8	50	0,80	6,0	10,0	0,20	0,20	HBX 2016
	BXBR 02505 R-NB	□		2,5	2,5	2,2	50	1,05	7,5	12,5	0,20	0,05	HBX 2516
	02520 R-NB	○		2,5	2,5	2,2	50	1,05	7,5	12,5	0,20	0,20	HBX 2516
	BXBR 03005 R-NB	○		3,0	3,0	2,7	50	1,30	9,0	15,0	0,25	0,05	HBX 3016
	03020 R-NB	○		3,0	3,0	2,7	50	1,30	9,0	15,0	0,25	0,20	HBX 3016
	BXBR 03505 R-NB	□		3,5	3,5	3,1	60	1,55	10,5	17,5	0,25	0,05	HBX 3516
	03520 R-NB	○		3,5	3,5	3,1	60	1,55	10,5	17,5	0,25	0,20	HBX 3516
	BXBR 04005 R-NB	○		4,0	4,0	3,6	60	1,80	12,0	20,0	0,35	0,05	HBX 4016
	04020 R-NB	○		4,0	4,0	3,6	60	1,80	12,0	20,0	0,35	0,20	HBX 4016
BXBR 04505 R-NB	○		4,5	4,5	4,1	70	2,05	13,5	22,5	0,35	0,05	HBX 4516	
04520 R-NB	○		4,5	4,5	4,1	70	2,05	13,5	22,5	0,35	0,20	HBX 4516	
BXBR 05005 R-NB	○		5,0	5,0	4,5	70	2,30	15,0	25,0	0,40	0,05	HBX 5016	
05020 R-NB	○		5,0	5,0	4,5	70	2,30	15,0	25,0	0,40	0,20	HBX 5016	

■ Adaptor Sleeve (Optional)

	Cat. No.	Stock	DCB (mm)	Applicable Bar
	HBX 2016	○	2,0	BXBR 02000 R(-NB)
	HBX 2516	○	2,5	BXBR 02500 R(-NB)
	HBX 3016	○	3,0	BXBR 03000 R(-NB)
	HBX 3516	○	3,5	BXBR 03500 R(-NB)
	HBX 4016	○	4,0	BXBR 04000 R(-NB)
	HBX 4516	○	4,5	BXBR 04500 R(-NB)
	HBX 5016	○	5,0	BXBR 05000 R(-NB)


* BXBR bars can be used with HBB type sleeves. Commercially available sleeves may also be used.

■ Spare Parts (For sleeve)

Screw	(N·m)	Setting Screw	Wrench
BFTX 0409 N	3,4	BT 06035 T	TRD 15

Grooving & Parting-Off Threading Holders

F1–F56



Grooving, Parting-Off & Threading

GND Type Grooving Tools Selection Guide	GND	F 2–15
External Grooving, (Small Tools)	GNDM / GNDL	F16–17
(Shallow Grooves)	GNDS	F18–19
External Multi Purpose Grooving/Internal Coolant	GNDM / GNDMS	F20–21
External Deep Grooving and Cut-Off	GNDM JE New	F22–23
External Deep Grooving and Cut-Off/Internal Coolant	GNDL / GNDLS	F24–25
Internal Grooving	GNDL JE New	F26–27
Necking	GNDI / GNDIS	F28–30
Face Grooving	GNDN	F31
	GNDF / GNDFS	F32–35
ISO-PSC Polygon Modular Grooving System Holders	PSC	F36/F38
ISO-PSC Polygon Modular Grooving System Inserts	GCM	F37/F39
"SumiTurn B-Groove" Holders	GWC / GWCS	F40
"SumiTurn B-Groove" Inserts	PSC /GWCI /TGA-BF	F41
"SumiTurn B-Groove" Inserts	TGA R/L (E)	F42
"SumiTurn B-Groove" Inserts	TGA R/L R, TGA R/L T	F43
Parting-Off Mini Holders	SCT	F44
Sumi-Grip		F45
"Sumi-Grip Jr." Steel Type	STFH / STFS R/L	F46
Sumi-Grip Jr. Inserts	WCF (NTL)	F47
"Sumi-Grip" Carbide Blade Type	WCFH / WCF S R/L	F48-49
Sumi-Grip Inserts	WCF (NTL)	F50
Threading Tools Selection Guide		F51–52
Cutting Conditions		F53
External Threading Holders	LTER / STER	F54
Internal Threading Holders	STIR	F55




Grooving Tool Holders GND Type



Cutting Performance

Eliminates Vibration

Reduces vibration up to 30 % compared to conventional grades thanks to its high-rigidity design.

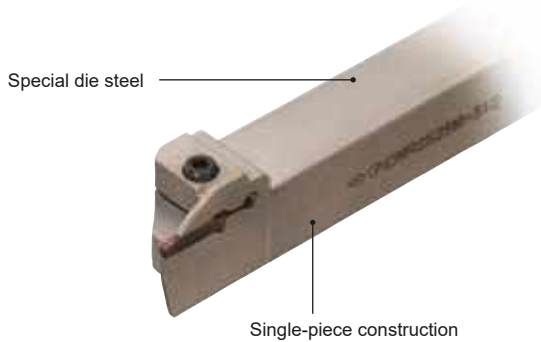


Work Material:	15CrMo5
Holder:	GNDL R2525M 220
Insert:	GCM N2002 GG
Cutting Conditions:	$v_c = 100$ m/min, $f = 0,10$ mm/rev, $a_p = 20$ mm, wet

Characteristics

- Wide range of application processes
Applicable for grooving, turning, copying, facing, boring and cut-off.
- Achieving stable tool life
An array of chipbreakers improves the efficiency in chip control in various applications and prevents unexpected damages caused by chip blockade.
- Achieving smooth cutting and high efficiency machining
Holders utilizing one-piece body construction made of special steel, reduce vibration by 30 % during machining as compared to conventional types.
- Achieving high precision grooving widths with moulded inserts
Grooving insert width tolerance of $\pm 0,03$ mm over the entire range

Ensures both, high rigidity and good chip evacuation

Internal

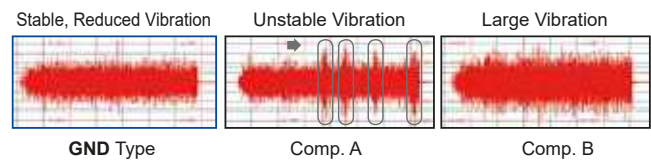


Work Material:	15CrMo5
Holder:	GNDI R2532 T306
Insert:	GCM N3002 GG
Cutting Conditions:	$v_c = 100$ m/min, $f = 0,05$ mm/rev, $a_p = 3,0$ mm, wet

Application Examples

Substantially improved machining efficiency!

High rigidity holder enables high load machining at high feed rate.

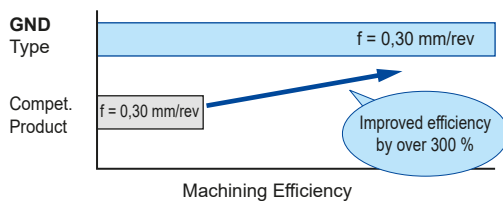

Work Material:	42CrMo4
Holder:	GNDL R2525M 320
Insert:	GCM N3002 GG (AC530U)
Cutting Conditions:	$v_c = 130$ m/min, $f = 0,30$ mm/rev, wet

Stable and long tool life ensures reliable functionality even on automatic production lines!

Reduction of chattering prevents unexpected breakage.



Work Material:	C53
Holder:	GNDM L2525M 618
Insert:	GCM N6030 RG (AC530U)
Cutting Conditions:	$v_c = 130$ m/min, $f = 0,30$ mm/rev, wet


New

Internal Coolant Grooving Tool Holder GNDM-JE Type / GNDL-JE Type

- Newly developed 2-hole coolant design optimizes cooling of the insert and improves chip removal, extending tool life and allowing for improved speeds and feeds in production.
- Grooving width range from 2,0 to 6,0 mm.
- Achieves both high efficiency in high speed machining and extension of tool life due to internal coolant supply to the cutting edge.
- Improves chip control by applying direct coolant from cutting edge side.



Wear Resistance

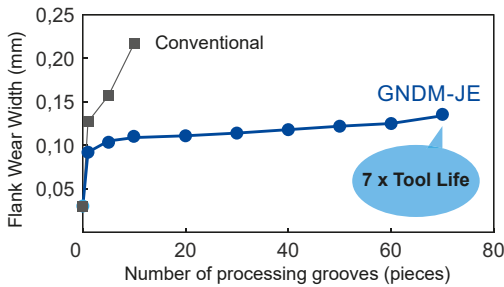

Upper coolant hole improves chip control.

Lower coolant hole improves wear resistance.



Chip Control



Coolant Pressure: 7 MPA



Coolant Pressure: 1 MPA



External Coolant

Work Material:	Ti-6Al-4V
Holder:	GNDM R2525K 312JE
Insert:	GCM N3002 GG (AC530U)
Cutting Conditions:	$v_c = 60 \text{ m/min}$, $f = 0,1 \text{ mm/rev}$, $a_p = 5,0 \text{ mm}$, wet

CF Type Chipbreaker for Cut-Off

New

- Lead angle of 10°/15° for improved sharpness in cut-off machining.
- Asymmetrical chipbreaker design provides excellent chip control even in difficult to machine conditions.



GCMN20003 CF 10



GCMN20003 CF 15



Competitor

Work Material:	St42-3
Holder:	GNDM R2525M 220
Insert:	GCM N3002 CF-10,15 (AC1030U)
Cutting Conditions:	$n = 2000 \text{ min}^{-1}$, $f = 0,08 \text{ mm/rev}$, wet

Grooving Tool Holders

GND Type

■ Inserts - Chipbreaker Series

Achieving stability and longer tool life. A variety of chipbreakers ensures outstanding chip control performance in many different types of applications.

Grooving / Turning		Grooving / Cut-Off			Cut-Off		Profiling	Necking	Non Ferrous Metals
General Type	Low Feed Type	General Type	Low Feed Type	Low Cutting Force Type	Cut-Off Type	Low Cutting Force Type	General Type	General Type	General Type
MG	ML	GG	GL	GF	CG	CF New	RG	RN	GA
Cross Section of Cutting Edge	Cross Section of Cutting Edge	Cross Section of Cutting Edge	Cross Section of Cutting Edge	Cross Section of Cutting Edge	Cross Section of Cutting Edge	Cross Section of Cutting Edge	Cross Section of Cutting Edge	Cross Section of Cutting Edge	Cross Section of Cutting Edge
Grooving Width (mm)	Grooving Width (mm)	Grooving Width (mm)	Grooving Width (mm)	Grooving Width (mm)	Grooving Width (mm)	Grooving Width (mm)	Grooving Width (mm)	Grooving Width (mm)	Grooving Width (mm)
1,25 1,5 2,0	1,25 1,5 2,0	1,25 1,5 2,0	1,25 1,5 2,0	1,25 1,5 2,0	1,25 1,5 2,0	1,25 1,5 2,0	1,25 1,5 2,0	1,25 1,5 2,0	1,25 1,5 2,0
3,0 4,0 5,0	3,0 4,0 5,0	3,0 4,0 5,0	3,0 4,0 5,0	3,0 4,0 5,0	3,0 4,0 5,0	3,0 4,0 5,0	3,0 4,0 5,0	3,0 4,0 5,0	3,0 4,0 5,0
6,0 7,0 8,0	6,0 7,0 8,0	6,0 7,0 8,0	6,0 7,0 8,0	6,0 7,0 8,0	6,0 7,0 8,0	6,0 7,0 8,0	6,0 7,0 8,0	6,0 7,0 8,0	6,0 7,0 8,0
Grade	Grade	Grade	Grade	Grade	Grade	Grade	Grade	Grade	Grade
AC830P AC425K	AC830P AC425K	AC830P AC425K	AC830P AC425K	AC830P AC425K	AC830P AC425K	AC830P AC425K	AC830P AC425K	AC830P AC425K	AC830P AC425K
AC520U AC530U	AC520U AC530U	AC520U AC530U	AC520U AC530U	AC520U AC530U	AC520U AC530U	AC520U AC530U	AC520U AC530U	AC520U AC530U	AC520U AC530U
AC1030U T2500A	*AC1030U T2500A	AC1030U T2500A	AC1030U T2500A	*AC1030U T2500A	AC1030U T2500A	AC1030U T2500A	AC1030U T2500A	AC1030U T2500A	AC1030U T2500A
H10	H10	H10	H10	H10	H10	H10	H10	H10	H10

Stock


* Only use with GNDIS

■ Recommended Cutting Conditions


Work Material	P Carbon Steel / Alloy Steel	M Stainless Steel	K Cast Iron	S Exotic Alloy	N
Grade	AC830P AC520U AC530U T2500A	AC830P AC520U AC530U	AC425K AC520U AC530U AC1030U	AC520U AC530U AC1030U	H10
Cutting Speed (m/min)	80-200 80-200 50-200 50-200	70-150 70-150 50-150	80-200 60-200 50-200 50-200	20-80 20-60 20-60	150-300

Please see cutting data page F14


■ Excellent Chip Control

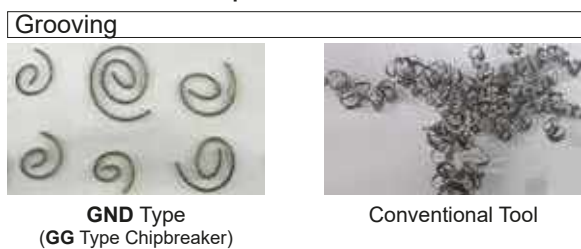


Work Material: 15CrMo5
 Holder: GNDL R2525M 320
 Insert: GCM N3002 GG
 Cutting Conditions: $v_c=100$ m/min, $f=0,15$ mm/rev, $a_p=12,0$ mm, wet

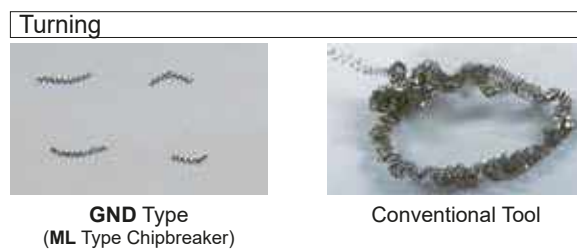

Work Material: 15CrMo5
 Holder: GNDM R2525M 312
 Insert: GCM N3002 ML
 Cutting Conditions: $v_c=100$ m/min, $f=0,10$ mm/rev, $a_p=0,5$ mm, wet

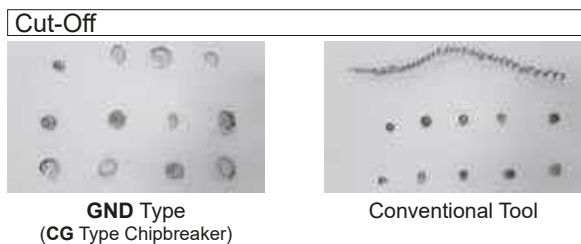



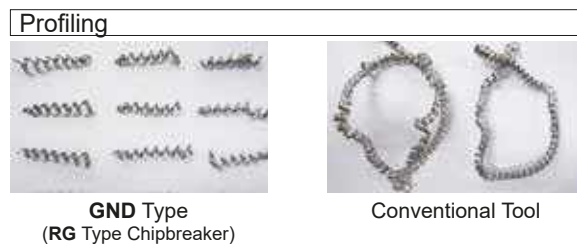






Work Material: X5CrMo17122 (Ø 30 mm)
 Holder: GNDL R2525M 220
 Insert: GCM R2002 CG 05
 Cutting Conditions: $v_c=100$ m/min, $f=0,15$ mm/rev, wet







Work Material: 15CrMo5
 Holder: GNDM R2525M 312
 Insert: GCM N3015 RG
 Cutting Conditions: $v_c=100$ m/min, $f=0,15$ mm/rev, $a_p=0,1$ mm, wet

Grooving Tool Holders GND Type

Chipbreaker Selection

	Grooving / Turning	Grooving	Cut-Off
1st Recommendation	MG General Feed 	GG General Feed 	GG General Feed 
	Improved Chip Control Chipping Prevention	Improved Chip Control Chipping Prevention	Prevent Nip Formation Good Chip Control Improved Chip Control Chipping Prevention
2nd Recommendation	ML Low Feed Good Chip Control 	GL General Feed Good Chip Control 	GL General Feed Good Chip Control 
		Good Chip Control Reduce Chattering Chipping Prevention	Prevent Nip Formation Chipping Prevention Good Chip Control Reduce Chattering Chipping Prevention
	GF Low Cutting Force 	GF Low Cutting Force 	CF New Low Cutting Force Feed Direction Front Cutting Edge Angle 10°/15° 

	Profiling / Radius Grooving Outside Diameter	Necking / Radius Grooving Internal Profiling	For Non Ferrous Metals
Recommendation	RG General Feed 1st Recommendation 	RN General Feed 2nd Recommendation w = 2 mm 	RN General Feed 
			GA General Feed 

Grade Selection

	P Steel	M Stainless Steel	K Cast Iron	S Exotic Alloy	N Non Ferrous Metals
1st Recommendation	AC530U/AC1030U <small>PVD</small>	AC530U/AC1030U <small>PVD</small>	AC425K <small>CVD</small>	AC520U <small>PVD</small>	H10 Uncoated Carbide
	Insufficient Wear Resistance Chipping Countermeasures Importance of Surface Finish	Insufficient Wear Resistance Chipping Countermeasures	Chipping Countermeasures Insufficient Wear Resistance	Chipping Countermeasures Insufficient Wear Resistance	
2nd Recommendation	AC520U <small>PVD</small>	AC520U <small>PVD</small>	AC520U <small>PVD</small>		
	Insufficient Wear Resistance Chipping Countermeasures	Insufficient Wear Resistance Chipping Countermeasures	Chipping Countermeasures Insufficient Wear Resistance	Insufficient Wear Resistance	
	AC830P <small>CVD</small> T2500A <small>Uncoated Cermet</small>	AC830P <small>CVD</small>	AC530U/AC1030U <small>PVD</small>	AC530U/AC1030U <small>PVD</small>	

Grooving Tool Holders

GND Type

For External Machining (Straight Type)

Turning / Profiling

Grooving / Cut-Off

Model	Shank Size (mm)	Grooving Width (mm)	Chipbreaker
GNDM (Small Tools) Straight Type	16 mm x 16 mm	1.25, 1.5, 2.0, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0	→ F16
GNDM JE New	20 mm x 20 mm, 25 mm x 25 mm, 32 mm x 25 mm	1.25, 1.5, 2.0, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0	→ F22
GNDL (Small Tools) Straight Type	10 mm x 10 mm, 12 mm x 12 mm, 16 mm x 16 mm	1.25, 1.5, 2.0, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0	→ F16
GNDL JE New	20 mm x 20 mm, 25 mm x 25 mm	1.25, 1.5, 2.0, 3.0, 4.0, 5.0, 6.0, 7.0, 8.0	→ F26

Series for External Machining (Straight Type)

Type	Shank Size	Cutting Width (mm)	Series	Max. Grooving Depth (mm)						Ref. Page	Applicable Chipbreaker															
				5	10	15	20	25	30		MG	ML	GG	GL	GF	CG	CF	RG	RN	GA						
Small Tools	10	10	GNDL	10																						
			GNDL	10																						
			GNDL	10																						
		12	12	GNDL	12																					
				GNDL	12,5																					
				GNDL	12,5																					
	16	16	16	GNDM	8																					
				GNDL	12,5																					
				GNDM	10																					
			20	20	20	GNDL	12																			
						GNDL	16																			
						GNDL	12																			
Straight Type	20	20	GNDL	16																						
			GNDM	10																						
			GNDL	6																						
			GNDM	10																						
			GNDM-JE	10																						
			GNDL	20																						
			GNDL-JE	20																						
			GNDM	12																						
			GNDM-JE	12																						
			GNDL	20																						
			GNDL-JE	20																						
			25	25	25	GNDM	10																			
	GNDM	18																								
	GNDM-JE	18																								
	GNDL	25																								
	GNDL-JE	25																								
	GNDM	18																								
	32	32	32	GNDM	12																					
GNDL				20																						
GNDM				18																						
GNDL				25																						
GNDM				18																						
GNDL				25																						

Stock

* Make to order item (32x25mm)

1st Recommendation

2nd Recommendation

Grooving Tool Holders GND Type

For External Machining (L Type)

Turning / Profiling

GNDMS

L Type
Shank Size
Height x Width
20 mm x 20 mm
25 mm x 25 mm

→ F20

Grooving Width (mm)		
1,25	1,5	2,0
3,0	4,0	5,0
6,0	7,0	8,0

Chipbreaker
MG ML GG GL GF CG CF RG RN GA

Grooving / Cut-Off

GNDLS

L Type
Shank Size
Height x Width
20 mm x 20 mm
25 mm x 25 mm

→ F24

Grooving Width (mm)		
1,25	1,5	2,0
3,0	4,0	5,0
6,0	7,0	8,0

Chipbreaker
MG ML GG GL GF CG CF RG RN GA

Series for External Machining (L Type)

Type	Shank Size		Cutting Width (mm)								Series	Max. Grooving Depth (mm)						Ref. Page	Applicable Chipbreaker													
	Height	Width	1,25	1,5	2	3	4	5	6	7		8	5	10	15	20	25		30	MG	ML	GG	GL	GF	CG	CF	RG	RN	GA			
L Type	20	20			2							GNDLS	16						→ F24													
					3								GNDMS	10						→ F20												
					3									GNDLS	16						→ F24											
							4							GNDMS	12						→ F20											
								5						GNDMS	12						→ F20											
														GNDLS	18						→ F24											
	25	25			2							GNDLS	18						→ F24													
					3								GNDMS	12						→ F20												
					3								GNDLS	18						→ F24												
							4							GNDMS	14						→ F20											
							4							GNDLS	23						→ F24											
								5	6					GNDMS	14						→ F20											
					5	6					GNDLS	23						→ F24														

■ Stock

○ 1st Recommendation ○ 2nd Recommendation

Cassettes for Radial Machining

Grooving

GNDCM New

Cassette
Applicable Holder
SumiPolygon
PSC 00 (Straight)
PSC 90 (L Type)

→ F36

Grooving Width (mm)		
1,25	1,5	2,0
3,0	4,0	5,0
6,0	7,0	8,0

Chipbreaker
MG ML GG GL GF CG CF RG RN GA

Radial Grooving Cassettes

Type	Applicable Holders	Cutting Width (mm)								Series	Max. Grooving Depth (mm)						Ref. Page	Applicable Chipbreaker												
		1,25	1,5	2	3	4	5	6	7		8	5	10	15	20	25		30	MG	ML	GG	GL	GF	CG	CF	RG	RN	GA		
Cassette	GND00			2							GNDCM	12						→ F36												
				3							GNDCM	12																		
	GND90					4					GNDCM	18																		
							5	6				GNDCM	18																	

■ Stock


○ 1st Recommendation ○ 2nd Recommendation

Grooving Tool Holders

GND Type

For Face Machining


Grooving / Turning / Profiling



Grooving Width (mm)		
1,25	1,5	2,0
3,0	4,0	5,0
6,0	7,0	8,0

Chipbreaker

MG	ML	GG	GL	GF	CG	CF	RGR	RN	GA
----	----	----	----	----	----	----	-----	----	----



Grooving Width (mm)		
1,25	1,5	2,0
3,0	4,0	5,0
6,0	7,0	8,0

Chipbreaker

MG	ML	GG	GL	GF	CG	CF	RGR	RN	GA
----	----	----	----	----	----	----	-----	----	----

Series for Face Machining

Type	Shank Size Height : Width	Cutting Width (mm)						Series	Max. Grooving Depth (mm)	Bore (mm)	Ref. Page	Applicable Chipbreaker									
		3	4	5	6	7	8					MG	ML	GG	GL	GF	CG	CF	RGR	RN	GA
Straight Type	20	20	3						12	ø35	→ F32	○	○	○	○					○	○
			3						12	ø40	→ F32	○	○	○	○					○	○
			3						18	ø50	→ F32	○	○	○	○					○	○
			3						18	ø65	→ F32	○	○	○	○					○	○
			3						18	ø90	→ F32	○	○	○	○					○	○
			3						18	ø140	→ F32	○	○	○	○					○	○
	25	25	4						18	ø40	→ F32	○	○	○	○					○	○
			4						23	ø50	→ F32	○	○	○	○					○	○
			4						23	ø65	→ F32	○	○	○	○					○	○
			4						23	ø85	→ F32	○	○	○	○					○	○
			4						23	ø125	→ F32	○	○	○	○					○	○
			4						23	ø180	→ F32	○	○	○	○					○	○
25	25	5						23	ø50	→ F32	○	○	○	○					○	○	
		5						23	ø65	→ F32	○	○	○	○					○	○	
		5						23	ø85	→ F32	○	○	○	○					○	○	
		5						23	ø125	→ F32	○	○	○	○					○	○	
		5						23	ø180	→ F32	○	○	○	○					○	○	
		5						23	ø280	→ F32	○	○	○	○					○	○	
L Type	20	20				6		23	ø50	→ F32	○	○	○	○					○	○	
						6		23	ø70	→ F32	○	○	○	○					○	○	
						6		23	ø100	→ F32	○	○	○	○					○	○	
	25	25				6		20	ø70	→ F34	○	○	○	○					○	○	
						6		20	ø100	→ F34	○	○	○	○					○	○	
						6		20	ø180	→ F34	○	○	○	○					○	○	

Stock

Make to order item

○ 1st Recommendation

○ 2nd Recommendation

Grooving Tool Holders

GND Type

Cassettes for Face Machining

Face Grooving / Turning / Profiling

GNDCF New

Cassette
Applicable
Holder
SumiPolygon
PSC 00 (Straight)
PSC 90 (L-Type)

→ F38

Grooving Width (mm)		
1,25	1,5	2,0
3,0	4,0	5,0
6,0	7,0	8,0

Chipbreaker

MG ML GG GL GF CG CF RG RN GA

Face Grooving Cassettes

Type	Cutting Width (mm)							Series	Max. Grooving Depth (mm)					Bore (mm)					Ref. Page	Applicable Chipbreaker															
	3	4	5	6	7	8	5		10	15	20	25	30	50	100	150	200	250		300	1.000	MG	ML	GG	GL	GF	CG	CF	RG	RN	GA				
Straight Type	3							GNDCF R/L	12					ø40 ø55					→ F38	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	3								15					ø50 ø75						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	3								15					ø65 ø100						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
	3								18					ø90 ø150						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	3								18					ø140 ø200						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	4								18					ø40 ø55						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	4								18					ø50 ø70						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4								18					ø65 ø90						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4								18					ø85 ø130						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4								18					ø125 ø200						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	4								18					ø180 ø300						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	5								18					ø50 ø70						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	5								18					ø65 ø90						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	5								18					ø85 ø130						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	5								18					ø125 ø200						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	5								18					ø180 ø300						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	6								18					ø50 ø75						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	6								18					ø70 ø110						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	6								18					ø100 ø200						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	6								18					ø180 ø300						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	6								18					ø280 ø1.000						<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Stock

Make to order item


1st Recommendation

2nd Recommendation

Grooving Tool Holders GND Type

For Necking

GNDN
Straight Type



Shank Size
Height x Width
20 mm x 20 mm
25 mm x 25 mm

→ F31

Grooving Width (mm)		
1,25	1,5	2,0
3,0	4,0	5,0
6,0	7,0	8,0

Chipbreaker
MG ML GG GL GF CG CF FR RN GA

Series for Necking

Straight Type	Shank Size		Cutting Width (mm)					Series	Max. Grooving Depth (mm)					Min. Bore (mm)	Ref. Page	Applicable Chipbreaker											
	20	25	2	3	4	5	6		5	10	15	20	25			30	MG	ML	GG	GL	GF	CG	CF	FR	RN	GA	
	20	20	2	3				GNDN	2,0						→ F31												
	25	25			4				2,5																		
						5			3,0																		
							6		3,5																		
								4,0																			


Stock

Tips for Necking

Notes for Undercutting

Recommended Chipbreaker: **RN**


Distance between Workpiece and Necking

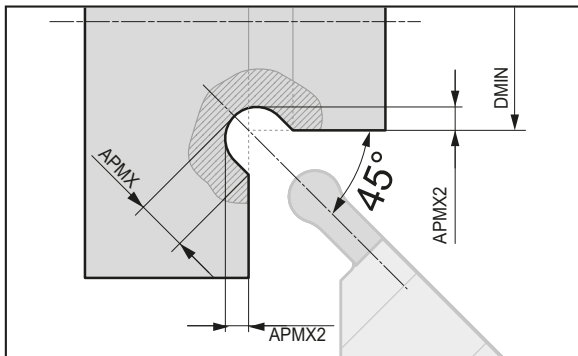

Edge Width CW (mm)	Depth of Necking APMX (mm)	Distance between Workpiece and Necking APMX2 (mm)
2,0	1,50	0,64
3,0	2,00	0,79
4,0	3,00	1,29
5,0	3,50	1,44
6,0	4,00	1,59

The recommended cutting conditions for necking are the same as grooving with RN type chipbreaker and edge width. To prevent interference with the work material, do not use the holder for less than the minimum cutting diameter (DMIN) as specified for GNDN type holders.

Chip Shape

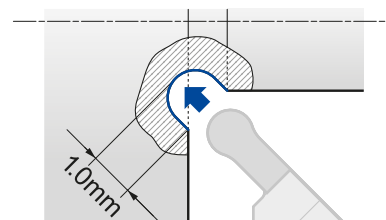


Work Material: 34CrMo4
Holder: GNDN R2020K 325-020
Insert: GCM N3015 RN
Cutting Conditions: $v_c = 100\text{m/min}$, $f = 0,1\text{mm/rev}$
Depth of Necking = 1,0mm, wet

Grooving Tool Holders GND Type

For Internal Machining ($\geq \varnothing 14 \text{ mm} \sim$)

Grooving / Turning / Copying

GNDIS
Straight Type



$\varnothing 12 \text{ mm}$
 $\varnothing 16 \text{ mm}$
 $\varnothing 20 \text{ mm}$

→ F30


Grooving Width (mm)		
1,5	2,0	3,0

Chipbreaker	
ML	GF

For Internal Machining ($\geq \varnothing 32 \text{ mm} \sim$)

Grooving / Turning / Copying

GNDI
Straight Type



$\varnothing 25 \text{ mm}$
 $\varnothing 32 \text{ mm}$
 $\varnothing 40 \text{ mm}$

→ F28

Grooving Width (mm)		
1,25	1,5	2,0
3,0	4,0	5,0
6,0	7,0	8,0

Chipbreaker									
MG	ML	GG	GL	GF	CG	CF	RG	RN	GA

Series for Internal Machining ($\geq \varnothing 14 \text{ mm} \sim$)

Type	Shank Size $\varnothing D_s(\text{mm})$	Cutting Width (mm)			Series	Max. Grooving Depth (mm)						Min. Bore (mm)	Ref. Page	Applicable Chipbreaker	
		1,5	2	3		5	10	15	20	25	30			ML	GF
Straight Type	$\varnothing 12$	1,5			GNDIS	2,6						$\varnothing 14$	→ F30		○
		1,5				3,6						$\varnothing 14$		○	
			2	3		2,6						$\varnothing 14$		○	
	$\varnothing 16$	1,5				3,6						$\varnothing 16$		○	
		1,5				4,6						$\varnothing 20$		○	
			2	3		3,6						$\varnothing 16$		○	
$\varnothing 20$		2	3	4,6						$\varnothing 20$	○				
	1,5			6,6						$\varnothing 25$	○				
		2	3	6,6						$\varnothing 25$	○				

■ Stock GNDIS type: use smaller GXM type inserts ○ 1st Recommendation

Series for Internal Machining ($\geq \varnothing 32 \text{ mm} \sim$)


Type	Shank Size $\varnothing D_s(\text{mm})$	Cutting Width (mm)					Series	Max. Grooving Depth (mm)						Min. Bore (mm)	Ref. Page	Applicable Chipbreaker										
		2	3	4	5	6		5	10	15	20	25	30			MG	ML	GG	GL	GF	CG	CF	RG	RN	GA	
Straight Type	$\varnothing 25$	2					GNDI	6						$\varnothing 32$	→ F28	○	○	○	○	○					○	○
			3	4	5			6						$\varnothing 32$		○	○	○	○	○					○	○
								6						$\varnothing 32$		○	○	○	○	○					○	○
	$\varnothing 32$	2						10						$\varnothing 40$		○	○	○	○	○					○	○
			3	4	5			11						$\varnothing 50$		○	○	○	○	○					○	○
																	○	○	○	○	○					○

■ Stock ○ 1st Recommendation ○ 2nd Recommendation

Grooving Tool Holders GND Type


Key Points for Face Machining

Holder Selection

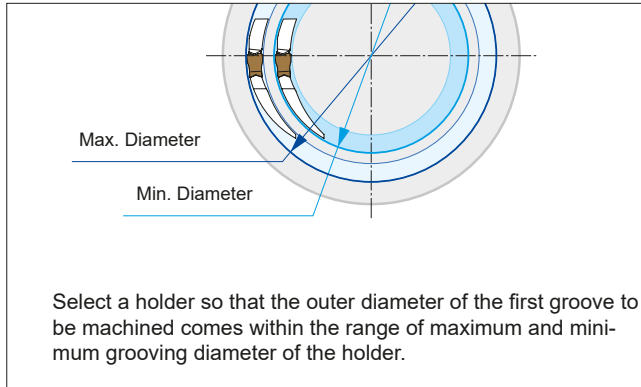

Precautions for Groove Expansion

Recommended Chipbreaker: **MG, ML, GG, GL, GF**


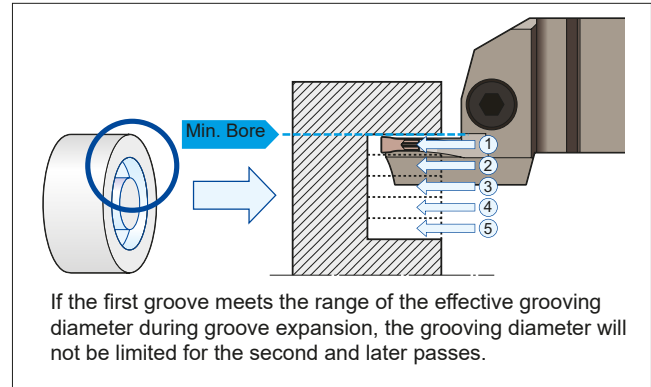


Precautions for Turning

Recommended Chipbreaker:

MG, ML

Considering the rigidity of the holder, we recommend machining from the outside to the inside.

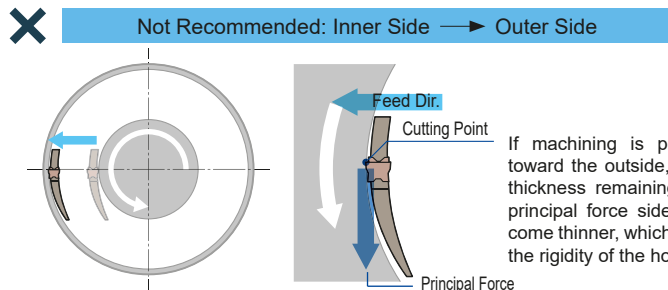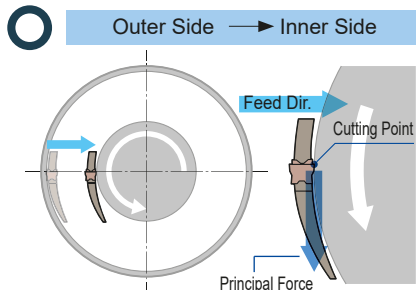

- If the first groove meets the range of the effective grooving diameter in face turning, the grooving diameter will not be limited for the second and later passes.
- Select the chipbreaker of the lower limit side of the recommended cutting conditions and straight chips before evacuation. (In face grooving, broken chips easily get stuck in grooves, which causes problems.)
- When breaking chips, step feed is required.


Key Points for Internal Machining

Precautions for Internal Machining

Recommended Chipbreaker:

ML, GL

If the prepared hole diameter is small, use an ML or GL low-feed chipbreaker, each of which reduces chip curl diameter, to ensure adequate chip evacuation.



Work Material: 15CrMo5 (Ø 25 mm)
Holder: GNDI R2532 T306
Insert: GCM N300□-□□
Cutting Conditions: $v_c=100$ m/min, $f=0,10$ mm/rev, $a_p=3,0$ mm, wet





Chip shapes differ between internal and external machining even under the same cutting conditions.

Work Material: 15CrMo5
Holder: GNDL R2525M 320
Insert: GCM N3002 GG
Cutting Conditions: $v_c=100$ m/min, $f=0,10$ mm/rev, $a_p=5$ mm, wet

Grooving Tool Holders GND Type




Notes on how to Attach Inserts

- ① Remove any foreign particles or oil from the insert seat before attaching the insert.
- ② Ensure the seat location is clean and free of damage.
- ③ Slide the insert level over its seat.
- ④ Push the insert with its opposite end (the holder side) firmly against the insert stop end.
- ⑤ The recommended tightening torque is 5 N·m. Tightening above the recommended torque may damage the insert or the holder which could cause injury and other accidents.

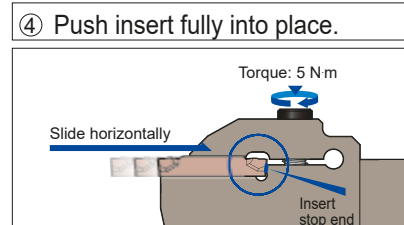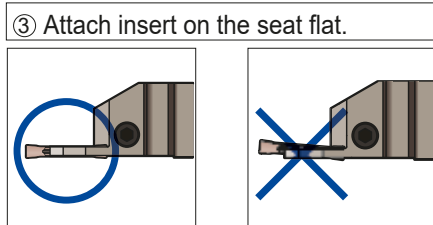


Notes on how to Apply Holders

- ① Remove any foreign particles or oil from the tool post before attaching the holder.
- ② Ensure the seat location is clean and free of damage.
- ③ Attach the holder so that the insert is perpendicular to the workpiece.
- ④ Set holder with shortest possible overhang.
- ⑤ When grooving or turning, adjust the center height of the cutting edge to as close ± 0 mm as possible. (Within $\pm 0,1$ mm is recommended)
- ⑥ Incorrect center height adjustment may cause chattering. (In cut-off applications, adjust the center height of the cutting edge to a value from 0,0 to $+0,2$ mm).
A lower center height will result in larger nip at the center.

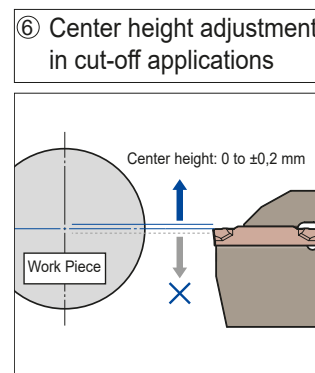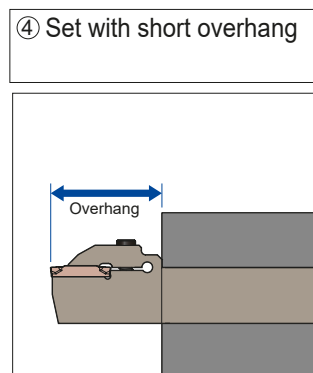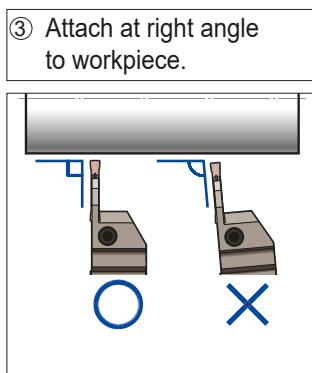


Notes on Setting Coolant Supply Nozzle

Set the coolant supply nozzle so that coolant can be supplied from the top of the upper clamp unit.

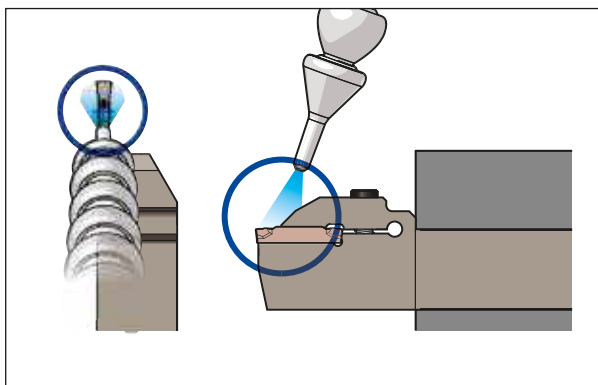

Maximum Depth of Cut

Maximum depth of cut when pulling up with RG chipbreaker

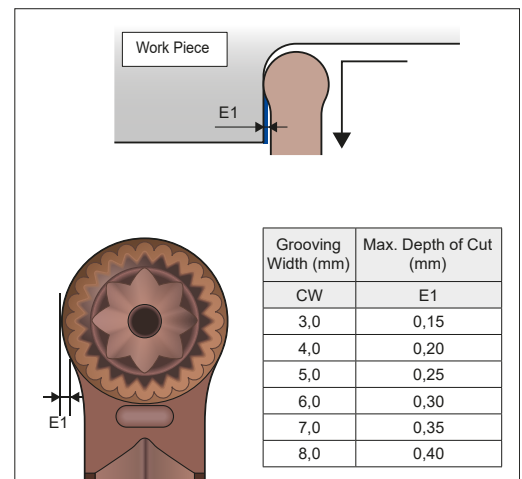

Grooving Tool Holders

GND Type

Chipbreaker Selection Guide

Groov. Width (mm)	Recommended Cutting Conditions		Nose Radius (mm)	Inserts
	Grooving	Turning		
1,25			0,05	GCM N125005-GF
1,5			0,05	GCM N150005-GF
2,0			0,02	GCM R/L20002-CF-10 GCM R/L20002-CF-15 GCM N2002-ML GCM N2002-GG GCM N2002-GL GCM N2002-GF GCM R/L2002-CG-05 GCG N2002-GA
			0,2	GCM N2010-RN
			1,0	
3,0			0,02	GCM R/L30002-CF-10 GCM R/L30002-CF-15 GCM N3002-ML GCM N3002-GG GCM N3002-GL GCM N3002-GF GCM R/L3002-CG-05 GCG N3002-GA
			0,2	GCM N3004-MG GCM N3004-GG
			0,4	GCM N3004-MG GCM N3004-GG
			1,5	GCM N3015-RG GCM N3015-RN
4,0			0,2	GCM N4002-GG GCM N4002-GL GCM N4002-GF GCM R/L4002-CG-05 GCM N4004-ML GCM N4004-GG GCG N4004-GA
			0,4	GCM N4008-MG
			0,8	GCM N4020-RG GCM N4020-RN
			2,0	GCM N5002-GG GCM N5002-GL GCM N5002-GF
			0,2	GCM N5004-ML GCM N5004-GG GCG N5004-GA
5,0			0,2	GCM N5008-MG
			0,4	GCM N5025-RG GCM N5025-RN
			2,5	GCM N6002-GG GCM N6002-GL GCM N6002-GF
6,0			0,2	GCM N6004-ML GCM N6004-GG GCG N6004-GA
			0,4	GCM N6008-MG
			0,8	GCM N6030-RG GCM N6030-RN
			3,0	GCM N7002-GF GCM N7004-ML GCM N7004-GG GCM N7004-GL GCM N7004-GF
7,0			0,2	GCM N7008-MG
			0,4	GCM N7035-RG
			0,8	GCM N8002-GF GCM N8004-ML GCM N8004-GG GCM N8004-GL GCM N8004-GF
8,0			0,2	GCM N8008-MG
			0,4	GCM N8040-RG
			0,8	
			4,0	

Recommended Cutting Conditions

Work Material	P Carbon Steel, Alloy Steel				M Stainless Steel			K Cast Iron			S Exotic Alloy		N
Grade	AC830P	AC520U	AC530U AC1030U	T2500A	AC830P	AC520U	AC530U AC1030U	AC425K	AC520U	AC530U AC1030U	AC520U	AC530U AC1030U	H10
Cutting Speed (m/min)	80-200	80-200	50-200	50-200	70-150	70-150	50-150	80-200	60-200	50-200	20-80	20-60	150-300

Grooving Tool Holders

GND Type

Identification Details – Holders

GND M R 25 25 (M) - (T) 3 12 (JE) (- 0 3 5)

①
Series Symbol
GND

②
Holder Design
Chart 3

③
Shank Width / Work Dia.
Chart 5

④
Type
Internal Grooving

⑤
Max. Grooving Depth
Chart 8

⑥
Min. Machining Dia.
(mm)

Application
Chart 2

Shank Height / Dia.
Chart 4

Shank Length
Chart 6

Insert Width
Chart 7

Coolant Supply
JE: Internal Coolant

② Application		
Symbol	Application	
S	External Multi-Purpose	Grooving / Cut Off / Turning / Profiling
M	External Multi-Purpose	Grooving / Cut Off / Turning / Profiling
L	External Grooving	Grooving / Cut Off
MS	External L-Styled (Side Cut) Multi-Purpose	Grooving / Turning / Profiling
LS	External L-Styled (Side Cut) Deep Grooving	Grooving
N	Necking	Necking
I	Internal Grooving	Grooving / Turning / Profiling
IS	Internal Grooving	Grooving / Turning / Profiling
F	Face Grooving	Grooving / Turning / Profiling
FS	L-Shaped Tools for Facing	Grooving / Turning / Profiling
CM	Cassette for Polygon Holder	Radial Grooving
CF	Cassette for Polygon Holder	Face Grooving

③ Holder Design	
Symbol	Direction
R	Right
L	Left

④ Shank Height / Diameter		
Application	Symbol	Height (mm)
External/ Face Grooving (Shank Height)	10	10
	12	12
	16	16
	20	20
	25	25
Internal Grooving (Shank Diameter)	25	25
	32	32
	40	40

⑤ Shank Width / Work Dia.		
Application	Symbol	Width (mm)
External/ Face Grooving (Shank Width)	10	10
	12	12
	16	16
	20	20
	25	25
Internal Grooving (Shank Diameter)	32	32
	40	40
	50	50

⑥ Shank Length	
Symbol	Length (mm)
JX	120
K	125
M	150
P	170

⑧ Insert Width	
Symbol	Groov. Width (mm)
1,25	1,25
1,5	1,5
2	2,0
3	3,0
4	4,0
5	5,0
6	6,0
7	7,0
8	8,0

⑨ Max. Grooving Depth			
Symbol	Groov. Depth (mm)	Symbol	Groov. Depth (mm)
06	6,0	20	20,0
08	8,0	23	23,0
10	10,0	25	25,0
11	11,0		
12	12,0		
12,5	12,5		
14	14,0		
16	16,0		
18	18,0		

To ensure maximum rigidity, use the multi-purpose type holder to machine the maximum grooving depth.

Identification Details – Inserts

G C M N 30 02 (S) - G G - (05)

①
Series Symbol
Grooving

②
Tolerance
G Class
M Class

③
Insert Design
Symbol Direction
N Neutral
R Right Hand
L Left Hand

④
Front Relief Angle
C: 7°
X: Special

⑤
Insert Width
Symbol Groov. Width (mm)
125 1,25
150 1,5
20 2,0
30 3,0
40 4,0
50 5,0
60 6,0
70 7,0
80 8,0

⑥
Nose Radius
Symbol R (mm)
005 0,05
02 0,2
04 0,4
08 0,8
15 1,5
20 2,0
25 2,5
30 3,0



⑦
Applicable Holder
Symbol Holder
S GNDIS

⑧
Chipbreaker
Symbol Application
MG Multi-Purpose: General Feed
ML Multi-Purpose: Low Feed
GG Grooving: General Feed
GL Grooving: Low Feed
GF Grooving: Low Cutting Forces
CG Cut-Off
CF Cut-Off: Low Cutting Forces
RG Copying: General Feed
RN Multi-Purpose: General Feed
GA Multi-Purpose: General Feed

⑨
Front Cutt. Edge Angle
PSI
05 : 5°
10 : 10°
15 : 15°

Grooving Tool Holders GNDM /GNDL Type

External Multi-Purpose Small Tools Type (Grooving, Turning, Profiling)

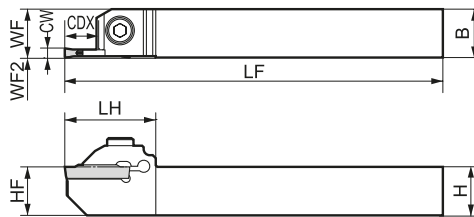

Use the multi-purpose profiling insert for turning (wide grooves).

Above figures show right hand tools.

Spare Parts



■ Holders

Cat. No.	Stock		Dimensions (mm)							Grooving Width (mm)	Max. Groov. Depth (mm)	Max. Cutt-Off Dia (mm)	Applicable Insert	Cap Screw	N·m	Spanner
	R	L	H	B	LF	WF	HF	LH	WF2							
GNDM R/L 1616 JX 1.2508	●	●	16	16	120	(16)	16	26	0	1,25	8,0	16	GCM N125005 GF	BX0515	4,0	LH040
GNDM R/L 1616 JX 1.510	○	○	16	16	120	(16)	16	26	0	1,50	10,0	20	GCM N150005 GF			
GNDM R/L 1616 JX 212	○	○	16	16	120	(16)	16	30	0	2,00	12,0	24	GCM □200○-□□			
GNDM R/L 1616 JX 312	○	○	16	16	120	(16)	16	30	0	3,00	12,0	24	GCM □300○-□□			

Select holders and inserts with the same grooving width (CW).

External Grooving / Cut-Off Small Tools




Fig. 1


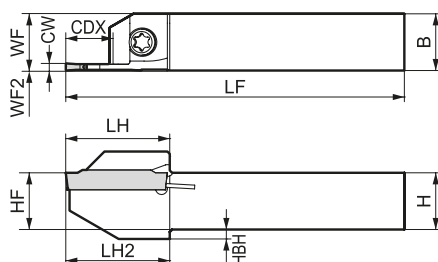


Fig. 2



Above figures show right hand tools.

■ Spare Parts

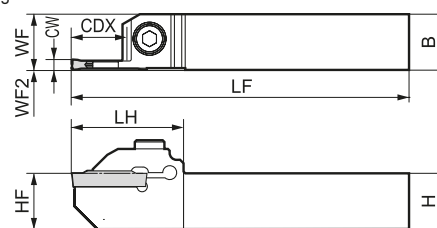

BX0515

LH040

■ Holders

Cat. No.	Stock		Dimensions (mm)										Grooving Width (mm)	Max. Groov. Depth (mm)	Max. Cutt-Off Dia (mm)	Fig.	Applicable Insert	Cap Screw	N·m	Spanner
	R	L	H	B	LF	WF	HF	HBH	LH	LH2	WF2	CW								
GNDL R/L 1010 JX 1.2510	●	●	10	10	120	(10)	10	2,0	18	18,3	0	1,25	10,0	20	1	GCM N125005 GF	BFTX0412N	3,0	LT15-10	
GNDL R/L 1010 JX 1.510	●	●	10	10	120	(10)	10	2,0	18	22,3	0	1,50	10,0	20		GCM N150005 GF				
GNDL R/L 1010 JX 210	●	●	10	10	120	(10)	10	2,0	22	22,3	0	2,00	10,0	20		GCM □200○-□□				
GNDL R/L 1010 JX 310	●	●	10	10	120	(10)	10	2,0	22	22,3	0	3,00	10,0	20	GCM □300○-□□					
GNDL R/L 1212 JX 1.2512	●	●	12	12	120	(12)	12	2,0	19	19,3	0	1,25	12,0	24	1	GCM N125005 GF	BFTX0412N	3,0	LT15-10	
GNDL R/L 1212 JX 1.512	●	●	12	12	120	(12)	12	2,0	19	19,3	0	1,50	12,0	24		GCM N150005 GF				
GNDL R/L 1212 JX 212.5	●	●	12	12	120	(12)	12	2,0	22	22,3	0	2,00	12,5	25		GCM □200○-□□				
GNDL R/L 1212 JX 312.5	●	●	12	12	120	(12)	12	2,0	22	22,3	0	3,00	12,5	25	GCM □300○-□□					
GNDL R/L 1616 JX 1.2512.5	●	●	16	16	120	(16)	16		28		0	1,25	12,5	20	2	GCM N125005 GF	BFTX0515	4,0	LH040	
GNDL R/L 1616 JX 1.512.5	●	●	16	16	120	(16)	16		28		0	1,50	12,5	25		GCM N150005 GF				
GNDL R/L 1616 JX 216	●	●	16	16	120	(16)	16		32		0	2,00	16,0	32		GCM □200○-□□				
GNDL R/L 1616 JX 316	●	●	16	16	120	(16)	16		32		0	3,00	16,0	32	GCM □300○-□□					

Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDM / GNDL Type

■ Inserts for GNDM (Small Tools) / GNGL (Small Tools)



Application	Shape	Type	Cat. No.	Coated Carbide				Cermet T2500A	Carbide H10	Dimensions (mm)				
				AC830P	AC425K	AC520U	AC530U			CW		RE	L	S
										Cutting Width	Tolerance			
Grooving / Turning		General Purpose	GCM N3004 MG	●	●	○	●			3,0	±0,03	0,4	21,1	3,8
		Low Feed	GCM N2002 ML			○	●			2,0	±0,03	0,2	21,1	3,6
			N3002 ML	●	●	○	●	○		3,0	±0,03	0,2	21,1	3,8
Copying / Cut-Off		General Purpose	GCM N2002 GG	●		●	●			2,0	±0,03	0,2	21,1	3,6
			N3002 GG	●		○	●			3,0	±0,03	0,2	21,1	3,8
			N3004 GG	●		○	●			3,0	±0,03	0,2	21,1	3,8
		Low Feed	GCM N2002 GL	●		○	●			2,0	±0,03	0,2	21,1	3,6
			M3002 GL	●		○	●			3,0	±0,03	0,2	21,1	3,8
		Low Cutting Force	GCM N125005 GF				●			1,25	±0,03	0,05	17,4	3,2
			N150005 GF				●			1,5	±0,03	0,05	17,4	3,7
N2002 GF					●	○		2,0	±0,03	0,2	21,1	3,6		
N3002 GF	●		●	●	○			3,0	±0,03	0,2	21,1	3,8		
Copying		General Purpose	GCM N3015 RG	●	●	○	●	○		3,0	±0,03	1,5	21,1	3,8
Face / Necking		General Purpose	GCM N2010 RN			○	○			2,0	±0,03	1,0	21,7	3,6
			N3015 RN	○	○	○	○			3,0	±0,03	1,5	22,4	3,8
Non Ferrous Metals		General Purpose	GCG N2002 GA						○	2,0	±0,025	0,2	21,1	3,6
			N3002 GA						○	3,0	±0,025	0,2	21,1	3,8

Application	Shape	Type	Cat. No.	Coated Carbide										PSI	Dimensions (mm)						
				AC830P		AC520U		AC530U		AC1030U		PSI	CW		RE	L	S				
				R	L	R	L	R	L	R	L		R					L	Cutting Width	Tolerance	
Cut-Off	Figures show right hand tools. 	General Purpose	GCM R/L2002 CG 05	○	○	○	○	●	●					5°	2,0	±0,03	0,2	21,1	3,6		
			R/L3002 CG 05	●	○	○	○	●	●					5°	3,0	±0,03	0,2	21,3	3,8		
			R/L4002 CG 05	○	○	○	○	●	●					5°	4,0	±0,04	0,2	26,7	4,0		
Cut-Off		Low Cutting Force	New GCM R/L20003 CF 10											10°	2,0	±0,08	0,03	22,4	3,6		
			R/L30003 CF 10												10°	3,0	±0,08	0,03	22,4	3,8	
			R/L20003 CF 15													15°	2,0	±0,08	0,03	22,4	3,6
			R/L30003 CF 15													15°	3,0	±0,08	0,03	22,4	3,8

Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDS Type


External Multi-Purpose Shallow Grooves Type (Grooving, Turning, Profiling)

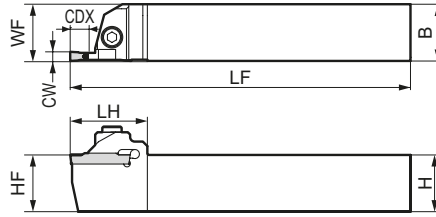

Use the multi-purpose profiling insert for turning (wide grooves).

Above figures show right hand tools.

■ Spare Parts



■ Holders

Cat. No.	Stock		Dimensions (mm)						Grooving Width (mm)	Max. Groov. Depth (mm)	Applicable Insert	Cap Screw	N·m	Spanner
	R	L	H	B	LF	WF	HF	LH	CW	CDX				
GNDS R/L 2020 K 206	○	○	20	20	125	20	20	30	2,0	6	GCM □2000-□□	BX0520	5,0	LH040
GNDS R/L 2020 K 306	○	○	20	20	125	20	20	30	3,0	6	GCM □3000-□□			
GNDS R/L 2020 K 410	○	○	20	20	125	20	20	34	4,0	10	GCM □4000-□□			
GNDS R/L 2020 K 510	○	○	20	20	125	20	20	34	5,0	10	GCM N5000-□□			
GNDS R/L 2020 K 610	○	○	20	20	125	20	20	34	6,0	10	GCM N6000-□□			
GNDS R/L 2525 M 206	○	○	25	25	150	25	25	30	2,0	6	GCM □2000-□□			
GNDS R/L 2525 M 306	○	○	25	25	150	25	25	30	3,0	6	GCM □3000-□□			
GNDS R/L 2525 M 410	○	○	25	25	150	25	25	34	4,0	10	GCM □4000-□□			
GNDS R/L 2525 M 510	○	○	25	25	150	25	25	34	5,0	10	GCM N5000-□□			
GNDS R/L 2525 M 610	○	○	25	25	150	25	25	34	6,0	10	GCM N6000-□□			

Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDS Type

Inserts for GNDS


Application	Shape	Type	Cat. No.	Coated Carbide				Cermet	Carbide	Dimensions (mm)				
				AC830P	AC425K	AC520U	AC530U	T2500A	H10	CW		RE	L	S
										Cutting Width	Tolerance			
Grooving / Turning		MG General Purpose	GCM N3004 MG	●	●	○	●			3,0	±0,03	0,4	21,1	3,8
			N4008 MG	●	●	○	●			4,0	±0,03	0,8	26,4	4,0
			N5008 MG	●	●	○	●			5,0	±0,03	0,8	26,4	4,1
			N6008 MG	●	●	○	●			6,0	±0,03	0,8	26,4	4,5
		ML CW=<4mm CW=>5mm Low Feed	GCM N2002 ML	●	●	○	●			2,0	±0,03	0,2	21,1	3,6
			N3002 ML	●	●	○	●	○		3,0	±0,03	0,2	21,1	3,8
			N4004 ML	●	●	○	●	○		4,0	±0,03	0,4	26,4	4,0
			N5004 ML	●	●	○	●			5,0	±0,03	0,4	26,4	4,1
			N6004 ML	●	●	○	●			6,0	±0,03	0,4	26,4	4,5
			Copying / Cut-Off		GG General Purpose	GCM N2002 GG	●		●	●			2,0	±0,03
N3002 GG	●					○	●			3,0	±0,03	0,2	21,1	3,8
N4002 GG	●					○	●			4,0	±0,03	0,2	26,4	4,0
N5002 GG	○					○	●			5,0	±0,03	0,2	26,4	4,1
N6002 GG	○					○	●			6,0	±0,03	0,2	26,4	4,5
GCM N3004 GG	●					○	●			3,0	±0,03	0,4	21,1	3,8
GL Low Feed	N4004 GG	●				○	●			4,0	±0,03	0,4	26,4	4,0
	N5004 GG	○				○	●			5,0	±0,03	0,4	26,4	4,1
	N6004 GG	○				○	●			6,0	±0,03	0,4	26,4	4,5
	GCM N2002 GL	●				○	●			2,0	±0,03	0,2	21,1	3,6
	N3002 GL	●				○	●			3,0	±0,03	0,2	21,1	3,8
	N4002 GL	●				○	●			4,0	±0,03	0,2	26,4	4,0
GF Low Cutting Force	N5002 GL	○				○	●			5,0	±0,03	0,2	26,4	4,1
	N6002 GL	○				○	●			6,0	±0,03	0,2	26,4	4,5
	GCM N2002 GF						●	○		2,0	±0,03	0,2	21,1	3,6
	N3002 GF	●				●	●	○		3,0	±0,03	0,2	21,1	3,8
	N4002 GF	●				●	●	○		4,0	±0,03	0,2	26,4	4,0
	N5002 GF	○				●	●			5,0	±0,03	0,2	26,4	4,1
Copying		RG General Purpose	GCM N3015 RG	●	●	○	●	○		3,0	±0,03	1,5	21,1	3,8
			N4020 RG	○	●	○	●	○		4,0	±0,03	2,0	26,4	4,0
			N5025 RG	●	●	○	●			5,0	±0,03	2,5	27,2	4,1
			N6030 RG	○	●	○	●			6,0	±0,03	3,0	27,5	4,5
Face / Necking		RN General Purpose	GCM N2010 RN			○	○			2,0	±0,03	1,0	21,7	3,6
			N3015 RN	○	○	○	○			3,0	±0,03	1,5	22,4	3,8
			N4020 RN	○	○	○	○			4,0	±0,03	2,0	28,0	4,0
			N5025 RN	○	○	○	○			5,0	±0,03	2,5	28,1	4,1
			N6030 RN	○	○	○	○			6,0	±0,03	3,0	28,1	4,5
Non Ferrous Metals		GA General Purpose	GCG N2002 GA						○	2,0	±0,025	0,2	21,1	3,6
			N3002 GA						○	3,0	±0,025	0,2	21,1	3,8
			N4004 GA						○	4,0	±0,025	0,4	26,4	4,0
			N5004 GA						○	5,0	±0,025	0,4	26,4	4,1
			N6004 GA						○	6,0	±0,025	0,4	26,4	4,5

Application	Shape	Type	Cat. No.	Coated Carbide								PSI	Dimensions (mm)						
				AC830P		AC520U		AC530U		AC1030U			Cutting Width	Tolerance	RE	L	S		
				R	L	R	L	R	L	R	L								
Cut-Off	Figures show right hand tools. 	CG General Purpose	GCM R/L2002 CG 05	○	○	○	○	●	●				5°	2,0	±0,03	0,2	21,1	3,6	
			R/L3002 CG 05	●	○	○	○	●	●					5°	3,0	±0,03	0,2	21,3	3,8
			R/L4002 CG 05	○	○	○	○	●	●					5°	4,0	±0,03	0,2	26,7	4,0
Cut-Off		CF Low Cutting Force	GCM R/L20003 CF 10							●	●		10°	2,0	±0,08	0,03	22,4	3,6	
			R/L30003 CF 10							●	●		10°	3,0	±0,08	0,03	22,4	3,8	
			R/L20003 CF 15							●	●		15°	2,0	±0,08	0,03	22,4	3,6	
			R/L30003 CF 15							●	●		15°	3,0	±0,08	0,03	22,4	3,8	


Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDM / GNDMS Type

External Multi-Purpose Type (Grooving, Turning, Profiling)



Use for multi-purpose or profiling insert for turning (wide grooves).

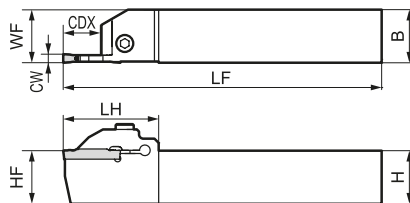

Above figures show right hand tools.

Spare Parts




■ Holders


Cat. No.	Stock		Dimensions (mm)						Grooving Width (mm)	Max. Groov. Depth (mm)	Max. Cut-Off Dia (mm)	Applicable Insert	Cap Screw	N·m	Spanner
	R	L	H	B	LF	WF	HF	LH							
GNDM R/L 2020 K 1.2510	●	●	20	20	125	20	20	34,0	1,25	10	20	GCM N125005 GF	BX0520	5,0	LH040
GNDM R/L 2020 K 1.510	●	●	20	20	125	20	20	34,0	1,50	10	20	GCM N150005 GF			
GNDM R/L 2020 K 210	○	○	20	20	125	20	20	33,6	2,00	10	20	GCM □200○-□□			
GNDM R/L 2020 K 312	○	○	20	20	125	20	20	36,6	3,00	12	24	GCM □300○-□□			
GNDM R/L 2020 K 418	○	○	20	20	125	20	20	45,0	4,00	18	36	GCM □400○-□□			
GNDM R/L 2020 K 518	●	○	20	20	125	20	20	45,0	5,00	18	36	GCM N500○-□□			
GNDM R/L 2020 K 618	○	○	20	20	125	20	20	45,0	6,00	18	36	GCM N600○-□□			
GNDM R/L 2525 M 1.2510	●	●	25	25	150	25	25	36,0	1,25	10	20	GCM N125005 GF			
GNDM R/L 2525 M 1.510	●	●	25	25	150	25	25	36,0	1,25	10	20	GCM N150005 GF			
GNDM R/L 2525 M 210	○	○	25	25	150	25	25	33,6	2,00	10	20	GCM N200○-□□			
GNDM R/L 2525 M 312	○	○	25	25	150	25	25	36,6	3,00	12	24	GCM □300○-□□			
GNDM R/L 2525 M 418	○	○	25	25	150	25	25	45,0	4,00	18	36	GCM □400○-□□			
GNDM R/L 2525 M 518	○	○	25	25	150	25	25	45,0	5,00	18	36	GCM N500○-□□			
GNDM R/L 2525 M 618	●	○	25	25	150	25	25	45,0	6,00	18	36	GCM N600○-□□			
GNDM R/L 3225 P 312			32	25	170	25	32	36,6	3,00	12	24	GCM □300○-□□	BX0620	6,0	LH050
GNDM R/L 3225 P 418			32	25	170	25	32	45,0	4,00	18	36	GCM □400○-□□			
GNDM R/L 3225 P 518			32	25	170	25	32	45,0	5,00	18	36	GCM N500○-□□			
GNDM R/L 3225 P 618			32	25	170	25	32	45,0	6,00	18	36	GCM N600○-□□			
GNDM R/L 3225 P 718			32	25	170	25	32	50,0	7,00	18	36	GCM N700○-□□			
GNDM R/L 3225 P 818			32	25	170	25	32	50,0	8,00	18	36	GCM N800○-□□			
GNDM R/L 3232 P 312	●	●	32	32	170	32	32	36,6	3,00	12	24	GCM □300○-□□	BX0620	6,0	LH050
GNDM R/L 3232 P 418	●	●	32	32	170	32	32	45,0	4,00	18	36	GCM □400○-□□			
GNDM R/L 3232 P 518	●	●	32	32	170	32	32	45,0	5,00	18	36	GCM N500○-□□			
GNDM R/L 3232 P 618	●	●	32	32	170	32	32	45,0	6,00	18	36	GCM N600○-□□			
GNDM R/L 3232 P 718	●	●	32	32	170	32	32	50,0	7,00	18	36	GCM N700○-□□			
GNDM R/L 3232 P 818	●	●	32	32	170	32	32	50,0	8,00	18	36	GCM N800○-□□			

Select holders and inserts with the same grooving width (CW).

External L-Styled (Side Cut) Multi-Purpose Type (Grooving, Turning, Profiling)




Use for multi-purpose or profiling insert for turning (wide grooves).

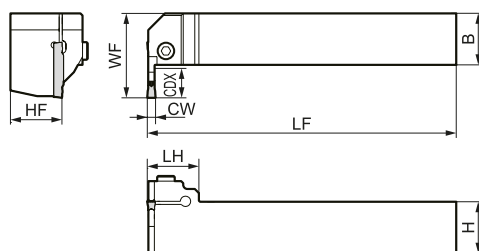

Above figures show right hand tools.

Spare Parts



■ Holders

Cat. No.	Stock		Dimensions (mm)						Grooving Width (mm)	Max. Groov. Depth (mm)	Applicable Insert	Cap Screw	N·m	Spanner
	R	L	H	B	LF	WF	HF	LH						
GNDMS R/L 2020 K 310	●	●	20	20	125	32	20	25	3,0	10	GCM □300○-□□	BX0520	5,0	LH040
GNDMS R/L 2020 K 412	●	●	20	20	125	34	20	25	4,0	12	GCM □400○-□□			
GNDMS R/L 2020 K 512	●	●	20	20	125	34	20	25	5,0	12	GCM N500○-□□			
GNDMS R/L 2525 M 312	●	●	25	25	150	39	25	25	3,0	12	GCM □300○-□□			
GNDMS R/L 2525 M 414	●	●	25	25	150	41	25	25	4,0	14	GCM □400○-□□			
GNDMS R/L 2525 M 514	●	●	25	25	150	41	25	25	5,0	14	GCM N500○-□□			
GNDMS R/L 2525 M 614	●	●	25	25	150	41	25	25	6,0	14	GCM N600○-□□			

Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDM / GNDMS Type

Inserts for GNDM / GNDMS

Application	Shape	Type	Cat. No.	Coated Carbide				Cermet T2500A	Carbide H10	Dimensions (mm)						
				AC830P	AC425K	AC520U	AC530U			CW		RE	L	S		
								Cutting Width	Tolerance							
Grooving / Turning		MG General Purpose	GCM N3004 MG	●	●	○	●			3.0	±0,03	0,4	21,1	3,8		
			N4008 MG	●	●	○	●			4.0	±0,03	0,8	26,4	4,0		
			N5008 MG	●	●	○	●			5.0	±0,03	0,8	26,4	4,1		
			N6008 MG	●	●	○	●			6.0	±0,03	0,8	26,4	4,5		
			N7008 MG	○	●	○	●			7.0	±0,04	0,8	28,75	5,5		
			N8008 MG	●	●	○	●			8.0	±0,04	0,8	28,75	6,0		
			ML Low Feed CW=<4mm CW=>5mm	GCM N2002 ML		○	○	○	●			2.0	±0,03	0,2	21,1	3,6
				N3002 ML	●	●	○	●	○			3.0	±0,03	0,2	21,1	3,8
		N4004 ML		●	●	○	●	○			4.0	±0,03	0,4	26,4	4,0	
		N5004 ML		●	●	○	●	○			5.0	±0,03	0,4	26,4	4,1	
		N6004 ML		●	●	○	●	○			6.0	±0,03	0,4	26,4	4,5	
		N7004 ML		●	●	○	●	○			7.0	±0,04	0,4	28,75	5,5	
		N8004 ML		○	●	○	●	○			8.0	±0,04	0,4	28,75	6,0	
		Copying / Cut-Off			GG General Purpose	GCM N2002 GG	●		○	●			2.0	±0,03	0,2	21,1
			N3002 GG			●		○	●			3.0	±0,03	0,2	21,1	3,8
			N4002 GG			●		○	●			4.0	±0,03	0,2	26,4	4,0
N5002 GG	○					○	●			5.0	±0,03	0,2	26,4	4,1		
N6002 GG	○					○	●			6.0	±0,03	0,2	26,4	4,5		
N3004 GG	●					○	●			3.0	±0,03	0,4	21,1	3,8		
N4004 GG	●					○	●			4.0	±0,03	0,4	26,4	4,0		
N5004 GG	○					○	●			5.0	±0,03	0,4	26,4	4,1		
N6004 GG	○					○	●			6.0	±0,03	0,4	26,4	4,5		
N7004 GG	○					○	●			7.0	±0,04	0,4	28,75	5,5		
N8004 GG	●					○	●			8.0	±0,04	0,4	28,75	6,0		
GL Low Feed	GCM N2002 GL		●				○	●				2.0	±0,03	0,2	21,1	3,6
	N3002 GL		●			○	●				3.0	±0,03	0,2	21,1	3,8	
	N4002 GL		●			○	●				4.0	±0,03	0,2	26,4	4,0	
	N5002 GL		○			○	●				5.0	±0,03	0,2	26,4	4,1	
	N6002 GL		○			○	●				6.0	±0,03	0,2	26,4	4,5	
	N7004 GL		○			○	●				7.0	±0,04	0,4	28,75	5,5	
	N8004 GL		○			○	●				8.0	±0,04	0,4	28,75	6,0	
	GF Low Cutting Force		GCM N125005 GF					●				1,25	±0,03	0,05	17,4	3,2
N150005 GF							●				1,5	±0,03	0,05	17,4	3,7	
N2002 GF							●	○			2.0	±0,03	0,2	21,1	3,6	
N3002 GF			●			●	●	○			3.0	±0,03	0,2	21,1	3,8	
N4002 GF			○			●	●	○			4.0	±0,03	0,2	26,4	4,0	
N5002 GF			○			●	●	○			5.0	±0,03	0,2	26,4	4,1	
N6002 GF		○		●	●	○			6.0	±0,03	0,2	26,4	4,5			
N7002 GF		○		○	●				7.0	±0,04	0,2	28,75	5,5			
N8002 GF		○		○	●				8.0	±0,04	0,2	28,75	6,0			
GCM N7004 GF		○		○	●				7.0	±0,04	0,4	28,75	5,5			
N8004 GF		○		○	●				8.0	±0,04	0,4	28,75	6,0			
Copying			RG General Purpose	GCM N3015 RG	●	●	○	●	○		3.0	±0,03	1,5	21,1	3,8	
	N4020 RG			○	●	○	●	○		4.0	±0,03	2,0	26,4	4,0		
	N5025 RG			●	●	○	●	○		5.0	±0,03	2,5	27,2	4,1		
	N6030 RG			○	●	○	●	○		6.0	±0,03	3,0	27,5	4,5		
	N7035 RG			○	●	○	●	○		7.0	±0,04	3,5	29,05	5,5		
	N8040 RG			○	●	○	●	○		8.0	±0,04	4,0	29,25	6,0		
Face / Necking		RN General Purpose	GCM N2010 RN			○	○			2.0	±0,03	1,0	21,7	3,6		
			N3015 RN	○	○	○	○			3.0	±0,03	1,5	22,4	3,8		
			N4020 RN	○	○	○	○			4.0	±0,03	2,0	28,0	4,0		
			N5025 RN	○	○	○	○			5.0	±0,03	2,5	28,1	4,1		
			N6030 RN	○	○	○	○			6.0	±0,03	3,0	28,1	4,5		
			Non Ferrous Metals		GA General Purpose	GCG N2002 GA						○	2.0	±0,025	0,2	21,1
N3002 GA									○	3.0	±0,025	0,2	21,1	3,8		
N4004 GA									○	4.0	±0,025	0,4	26,4	4,0		
N5004 GA									○	5.0	±0,025	0,4	26,4	4,1		
N6004 GA									○	6.0	±0,025	0,4	26,4	4,5		

Application	Shape	Type	Cat. No.	Coated Carbide								PSI	Dimensions (mm)					
				AC830P		AC520U		AC530U		AC1030U			Cutting Width	Tolerance	RE	L	S	
				R	L	R	L	R	L	R	L							
Cut-Off		CG General Purpose	GCM R/L2002 CG 05	○	○	○	○	●	●			5°	2.0	±0,03	0,2	21,1	3,6	
			R/L3002 CG 05	●	○	○	○	●	●				5°	3.0	±0,03	0,2	21,3	3,8
			R/L4002 CG 05	○	○	○	○	●	●				5°	4.0	±0,04	0,2	26,7	4,0
Cut-Off		CF Low Cutting Force	GCM R/L20003 CF 10					●	●			10°	2.0	±0,08	0,03	22,4	3,6	
			R/L30003 CF 10					●	●			10°	3.0	±0,08	0,03	22,4	3,8	
			R/L20003 CF 15					●	●			15°	2.0	±0,08	0,03	22,4	3,6	
			R/L30003 CF 15					●	●			15°	3.0	±0,08	0,03	22,4	3,8	

Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDM-JE Type

Holder with Internal Coolant




External Multi-Purpose Type (Grooving, Turning, Profiling)



Internal Coolant



Use for multi-purpose or profiling insert for turning (wide grooves).

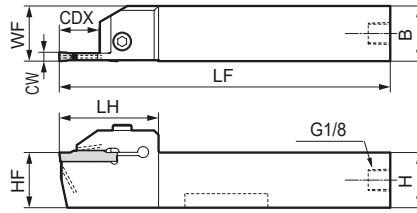

Above figures show right hand tools.

Spare Parts

Cap Screw	Plug and Sealing	Grub Screw*	Spanner
BX0520	6,0	XP02-E	BT0505-E LH040

■ Holders

Cat. No.	Stock		Dimensions (mm)						Grooving Width (mm)	Max. Groov. Depth (mm)	Max. Cutt-Off Dia (mm)	Applicable Insert
	R	L	H	B	LF	WF	HF	LH				
GNDM R/L 2020 X 210 JE	●	●	20	20	100	20	20	33,6	2,00	10	20	GC □ 2000-□□
GNDM R/L 2020 X 312 JE	●	●	20	20	100	20	20	36,6	3,00	12	24	GC □ 3000-□□
GNDM R/L 2020 X 418 JE	●	●	20	20	110	20	20	45,0	4,00	18	36	GC □ 4000-□□
GNDM R/L 2020 X 518 JE	●	●	20	20	110	20	20	45,0	5,00	18	36	GC □ N5000-□□
GNDM R/L 2020 X 618 JE	●	●	20	20	110	20	20	45,0	6,00	18	36	GC □ N6000-□□
GNDM R/L 2525 X 210 JE	●	●	25	25	100	25	25	33,6	2,00	10	20	GC □ 2000-□□
GNDM R/L 2525 X 312 JE	●	●	25	25	100	25	25	36,6	3,00	12	24	GC □ 3000-□□
GNDM R/L 2525 X 418 JE	●	●	25	25	110	25	25	45,0	4,00	18	36	GC □ 4000-□□
GNDM R/L 2525 X 518 JE	●	●	25	25	110	25	25	45,0	5,00	18	36	GC □ N5000-□□
GNDM R/L 2525 X 618 JE	●	●	25	25	110	25	25	45,0	6,00	18	36	GC □ N6000-□□

Select holders and inserts with the same grooving width (CW).

*Grub screws are sold separately (M5x5)

Fig. 1




Fig. 1




Fig. 2





Fig. 3



■ Parts (Hose)

Cat. No.	Stock	L (mm)	Screw Standard	Screw Standard	Fig.
J-HOSE-G1/8-G1/8-200-E	●	200	G1/8	G1/8	1
J-HOSE-G1/8-G1/8-300-E	●	300	G1/8	G1/8	1


Hoses are sold separately.

■ Parts (Connector)

Cat. No.	Stock	Screw Standard	Screw Standard	Fig.
J-G1/8-G1/8-00-E	●	G1/8	G1/8	1
J-G1/8-G1/8F-90-E	●	G1/8	G1/8	2
J-G1/8-G1/8-90-E	●	G1/8	G1/8	3

Connectors are sold separately.

■ Piping Method for Hoses and Connectors

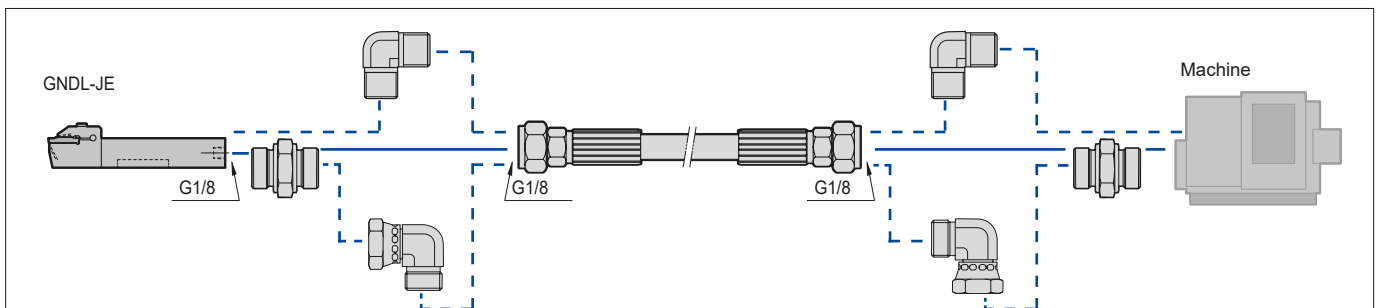

Apply sealant such as commercial sealing tape to the piping connection parts.

GNDM-JE type holders have a plug (XP02-E) mounted on the holder back end at shipping. (see fig. 1)

When piping from the holder back end, mount a grub screw (BT0505-E) on the bottom of the holder for use. (see fig. 2)

Fig. 1 Piping from bottom.





Fig. 2 Piping from back end.



Grooving Tool Holders GNDM-JE Type

Inserts for GNDM-JE



Application	Shape	Type	Cat. No.	Coated Carbide				Cermet	Carbide	Dimensions (mm)				
				AC830P	AC425K	AC520U	AC530U	T2500A	H10	CW		RE	L	S
										Cutting Width	Tolerance			
Grooving / Turning		MG General Purpose	GCM N3004 MG	●	●	○	●			3,0	±0,03	0,4	21,1	3,8
			N4008 MG	●	●	○	●			4,0	±0,03	0,8	26,4	4,0
			N5008 MG	●	●	○	●			5,0	±0,03	0,8	26,4	4,1
			N6008 MG	●	●	○	●			6,0	±0,03	0,8	26,4	4,5
		ML CW=<4mm CW=>5mm Low Feed	GCM N2002 ML	●	●	○	●			2,0	±0,03	0,2	21,1	3,6
			N3002 ML	●	●	○	●	○		3,0	±0,03	0,2	21,1	3,8
			N4004 ML	●	●	○	●	○		4,0	±0,03	0,4	26,4	4,0
			N5004 ML	●	●	○	●			5,0	±0,03	0,4	26,4	4,1
			N6004 ML	●	●	○	●			6,0	±0,03	0,4	26,4	4,5
			Copying / Cut-Off		GG General Purpose	GCM N2002 GG	●		●	●			2,0	±0,03
N3002 GG	●					○	●			3,0	±0,03	0,2	21,1	3,8
N4002 GG	●					○	●			4,0	±0,03	0,2	26,4	4,0
N5002 GG	○					○	●			5,0	±0,03	0,2	26,4	4,1
N6002 GG	○					○	●			6,0	±0,03	0,2	26,4	4,5
GCM N3004 GG	●					○	●			3,0	±0,03	0,4	21,1	3,8
GL Low Feed	N4004 GG	●				○	●			4,0	±0,03	0,4	26,4	4,0
	N5004 GG	○				○	●			5,0	±0,03	0,4	26,4	4,1
	N6004 GG	○				○	●			6,0	±0,03	0,4	26,4	4,5
	GCM N2002 GL	●				○	●			2,0	±0,03	0,2	21,1	3,6
	N3002 GL	●				○	●			3,0	±0,03	0,2	21,1	3,8
	N4002 GL	●				○	●			4,0	±0,03	0,2	26,4	4,0
GF Low Cutting Force	N5002 GL	○				○	●			5,0	±0,03	0,2	26,4	4,1
	N6002 GL	○				○	●			6,0	±0,03	0,2	26,4	4,5
	GCM N2002 GF						●	○		2,0	±0,03	0,2	21,1	3,6
	N3002 GF	●				●	●	○		3,0	±0,03	0,2	21,1	3,8
	N4002 GF	●				●	●	○		4,0	±0,03	0,2	26,4	4,0
	N5002 GF	○				●	●			5,0	±0,03	0,2	26,4	4,1
Copying		RG General Purpose	GCM N3015 RG	●	●	○	●	○		3,0	±0,03	1,5	21,1	3,8
			N4020 RG	○	●	○	●	○		4,0	±0,03	2,0	26,4	4,0
			N5025 RG	●	●	○	●			5,0	±0,03	2,5	27,2	4,1
			N6030 RG	○	●	○	●			6,0	±0,03	3,0	27,5	4,5
			Face / Necking		RN General Purpose	GCM N2010 RN			○	○			2,0	±0,03
N3015 RN	○	○				○	○			3,0	±0,03	1,5	22,4	3,8
N4020 RN	○	○				○	○			4,0	±0,03	2,0	28,0	4,0
N5025 RN	○	○				○	○			5,0	±0,03	2,5	28,1	4,1
N6030 RN	○	○				○	○			6,0	±0,03	3,0	28,1	4,5
Non Ferrous Metals		GA General Purpose	GCG N2002 GA						○	2,0	±0,025	0,2	21,1	3,6
			N3002 GA						○	3,0	±0,025	0,2	21,1	3,8
			N4004 GA						○	4,0	±0,025	0,4	26,4	4,0
			N5004 GA						○	5,0	±0,025	0,4	26,4	4,1
			N6004 GA						○	6,0	±0,025	0,4	26,4	4,5

Application	Shape	Type	Cat. No.	Coated Carbide								PSI	Dimensions (mm)					
				AC830P		AC520U		AC530U		AC1030U			Cutting Width	Tolerance	RE	L	S	
				R	L	R	L	R	L	R	L							
Cut-Off	Figures show right hand tools. 	CG General Purpose	GCM R/L2002 CG 05	○	○	○	○	●	●			5°	2,0	±0,03	0,2	21,1	3,6	
			R/L3002 CG 05	●	○	○	○	●	●				5°	3,0	±0,03	0,2	21,3	3,8
			R/L4002 CG 05	○	○	○	○	●	●				5°	4,0	±0,03	0,2	26,7	4,0
Cut-Off		CF New Low Cutting Force	GCM R/L20003 CF 10							●	●	10°	2,0	±0,08	0,03	22,4	3,6	
			R/L30003 CF 10							●	●	10°	3,0	±0,08	0,03	22,4	3,8	
			R/L20003 CF 15							●	●	15°	2,0	±0,08	0,03	22,4	3,6	
			R/L30003 CF 15							●	●	15°	3,0	±0,08	0,03	22,4	3,8	

Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDL / GNDLS Type

External Deep Grooving and Cut-Off

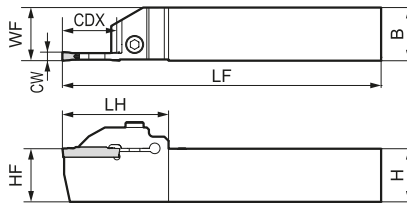

Above figures show right hand tools.

Spare Parts





■ Holders

Cat. No.	Stock		Dimensions (mm)						Grooving Width (mm)	Max. Groov. Depth (mm)	Max. Cut-Off Dia (mm)	Applicable Insert	Cap Screw	N·m	Spanner
	R	L	H	B	LF	WF	HF	LH							
GNDL R/L 2020 K 1.2516	●	●	20	20	125	20	20	38,0	1,25	16	32	GCM N125005 GF	BX0520	5,0	LH040
GNDL R/L 2020 K 1.516	●	●	20	20	125	20	20	38,0	1,50	16	32	GCM N150005 GF			
GNDL R/L 2020 K 220	●	●	20	20	125	20	20	44,5	2,00	20	40	GCM □20○-□□			
GNDL R/L 2020 K 320	●	●	20	20	125	20	20	44,5	3,00	20(18)	40	GCM □30○-□□			
GNDL R/L 2020 K 425	●	●	20	20	125	20	20	50,0	4,00	25(23)	50	GCM □40○-□□			
GNDL R/L 2020 K 525	●	●	20	20	125	20	20	50,0	5,00	25(23)	50	GCM N50○-□□			
GNDL R/L 2020 K 625	●	●	20	20	125	20	20	50,0	6,00	25(23)	50	GCM N60○-□□			
GNDL R/L 2525 M 1.2516	●	●	25	25	150	25	25	40,0	1,25	16	32	GCM N125005 GF			
GNDL R/L 2525 M 1.516	●	●	25	25	150	25	25	40,0	1,50	16	32	GCM N150005 GF			
GNDL R/L 2525 M 220	●	●	25	25	150	25	25	44,5	2,00	20	40	GCM □20○-□□			
GNDL R/L 2525 M 320	●	●	25	25	150	25	25	44,5	3,00	20(18)	40	GCM □30○-□□			
GNDL R/L 2525 M 425	●	●	25	25	150	25	25	50,0	4,00	25(23)	50	GCM □40○-□□			
GNDL R/L 2525 M 525	●	●	25	25	150	25	25	50,0	5,00	25(23)	50	GCM N50○-□□			
GNDL R/L 2525 M 625	●	●	25	25	150	25	25	50,0	6,00	25(23)	50	GCM N60○-□□			
GNDL R/L 3225 P 320			32	25	170	25	32	44,5	3,00	20(18)	40	GCM □30○-□□	BX0520	6,0	LH050
GNDL R/L 3225 P 425			32	25	170	25	32	50,0	4,00	25(23)	50	GCM □40○-□□			
GNDL R/L 3225 P 525			32	25	170	25	32	50,0	5,00	25(23)	50	GCM N50○-□□			
GNDL R/L 3225 P 625			32	25	170	25	32	50,0	6,00	25(23)	50	GCM N60○-□□			
GNDL R/L 3225 P 725			32	25	170	25	32	50,0	7,00	25(23)	50	GCM N70○-□□			
GNDL R/L 3225 P 825			32	25	170	25	32	50,0	8,00	25(23)	50	GCM N80○-□□			
GNDL R/L 3232 P 320	●	●	32	32	170	32	32	44,5	3,00	20(18)	40	GCM □30○-□□	BX0620	6,0	LH050
GNDL R/L 3232 P 425	●	●	32	32	170	32	32	50,0	4,00	25(23)	50	GCM □40○-□□			
GNDL R/L 3232 P 525	●	●	32	32	170	32	32	50,0	5,00	25(23)	50	GCM N50○-□□			
GNDL R/L 3232 P 625	●	●	32	32	170	32	32	50,0	6,00	25(23)	50	GCM N60○-□□			
GNDL R/L 3232 P 725	●	●	32	32	170	32	32	50,0	7,00	25(23)	50	GCM N70○-□□			
GNDL R/L 3232 P 825	●	●	32	32	170	32	32	50,0	8,00	25(23)	50	GCM N80○-□□			

Select holders and inserts with the same grooving width (CW). Dimensions in parentheses are for applications that use copying inserts (RG type breakers).

External L-Styled (Side Cut) Grooving

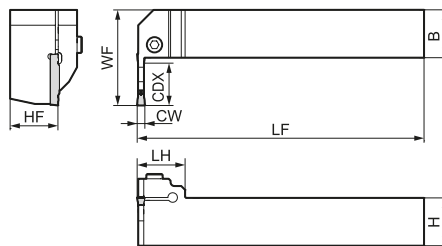

Above figures show right hand tools.

■ Spare Parts



■ Holders

Cat. No.	Stock		Dimensions (mm)						Grooving Width (mm)	Max. Groov. Depth (mm)	Applicable Insert	Cap Screw	N·m	Spanner
	R	L	H	B	LF	WF	HF	LH						
GNDLS R/L 2020 K 216	●	●	20	20	125	38	20	25	2,0	16	GCM □20○-□□	BX0520	5,0	LH040
GNDLS R/L 2020 K 316	●	●	20	20	125	38	20	25	3,0	16	GCM □30○-□□			
GNDLS R/L 2525 M 218	●	●	25	25	150	45	25	25	2,0	18	GCM □20○-□□			
GNDLS R/L 2525 M 318	●	●	25	25	150	45	25	25	3,0	18	GCM □30○-□□			
GNDLS R/L 2525 M 423	●	●	25	25	150	50	25	25	4,0	23	GCM □40○-□□			
GNDLS R/L 2525 M 523	●	●	25	25	150	50	25	25	5,0	23	GCM N50○-□□			
GNDLS R/L 2525 M 623	●	●	25	25	150	50	25	25	6,0	23	GCM N60○-□□			

Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDL / GNDLS Type

Inserts for GNDL / GNDLS

Application	Shape	Type	Cat. No.	Coated Carbide				Cermet T2500A	Carbide H10	Dimensions (mm)						
				AC830P	AC425K	AC520U	AC530U			CW		RE	L	S		
										Cutting Width	Tolerance					
Grooving / Turning		MG General Purpose	GCM N3004 MG	●	●	○	●			3.0	±0,03	0,4	21,1	3,8		
			N4008 MG	●	●	○	●			4.0	±0,03	0,8	26,4	4,0		
			N5008 MG	●	●	○	●			5.0	±0,03	0,8	26,4	4,1		
			N6008 MG	●	●	○	●			6.0	±0,03	0,8	26,4	4,5		
			N7008 MG	○	●	○	●			7.0	±0,04	0,8	28,75	5,5		
			N8008 MG	●	●	○	●			8.0	±0,04	0,8	28,75	6,0		
			ML Low Feed CW=<4mm CW=>5mm	GCM N2002 ML		○	○	○	●			2.0	±0,03	0,2	21,1	3,6
				N3002 ML	●	●	○	●	○			3.0	±0,03	0,2	21,1	3,8
		N4004 ML		●	●	○	●	○			4.0	±0,03	0,4	26,4	4,0	
		N5004 ML		●	●	○	●	○			5.0	±0,03	0,4	26,4	4,1	
		N6004 ML		●	●	○	●	○			6.0	±0,03	0,4	26,4	4,5	
		N7004 ML		●	●	○	●	○			7.0	±0,04	0,4	28,75	5,5	
		N8004 ML		○	●	○	●	○			8.0	±0,04	0,4	28,75	6,0	
		Copying / Cut-Off			GG General Purpose	GCM N2002 GG	●		○	●			2.0	±0,03	0,2	21,1
			N3002 GG			●		○	●			3.0	±0,03	0,2	21,1	3,8
			N4002 GG			●		○	●			4.0	±0,03	0,2	26,4	4,0
N5002 GG	○					○	●			5.0	±0,03	0,2	26,4	4,1		
N6002 GG	○					○	●			6.0	±0,03	0,2	26,4	4,5		
N3004 GG	●					○	●			3.0	±0,03	0,4	21,1	3,8		
N4004 GG	●					○	●			4.0	±0,03	0,4	26,4	4,0		
N5004 GG	○					○	●			5.0	±0,03	0,4	26,4	4,1		
N6004 GG	○					○	●			6.0	±0,03	0,4	26,4	4,5		
N7004 GG	○					○	●			7.0	±0,04	0,4	28,75	5,5		
N8004 GG	●					○	●			8.0	±0,04	0,4	28,75	6,0		
GL Low Feed	GCM N2002 GL		●				○	●				2.0	±0,03	0,2	21,1	3,6
	N3002 GL		●			○	●				3.0	±0,03	0,2	21,1	3,8	
	N4002 GL		●			○	●				4.0	±0,03	0,2	26,4	4,0	
	N5002 GL		○			○	●				5.0	±0,03	0,2	26,4	4,1	
	N6002 GL		○			○	●				6.0	±0,03	0,2	26,4	4,5	
	N7004 GL		○			○	●				7.0	±0,04	0,4	28,75	5,5	
GF Low Cutting Force	GCM N125005 GF						●				1,25	±0,03	0,05	17,4	3,2	
	N150005 GF						●				1,5	±0,03	0,05	17,4	3,7	
	N2002 GF						●		○		2.0	±0,03	0,2	21,1	3,6	
	N3002 GF		●			●	●		○		3.0	±0,03	0,2	21,1	3,8	
	N4002 GF		●			●	●		○		4.0	±0,03	0,2	26,4	4,0	
	N5002 GF		○			●	●				5.0	±0,03	0,2	26,4	4,1	
	N6002 GF		○			●	●				6.0	±0,03	0,2	26,4	4,5	
	N7002 GF	○		○	●				7.0	±0,04	0,2	28,75	5,5			
	N8002 GF	○		○	●				8.0	±0,04	0,2	28,75	6,0			
	GCM N7004 GF	○		○	●				7.0	±0,04	0,4	28,75	5,5			
	N8004 GF	○		○	●				8.0	±0,04	0,4	28,75	6,0			
	Copying		RG General Purpose	GCM N3015 RG	●	●	○	●		○	3.0	±0,03	1,5	21,1	3,8	
N4020 RG				○	●	○	●		○	4.0	±0,03	2,0	26,4	4,0		
N5025 RG				●	●	○	●			5.0	±0,03	2,5	27,2	4,1		
N6030 RG				○	●	○	●			6.0	±0,03	3,0	27,5	4,5		
N7035 RG				○	●	○	●			7.0	±0,04	3,5	29,05	5,5		
N8040 RG				○	●	○	●			8.0	±0,04	4,0	29,25	6,0		
Face / Necking		RN General Purpose	GCM N2010 RN			○	○			2.0	±0,03	1,0	21,7	3,6		
			N3015 RN	○	○	○	○			3.0	±0,03	1,5	22,4	3,8		
			N4020 RN	○	○	○	○			4.0	±0,03	2,0	28,0	4,0		
			N5025 RN	○	○	○	○			5.0	±0,03	2,5	28,1	4,1		
			N6030 RN	○	○	○	○			6.0	±0,03	3,0	28,1	4,5		
			Non Ferrous Metals		GA General Purpose	GCG N2002 GA						○	2.0	±0,025	0,2	21,1
N3002 GA									○	3.0	±0,025	0,2	21,1	3,8		
N4004 GA									○	4.0	±0,025	0,4	26,4	4,0		
N5004 GA									○	5.0	±0,025	0,4	26,4	4,1		
N6004 GA									○	6.0	±0,025	0,4	26,4	4,5		

Application	Shape	Type	Cat. No.	Coated Carbide								PSI	Dimensions (mm)					
				AC830P		AC520U		AC530U		AC1030U			Cutting Width	Tolerance	RE	L	S	
				R	L	R	L	R	L	R	L							
Cut-Off		CG General Purpose	GCM R/L2002 CG 05	○	○	○	○	●	●			5°	2.0	±0,03	0,2	21,1	3,6	
			R/L3002 CG 05	●	○	○	○	●	●				5°	3.0	±0,03	0,2	21,3	3,8
			R/L4002 CG 05	○	○	○	○	●	●				5°	4.0	±0,04	0,2	26,7	4,0
Cut-Off		CF <small>New</small> Low Cutting Force	GCM R/L20003 CF 10					●	●			10°	2.0	±0,08	0,03	22,4	3,6	
			R/L30003 CF 10					●	●			10°	3.0	±0,08	0,03	22,4	3,8	
			R/L20003 CF 15					●	●			15°	2.0	±0,08	0,03	22,4	3,6	
			R/L30003 CF 15					●	●			15°	3.0	±0,08	0,03	22,4	3,8	


Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDL-JE Type


Holder with Internal Coolant



External Deep Grooving and Cut-Off



Internal Coolant

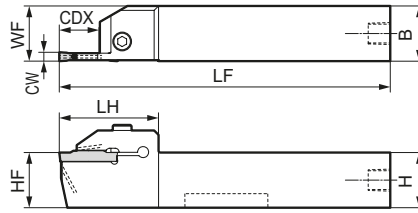

Above figures show right hand tools.

Spare Parts

Cap Screw	Plug and Sealing	Grub Screw*	Spanner
BX0520	6,0	XP02-E	BT0505-E
			LH040

■ Holders

Cat. No.	Stock		Dimensions (mm)						Grooving Width (mm)	Max. Groov. Depth (mm)	Max. Cutt-Off Dia (mm)	Applicable Insert
	R	L	H	B	LF	WF	HF	LH				
GNDL R/L 2020 X 210 JE	●	●	20	20	110	20	20	44,5	2,00	20	20	GC □ 2000-□□
GNDL R/L 2020 X 312 JE	●	●	20	20	110	20	20	44,5	3,00	20	24	GC □ 3000-□□
GNDL R/L 2020 X 418 JE	●	●	20	20	115	20	20	50,0	4,00	25	36	GC □ 4000-□□
GNDL R/L 2020 X 518 JE	●	●	20	20	115	20	20	50,0	5,00	25	36	GC □ N5000-□□
GNDL R/L 2020 X 618 JE	●	●	20	20	115	20	20	50,0	6,00	25	36	GC □ N6000-□□
GNDL R/L 2525 X 210 JE	●	●	25	25	110	25	25	44,5	2,00	20	20	GC □ 2000-□□
GNDL R/L 2525 X 312 JE	●	●	25	25	110	25	25	44,5	3,00	20	24	GC □ 3000-□□
GNDL R/L 2525 X 418 JE	●	●	25	25	115	25	25	50,0	4,00	25	36	GC □ 4000-□□
GNDL R/L 2525 X 518 JE	●	●	25	25	115	25	25	50,0	5,00	25	36	GC □ N5000-□□
GNDL R/L 2525 X 618 JE	●	●	25	25	115	25	25	50,0	6,00	25	36	GC □ N6000-□□

Select holders and inserts with the same grooving width (CW).

*Grub screws are sold separately (M5x5)

Fig. 1




Fig. 1




Fig. 2





Fig. 3



■ Parts (Hose)

Cat. No.	Stock	L (mm)	Screw Standard	Screw Standard	Fig.
J-HOSE-G1/8-G1/8-200-E	●	200	G1/8	G1/8	1
J-HOSE-G1/8-G1/8-300-E	●	300	G1/8	G1/8	1


Hoses are sold separately.

■ Parts (Connector)

Cat. No.	Stock	Screw Standard	Screw Standard	Fig.
J-G1/8-G1/8-00-E	●	G1/8	G1/8	1
J-G1/8-G1/8F-90-E	●	G1/8	G1/8	2
J-G1/8-G1/8-90-E	●	G1/8	G1/8	3

Connectors are sold separately.

■ Piping Method for Hoses and Connectors

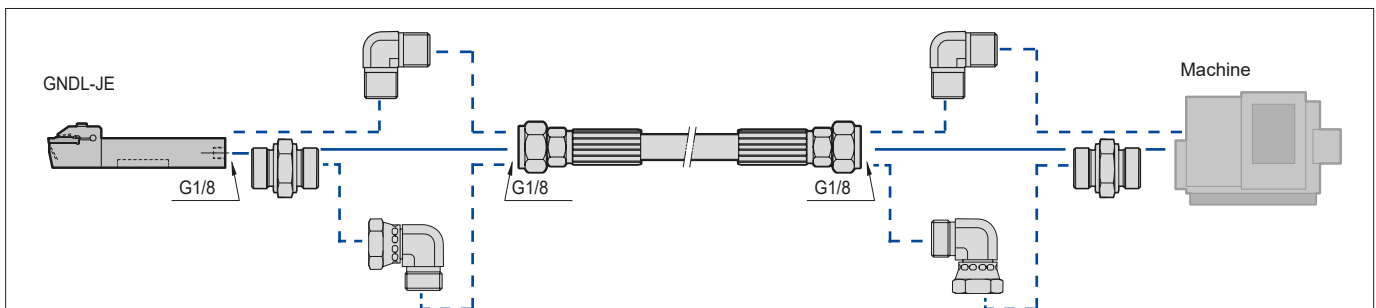

Apply sealant such as commercial sealing tape to the piping connection parts.

GNDL-JE type holders have a plug (XP02-E) mounted on the holder back end at shipping. (see fig.1)

When piping from the holder back end, mount a grub screw (BT0505-E) on the bottom of the holder for use. (see fig. 2)

Fig. 1 Piping from bottom.





Fig. 2 Piping from back end.



Grooving Tool Holders GNDL-JE Type

Inserts for GNDL-JE



Application	Shape	Type	Cat. No.	Coated Carbide				Cermet	Carbide	Dimensions (mm)				
				AC830P	AC425K	AC520U	AC530U	T2500A	H10	CW		RE	L	S
										Cutting Width	Tolerance			
Grooving / Turning		MG General Purpose	GCM N3004 MG	●	●	○	●			3,0	±0,03	0,4	21,1	3,8
			N4008 MG	●	●	○	●			4,0	±0,03	0,8	26,4	4,0
			N5008 MG	●	●	○	●			5,0	±0,03	0,8	26,4	4,1
			N6008 MG	●	●	○	●			6,0	±0,03	0,8	26,4	4,5
		ML CW=<4mm CW=>5mm Low Feed	GCM N2002 ML	●	●	○	●			2,0	±0,03	0,2	21,1	3,6
			N3002 ML	●	●	○	●	○		3,0	±0,03	0,2	21,1	3,8
			N4004 ML	●	●	○	●	○		4,0	±0,03	0,4	26,4	4,0
			N5004 ML	●	●	○	●			5,0	±0,03	0,4	26,4	4,1
			N6004 ML	●	●	○	●			6,0	±0,03	0,4	26,4	4,5
			Copying / Cut-Off		GG General Purpose	GCM N2002 GG	●		●	●			2,0	±0,03
N3002 GG	●					○	●			3,0	±0,03	0,2	21,1	3,8
N4002 GG	●					○	●			4,0	±0,03	0,2	26,4	4,0
N5002 GG	○					○	●			5,0	±0,03	0,2	26,4	4,1
N6002 GG	○					○	●			6,0	±0,03	0,2	26,4	4,5
GCM N3004 GG	●					○	●			3,0	±0,03	0,4	21,1	3,8
GL Low Feed	N4004 GG	●				○	●			4,0	±0,03	0,4	26,4	4,0
	N5004 GG	○				○	●			5,0	±0,03	0,4	26,4	4,1
	N6004 GG	○				○	●			6,0	±0,03	0,4	26,4	4,5
	GCM N2002 GL	●				○	●			2,0	±0,03	0,2	21,1	3,6
	N3002 GL	●				○	●			3,0	±0,03	0,2	21,1	3,8
	N4002 GL	●				○	●			4,0	±0,03	0,2	26,4	4,0
GF Low Cutting Force	N5002 GL	○				○	●			5,0	±0,03	0,2	26,4	4,1
	N6002 GL	○				○	●			6,0	±0,03	0,2	26,4	4,5
	GCM N2002 GF						●	○		2,0	±0,03	0,2	21,1	3,6
	N3002 GF	●				●	●	○		3,0	±0,03	0,2	21,1	3,8
	N4002 GF	●				●	●	○		4,0	±0,03	0,2	26,4	4,0
	N5002 GF	○				●	●			5,0	±0,03	0,2	26,4	4,1
RG General Purpose	N6002 GF	○		●	●			6,0	±0,03	0,2	26,4	4,5		
	GCM N3015 RG	●	●	○	●	○		3,0	±0,03	1,5	21,1	3,8		
	N4020 RG	○	●	○	●	○		4,0	±0,03	2,0	26,4	4,0		
	N5025 RG	●	●	○	●			5,0	±0,03	2,5	27,2	4,1		
RN General Purpose	N6030 RG	○	●	○	●			6,0	±0,03	3,0	27,5	4,5		
	GCM N2010 RN			○	○			2,0	±0,03	1,0	21,7	3,6		
	N3015 RN	○	○	○	○			3,0	±0,03	1,5	22,4	3,8		
	N4020 RN	○	○	○	○			4,0	±0,03	2,0	28,0	4,0		
GA General Purpose	N5025 RN	○	○	○	○			5,0	±0,03	2,5	28,1	4,1		
	N6030 RN	○	○	○	○			6,0	±0,03	3,0	28,1	4,5		
	GCM N2002 GA						○	2,0	±0,025	0,2	21,1	3,6		
	N3002 GA						○	3,0	±0,025	0,2	21,1	3,8		
Non Ferrous Metals		GA General Purpose	N4004 GA						○	4,0	±0,025	0,4	26,4	4,0
			N5004 GA						○	5,0	±0,025	0,4	26,4	4,1
			N6004 GA						○	6,0	±0,025	0,4	26,4	4,5

Application	Shape	Type	Cat. No.	Coated Carbide								PSI	Dimensions (mm)					
				AC830P		AC520U		AC530U		AC1030U			CW	RE	L	S		
				R	L	R	L	R	L	R	L						Cutting Width	Tolerance
Cut-Off	Figures show right hand tools. 	CG General Purpose	GCM R/L2002 CG 05	○	○	○	○	●	●			5°	2,0	±0,03	0,2	21,1	3,6	
			R/L3002 CG 05	●	○	○	○	●	●				5°	3,0	±0,03	0,2	21,3	3,8
			R/L4002 CG 05	○	○	○	○	●	●				5°	4,0	±0,03	0,2	26,7	4,0
Cut-Off		CF New Low Cutting Force	GCM R/L20003 CF 10							●	●	10°	2,0	±0,08	0,03	22,4	3,6	
			R/L30003 CF 10							●	●	10°	3,0	±0,08	0,03	22,4	3,8	
			R/L20003 CF 15							●	●	15°	2,0	±0,08	0,03	22,4	3,6	
			R/L30003 CF 15							●	●	15°	3,0	±0,08	0,03	22,4	3,8	

Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDI Type


Internal Grooving

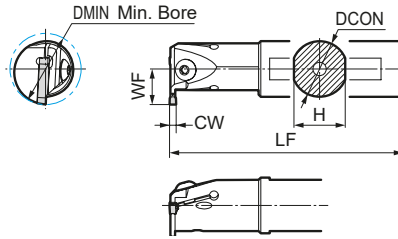

Use for multi-purpose or profiling insert for turning (wide grooves).

Above figures show right hand tools.

Spare Parts



Holders

Cat. No.	Stock		Dimensions (mm)				Min. Bore (mm)	Groov. Width (mm)	Max. Groov. Depth (mm)	Applicable Insert	Cap Screw	N·m	Spanner
	R	L	DCON	H	LF	WF							
GNDI R/L 2532 T 206	●	●	25	23	200	16	32	2,0	6	GCM N2000-□□	BH0516	5,0	LH030
GNDI R/L 3240 T 210	●	●	32	30	250	26	40	2,0	10	GCM N2000-□□	BH0616	6,0	LH040
GNDI R/L 2532 T 306	●	●	25	23	200	16	32	3,0	6	GCM N3000-□□	BH0516	5,0	LH030
GNDI R/L 3240 T 310	●	●	32	30	250	26	40	3,0	10	GCM N3000-□□	BH0616	6,0	LH040
GNDI R/L 4050 T 311	●	●	40	38	300	31	50	3,0	11	GCM N3000-□□	BH0616	6,0	LH040
GNDI R/L 2532 T 406	●	●	25	23	200	19	32	4,0	6	GCM N4000-□□	BH0516	5,0	LH030
GNDI R/L 3240 T 410	●	●	32	30	250	26	40	4,0	10	GCM N4000-□□	BH0616	6,0	LH040
GNDI R/L 4050 T 411	●	●	40	38	300	31	50	4,0	11	GCM N4000-□□	BH0616	6,0	LH040
GNDI R/L 2532 T 506	●	●	25	23	200	19	32	5,0	6	GCM N5000-□□	BH0516	5,0	LH030
GNDI R/L 3240 T 510	●	●	32	30	250	26	40	5,0	10	GCM N5000-□□	BH0616	6,0	LH040
GNDI R/L 4050 T 511	●	●	40	38	300	31	50	5,0	11	GCM N5000-□□	BH0616	6,0	LH040
GNDI R/L 4050 T 611	●	●	40	38	300	31	50	6,0	11	GCM N6000-□□	BH0616	6,0	LH040

Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDI Type



■ GNDI Inserts

Application	Shape	Type	Cat. No.	Coated Carbide				Cermet	Carbide	Dimensions (mm)				
				AC830P	AC425K	AC520U	AC530U	T2500A	H10	CW		RE	L	S
										Cutting Width	Tolerance			
Grooving / Turning		MG General Purpose	GCM N3004 MG	●	●	○	●			3,0	±0,03	0,4	21,1	3,8
			N4008 MG	●	●	○	●			4,0	±0,03	0,8	26,4	4,0
			N5008 MG	●	●	○	●			5,0	±0,03	0,8	26,4	4,1
			N6008 MG	●	●	○	●			6,0	±0,03	0,8	26,4	4,5
		ML CW=<4mm CW=>5mm Low Feed	GCM N2002 ML	●	●	○	●			2,0	±0,03	0,2	21,1	3,6
			N3002 ML	●	●	○	●	○		3,0	±0,03	0,2	21,1	3,8
			N4004 ML	●	●	○	●	○		4,0	±0,03	0,4	26,4	4,0
			N5004 ML	●	●	○	●			5,0	±0,03	0,4	26,4	4,1
			N6004 ML	●	●	○	●			6,0	±0,03	0,4	26,4	4,5
			Copying / Cut-Off		GG General Purpose	GCM N2002 GG	●		●	●			2,0	±0,03
N3002 GG	●					○	●			3,0	±0,03	0,2	21,1	3,8
N4002 GG	●					○	●			4,0	±0,03	0,2	26,4	4,0
N5002 GG	○					○	●			5,0	±0,03	0,2	26,4	4,1
N6002 GG	○					○	●			6,0	±0,03	0,2	26,4	4,5
GCM N3004 GG	●					○	●			3,0	±0,03	0,4	21,1	3,8
GL Low Feed	N4004 GG	●				○	●			4,0	±0,03	0,4	26,4	4,0
	N5004 GG	○				○	●			5,0	±0,03	0,4	26,4	4,1
	N6004 GG	○				○	●			6,0	±0,03	0,4	26,4	4,5
	GCM N2002 GL	●				○	●			2,0	±0,03	0,2	21,1	3,6
	N3002 GL	●				○	●			3,0	±0,03	0,2	21,1	3,8
	N4002 GL	●				○	●			4,0	±0,03	0,2	26,4	4,0
GF Low Cutting Force	N5002 GL	○				○	●			5,0	±0,03	0,2	26,4	4,1
	N6002 GL	○				○	●			6,0	±0,03	0,2	26,4	4,5
	GCM N2002 GF						●	○		2,0	±0,03	0,2	21,1	3,6
	N3002 GF	●				●	●	○		3,0	±0,03	0,2	21,1	3,8
	N4002 GF	●				●	●	○		4,0	±0,03	0,2	26,4	4,0
	N5002 GF	○				●	●			5,0	±0,03	0,2	26,4	4,1
Copying		RG General Purpose	GCM N3015 RG	●	●	○	●	○		3,0	±0,03	1,5	21,1	3,8
			N4020 RG	○	●	○	●	○		4,0	±0,03	2,0	26,4	4,0
			N5025 RG	●	●	○	●			5,0	±0,03	2,5	27,2	4,1
			N6030 RG	○	●	○	●			6,0	±0,03	3,0	27,5	4,5
Face / Necking		RN General Purpose	GCM N2010 RN			○	○			2,0	±0,03	1,0	21,7	3,6
			N3015 RN	○	○	○	○			3,0	±0,03	1,5	22,4	3,8
			N4020 RN	○	○	○	○			4,0	±0,03	2,0	28,0	4,0
			N5025 RN	○	○	○	○			5,0	±0,03	2,5	28,1	4,1
			N6030 RN	○	○	○	○			6,0	±0,03	3,0	28,1	4,5
Non Ferrous Metals		GA General Purpose	GCG N2002 GA						○	2,0	±0,025	0,2	21,1	3,6
			N3002 GA						○	3,0	±0,025	0,2	21,1	3,8
			N4004 GA						○	4,0	±0,025	0,4	26,4	4,0
			N5004 GA						○	5,0	±0,025	0,4	26,4	4,1
			N6004 GA						○	6,0	±0,025	0,4	26,4	4,5

Select holders and inserts with the same grooving width (CW).


Grooving Tool Holders GNDIS Type

Internal Grooving

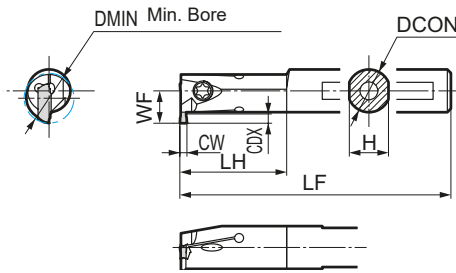

Above figures show right hand tools.

Spare Parts



Holdings

Cat. No.	Stock		Dimensions (mm)					Min. Bore (mm)	Groov. Width (mm)	Max. Groov. Depth (mm)	Applicable Insert	Cap Screw	Spanner
	R	L	DCON	H	LF	LH	WF						
GNDIS R/L 1214 T 1526	○	○	12	11	150	30	9,0	14	1,5	2,6	GXM N150005S GF		
GNDIS R/L 1214 T 1536	○	○	12	11	150	30	10,0	14	1,5	3,6	GXM N150005S GF	BFTX0409N	3,4 LT15
GNDIS R/L 1616 T 1536	○	○	16	15	160	35	11,5	16	1,5	3,6	GXM N150005S GF		
GNDIS R/L 1620 T 1546	○	○	16	15	160	40	14,5	20	1,5	4,6	GXM N150005S GF		
GNDIS R/L 2025 T 1566	○	○	20	19	180	40	19,0	25	1,5	6,6	GXM N150005S GF	BFTX0511N	5,0 LT20
GNDIS R/L 1214 T 2026	○	○	12	11	150	30	9,0	14	2,0	2,6	GXM N2002S-□□		
GNDIS R/L 1214 T 2036	○	○	12	11	150	30	10,0	14	2,0	3,6	GXM N2002S-□□	BFTX0409N	3,4 LT15
GNDIS R/L 1616 T 2036	○	○	16	15	160	35	11,5	16	2,0	3,6	GXM N2002S-□□		
GNDIS R/L 1620 T 2046	○	○	16	15	160	40	14,5	20	2,0	4,6	GXM N2002S-□□		
GNDIS R/L 2025 T 2066	○	○	20	19	180	40	19,0	25	2,0	6,6	GXM N2002S-□□	BFTX0511N	5,0 LT20
GNDIS R/L 1214 T 3026	○	○	12	11	150	30	9,0	14	3,0	2,6	GXM N3002S-□□		
GNDIS R/L 1214 T 3036	○	○	12	11	150	30	10,0	14	3,0	3,6	GXM N3002S-□□	BFTX0409N	3,4 LT15
GNDIS R/L 1616 T 3036	○	○	16	15	160	35	11,5	16	3,0	3,6	GXM N3002S-□□		
GNDIS R/L 1620 T 3046	○	○	16	15	160	40	14,5	20	3,0	4,6	GXM N3002S-□□		
GNDIS R/L 2025 T 3066	○	○	20	19	180	40	19,0	25	3,0	6,6	GXM N3002S-□□	BFTX0511N	5,0 LT20

Select holders and inserts with the same grooving width (CW).

Only GXM inserts can be used.

GNDIS Inserts




Application	Shape	Type	Cat. No.	Coated Carbide		Dimensions (mm)				
				AC520U	AC1030U	CW		RE	L	S
						Cutting Width	Tolerance			
Grooving / Turning		ML Low Feed	GXM N2002S ML	○	○	2,0	±0,03	0,2	11,1	3,1
			GXM N3002S ML	○	○	3,0	±0,03	0,2	11,1	3,1
Grooving		GF Low Cutting Force	GXM N150005S GF		○	1,5	±0,03	0,05	11,1	3,1
			GXM N2002S GF	○	○	2,0	±0,03	0,2	11,1	3,1
			GXM N3002S GF	○	○	3,0	±0,03	0,2	11,1	3,1

Select holders and inserts with the same grooving width (CW).

GCM and GCG inserts are not compatible.

Grooving Tool Holders GNDN Type

Necking

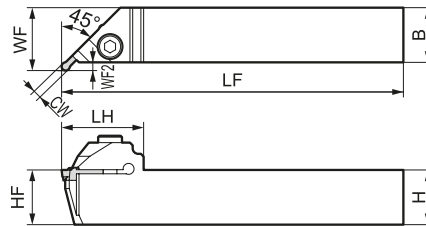

Above figures show right hand tools.

■ Spare Parts



■ Holders

Cat. No.	Stock		Dimensions (mm)							Min. Bore (mm)	Groov. Width (mm)	APMX	APMX2	Applicable Insert	Cap Screw	Spanner	
	R	L	H	B	LF	WF	HF	LH	WF2								DMIN
GNDN R/L2020 K 215-020	○	○	20	20	125	23	20	30	3,0	20	2,0	1,5	0,64	GCM N2010 RN	BX0520	5,0	LH040
GNDN R/L2020 K 320-020	○	○	20	20	125	23	20	30	3,0	20	3,0	2,0	0,79	GCM N3015 RN			
GNDN R/L2020 K 430-030	○	○	20	20	125	24	20	32	4,0	30	4,0	3,0	1,29	GCM N4020 RN			
GNDN R/L2020 K 535-030	○	○	20	20	125	25	20	35	5,0	30	5,0	3,5	1,44	GCM N5025 RN			
GNDN R/L2020 K 640-030	○	○	20	20	125	25	20	35	5,0	30	6,0	4,0	1,59	GCM N6030 RN			
GNDN R/L2525 M 215-020	○	○	25	25	150	28	25	30	3,0	20	2,0	1,5	0,64	GCM N2010 RN	BX0520	5,0	LH040
GNDN R/L2525 M 320-020	○	○	25	25	150	28	25	30	3,0	20	3,0	2,0	0,79	GCM N3015 RN			
GNDN R/L2525 M 430-030	○	○	25	25	150	29	25	32	4,0	30	4,0	3,0	1,29	GCM N4020 RN			
GNDN R/L2525 M 535-030	○	○	25	25	150	30	25	35	5,0	30	5,0	3,5	1,44	GCM N5025 RN			
GNDN R/L2525 M 640-030	○	○	25	25	150	30	25	35	5,0	30	6,0	4,0	1,59	GCM N6030 RN			

Select holders and inserts with the same grooving width (CW).




■ GNDN Inserts

Application	Shape	Type	Cat. No.	Coated Carbide				Dimensions (mm)				
				AC830P	AC425K	AC520U	AC530U	CW		RE	L	S
								Cutting Width	Tolerance			
Face / Necking		RN General Purpose	GCM N2010 RN	-	-	○	○	2,0	±0,03	1,0	21,7	3,6
			N3015 RN	○	○	○	○	3,0	±0,03	1,5	22,4	3,8
			N4020 RN	○	○	○	○	4,0	±0,03	2,0	28,0	4,0
			N5025 RN	○	○	○	○	5,0	±0,03	2,5	28,1	4,1
			N6030 RN	○	○	○	○	6,0	±0,03	3,0	28,1	4,5

Select holders and inserts with the same grooving width (CW).

Grooving Tool Holders GNDF Type

Face Grooving

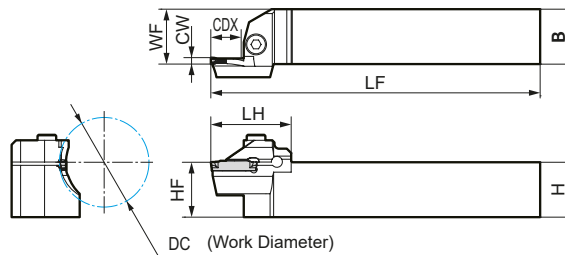


Work diameters in the stock indicate external diameters of face grooving.

Use for multi-purpose or profiling insert for turning (wide grooves).

Above figures show right hand tools.

■ Holders

■ Spare Parts



Cat. No.	Stock		Dimensions (mm)						Work Dia. (mm)	Groov. Width (mm)	Max. Cut-off Dia. (mm)	Applicable Insert	Cap Screw	N·m	Spanner
	R	L	H	B	LF	WF	HF	LH	DC	CW	CDX				
GNDF R/L 2020 K 312-035	●	●	20	20	125	20	20	35,6	35-45	3,0	12	GCM N30○-□□	BX0520	5,0	LH040
GNDF R/L 2020 K 312-040	●	●	20	20	125	20	20	35,6	40-55	3,0	12				
GNDF R/L 2020 K 318-050	●	●	20	20	125	20	20	41,6	50-70	3,0	18				
GNDF R/L 2020 K 318-065	●	●	20	20	125	20	20	41,6	65-100	3,0	18				
GNDF R/L 2020 K 318-090	●	●	20	20	125	20	20	41,6	90-150	3,0	18				
GNDF R/L 2020 K 318-140	●	●	20	20	125	20	20	41,6	140-200	3,0	18				
GNDF R/L 2020 K 318-180	●	●	20	20	125	20	20	41,6	180-300	3,0	18				
GNDF R/L 2020 K 418-040	●	●	20	20	125	20	20	41,6	40-55	4,0	18	GCM N40○-□□	BX0520	5,0	LH040
GNDF R/L 2020 K 423-050	●	●	20	20	125	20	20	46,6	50-70	4,0	23				
GNDF R/L 2020 K 423-065	●	●	20	20	125	20	20	46,6	65-90	4,0	23				
GNDF R/L 2020 K 423-085	●	●	20	20	125	20	20	46,6	85-130	4,0	23				
GNDF R/L 2020 K 423-125	●	●	20	20	125	20	20	46,6	125-200	4,0	23				
GNDF R/L 2020 K 423-180	●	●	20	20	125	20	20	46,6	180-300	4,0	23				
GNDF R/L 2020 K 423-280	●	●	20	20	125	20	20	46,6	280-1000	4,0	23				
GNDF R/L 2020 K 523-050	●	●	20	20	125	20	20	46,6	50-70	5,0	23	GCM N50○-□□	BX0520	5,0	LH040
GNDF R/L 2020 K 523-065	●	●	20	20	125	20	20	46,6	65-90	5,0	23				
GNDF R/L 2020 K 523-085	●	●	20	20	125	20	20	46,6	85-130	5,0	23				
GNDF R/L 2020 K 523-125	●	●	20	20	125	20	20	46,6	125-200	5,0	23				
GNDF R/L 2020 K 523-180	●	●	20	20	125	20	20	46,6	180-300	5,0	23				
GNDF R/L 2020 K 523-280	●	●	20	20	125	20	20	46,6	280-1000	5,0	23				
GNDF R/L 2020 K 623-050	●	●	20	20	125	20	20	46,6	50-75	6,0	23	GCM N60○-□□	BX0520	5,0	LH040
GNDF R/L 2020 K 623-070	●	●	20	20	125	20	20	46,6	70-110	6,0	23				
GNDF R/L 2020 K 623-100	●	●	20	20	125	20	20	46,6	100-200	6,0	23				
GNDF R/L 2020 K 623-180	●	●	20	20	125	20	20	46,6	180-300	6,0	23				
GNDF R/L 2020 K 623-280	●	●	20	20	125	20	20	46,6	280-1000	6,0	23				
GNDF R/L 2525 M 312-035	●	●	25	25	150	25	25	35,6	35-45	3,0	12				
GNDF R/L 2525 M 312-040	●	●	25	25	150	25	25	35,6	40-55	3,0	12				
GNDF R/L 2525 M 318-050	●	●	25	25	150	25	25	41,6	50-70	3,0	18				
GNDF R/L 2525 M 318-065	●	●	25	25	150	25	25	41,6	65-100	3,0	18				
GNDF R/L 2525 M 318-090	●	●	25	25	150	25	25	41,6	90-150	3,0	18				
GNDF R/L 2525 M 318-140	●	●	25	25	150	25	25	41,6	140-200	3,0	18				
GNDF R/L 2525 M 318-180	●	●	25	25	150	25	25	41,6	180-300	3,0	18				
GNDF R/L 2525 M 418-040	●	●	25	25	150	25	25	41,6	40-55	4,0	18	GCM N40○-□□	BX0520	5,0	LH040
GNDF R/L 2525 M 423-050	●	●	25	25	150	25	25	46,6	50-70	4,0	23				
GNDF R/L 2525 M 423-065	●	●	25	25	150	25	25	46,6	65-90	4,0	23				
GNDF R/L 2525 M 423-085	●	●	25	25	150	25	25	46,6	85-130	4,0	23				
GNDF R/L 2525 M 423-125	●	●	25	25	150	25	25	46,6	125-200	4,0	23				
GNDF R/L 2525 M 423-180	●	●	25	25	150	25	25	46,6	180-300	4,0	23				
GNDF R/L 2525 M 423-280	●	●	25	25	150	25	25	46,6	280-1000	4,0	23				
GNDF R/L 2525 M 523-050	●	●	25	25	150	25	25	46,6	50-70	5,0	23	GCM N50○-□□	BX0520	5,0	LH040
GNDF R/L 2525 M 523-065	●	●	25	25	150	25	25	46,6	65-90	5,0	23				
GNDF R/L 2525 M 523-085	●	●	25	25	150	25	25	46,6	85-130	5,0	23				
GNDF R/L 2525 M 523-125	●	●	25	25	150	25	25	46,6	125-200	5,0	23				
GNDF R/L 2525 M 523-180	●	●	25	25	150	25	25	46,6	180-300	5,0	23				
GNDF R/L 2525 M 523-280	●	●	25	25	150	25	25	46,6	280-1000	5,0	23				
GNDF R/L 2525 M 623-050	●	●	25	25	150	25	25	46,6	50-75	6,0	23	GCM N60○-□□	BX0520	5,0	LH040
GNDF R/L 2525 M 623-070	●	●	25	25	150	25	25	46,6	70-110	6,0	23				
GNDF R/L 2525 M 623-100	●	●	25	25	150	25	25	46,6	100-200	6,0	23				
GNDF R/L 2525 M 623-180	●	●	25	25	150	25	25	46,6	180-300	6,0	23				
GNDF R/L 2525 M 623-280	●	●	25	25	150	25	25	46,6	280-1000	6,0	23				

Select holders and inserts with the same grooving width (CW).

● = Euro stock
○ = Japan stock

Recommended Tightening Torque (N·m)

Grooving Tool Holders GNDF Type




Inserts for GNDF

Application	Shape	Type	Cat. No.	Coated Carbide					Cermet	Carbide	Dimensions (mm)					
				AC830P	AC425K	AC520U	AC530U	T2500A			H10	CW		RE	L	S
												Cutting Width	Tolerance			
Grooving / Turning		MG General Purpose	GCM N3004 MG	●	●	○	●			3,0	±0,03	0,4	21,1	3,8		
			N4008 MG	●	●	○	●			4,0	±0,03	0,8	26,4	4,0		
			N5008 MG	●	●	○	●			5,0	±0,03	0,8	26,4	4,1		
		ML CW=<4mm CW=>5mm Low Feed	GCM N3002 ML	●	●	○	●	○			3,0	±0,03	0,2	21,1	3,8	
			N4004 ML	●	●	○	●	○			4,0	±0,03	0,4	26,4	4,0	
			N5004 ML	●	●	○	●	○			5,0	±0,03	0,4	26,4	4,1	
Copying / Cut-Off		GG General Purpose	GCM N3002 GG	●		○	●			3,0	±0,03	0,2	21,1	3,8		
			N4002 GG	●		○	●			4,0	±0,03	0,2	26,4	4,0		
			N5002 GG	○		○	●			5,0	±0,03	0,2	26,4	4,1		
			N6002 GG	○		○	●			6,0	±0,03	0,2	26,4	4,5		
			GCM N3004 GG	●		○	●			3,0	±0,03	0,4	21,1	3,8		
			N4004 GG	●		○	●			4,0	±0,03	0,4	26,4	4,0		
		GL Low Feed	GCM N3002 GL	●		○	●				3,0	±0,03	0,2	21,1	3,8	
			N4002 GL	●		○	●				4,0	±0,03	0,2	26,4	4,0	
			N5002 GL	○		○	●				5,0	±0,03	0,2	26,4	4,1	
		GF Low Cutting Force	GCM N3002 GF	●		●	●	○			3,0	±0,03	0,2	21,1	3,8	
			N4002 GF	●		●	●	○			4,0	±0,03	0,2	26,4	4,0	
			N5002 GF	○		●	●	○			5,0	±0,03	0,2	26,4	4,1	
RN General Purpose	GCM N3015 RN	○	○	○	○				3,0	±0,03	1,5	22,4	3,8			
	N4020 RN	○	○	○	○				4,0	±0,03	2,0	28,0	4,0			
	N5025 RN	○	○	○	○				5,0	±0,03	2,5	28,1	4,1			
	N6030 RN	○	○	○	○				6,0	±0,03	3,0	28,1	4,5			
Non Ferrous Metals		GA General Purpose	GCG N3002 GA						○	3,0	±0,025	0,2	21,1	3,8		
			N4004 GA						○	4,0	±0,025	0,4	26,4	4,0		
			N5004 GA						○	5,0	±0,025	0,4	26,4	4,1		
			N6004 GA						○	6,0	±0,025	0,4	26,4	4,5		

Select holders and inserts with the same grooving width (CW).


Grooving Tool Holders GNDFS Type

Face Grooving L-Styled (Non-Adjustable Type)

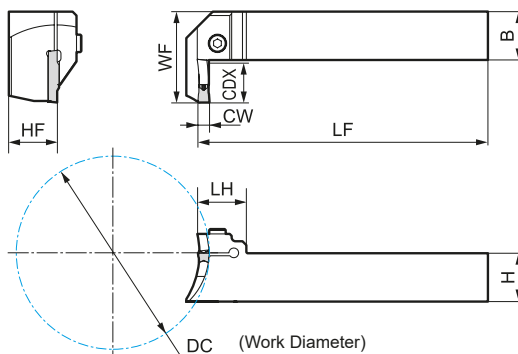

Use the multi-purpose copying inserts for turning (wide grooves).

Spare Parts



■ Holders

Above figures show right hand tools.

Cat. No.	Stock		Dimensions (mm)						Work Dia. (mm)	Min. Bore Ø Inner (mm)	Groov. Width (mm)	Max. Groov. Depth (mm)	Applicable Insert	Cap Screw	Spanner	
	R	L	H	B	LF	WF	HF	LH								DC
GNDFS R/L2525M 620 070			25	25	150	47	25	25	70-100	58	6,0	20	GC□ N60□□-□□	BX0520	5,0	LH040
GNDFS R/L2525M 620 100			25	25	150	47	25	25	100-200	88	6,0	20				
GNDFS R/L2525M 620 180			25	25	150	47	25	25	180-300	168	6,0	20				
GNDFS R/L2525M 620 280			25	25	150	47	25	25	280-1000	268	6,0	20				
GNDFS R/L2525M 620 450			25	25	150	47	25	25	>450	438	6,0	20				
GNDFS R/L3232P 620 070			32	32	170	54	32	25	70-100	58	6,0	20	GC□ N60□□-□□	BX0620	6,0	LH050
GNDFS R/L3232P 620 100			32	32	170	54	32	25	100-200	88	6,0	20				
GNDFS R/L3232P 620 180			32	32	170	54	32	25	180-300	168	6,0	20				
GNDFS R/L3232P 620 280			32	32	170	54	32	25	280-1000	268	6,0	20				
GNDFS R/L3232P 620 450			32	32	170	54	32	25	>450	438	6,0	20				
GNDFS R/L2525M 820 070			25	25	150	47	25	30	70-100	54	8,0	20	GCM N80□□-□□	BX0620	6,0	LH050
GNDFS R/L2525M 820 100			25	25	150	47	25	30	100-200	84	8,0	20				
GNDFS R/L2525M 820 180			25	25	150	47	25	30	180-300	164	8,0	20				
GNDFS R/L2525M 820 280			25	25	150	47	25	30	280-1000	264	8,0	20				
GNDFS R/L2525M 820 450			25	25	150	47	25	30	>450	434	8,0	20				
GNDFS R/L3232P 820 070			32	32	170	54	32	30	70-100	54	8,0	20	GCM N80□□-□□	BX0620	6,0	LH050
GNDFS R/L3232P 820 100			32	32	170	54	32	30	100-200	84	8,0	20				
GNDFS R/L3232P 820 180			32	32	170	54	32	30	180-300	164	8,0	20				
GNDFS R/L3232P 820 280			32	32	170	54	32	30	280-1000	264	8,0	20				
GNDFS R/L3232P 820 450			32	32	170	54	32	30	>450	434	8,0	20				


Select holders and inserts with the same grooving width (CW).


■ Inserts for GNDFS


Application	Shape	Type	Cat. No.	Coated Carbide				Cermet Carbide		Dimensions (mm)					
				AC830P	AC425K	AC520U	AC530U	T2500A	H10	CW		RE	L	S	
										Cutting Width	Tolerance				
Grooving / Turning		MG General Purpose	GCM N6008 MG	●	●	○	●			6,0	±0,03	0,8	26,4	4,5	
			N8008 MG	●	●	○	●			8,0	±0,04	0,8	28,75	6,0	
		ML Low Feed	GCM N6004 ML	●	●	○	●				6,0	±0,03	0,4	26,4	4,5
			N8004 ML	○	●	○	●				8,0	±0,04	0,4	28,75	6,0
Copying / Cut-Off		GG General Purpose	GCM N6002 GG	○		○	●			6,0	±0,03	0,2	26,4	4,5	
			N6004 GG	○		○	●			6,0	±0,03	0,4	26,4	4,5	
		GL Low Feed	GCM N6002 GL	○		○	●				8,0	±0,04	0,4	28,75	6,0
			N8004 GL	○		○	●				6,0	±0,03	0,2	26,4	4,5
		GF Low Cutting Force	GCM N6002 GF	○		○	●				8,0	±0,04	0,2	28,75	6,0
			N8002 GF	○		○	●				8,0	±0,04	0,4	28,75	6,0
Face / Necking		RN General Purpose	GCM N6030 RN	○	○	○	○			6,0	±0,03	3,0	28,1	4,5	
Non Ferrous Metals		GA General Purpose	GCG N6004 GA						○	6,0	±0,025	0,4	26,4	4,5	


Select holders and inserts with the same grooving width (CW).


Application Examples


20CrMo5, Automotive Part, Face Profiling	
	Target: - Higher rigidity - Vibration reduction - Chip control - Wear resistance performance
	Holder: GND F R2525M 423-125 Insert: GCM N4020 RG Grooving width: 4 mm Cutting conditions: $v_c = 200$ m/min $f = 0,14$ mm/rev wet
Stable machining free of vibration! Excellent chip control using the GND type.	

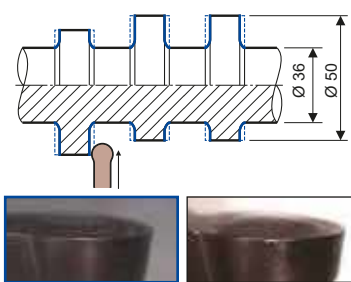C53, Cam Shaft Grooving / Finishing (Contin. to Heavy Interrupted)	
	Target: - Higher rigidity - Vibration reduction - Chip control - Fracture resistance
	Holder: GND M L2525M 618 Insert: GCM N6030 RG Grooving width: 6 mm Cutting conditions: $v_c = 130$ m/min $f = 0,36$ mm/rev wet
Stable machining free of vibration! Excellent fracture resistance Stable chip control	


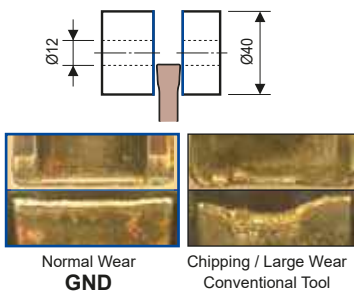
C48, Machine Part, Cut-Off	
	Target: - Higher rigidity - Vibration reduction - Fracture resistance
	Holder: GND L R2525M 320 Insert: GCM N3002 GG Grooving width: 3 mm Cutting conditions: $n = 1600$ min ⁻¹ $v_c = 200$ m/min $f = 0,05$ mm/rev wet
Stable machining free of vibration! Excellent fracture resistance Stable fracture resistance	

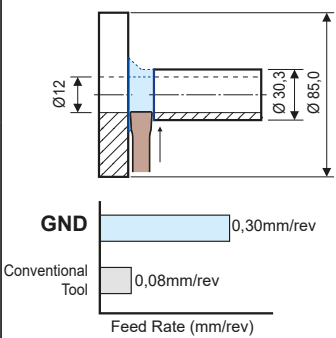34CrMo4, Crank, Cut-Off	
	Target: - Higher rigidity - Vibration reduction - Chip control
	Holder: GND L R2525M 320 Insert: GCM N3002 GG Grooving width: 3 mm Cutting conditions: $v_c = 115$ m/min $f = 0,30$ mm/rev wet
Improved efficiency Stable machining free of vibration Stable chip control	

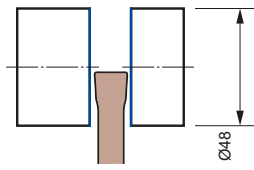X40CrVMo5-1, (45-48HRC), Machine Part, Cut-Off	
	Target: - Higher rigidity - Vibration reduction - Chip control
	Holder: GND L R2525M 425 Insert: GCM N4002 GG Grooving width: 4 mm Cutting conditions: $v_c = 50$ m/min $f = 0,03$ mm/rev wet
Stable machining free of vibration! Excellent chip control using the GND type. No more unexpected breakage!	

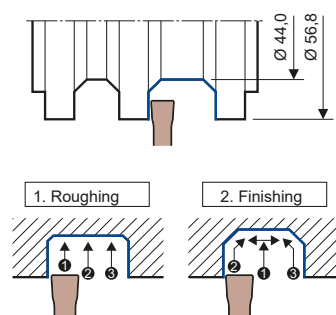20Cr4, Gear Shaft, Grooving / Pocketing	
	Target: - Higher rigidity - Vibration reduction - Chip control
	Holder: GND M R2020K 518 Insert: GCM N5008 MG Grooving width: 5 mm Cutting conditions: $v_c = 150$ m/min $f = 0,1$ mm/rev wet
Stable machining free of vibration! Excellent chip control using the GND type.	

ISO-PSC Polygon Modular GND Grooving System



General Features

New grades and chipbreakers have been added to the already established GND grooving system with polygon shank and a flexible and economical cassette system for inserts. An array of chipbreakers improves the efficiency in chip control in various applications such as grooving, turning, profiling and cut-off.



Advantages

- GND inserts for soft grooving from 2,0 - 6,0 mm width
- Expanded grade selection with 9 different chipbreakers for a wide application range
- Provides excellent chip control
- Achieves stable long tool life

Cassette

Cat. No.	R	L	CW (mm)	CDX (mm)	Inserts	Cap Screw	Tightening Torque (N·m)	Spanner
GND MCM R/L 212	●	●	2	12	GCM □2000-□□	BX0512	5,0	LH040
GND MCM R/L 312	●	●	3		GCM □3000-□□			
GND MCM R/L 418	●	●	4	GCM □4000-□□				
GND MCM R/L 518	●	●	5	GCM □5000-□□				
GND MCM R/L 618	●	●	6	GCM □6000-□□				


Holder

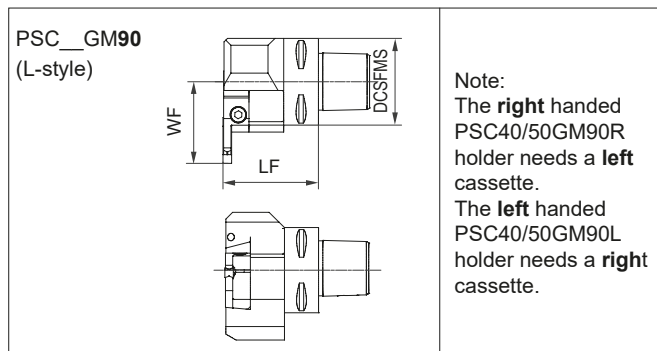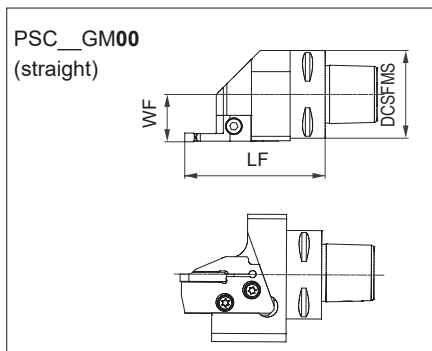


Style	Cat. No.	R	L	DCSFMS (mm)	WF (mm)	LF (mm)	Cap Screw	Tightening Torque (N·m)	Spanner
Straight	PSC40GM00 R/L	●	●	40	22	80*	BFTX0619N	7,5	LT25
	PSC50GM00 R/L	●	●	50	27				
L-Style	PSC40GM90 R/L	●	●	40	42*	52,5			
	PSC50GM90 R/L	●	●	50	47*	55,0			

* Dimension when using radial grooving cassettes.

Identification Details - Polygon-Toolholder

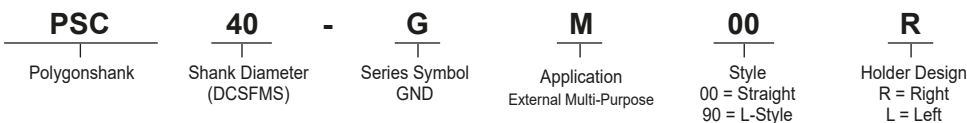

Identification Details - Cassette

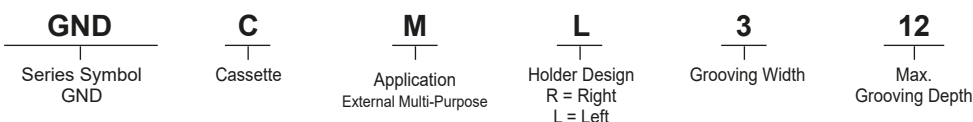

■ Inserts

Application	Shape	Type	Cross section of cutting edge	Cat. No.	Coated Carbide				Cermet	Carbide	Dimensions (mm)							
					AC830P	AC425K	AC520U	AC530U			T2500A	H10	CW		RE	L	S	
													Cutting Width	Tolerance				
Grooving / Turning		MG General Purpose		GCM N3004 MG	●	●		●				3,0	±0,03	0,4	21,1	3,8		
				N4008 MG	●	●	○	●					4,0	±0,03	0,8	26,4	4,0	
				N5008 MG	●	●	○	●						5,0	±0,03	0,8	26,4	4,1
				N6008 MG	●	●	○	●						6,0	±0,03	0,8	26,4	4,5
		ML Low Feed		GCM N2002 ML			○	●						2,0	±0,03	0,2	21,1	3,6
				N3002 ML	●	●	○	●	○					3,0	±0,03	0,2	21,1	3,8
				N4004 ML	●	●	○	●	○					4,0	±0,03	0,4	26,4	4,0
				N5004 ML	●	●	○	●	○					5,0	±0,03	0,4	26,4	4,1
				N6004 ML	●	●	○	●	○					6,0	±0,03	0,4	26,4	4,5
Copying / Cut-Off		GG General Purpose		GCM N2002 GG	●		●	●					2,0	±0,03	0,2	21,1	3,6	
				N3002 GG	●		○	●						3,0	±0,03	0,2	21,1	3,8
				N4002 GG	●		○	●						4,0	±0,03	0,2	26,4	4,0
				N5002 GG	○		○	●						5,0	±0,03	0,2	26,4	4,1
				N6002 GG	○		○	●						6,0	±0,03	0,2	26,4	4,5
				GCM N3004 GG	●		○	●						3,0	±0,03	0,4	21,1	3,8
				N4004 GG	●		○	●						4,0	±0,03	0,4	26,4	4,0
				N5004 GG	○		○	●						5,0	±0,03	0,4	26,4	4,1
				N6004 GG	○		○	●						6,0	±0,03	0,4	26,4	4,5
		GL Low Feed		GCM N2002 GL	●		○	●						2,0	±0,03	0,2	21,1	3,6
				N3002 GL	●		○	●						3,0	±0,03	0,2	21,1	3,8
				N4002 GL	●		○	●						4,0	±0,03	0,2	26,4	4,0
		N5002 GL		N5002 GL	○		○	●						5,0	±0,03	0,2	26,4	4,1
				N6002 GL	○		○	●						6,0	±0,03	0,2	26,4	4,5
		GF Low Cutting Force		N2002 GF				●			○			2,0	±0,03	0,2	21,1	3,6
				N3002 GF				●			○			3,0	±0,03	0,2	21,1	3,8
				N4002 GF	●		●	●			○			4,0	±0,03	0,2	26,4	4,0
N5002 GF	○				●	●			○			5,0	±0,03	0,2	26,4	4,1		
N6002 GF		N6002 GF	○		●	●						6,0	±0,03	0,2	26,4	4,5		
Copying		RG General Purpose		GCM N3015 RG	●	●	○	●	○				3,0	±0,03	1,5	21,1	3,8	
				N4020 RG	○	●	○	●	○					4,0	±0,03	2,0	26,4	4,0
				N5025 RG	●	●	○	●						5,0	±0,03	2,5	27,2	4,1
				N6030 RG	○	●	○	●						6,0	±0,03	3,0	27,5	4,5
Face / Necking		RN General Purpose		GCM N2010 RN			○	○					2,0	±0,03	1,0	21,7	3,6	
				N3015 RN	○	○	○	○						3,0	±0,03	1,5	22,4	3,8
				N4020 RN	○	○	○	○						4,0	±0,03	2,0	28,0	4,0
				N5025 RN	○	○	○	○						5,0	±0,03	2,5	28,1	4,1
				N6030 RN	○	○	○	○						6,0	±0,03	3,0	28,1	4,5
Non Ferrous Metals		GA General Purpose		GCG N2002 GA							○	2,0	±0,025	0,2	21,1	3,6		
				N3002 GA							○	3,0	±0,025	0,2	21,1	3,8		
				N4004 GA							○	4,0	±0,025	0,4	26,4	4,0		
				N5004 GA							○	5,0	±0,025	0,4	26,4	4,1		
				N6004 GA							○	6,0	±0,025	0,4	26,4	4,5		





Select holders and inserts with the same grooving width (CW).

Application	Shape	Type	Cross section of cutting edge	Cat. No. R / L	Coated Carbide								PSI	Dimensions (mm)					
					AC830P		AC520U		AC530U		AC1030U			CW	RE	L	S		
					R	L	R	L	R	L	R	L							
Cut-Off	Figures show right hand tools. 	CG General Purpose		GCM □2002 CG 05	○	○	○	○	●	●				5°	2,0	±0,03	0,2	21,1	3,6
				□3002 CG 05	●	○	○	○	●	●				5°	3,0	±0,03	0,2	21,3	3,8
				□4002 CG 05	○	○	○	○	●	●				5°	4,0	±0,03	0,2	26,7	4,0
Cut-Off		CF <small>New</small> Low Cutting Force		GCM □20003 CF 10						●	●			10°	2,0	±0,08	0,03	22,4	3,6
				□30003 CF 10						●	●			10°	3,0	±0,08	0,03	22,4	3,8
				□20003 CF 15						●	●			15°	2,0	±0,08	0,03	22,4	3,6
				□30003 CF 15						●	●			15°	3,0	±0,08	0,03	22,4	3,8

ISO-PSC Polygon Modular GND Grooving System



New





Work diameters in the stock indicate external diameters of face grooving.

Above figures show right hand tools.

■ Cassette

Cat. No.	R	L	CW (mm)	Diameter Range (mm)	DC (mm)	CDX (mm)	Inserts	Cap Screw	Tightening Torque (N·m)	Spanner		
GNDCF R/L 312-040	●	●	3	40-200	40-55	12	GC□ N3000-□□	BX0512	5,0 ^{Nm}	LH040		
GNDCF R/L 315-050	●	●			50-70	15						
GNDCF R/L 315-065	●	●			65-100	15						
GNDCF R/L 318-090	●	●			90-150	18						
GNDCF R/L 318-140	□	□			140-200	18						
GNDCF R/L 418-040	●	●	4	40-300	40-55	18	GC□ N4000-□□		BX0512		6,0 ^{Nm}	LH040
GNDCF R/L 418-050	●	●			50-70	18						
GNDCF R/L 418-065	●	●			65-90	18						
GNDCF R/L 418-085	●	●			85-130	18						
GNDCF R/L 418-125	□	□			125-200	18						
GNDCF R/L 418-180	□	□	180-300	18								
GNDCF R/L 518-050	□	□	5	50-300	50-70	18	GC□ N5000-□□	BX0512		6,0 ^{Nm}	LH040	
GNDCF R/L 518-065	□	□			65-90	18						
GNDCF R/L 518-085	□	□			85-130	18						
GNDCF R/L 518-125	□	□			125-200	18						
GNDCF R/L 518-180	□	□			180-300	18						
GNDCF R/L 618-050	□	□	6	50-1000	50-75	18	GC□ N6000-□□		BX0512	6,0 ^{Nm}		LH040
GNDCF R/L 618-070	□	□			70-110	18						
GNDCF R/L 618-100	□	□			100-200	18						
GNDCF R/L 618-180	□	□			180-300	18						
GNDCF R/L 618-280	□	□			280-1000	18						

■ Holder

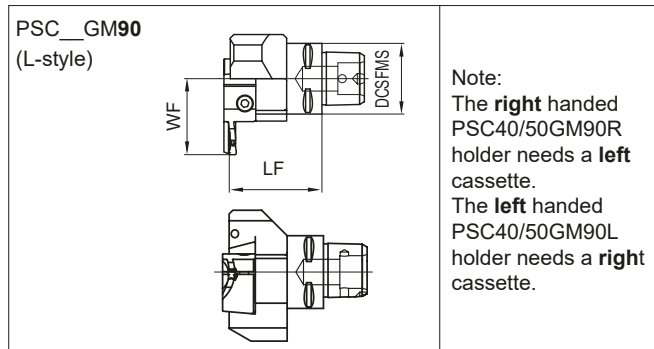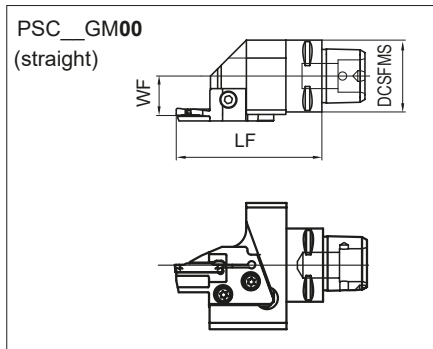


Note:
The **right** handed PSC40/50GM90R holder needs a **left** cassette.
The **left** handed PSC40/50GM90L holder needs a **right** cassette.


Style	Cat. No.	R	L	DCSFMS (mm)	WF (mm)	LF (mm)	Cap Screw	Tightening Torque (N·m)	Spanner
Straight	PSC40GM00 R/L	●	●	40	22	81*	BFTX0619N	7,5 ^{Nm}	LT25
	PSC50GM00 R/L	●	●	50	27				
L-Style	PSC40GM90 R/L	●	●	40	43*	52,5			
	PSC50GM90 R/L	●	●	50	48*	55,0			

* Dimension when using face grooving cassettes.

■ Identification Details - Polygon-Toolholder

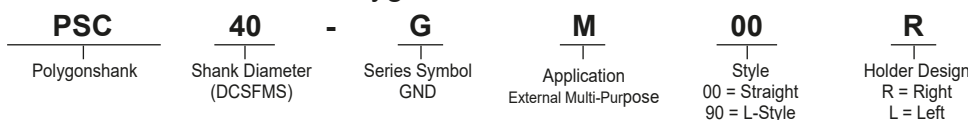

■ Identification Details - Cassette



Inserts

Application	Shape	Type	Cat. No.	Coated Carbide				Cermet	Carbide	Dimensions (mm)						
				AC830P	AC425K	AC520U	AC530U			T2500A	H10	CW		RE	L	S
												Cutting Width	Tolerance			
Grooving / Turning		MG General Purpose	GCM N3004 MG	●	●	○	●			3,0	±0,03	0,4	21,1	3,8		
			N4008 MG	●	●	○	●			4,0	±0,03	0,8	26,4	4,0		
			N5008 MG	●	●	○	●			5,0	±0,03	0,8	26,4	4,1		
			N6008 MG	●	●	○	●			6,0	±0,03	0,8	26,4	4,5		
		ML CW=<4mm CW=>5mm Low Feed	GCM N3002 ML	●	●	○	●	○			3,0	±0,03	0,2	21,1	3,8	
			N4004 ML	●	●	○	●				4,0	±0,03	0,4	26,4	4,0	
N5004 ML	●		●	○	●				5,0	±0,03	0,4	26,4	4,1			
Copying / Cut-Off		GG General Purpose	GCM N3002 GG	●		○	●			3,0	±0,03	0,2	21,1	3,8		
			N4002 GG	●		○	●			4,0	±0,03	0,2	26,4	4,0		
			N5002 GG	○		○	●			5,0	±0,03	0,2	26,4	4,1		
			N6002 GG	○		○	●			6,0	±0,03	0,2	26,4	4,5		
		GL Low Feed	GCM N3004 GG	●		○	●				3,0	±0,03	0,4	21,1	3,8	
			N4004 GG	●		○	●				4,0	±0,03	0,4	26,4	4,0	
			N5004 GG	○		○	●				5,0	±0,03	0,4	26,4	4,1	
			N6004 GG	○		○	●				6,0	±0,03	0,4	26,4	4,5	
		GF Low Cutting Force	GCM N3002 GL	●		○	●				3,0	±0,03	0,2	21,1	3,8	
			N4002 GL	●		○	●				4,0	±0,03	0,2	26,4	4,0	
			N5002 GL	○		○	●				5,0	±0,03	0,2	26,4	4,1	
			N6002 GL	○		○	●				6,0	±0,03	0,2	26,4	4,5	
GF Low Cutting Force	GCM N3002 GF	●		●	●	○			3,0	±0,03	0,2	21,1	3,8			
	N4002 GF	●		●	●	○			4,0	±0,03	0,2	26,4	4,0			
	N5002 GF	○		●	●				5,0	±0,03	0,2	26,4	4,1			
	N6002 GF	○		●	●				6,0	±0,03	0,2	26,4	4,5			
Face / Necking		RN General Purpose	GCM N3015 RN	○	○	○	○			3,0	±0,03	1,5	22,4	3,8		
			N4020 RN	○	○	○	○			4,0	±0,03	2,0	28,0	4,0		
			N5025 RN	○	○	○	○			5,0	±0,03	2,5	28,1	4,1		
			N6030 RN	○	○	○	○			6,0	±0,03	3,0	28,1	4,5		
Non Ferrous Metals		GA General Purpose	GCG N3002 GA						○	3,0	±0,025	0,2	21,1	3,8		
			N4004 GA						○	4,0	±0,025	0,4	26,4	4,0		
			N5004 GA						○	5,0	±0,025	0,4	26,4	4,1		
			N6004 GA						○	6,0	±0,025	0,4	26,4	4,5		

Select holders and inserts with the same grooving width (CW).

SumiTurn B-Groove Insert TGA-BF Type





■ Characteristics

- Outstanding chip control when grooving
- Excellent chip control when finishing wide grooves using axial feed
- Grooving inserts from 1,5–4,5 mm wide
- Grade AC530U with Super ZX ultra hard coating for steels, stainless steels and cast iron increases productivity and extends tool life

External Grooving

Figures show right hand tools.

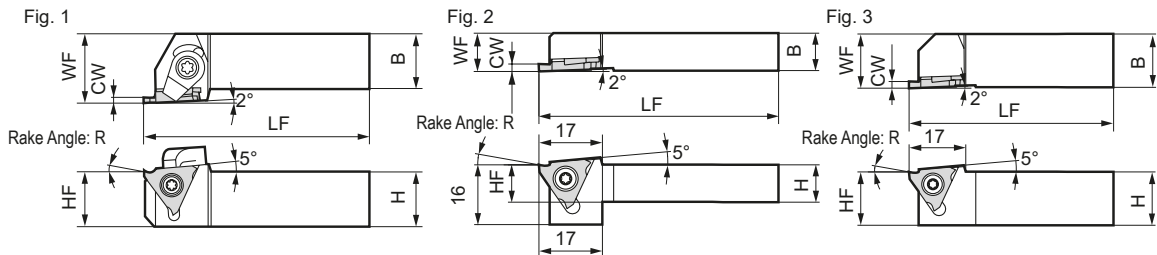

The rake angle R varies depending on the insert grade. For details, see the table at the lower part of page F39.



■ Spare Parts



■ Holders

Right handed tool holders are applicable with **left** handed inserts (TGA-L).

Cat. No.	Stock		Dimensions (mm)					Fig.	Grooving Width CW (mm)	Maximum Grooving Depth (mm)	Applicable Insert Group No.	Screw	Wrench	Clamp	Screw	Wrench	
	R	L	H	B	LF	WF	HF										
GWC R/L 1010-3	○	○	10	10	125	10	10	2	0,33–2,80	0,8–2,5	①	BFTX 0409N	3,4	TRX15	–	–	–
GWC R/L 1212-3	○	○	12	12	125	12	12	2	0,33–2,80	0,8–2,5	①						
GWC R/L 1616-3	●	○	16	16	125	16	16	3	0,33–2,80	0,8–2,5	①						
GWC R/L 2020-3	○	○	20	20	125	25	20	1	0,33–2,80	0,8–2,5	①	BFTX 0409N	3,4	TRX15	CCM 6B -L/R	WB 6-20 -T/TL	LT20
GWC R/L 2525-3	○	●	25	20	150	30	25	1	0,33–2,80	0,8–2,5	①						
GWC R/L 2020-15	●	●	20	20	125	25	20	1	1,25–1,45	2,0	②						
GWC R/L 2020-25	●	●	20	20	125	25	20	1	1,50–2,30	3,5	③						
GWC R/L 2020-35	●	●	20	20	125	25	20	1	2,50–4,80	5,0	④	BFTX 0511N	5,0	TRX20	CCM 8U -L/R	WB 8-22 -T/TL	LT27
GWC R/L 2525-15	●	●	25	25	150	30	25	1	1,25–1,45	2,0	②						
GWC R/L 2525-25	●	●	25	25	150	30	25	1	1,50–2,30	3,5	③						
GWC R/L 2525-35	●	●	25	25	150	30	25	1	2,50–4,80	5,0	④						

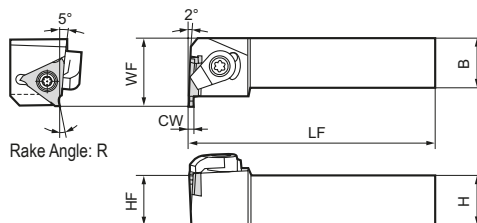

The rake angle R varies depending on the insert grade. For details, see the table at the lower part of page F39.

Figures show right hand tools.

■ Spare Parts



■ Holders

Right handed tool holders are applicable with **left** handed inserts (TGA-L).

Cat. No.	Stock		Dimensions (mm)					Grooving Width CW (mm)	Maximum Grooving Depth (mm)	Applicable Insert Group No.	Screw	Wrench	Clamp	Screw	Wrench	
	R	L	H	B	LF	WF	HF									
GWCS R/L 2020-3			20	20	125	25	20	0,33–2,80	0,8–2,5	①	BFTX 0409N	3,4	TRX15	CCM 6B -L/R	WB 6-20 -T/TL	LT20
GWCS R/L 2525-3			25	25	150	30	25	0,33–2,80	0,8–2,5	①						
GWCS R/L 2020-15	○	○	20	20	125	27	20	1,25–1,45	2,0	②						
GWCS R/L 2020-25	○	○	20	20	125	27	20	1,50–2,30	3,5	③						
GWCS R/L 2020-35	○	○	20	20	125	27	20	2,50–4,80	5,0	④	BFTX 0511N	5,0	TRX20	CCM 8U -L/R	WB 8-22 -T/TL	LT27
GWCS R/L 2525-15	○	○	25	25	150	32	25	1,25–1,45	2,0	②						
GWCS R/L 2525-25	○	○	25	25	150	32	25	1,50–2,30	3,5	③						
GWCS R/L 2525-35	○	○	25	25	150	32	25	2,50–4,80	5,0	④						

ISO-PSC Polygon Modular





Holder

Cat. No.	R	L	Ø (mm)	F (mm)	L (mm)	Cap Screw	ω	Spanner
PSC 40 GM00 R/L	●	●	40	22	80,0	BFTX0619N	7,5	LT25
PSC 50 GM00 R/L	●	●	50	27	80,0			
PSC 40 GM90 R/L	●	●	40	42	52,5			
PSC 50 GM90 R/L	●	●	50	47	55,0			

Cassette

Cat. No.	R	L	Grooving Width (mm)	Grooving Depth (mm)	Insert	Insert Screw	Spanner	Spring	Clamp Finger	Cap Screw	ω	Spanner
GWCCM R/L 25	●	●	1,5-2,3	3,9	TGA□4□□□BF	BFTX0511N	TRX20		SCP4A		3,0	LH030
GWCCM R/L 35	●	●	2,5-4,5	5,4	TGA□4□□□BF	5,0 ω						

Internal Grooving

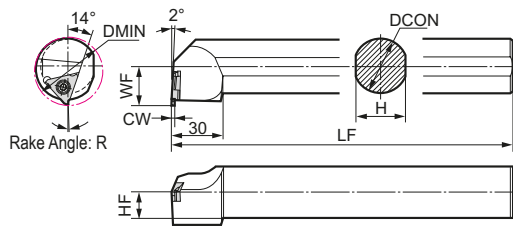

The rake angle R varies depending on the insert grade. For details, see the table at the lower part of page F39.

Figures show right hand tools.

Spare Parts



Holder

Right handed tool holders are applicable with left handed inserts (TGA-L).

Cat. No.	Stock		Dimensions (mm)						Grooving width CW (mm)	Maximum Grooving Depth (mm)	Applicable Insert Group No.	Screw	ω	Wrench
	R	L	DMIN	DCON	LF	H	HF	WF						
GWCI R/L 325	□	□	35	25	100	23	11,5	17,5	0,33-2,80	0,8-2,0	1	BFTX0409N	3,4	TRX 15
GWCI R/L 432	□	□	40	32	250	30	15,0	17,5	1,25-4,80	2,0-2,5	2 3 4	BFTX0511N	5,0	TRX 20

Inserts

Cat. No.	Coated		Dimensions (mm)					Fig.	Applicable holder & insert group
	AC530U		() CDX: presents max. depth						
	R	L	CW	CDX	RE	E2			
TGA R/L 4140BF01	○	○	1,40	2,5 (2,0-1,7)	0,1	0,300	2	2	
TGA R/L 4150BF	●	●	1,50	3,9	0,2	0,250	2	3	
TGA R/L 4165BF	○	○	1,65			0,175			
TGA R/L 4175BF	○	○	1,75			0,125			
TGA R/L 4185BF	○	○	1,85			0,075			
TGA R/L 4200BF	●	●	2,00			0			1
TGA R/L 4220BF	○	○	2,20						
TGA R/L 4230BF	○	○	2,30	5,4	0,3	0	1	4	
TGA R/L 4250BF	●	●	2,50						
TGA R/L 4265BF	○	○	2,65						
TGA R/L 4270BF	○	○	2,70						
TGA R/L 4280BF	○	○	2,80						
TGA R/L 4300BF	●	●	3,00						
TGA R/L 4320BF	○	○	3,20						
TGA R/L 4330BF	○	○	3,30						
TGA R/L 4350BF	●	●	3,50						
TGA R/L 4370BF	○	○	3,70						
TGA R/L 4390BF	○	○	3,90						
TGA R/L 4400BF	●	●	4,00						0,4
TGA R/L 4410BF	○	○	4,10						
TGA R/L 4420BF	○	○	4,20						
TGA R/L 4430BF	○	○	4,30						
TGA R/L 4440BF	○	○	4,40						
TGA R/L 4450BF	●	●	4,50						

Recommended Cutting Conditions

Grooving

Wet condition is recommended.

Work Material	General Steel	Stainless Steel
Cutting speed (m/min)	50-180	50-160
Groove width (mm)	1,5-2,3	2,5-3,3
Feed rate (mm/rev)	0,03-0,12	0,04-0,12
Depth of cut (mm)	Ext.	-3,5
	Int.	-2,5

Axial Feed

Feed direction for axial feed

Wet condition is recommended.

Work Material	General Steel	Stainless Steel
Cutting speed (m/min)	50-180	50-160
Feed rate (mm/rev)	0,03-0,10	0,05-0,10
Depth of cut (mm)	-0,3	-0,5


Rake Angle with a Holder Fitted (E)

Grooving	AC530U	H1	T3000Z	T1500A	BN2000	DA2200
External GMC, GWCS	10°	20°	10°	5°	0°	10°
Internal GMCI	1°	11°	1°	-4°	-9°	1°

*) Please select applicable inserts for the holders by using matching group numbers.

SumiTurn Groove Insert TGA Type

Inserts



This figure shows right handed tools.

Grade		Cutting Edge	GAN
Coated Carbide	AC530U	Honing	15°
Carbide	H1	Sharp	25°
Coated Cermet	T3000Z	Honing	15°
Cermet	T1500A	Sharp	10°
SUMIBORON	BN2000	K-Land	5°
SUMIDIA	DA2200	Sharp	15°

* See page F39 for the rake angle with a holder fitted.

Dimensions (mm)

Cat. No. (The part numbers of T1500A end with E)	AC530U		H1		T3000Z		T1500A		BN2000		DA2200		CW	Max. Groove Depth		CDX	RE	IC	S	Insert /Holder Group No.*	
	R	L	R	L	R	L	R	L	R	L	R	L		External	Internal						
	TGA R/L 3033 (E)	○		○						-	-	-		-	0,33						0,8
TGA R/L 3050 (E)	○	○			○				-	-	-	-	0,50	1,2	0,8	1,4					
TGA R/L 3075 (E)	○	○	○										0,75	2,0	1,5	2,5	0,1 (T1500A 0,2)	9,525	3,18	①	
R/L 3095 (E)	○	○											0,95								
R/L 3100 (E)	○	○	○		○	○	○	○					1,00								
R/L 3110 (E)	○	○											1,10								
R/L 3125 (E)	○	○	○		○								1,25								
R/L 3135 (E)	○				○		○						1,35								
R/L 3145 (E)	○	○											1,45								
R/L 3150 (E)	○	○	○										1,50								
R/L 3165 (E)	○												1,65								
R/L 3175 (E)	○	○			○								1,75								
R/L 3185 (E)	○												1,85								
TGA R/L 3200 (E)	○	○	○		○		○						2,00								2,5
R/L 3220 (E)		○											2,20								
R/L 3230 (E)													2,30								
R/L 3250 (E)	○		○										2,50								
R/L 3265 (E)													2,65								
R/L 3270 (E)													2,70								
R/L 3280 (E)	○												2,80								
TGA R/L 4125 (E)	○	○									○		1,25	2,0	1,7	2,5					
R/L 4145 (E)	○	○											1,45								
TGA R/L 4150 (E)		○	○	○							□		1,50	3,5	2,5	3,9	0,2 *2				
R/L 4165 (E)													1,65								
R/L 4175 (E)													1,75								
R/L 4185 (E)		○	○	○									1,85								
R/L 4200 (E)	○	○						○		○			2,00								
R/L 4220 (E)		○											2,20								
R/L 4230 (E)	○	○											2,30								
TGA R/L 4250 (E)	○		○				○		○				2,50	5,0 *1	2,5	5,4 *1	0,3 *2	12,70	4,76		
R/L 4265 (E)	○		○										2,65								
R/L 4270 (E)													2,70								
R/L 4280 (E)	○												2,80								
R/L 4300 (E)	○	○	○				○			○			3,00								
R/L 4320 (E)													3,20								
R/L 4330 (E)	○												3,30								
TGA R/L 4350 (E)	○												3,50								
R/L 4370 (E)													3,70								
R/L 4390 (E)													3,90								
R/L 4400 (E)	○							○					4,00								
R/L 4410 (E)													4,10								
R/L 4420 (E)													4,20								
R/L 4430 (E)													4,30								
R/L 4440 (E)													4,40								
R/L 4450 (E)			○										4,50								
R/L 4480 (E)													4,80								


* See the group numbers of GWC, GWCS and GWCI types on page F38 and F39 to find applicable holders. Inserts and holders that have corresponding group numbers can be used together.

*1: CDX for SUMIBORON and SUMIDIA = 4,4, maximum groove depth 4,0 (2,5 during internal machining)

*2: RE for SUMIBORON = 0,2, RE for SUMIDIA = 0,1

SumiTurn Groove Insert TGA Type

Inserts



This figure shows right handed tools.

Grade		Cutting Edge	GAN
Coated Carbide	AC530U	Honing	15°
Carbide	H1	Sharp	25°
Coated Cermet	T3000Z	Honing	15°
Cermet	T1500A	Sharp	10°
SUMIBORON	BN2000	K-Land	5°
SUMIDIA	DA2200	Sharp	15°

* See page F39 for the rake angle with a holder fitted.

Dimensions (mm)

Cat. No.	AC530U		H1		T3000Z		T1500A		BN2000		DA2200		CW	Max. Groove Depth		CDX	RE	IC	S	Insert /Holder Group No.*
	R	L	R	L	R	L	R	L	R	L	R	L		External	Internal					
TGA R/L 4050 R	○	○											1,00	2,0	1,7	2,5	0,50	12,70	4,76	②
TGA R/L 4075 R	○	○											1,50	3,5	2,5	3,9	0,75			③
R/L 4100 R	○	○											2,00				1,00			④
TGA R/L 4125 R	○	○											2,50	5,0 ^{*1}	2,5	5,4 ^{*1}	1,25			④
R/L 4150 R	○				○								3,00				1,50			
R/L 4200 R	○												4,00				2,00			

* See the group numbers of GWC, GWCS and GWCI types on page F38 and F39 to find applicable holders. Inserts and holders that have corresponding group numbers can be used together.

*1 CDX for SUMIBORON and SUMIDIA = 4,4, maximum groove depth 4,0 (2,5 during internal machining)

Recommended Cutting Conditions

Work Material	P General Steel			M Stainless Steel			N Non-Ferrous Metal		H Hardened Steel
	AC530U	T3000Z	T1500A	AC530U	T3000Z	T1500A	H1	DA2200	BN2000
Grade	AC530U	T3000Z	T1500A	AC530U	T3000Z	T1500A	H1	DA2200	BN2000
Cutting Speed (m/min)	50-200	100-180	100-180	50-200	80-150	80-120	200-300	200-300	80-120
Feed Rate (mm/rev)	0,02-0,10	0,05-0,10	0,05-0,08	0,02-0,10	0,05-0,08	0,05-0,08	0,05-0,15	0,05-0,15	0,03-0,07

Insert Blanks

(Incomplete products. Machine them to meet your edge width, nose radius and rake angle requirements.)

Fig. 1





Fig. 2



This figure shows right handed tools.

Dimensions (mm)

Cat. No.	KH03		H1		EH510		T1500A		CW	CDX	IC	S	Fig.	
	R	L	R	L	R	L	R	L						
TGA R/L 3 T18									1,85	(3,4)			1	
R/L 3 T23							○ ○	2,35	(3,4)	9,525	3,18	2		
R/L 3 T31	○							3,18	-					
TGA R/L 4 T22									2,20	(4,8)			1	
R/L 4 T37									3,75	(6,2)	12,70	4,76		2
R/L 4 T47	○						○	4,76	-					


Note: CDX values in parentheses are for reference only.

Notes for Machining an Insert

Make the cutting edge so that the rake angle, back taper, etc. as shown in fig. 3. When you have installed an insert into a holder, it becomes a cutting blade element as shown in fig. 4.


Suggested Shape

Fig. 3



Cutting blade element during holder installation

Fig. 4



Parting-Off Mini Holders SCT Type



Parting-Off
Tools




Fig. 1


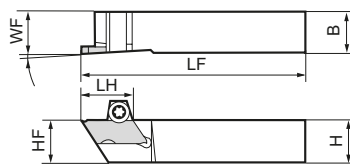


Fig. 2



Above figures show right hand tools.

■ Spare Parts

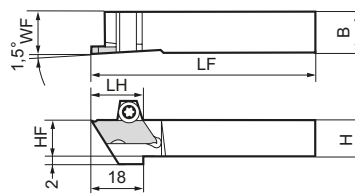


■ Holders

Cat. No.	Stock	Dimensions (mm)						Applicable inserts	Fig.	Screw	Wrench
		H	B	LF	WF	HF	LH				
SCT R 1010	●	10	10	120	10	10	15	CT R05_ _ _ CT R12_ _ _	1	BFTX0410T8L	TRX 08
SCT R 1212	●	12	12	120	12	12	15				
SCT R 1616	●	16	16	120	16	16	15	CT R16_ _ _	1	BFTX0410T8R	
SCT R 101016	○	10	10	120	10	10	18				
SCT R 121216	○	12	12	120	12	12	18	CT L05_ _ _ CT L12_ _ _	1	BFTX0410T8R	
SCT R 161616	○	16	16	120	16	16	18				
SCT L 1010	●	10	10	120	10	10	15	CT L05_ _ _ CT L12_ _ _	1	BFTX0410T8R	
SCT L 1212	●	12	12	120	12	12	15				
SCT L 1616	●	16	16	120	16	16	15	CT L16_ _ _	1	BFTX0410T8R	
SCT L 101016	○	10	10	120	10	10	18				
SCT L 121216	○	12	12	120	12	12	18	CT L16_ _ _	1	BFTX0410T8R	
SCT L 161616	○	16	16	120	16	16	18				

■ Inserts

Installation Conditions for Holder	For Right Handed Holder (SCTR)			For Left Handed Holder (SCTL)		
	CTR_R	CTR_N	CTR_L	CTL_R	CTL_N	CTL_L
Insert Shape and Dimensions						

Cat. No.	AC1030U			AC530U			Max. Cut-Off Ø (mm)	CW	RE	L	S	Chip Breaker	Applicable Holder		
	R	N	L	R	N	L									
CTR 050505 R/N/L	○	○	○	○	○	○	5	0,5	0,05	19	7	With Chip Breaker	SCT R1010 SCT R1212 SCT R1616		
CTR 050500 R/N/L	○	○	○	○	○	○	5	0	0						
CTR 121005 R/N/L	○	○	○	○	○	○	12	1,0	0,05						
CTR 121505 R/N/L	●	●	○	○	○	○	12	1,5	0,05						
CTR 122005 R/N/L	●	●	○	○	○	○	12	2,0	0						
CTR 121000 R/N/L	○	○	○	○	○	○	12	1,0	0						
CTR 121500 R/N/L	○	○	○	○	○	○	12	1,5	0						
CTR 122000 R/N/L	○	○	○	○	○	○	12	2,0	0						
CTR 161005 R/N/L	○	○	○	○	○	○	16	1,0	0,05			23,1	8,3	Without Chip Breaker	SCT R101016 SCT R121216 SCT R161616
CTR 161505 R/N/L	○	○	○	○	○	○	16	1,5	0,05						
CTR 162005 R/N/L	○	○	○	○	○	○	16	2,0	0						
CTR 161000 R/N/L	○	○	○	○	○	○	16	1,0	0						
CTR 161500 R/N/L	○	○	○	○	○	○	16	1,5	0						
CTR 162000 R/N/L	○	○	○	○	○	○	16	2,0	0						
CTR 050500 R/N/L NB							5	0,5	0	19	7	Without Chip Breaker	SCT R1010 SCT R1212 SCT R1616		
CTR 121000 R/N/L NB	○			○			12	1,0	0						
CTR 121500 R/N/L NB	○			○			12	1,5	0						
CTR 122000 R/N/L NB	○			○			12	2,0	0	23,1	8,3	Without Chip Breaker	SCT R101016 SCT R121216 SCT R161616		
CTR 161000 R/N/L NB							16	1,0	0						
CTR 161500 R/N/L NB							16	1,5	0						
CTR 162000 R/N/L NB	○			○			16	2,0	0						

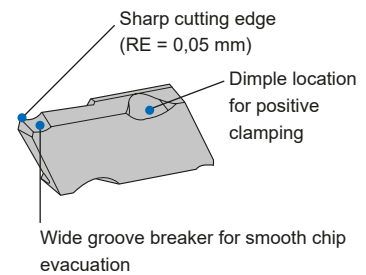

● Surface Finish Comparison

SCT	Competitor's tool
Work Material:	X6Cr17 (ø8 mm)
Insert:	CTR 121005 R, (b =1,0 mm)
Cutting Data:	v _c = 45 m/min f = 0,02 mm/rev., Wet

Parting-Off Holders Sumi-Grip




■ Characteristics

- Holders available in carbide (SumiGrip) and steel (SumiGrip JR).
- Capable on interrupted machining.
- Can be used for cut-off, grooving and chamfering applications.


■ Type

- Tool block type
STFH (steel) / WCFH (carbide)
- Shank type
STFS (steel) / WCFS (carbide)


■ Cut-Off

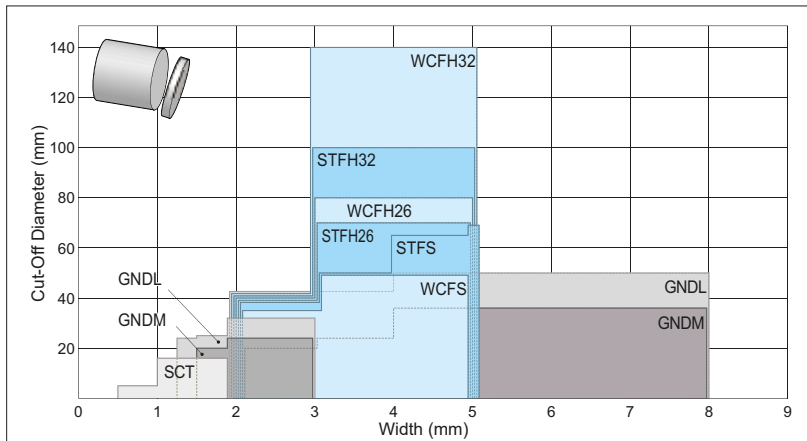


■ Features of Design

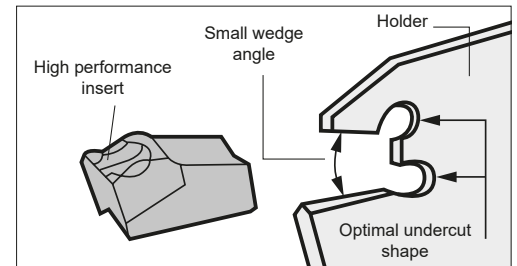


■ Twice the Insert Holding Force

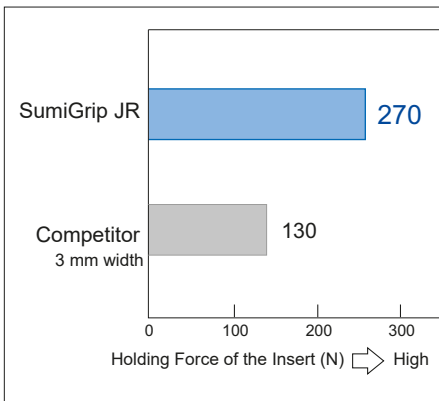

■ Low Vibration

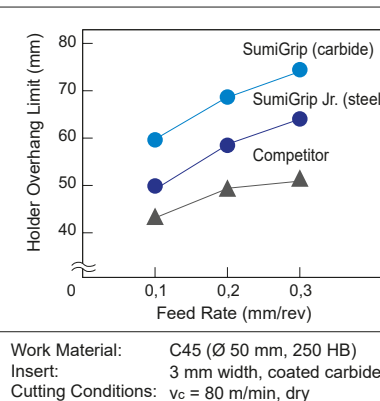

■ Wear Resistance

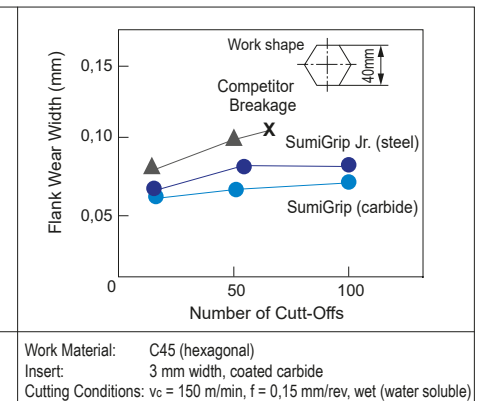

■ GG Type/GF Type/CF Type Chipbreaker, Grade AC1030U

Utilizing grooving tool GND type chipbreaker series for excellent chip control.

Low cutting force chipbreaker GF type (neutral) or CF type (left or right handed) inserts, coupled with a carbide blade, enables stable machining and prevents chattering even when machining stainless steel.

Achieving stable and longer tool life with the new AC1030U grade.

GG	GF	CF
Neutral	Neutral	L/R handed
General purpose	Exotic alloy, Low cutting force	Exotic alloy, Low cutting force



■ Performance (Chipbreaker)



Parting-Off Holders

Sumi-Grip Jr.

Cut-Off (Steel Holder/Tool Block Type)

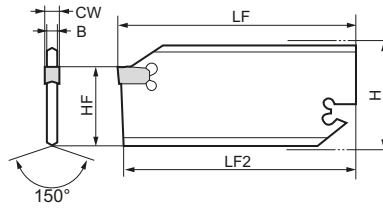

Above figures show right hand tools.

Parts



■ Holders

Cat. No.	Stock	Dimensions (mm)						Max. Cut-Off Dia.	Applicable Inserts	Applicable Tool Blocks	Wrench
		H	B	LF	HF	LF2	CW				
STFH 26-2	●	26	1,6	109	21,4	108	2,0	40	WCF_2_	SBN 20-26 SBU 20-26	SL 4
26-3	●	26	2,4	109	21,4	108	3,0	70	WCF_3_		
26-4	●	26	3,4	109	21,4	108	4,0	70	WCF_4_		
26-5	●	26	4,3	109	21,4	108	5,0	70	WCF_5_		
STFH 32-2	●	32	1,6	149	25,0	148	2,0	40	WCF_2_	SBN 20-32 SBN 25-32 SBU 20-32 SBU 25-32	SL 4
32-3	●	32	2,4	149	25,0	148	3,0	100	WCF_3_		
32-4	●	32	3,4	149	25,0	148	4,0	100	WCF_4_		
32-5	●	32	4,3	149	25,0	148	5,0	100	WCF_5_		

■ Tool Blocks

■ Parts

SBN Type, One piece type

Cat. No.	Stock	Dimensions (mm)					Applicable Carbide Blades
		H	Ha	Hb	Hc	L	
SBN 20-26	●	45	20	20	10,0	80	STFH 26_
SBN 20-32	●	50	20	20	13,5	100	STFH 32_
SBN 25-26	□	48	25	25	10,0	80	STFH 26_
SBN 25-32	●	50	25	25	8,5	110	STFH 32_

Clamp	Screw	Wrench
BWS 30	WB 8-20	LH 040



SBU Type, Separate type

Cat. No.	Stock	Dimensions (mm)					Applicable Carbide Blades
		H	Ha	Hb	Hc	L	
SBU 20-26	●	45	20	20	10,0	80	STFH 26_
SBU 20-32	●	50	20	20	13,5	100	STFH 32_
SBU 25-26	□	48	25	25	10,0	80	STFH 26_
SBU 25-32	●	50	25	25	8,5	110	STFH 32_

Wedge		
SBU 20-26	SBU 20-32	SBU 25-32
BCS 15	BCS 20	BCS 25
Screw	Wrench	
BX 0622	LH 050	

*Tool blocks selection guide see page F46

Cut-Off (Steel Holder/Shank Type)

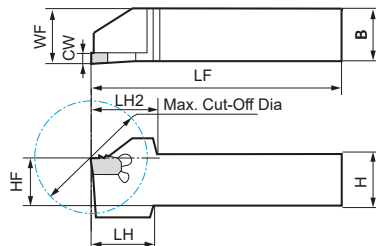

■ Parts



■ Holders

Cat. No.	Stock		Dimensions (mm)							Max. Cut-Off Dia.	Applicable Inserts	Wrench	
	R	L	H	B	LF	WF	HF	LH	LH2				CW
STFS R/L 1010-2	○		10	10	86	10	10	17	17	2,0	28	WCF_2_	SL 4
R/L 1212-2	●	●	12	12	110	12	12	18	18	2,0	30		
R/L 1616-2	○	○	16	16	110	16	16	-	19	2,0	32		
R/L 2020-2	●	○	20	20	125	20	20	-	24	2,0	40		
STFS R/L 1616-3	○	●	16	16	110	16	16	20	22	3,0	35	WCF_3_	SL 4
R/L 2012-3	○	○	20	12	110	12	20	-	24	3,0	40		
R/L 2020-3	●	●	20	20	125	20	20	-	30	3,0	50		
R/L 2525-3	●	●	25	25	150	25	25	-	30	3,0	50		
STFS R/L 2020-4	○	●	20	20	125	20	20	-	33	4,0	55	WCF_4_	SL 4
R/L 2525-4	●	○	25	25	150	25	25	-	38	4,0	65		
STFS R/L 2020-5	○	○	20	20	125	20	20	-	35	5,0	60	WCF_5_	SL 4
R/L 2525-5	○	○	25	25	150	25	25	-	40	5,0	70		

Parting-Off Holders Sumi-Grip Jr. Inserts

Inserts

Neutral (N)		Right Handed (R)		Left Handed (L)						
		* WCF_2T: 2_RE=0,15								
External Appearance	Cat. No.	AC830P	AC225	AC1030U	T1500A	A30	G10E	CW	Applicable Holder	
WCF N _ GG General purpose 	WCF N2 GG	○						2,0	STFH __ 2	STFS R/L ___ 2
	N3 GG	●						3,0	STFH __ 3	STFS R/L ___ 3
	N4 GG	●						4,0	STFH __ 4	STFS R/L ___ 4
	N5 GG	○						5,0	STFH __ 5	STFS R/L ___ 5
WCF N _ GF Exotic alloy Low feed 	WCF N2 GF			○				2,0	STFH __ 2	STFS R/L ___ 2
	N3 GF			○				3,0	STFH __ 3	STFS R/L ___ 3
	N4 GF			○				4,0	STFH __ 4	STFS R/L ___ 4
	N5 GF			○				5,0	STFH __ 5	STFS R/L ___ 5
WCF __ CF Exotic alloy Low feed 	WCF R3 CF			○				3,0	STFH __ 3	STFS R/L ___ 3
	L3 CF			○				3,0		
	R4 CF							4,0	STFH __ 4	STFS R/L ___ 4
	L4 CF			○				4,0		
WCF _ 2T Small diameter Low cutting force 	WCF N2T	●						2,0		
	R2T	○						2,0	STFH __ 2	STFS R/L ___ 2
	L2T	○						2,0		
WCF __ Without chip breaker General steel 	WCF N3	●						3,0		
	R3	●						3,0	STFH __ 3	STFS R/L ___ 3
	L3	●						3,0		
	WCF N4	●						4,0		
	R4	○						4,0	STFH __ 4	STFS R/L ___ 4
	L4	●						4,0		
	WCF N5	●						5,0		
	R5	○						5,0	STFH __ 5	STFS R/L ___ 5
L5	○						5,0			
WCF __ A Exotic alloy Low feed 	WCF N2A		●		○			2,0	STFH __ 2	STFS R/L ___ 2
	WCF N3A	●	●					3,0	STFH __ 3	STFS R/L ___ 3
	R3A		●					3,0		
	L3A		●					3,0		
	WCF N4A		●				○	4,0		
	R4A		●					4,0	STFH __ 4	STFS R/L ___ 4
	L4A		●					4,0		
WCF N5A		●					5,0			
R5A		○					5,0	STFH __ 5	STFS R/L ___ 5	
L5A							5,0			
WCF __ B Cast iron Light alloys 	WCF N3B						●	3,0		
	R3B						●	3,0	STFH __ 3	STFS R/L ___ 3
	L3B						●	3,0		
	WCF N4B						●	4,0		
	R4B							4,0	STFH __ 4	STFS R/L ___ 4
	L4B							4,0		
	WCF N5B						○	5,0		
R5B							5,0	STFH __ 5	STFS R/L ___ 5	
L5B							5,0			

Recommended Cutting Conditions


Work Material		Cutting Speed (m/min)					
		AC830P	AC225	AC1030U	T1500A	A30	G10
Steel	General Steel	80-200	80-200	50-200	80-200	50-120	-
	Soft Steel	100-230	100-230	50-230	100-230	70-150	-
	Die Steel	60-150	60-150	50-150	60-150	50-120	-
Stainless Steel		70-150	70-150	50-150	-	70-130	-
Cast Iron		-	-	50-200	-	-	50-120
Non-Ferrous Metal		-	-	200-500	-	-	200-500

Chip Breaker	Feed Rate (mm/rev)											
	Neutral						Left or Right Handed					
	GG	GF	Without Chip Breaker	T	A	B	Without Chip Breaker	CF	T	A	B	
	General Purpose	Exotic Alloy Low Cutting Force	General Steel	Small Diam. Low Cutting Force	Exotic Alloy Low Feed	Cast Iron Light Alloys	General Steel	Exotic Alloy Low Cutting Force	Small Diam. Low Cutting Force	Exotic Alloy Low Feed	Cast Iron Light Alloys	
Groove Width W (mm)	2,0	0,05-0,20	0,03-0,12	-	0,03-0,10	0,03-0,12	-	-	-	0,03-0,10	-	-
	3,0	0,08-0,25	0,04-0,15	0,08-0,25	-	0,04-0,15	0,05-0,15	0,08-0,25	0,08-0,12	-	0,04-0,15	0,05-0,15
	4,0	0,10-0,30	0,05-0,18	0,10-0,30	-	0,05-0,18	0,05-0,18	0,10-0,30	0,10-0,30	-	0,05-0,18	0,05-0,18
	5,0	0,10-0,35	0,05-0,20	0,10-0,30	-	0,05-0,20	0,06-0,20	0,10-0,20	0,10-0,30	-	-	0,06-0,20


Parting-Off Holders

Sumi-Grip Series


Cut-Off (Carbide Holder/Tool Block Type)



CW: 3 mm
4 mm
5 mm



CW: 2 mm



(WCFH 32-2)

Parts



Above figures show right hand tools.

■ Holders

Cat. No.	Stock	Dimensions (mm)						Max. Cut-Off Dia.	Applicable Inserts	Applicable Tool Blocks	Wrench
		H	B	LF	HF	LF2	CW				
WCFH 26-2	●	26	1,7	110	21,4	109,0	2,0	40	WCF_2_	SBN 20-26 SBU 20-26	SL 1
26-3	●	26	2,4	110	21,4	108,5	3,0	70	WCF_3_		
26-4	●	26	3,4	110	21,4	108,5	4,0	70	WCF_4_		
26-5	●	26	4,3	110	21,4	108,5	5,0	70	WCF_5_		
WCFH 32-2	●	32	1,7	150	25,0	149,0	2,0	40	WCF_2_	SBN 20-32 SBN 25-32 SBU 20-32 SBU 25-32	SL 2 SL 1
32-3	●	32	2,4	150	25,0	148,5	3,0	100	WCF_3_		
32-4	●	32	3,4	150	25,0	148,5	4,0	100	WCF_4_		
32-5	●	32	4,3	150	25,0	148,5	5,0	100	WCF_5_		

See F48 for applicable inserts.

■ Tool Blocks

■ Parts

SBN Type, Mono-block Type		Cat. No.	Stock	Dimensions (mm)					Applicable Carbide Blades
H	Ha			Hb	Hc	L			
45	20	20	10,0	80	WCFH 26_				
50	20	20	13,5	100	WCFH 32_				
48	25	25	10,0	80	WCFH 26_				
50	25	25	8,5	110	WCFH 32_				

Clamp	Screw	Wrench
BWS 30	WB 8-20	LH 040

SBU Type, Separate Type		Cat. No.	Stock	Dimensions (mm)					Applicable Carbide Blades
H	Ha			Hb	Hc	L			
45	20	20	10,0	80	WCFH 26_				
50	20	20	13,5	100	WCFH 32_				
48	25	25	10,0	80	WCFH 26_				
50	25	25	8,5	110	WCFH 32_				

Wedge		
SBU 20-26	SBU 20-32	SBU 25-32
BCS 15	BCS 20	BCS 25



Screw	Wrench
BX 0622	LH 050

■ Tool Block Type Selection Guide

Tool Block (Mono-Block Type)	<h4>SBN Type</h4> <p>This tool block can be used for the machining tool post A shown on the right.</p>	<h4>A</h4> General Purpose Lathe, etc. SBN Type, SBU Type <p>(Overhead clamp)</p>	<h4>B</h4> Turret Type Tool Post, etc. SBU Type <p>(Side clamp)</p>
Tool Block (Separate Type)	<h4>SBU Type</h4> <p>This tool block can be used for the machining tool posts A and B shown on the right. Since the clamp is large it has a large scope even when the holder has a long overhang.</p>		


Parting-Off Holders Sumi-Grip Series

Cut-Off (Carbide Holder/Shank Type)

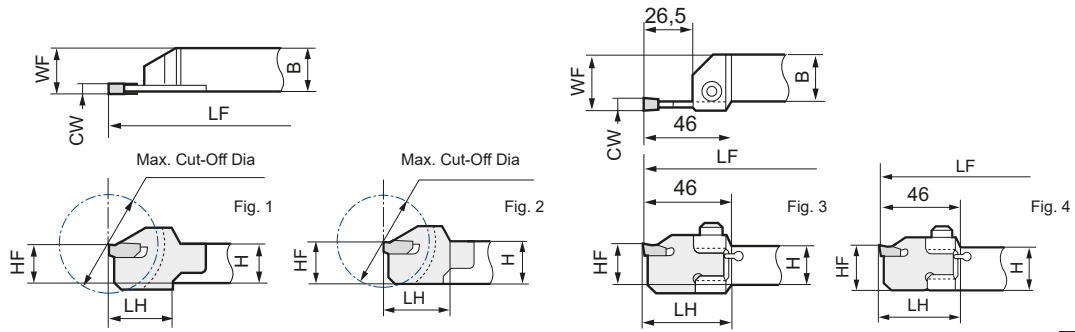

Parts

Above figures show right hand tools.




Holders

	Cat. No.	Stock		Dimensions (mm)							Max. Cut-Off Dia.	Applicable Blades	Applicable Inserts	Fig.	Wrench
		R	L	H	B	LF	WF	HF	LH	CW					
Brazed Type	WCFS R/L 1010-2	●		10	10	86	10	10	10	2,0	28	—	WCF_2_2	1	SL 2
	R/L 1212-2	●		12	12	110	12	12	18	2,0	30	—	WCF_2_1	1	
	R/L 1616-2	○	●	16	16	100	16	16	25	2,0	35	—	WCF_2_2	2	SL 1
R/L 1616-3			16	16	100	16	16	25	3,0	35	—	WCF_3_3	2		
Clamp Type	WCFS R/L 20-3	●	●	20	20	125	23	20	46	3,0	50	WCFH17-3	WCF_3_3	3	SL 1
	R/L 20-4	●		20	20	125	24	20	46	4,0	50	WCFH17-4	WCF_4_3	3	
	R/L 20-5	○		20	20	125	25	20	46	5,0	50	WCFH17-5	WCF_5_3	3	
	WCFS R/L 25-3	●	○	25	25	150	28	25	46	3,0	50	WCFH17-3	WCF_3_4	4	
	R/L 25-4		○	25	25	150	29	25	46	4,0	50	WCFH17-4	WCF_4_4	4	
R/L 25-5		○	25	25	150	30	25	46	5,0	50	WCFH17-5	WCF_5_4	4		

See F48 for applicable inserts.

Blade included in holder.

Blades

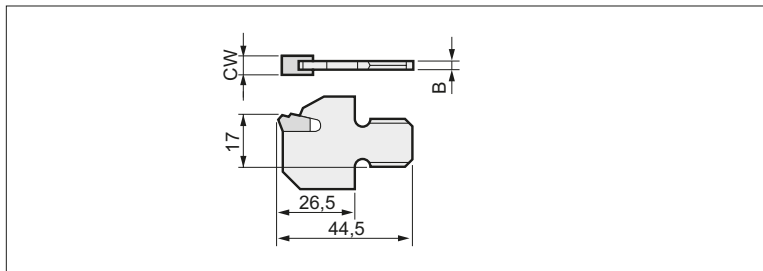

Cat. No.	Stock	Dimensions (mm)		Applicable Blades
		CW	B	
WCFH 17-3	●	3	2,4	WCFS R/L 20-3, 25-3
WCFH 17-4	●	4	3,4	WCFS R/L 20-4, 25-4
WCFH 17-5	●	5	4,3	WCFS R/L 20-5, 25-5

Parts

Cap Screw	Wrench	Applicable Holders
BX0622	LH050	All clamp type holders.

Parting-Off Holders

Sumi-Grip Inserts

Inserts

Neutral (N)		Right Handed (R)		Left Handed (L)							
						* WCF_2T: 2_RE=0,15					
External Appearance	Cat. No.	AC830P	AC225	AC1030U	T1500A	A30	G10	CW	Applicable Holder		
WCF N_GG General purpose 	WCF N2 GG	○						2,0	WCFH__2	WCFS R/L__2	
	N3 GG	●						3,0	WCFH__3	WCFS R/L__3, WCFS R/L__3	
	N4 GG	●						4,0	WCFH__4	WCFS R/L__4	
	N5 GG	○						5,0	WCFH__5	WCFS R/L__5	
WCF N_GF Exotic alloy Low feed 	WCF N2 GF			○				2,0	WCFH__2	WCFS R/L__2	
	N3 GF			○				3,0	WCFH__3	WCFS R/L__3, WCFS R/L__3	
	N4 GF			○				4,0	WCFH__4	WCFS R/L__4	
	N5 GF			○				5,0	WCFH__5	WCFS R/L__5	
WCF __CF Exotic alloy Low feed 	WCF R3 CF			○				3,0	WCFH__3	WCFS R/L__3	
	L3 CF			○				3,0		WCFS R/L__3	
	R4 CF							4,0	WCFH__4	WCFS R/L__4	
	L4 CF			○				4,0			
WCF _2T Small diameter Low cutting force 	WCF N2T	●						2,0			
	R2T	○						2,0	WCFH__2	WCFS R/L__2	
	L2T	○						2,0			
WCF __ Without chip breaker General steel 	WCF N3	●						3,0			
	R3	●						3,0	WCFH__3	WCFS R/L__3	
	L3	●						3,0		WCFS R/L__3	
	WCF N4	●						4,0			
	R4	○						4,0	WCFH__4	WCFS R/L__4	
	L4	●						4,0			
	WCF N5	●						5,0			
	R5	○						5,0	WCFH__5	WCFS R/L__5	
L5	○						5,0				
WCF __A Exotic alloy Low feed 	WCF N2A		●					2,0	WCFH__2	WCFS R/L__2	
	WCF N3A	●	●		○			3,0			
	R3A		●					3,0	WCFH__3	WCFS R/L__3	
	L3A		●					3,0		WCFS R/L__3	
	WCF N4A		●				●	4,0			
	R4A		●					4,0	WCFH__4	WCFS R/L__4	
	L4A		●					4,0			
WCF N5A		●					5,0				
R5A		○					5,0	WCFH__5	WCFS R/L__5		
L5A							5,0				
WCF __B Cast iron Light alloys Note: With the similar chip breaker style as for general steel (WCF __) but with smaller edge preparation.	WCF N3B							3,0			
	R3B							3,0	WCFH__3	WCFS R/L__3	
	L3B							3,0		WCFS R/L__3	
	WCF N4B							4,0			
	R4B							4,0	WCFH__4	WCFS R/L__4	
	L4B							4,0			
	WCF N5B							5,0			
R5B							5,0	WCFH__5	WCFS R/L__5		
L5B							5,0				

Recommended Cutting Conditions

Work Material		Cutting Speed (m/min)					
		AC830P	AC225	AC1030U	T1500A	A30	G10
Steel	General Steel	80-200	80-200	50-200	80-200	50-120	-
	Soft Steel	100-230	100-230	50-230	100-230	70-150	-
	Die Steel	60-150	60-150	50-150	60-150	50-120	-
Stainless Steel		70-150	70-150	50-150	-	70-130	-
Cast Iron		-	-	50-200	-	-	50-120
Non-Ferrous Metal		-	-	200-500	-	-	200-500

Chip Breaker		Feed Rate (mm/rev)										
		Neutral						Left or Right Handed				
		GG	GF	Without Chip Breaker	T	A	B	Without Chip Breaker	CF	T	A	B
		General Purpose	Exotic Alloy Low Cutting Force	General Steel	Small Diam. Low Cutting Force	Exotic Alloy Low Feed	Cast Iron Light Alloys	General Steel	Exotic Alloy Low Cutting Force	Small Diam. Low Cutting Force	Exotic Alloy Low Feed	Cast Iron Light Alloys
Groove Width W (mm)	2,0	0,05-0,20	0,03-0,12	-	0,03-0,10	0,03-0,12	-	-	-	0,03-0,10	-	-
	3,0	0,08-0,25	0,04-0,15	0,08-0,25	-	0,04-0,15	0,05-0,15	0,08-0,25	0,08-0,12	-	0,04-0,15	0,05-0,15
	4,0	0,10-0,30	0,05-0,18	0,10-0,30	-	0,05-0,18	0,05-0,18	0,10-0,30	0,10-0,30	-	0,05-0,18	0,05-0,18
	5,0	0,10-0,35	0,05-0,20	0,10-0,30	-	0,05-0,20	0,06-0,20	0,10-0,20	0,10-0,30	-	-	0,06-0,20

● = Euro stock
○ = Japan stock

Threading Tools



■ General Features


Sumitomo Electric has developed „TME“ external threading inserts with pitch ranges of 1,0–3,0 mm or 10–24 threads/inch and „TMI“ internal threading inserts with a pitch range of 1,0–3,0 mm.

The superior features of the new sintered threading inserts include an M-class tolerance and dimple shaped chip breaker. The M-class tolerance reduces insert cost by eliminating the need for expensive grinding.


Furthermore, chip control is greatly improved as a result of the specially designed dimple chip breakers.

■ New Series of Indexable Inserts and Holders for Threading

■ For External Threading

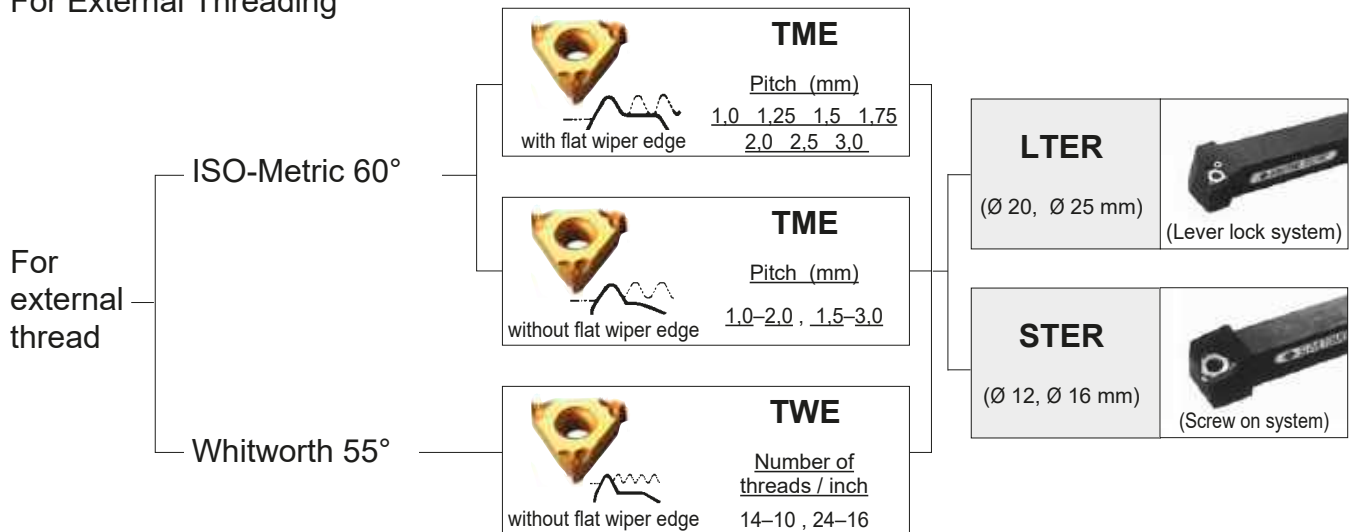


■ For Internal Threading

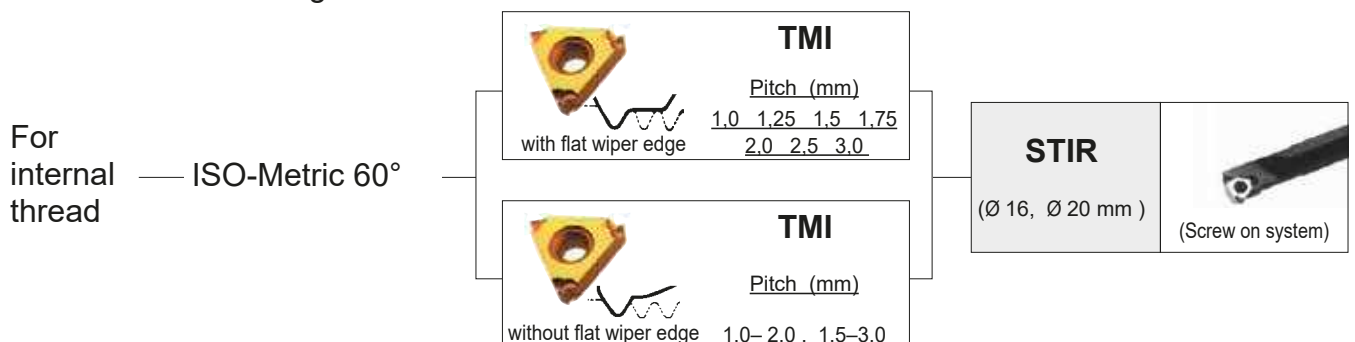


Threading Tools

Threading Insert

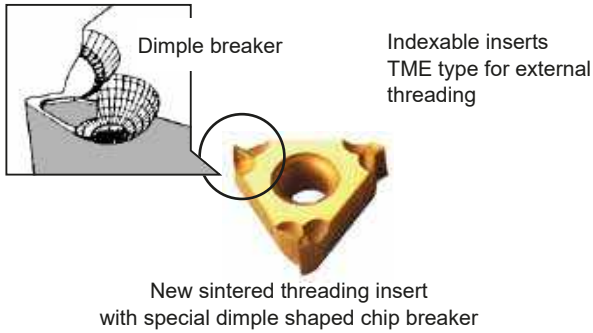

● Comparison of Chip Control




Work material: 25 CrMo 4
Cutting speed: 100 m/min
Pitch: 1,5 mm

■ General Features

- A positive rake angle encourages good chip control and reduces cutting resistance.
- Two tier dimple-style chip breakers evacuate chip smoothly and easily.
- M-class tolerance reduces insert cost.
- Four available grades cover a wider range of applications.
- The LTER type holder is designed for easy clamping and replacement.


● Comparison of Tool Life

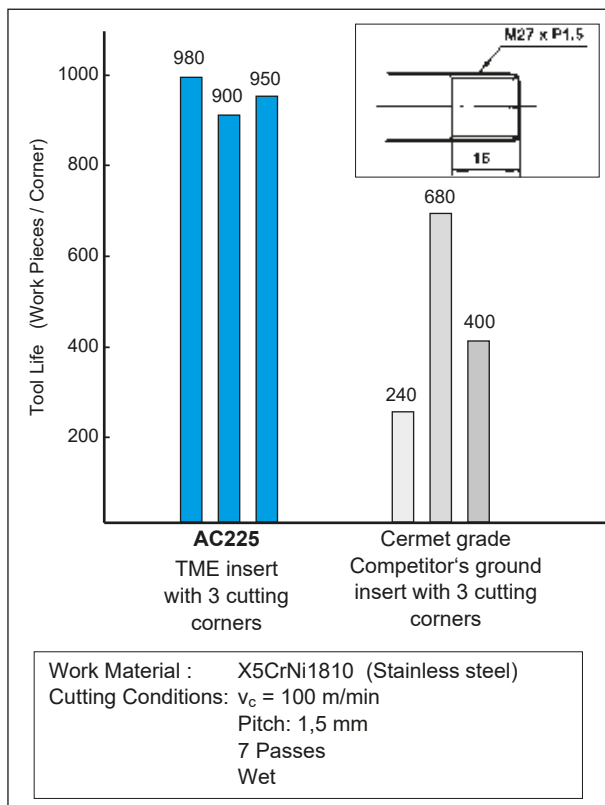

■ Cutting Grades for Threading

AC225

The AC225 is a carbide insert with a 2 μ m multiple-layer coating. This design results in improved toughness and adhesion resistance making this grade **suitable for stainless steel and general steel.**



Neue Cermet-Grade T130A

T130A

The T130A is a cermet grade containing high TiN with a uniform fine-grain microstructure which results in improved wear resistance and toughness. Thus, the T130A **produces a goods surface finish.**

Threading Tools

Cutting Conditions

Recommended Cutting Conditions

● Cutting Speed (m/min.)

Work material	Grade	
	AC225	T1500A/T130A
Soft steel	150-170	100-150
Carbon steel	100-170	80-130
Alloy steel	90-150	80-120
Stainless steel	70-140	-

● Depth of Cut (Wiper Insert)


	Cat. No.	Pitch	Depth of Cut	Pass	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
ISO-Metric 60°	External	TME 100R	1,00	0,68	5	0,20	0,16	0,14	0,11	0,07									
		TME 125R	1,25	0,82	6	0,20	0,18	0,15	0,12	0,10	0,07								
		TME 150R	1,50	0,96	7	0,22	0,18	0,14	0,13	0,12	0,10	0,07							
		TME 175R	1,75	1,12	8	0,22	0,19	0,16	0,14	0,13	0,12	0,09	0,07						
		TME 200R	2,00	1,25	8	0,25	0,21	0,18	0,16	0,15	0,13	0,10	0,07						
		TME 250R	2,50	1,55	10	0,27	0,24	0,20	0,18	0,16	0,13	0,11	0,10	0,09	0,07				
		TME 300R	3,00	1,86	12	0,28	0,25	0,20	0,19	0,17	0,15	0,13	0,12	0,10	0,10	0,09	0,07		
		TME 350R	3,50	2,25	13	0,30	0,27	0,24	0,22	0,20	0,18	0,16	0,15	0,14	0,12	0,11	0,09	0,07	
		TME 400R	4,00	2,57	14	0,35	0,32	0,29	0,26	0,23	0,20	0,17	0,15	0,14	0,12	0,10	0,09	0,08	0,07
	Internal	TMI 100R	1,00	0,63	5	0,18	0,16	0,12	0,10	0,07									
		TMI 125R	1,25	0,77	6	0,18	0,16	0,14	0,12	0,10	0,07								
		TMI 150R	1,50	0,90	7	0,20	0,16	0,14	0,13	0,11	0,09	0,07							
		TMI 170R	1,75	1,03	8	0,20	0,18	0,15	0,14	0,11	0,10	0,08	0,07						
		TMI 200R	2,00	1,18	8	0,22	0,19	0,17	0,15	0,14	0,13	0,11	0,07						
		TMI 250R	2,50	1,44	10	0,25	0,22	0,19	0,16	0,14	0,12	0,10	0,10	0,07	0,07				
		TMI 300R	3,00	1,70	12	0,27	0,24	0,20	0,17	0,14	0,12	0,10	0,10	0,10	0,09	0,06	0,07		

● Depth of Cut (Non Wiper Insert)


	Cat. No.	Radius	Pitch	Depth of Cut	Pass	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
ISO-Metric 60°	External	TME 1020R	0,13	1,00	0,68	5	0,20	0,16	0,12	0,10	0,07									
				1,25	0,84	6	0,20	0,18	0,16	0,13	0,10	0,07								
				1,50	1,03	7	0,22	0,20	0,17	0,15	0,12	0,10	0,07							
				1,75	1,22	8	0,22	0,21	0,18	0,16	0,15	0,13	0,10	0,07						
				2,00	1,41	10	0,22	0,20	0,18	0,16	0,14	0,13	0,12	0,10	0,09	0,07				
	External	TME 1530R	0,20	1,50	0,95	7	0,22	0,17	0,14	0,13	0,12	0,10	0,07							
				1,75	1,14	8	0,22	0,18	0,15	0,14	0,13	0,12	0,09	0,07						
				2,00	1,33	9	0,25	0,20	0,18	0,16	0,15	0,13	0,10	0,09	0,07					
				2,50	1,71	12	0,25	0,22	0,19	0,17	0,15	0,14	0,13	0,12	0,10	0,09	0,08	0,07		
	Internal	TMI 1020R	0,06	1,00	0,59	6	0,16	0,12	0,10	0,08	0,08	0,05								
				1,25	0,75	7	0,16	0,14	0,12	0,10	0,10	0,08	0,05							
				1,50	0,92	8	0,18	0,15	0,14	0,12	0,10	0,10	0,08	0,05						
				1,75	1,08	9	0,18	0,16	0,14	0,13	0,12	0,12	0,10	0,08	0,05					
				2,00	1,24	10	0,20	0,18	0,15	0,14	0,12	0,12	0,10	0,10	0,08	0,05				
		Internal	TMI 1530R	0,09	1,50	0,91	8	0,18	0,14	0,14	0,12	0,10	0,10	0,08	0,05					
					1,75	1,07	9	0,18	0,16	0,13	0,13	0,12	0,12	0,10	0,08	0,05				
2,00					1,23	10	0,20	0,18	0,14	0,14	0,12	0,12	0,10	0,10	0,08	0,05				
2,50					1,56	12	0,20	0,18	0,16	0,16	0,15	0,13	0,13	0,11	0,11	0,10	0,08	0,05		
3,00					1,88	14	0,22	0,20	0,18	0,18	0,16	0,16	0,14	0,14	0,10	0,10	0,10	0,08	0,07	0,05

The shorter pitch, the slower speed. In case of non wiper insert or internal threading, passing time should be requested to increase.

External Threading Holders LTER / STER Type

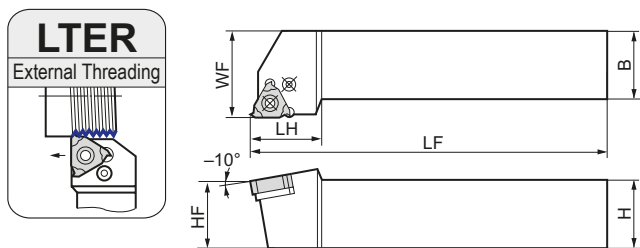

These figures show right hand tools.

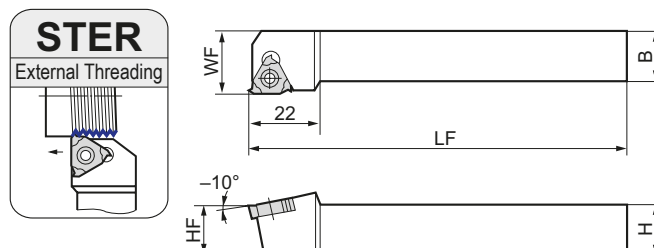

These figures show right hand tools.


■ Holders with Lever Lock System

Cat. No.	Stock	Dimensions (mm)				
		H	HF	B	LF	WF
LTER 2020	●	20	20	20	125	25
LTER 2525	●	25	25	25	150	32
LTER 2525M22	○	25	25	25	150	32
LTER 3232P22	○	32	32	32	170	40

■ Holders with Screw on System

Cat. No.	Stock	Dimensions (mm)				
		H	HF	B	LF	WF
STER 1212	●	12	12	12	100	16
STER 1616	●	16	16	16	100	20

■ Inserts

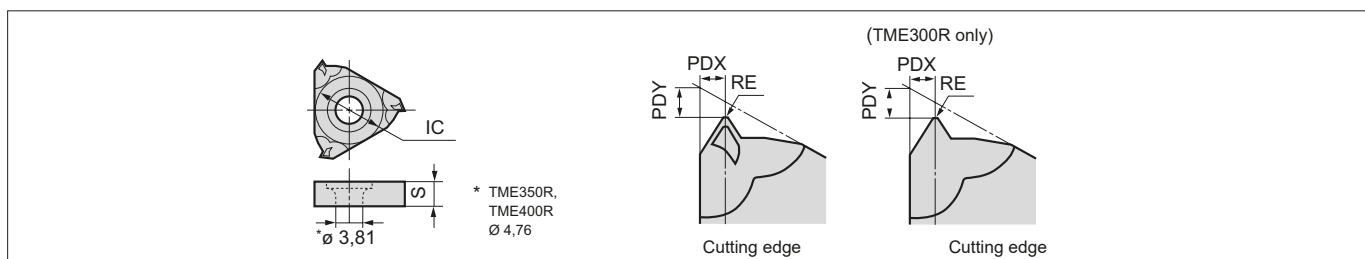


Types	Cat. No.	Pitch		Stock			Dimensions (mm)					Applicable Holders	
		(mm)	Threads No./inch	AC225	T1500A	T130A	RE	PDX	PDY	IC	S		
60° Metric Thread	TME 100R	1,00	-	●	○	●	0,11	0,8	1,2	9,525	3,65	(1)	LTER 2020 LTER 2525 STER 1212 STER 1616
	TME 125R	1,25	-	●	○		0,15	0,8	1,2	9,525	3,65	(1)	
	TME 150R	1,50	-	●	○	●	0,19	1,0	1,2	9,525	3,65	(1)	
	TME 175R	1,75	-	●		○	0,22	1,2	1,2	9,525	3,65	(1)	
	TME 200R	2,00	-	●	○	○	0,26	1,4	1,2	9,525	3,65	(1)	
	TME 250R	2,50	-	●		○	0,33	1,4	1,2	9,525	3,65	(1)	
	TME 300R	3,00	-	●			0,40	1,8	1,2	9,525	3,65	(1)	
	TME 350R	3,50	-				0,47	2,5	1,7	12,70	4,60	(1)	
	TME 400R	4,00	-	○	○		0,54	2,5	1,7	12,70	4,60	(1)	
55° Whitworth Thread	TME 1020R	1,00-2,00	24-12	●			0,11	1,1	1,2	9,525	3,65	(2)	LTER 2525M22 LTER 3232P22
	TME 1530R	1,50-3,00	16-8	●			0,19	1,6	1,0	9,525	3,65	(2)	
	TWE 1410R	-	14-10				0,21	1,4	1,2	9,525	3,65	(3)	
	TWE 2416R	-	24-16				0,11	1,1	1,2	9,525	3,65	(3)	LTER 2020 LTER 2525

Remarks: (1) TME100R-300R (ISO Thread), (2) TME1020R, 1530R ISO Thread without chamfer, (3) TWE1410R, 2416R (Whitworth Thread) without chamfer

■ LTER Type Holder Shim Selection

$\beta=3^\circ$ (Shim LSTE __-2) $\beta=2^\circ$ (Shim LSTE __-1)

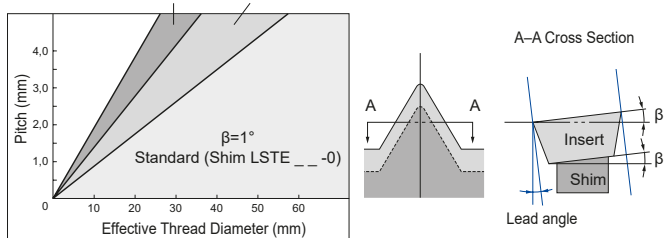



■ Spare Parts

Holder	Lever Pin	Screw	Shim	Shim pin	Wrench
LTER2020,2525	LCL3S	LCS3TE	LSTE31-0*)	LSP3	LH025
LTER2525M22, 3232P22	LCL4S	LCS4	LSTE42-0	LSP4	LH030

*) Remarks: LTER type has supplement of $\beta=1^\circ$ shim LSTE 31-0
Shims LSTE 31-1 for $\beta=2^\circ$ and LSTE 31-2 for $\beta=3^\circ$ are option.

■ Spare Parts

Holder	Screw		Wrench
STER	BFTX03508	2,0	TRX 10

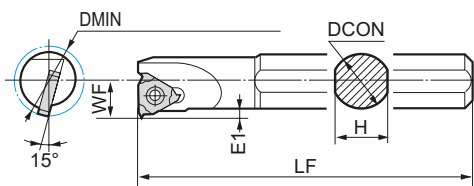


These figures show right hand tools.

■ Holders with Screw on System

Cat. No.	Stock	Dimensions (mm)					
		DCON	H	LF	E1	WF	DMIN
STIR 316	●	16	15	150	3,5	11	20
STIR 320	●	20	18	180	5,0	14	25

■ Inserts

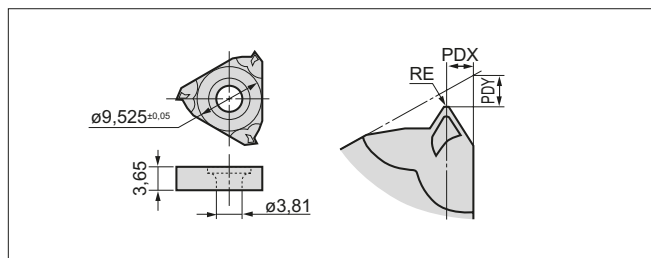

Cat. No..	Pitch		Stock		Dimensions (mm)			
	(mm)	Threads No./inch	AC225	T1500A	RE	β	PDX	PDY
TMI 100R	1,00	-	●	○	0,04	60	0,8	1,2
TMI 125R	1,25	-	○		0,05	60	0,8	1,2
TMI 150R	1,50	-	●		0,07	60	1,0	1,2
TMI 175R	1,75	-			0,09	60	1,2	1,2
TMI 200R	2,00	-	●		0,10	60	1,4	1,2
TMI 250R	2,50	-	●		0,14	60	1,4	1,2
TMI 300R	3,00	-	●		0,18	60	1,8	1,2
TMI 1020R	1,00-2,00	24-12			0,04	60	1,0	1,2
TMI 1530R	1,50-3,00	16-8	●		0,07	60	1,5	1,2

Remarks: (1) TME100R-300R (ISO Thread)
(2) TME1020R,1530R (ISO Thread) without chamfer

■ Spare Parts

Holder	Screw		Wrench
STIR	BFTX03508	2,0	TRX 10

Milling Cutters

G1-G70

























G















	Selection Guide	Milling Cutter Selection Guide	G 2-3
	ISO	Milling Insert Identification Table	G 4-5
Face Milling	General Purpose Face Mills	DGC (M/F) 13000	G 6-9
		WGX (M/F) 13000	G10-11
		WGC (M/F) 3000/4000	G12-13
		UFO (F) 4000/5000	G14-15
		DNX (F) 12000	G16-17
Multi Purpose Milling	"Wave Radius Mills" with Polygon Inserts with Round Inserts	WRCX (F) 12000/16000/20000	G18-19
		RSX	G20-21
		RSX (F) 10000/12000/16000/20000	G22-23
Shoulder Milling	"Sumi Dual Mill"	DFC 09000	G24-27
	"Wave Mills" for Shoulder Milling	WFX	G28-29
		WFX (M/F) 08000	G30
		WFX (F) 12000	G31
	"Sumi Dual Mill", tangential	TSX	G32-33
		TSX (F) 08000	G34
		TSX (M) 13000	G35
	Tangential Milling System	PWS (F) 4000	G36-37
	Wave Mills" for Shoulder Milling	WEZ 	G38-44
		WEZ 11000/17000	G45-47
	"Wave Mills" for Shoulder Milling	WEX (F) 1000/2000/3000	G48
	Repeater Mill	WRX (F)	G49
		PWC (F) 4000	G50-51
		CNP (F) 13000	G52
Others	High Feed Milling	MSX 08000/12000/14000	G53
	High Feed Milling	WFXH	G54-55
		WFXH 08000/12000	G56-57
	"Wave Mill" Series for Aluminium	WAX 3000	G58
		WAX 4000	G59
	High Speed Non-Ferrous Milling	ANX 	G60-65
		ANXS/ANXA 16000	G62/63
	Aluminium Milling	SUMIDIA "RF"	G66
		SUMIDIA "SRF"	G67
	Grey Cast Iron Milling	SUMIBORON "BN Finish Mill" FMU	G68-69

Milling Cutters


Face Mill and Shoulder Mill Selection Guide

Application	Cutter Type	Series	Insert Type	Approach Angle Max. Depth of Cut (mm) 	Cutter Diameter (mm)	Application											Work Material						Ref. Page	
						Face Milling		Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile Finishing	Carbon Steel / Alloy Steel	Tempered Steel / Die Steel	Stainless Steel	Cast Iron / Ductile Cast Iron	Non-Ferrous Metal	Aluminium Alloy	Ti Alloy / Heat Resistant Alloy	Hardened Steel HRC 45 ~ 55		
						General Purpose	Finishing																	High Feed
Face Milling	DGC 	DGC (-M/F) 13000RS	SNM/EU 13T6..  ONM/EU 05T6.. 	SNMU 6 mm 45° ONMU 3 mm 45°	40-250 42,9-52,9	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G8	
	WGX 	WGX (-M/F) 13000RS	SEE/MT 13T3.. 	6 mm 45°	40-250	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G10	
	WGC 	WGC 3000 RS 4000 RS WGC (-M/F) 4000 RS	SEE/MT0903.. (IC/I = 9,525) SEE/MT13T3.. (IC/I = 13,4) 	4 mm 45° 6 mm 45°	32-100 40-200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G12
	UFO 	UFO (-F) 4000 RS UFO 5000 RS	SFK-NR12T3.., SFK-N1504.. 	5 mm 45° 7 mm 45°	50-315 80-315	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G14 G15
	DNX 	DNX (-F) 12000RS	SNMT 1205.. 	8 mm 65°	80-250	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G16
Radius Milling	RSX 	RSX (-F) 10000RS RSX (-F) 12000RS RSX (-F) 16000RS RSX (-F) 20000RS	RDET10T3.. RDET1204..  RDET1606.. RDET2006..	5 mm 6 mm 8 mm 10 mm	40-52 40-100 63-160 80-160	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G22	
	WRCX 	WRCX (-F/X) 12000RS 16000RS 20000RS	QPMT1204../1606../2006 QPET1204../1606.. 	6 ~ 10 mm	40-160	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G19	
	MSX 	MSX 08000RS 12000RS 14000RS	WDMT0603../0804../1205.. 1406.. 	1,5 ~ 2,5 mm 20°	40-100	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G43	
	WFXH 	WFXH 08000RS WFXH 12000RS	SOMT0803.. SOMT1204.. 	1,5 mm 15° 2,5 mm 15°	40-63 50-63	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G46 G47	
Shoulder Milling	DFC 	DFC (-M/F) 09000RS	XNMU0606.. 	6 mm 90°	50-200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G26	
	WFX 	WFX (-F-M) 08000RS WFX (-F) 12000 RS	SOMT080.. SOMT1204.. 	6 mm 90° 10 mm 90°	50-160	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	G30 G31	


Face Mill and Shoulder Mill Selection Guide

Application	Cutter Type	Series	Insert Type	Approach Angle Max. Depth of Cut (mm)	Cutter Diameter (mm)	Application										Work Material					Ref. Page			
						Face Milling	High Feed	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile Finishing	P	M	K	N	S	H				
															Carbon Steel / Alloy Steel	Tempered Steel / Die Steel	Stainless Steel	Cast Iron / Ductile Cast Iron	Non-Ferrous Metal	Aluminium Alloy		Ti Alloy / Heat Resistant Alloy	Hardened Steel HRC 45 ~ 55	
Shoulder Milling	TSX	TSX (-F) 08000RS	LNEX0804...LNEX1306.. 	8 mm 90°	40-63	○	○															G34		
		TSX (-M) 13000 RS		12 mm 90°	40-160																			G35
	PWS	PWS (-F) 4000 RS	LNMX1708.. 	16 mm 90°	80-250			○	○	○	○												G37	
	WEZ	WEZ 11000R(S)	AOMT11T302PEER-G 	10 mm 90°	40-100	○	○			○	○	○											G45	
		WEZ 17000R(S)		15 mm 90°	40-160																			G47
	WEX	WEX 1000F	WEX 2000F	WEX 3000F	AXMT0602.. AXMT1235.. AXMT1705.. 	5 mm 90°	10-100																	G48
						10 mm 90°																		
						14 mm 90°																		
	WRX	WRX 2000F	WRX 3000F	AXMT12350../1705.. 	18 ~ 36 mm 90°	40-50																	G49	
					27 ~ 53 mm 90°	50-100																		
PWC	PWC (-F) 4000 RS	LNMX1606.. 	12 mm 88°	80-200					○	○	○											G50		
CNP	CNP (-F) 13000 RS	CNMU1306.. CNMQ1306.. 	12 mm 90°	40-200																		G52		
Aluminium Alloy and Non-Ferrous Metals	WAX	WAX 3000 RS	AECT1604 	16 ~ 18 mm 90°	50-125																		G58	
		WAX 4000 RS		22 ~ 24 mm 90°																				
	ANX	ANXS 16000R(S)	ANB 1600R-L 	3 mm 90°	40-125																		G62	
		ANXA 16000R(S)			80-160																			G63
RF	RF 4000 RS	SNEW1204.. SDET1204.. 	3 mm 90°	80-315	○	○																G66		
SRF	SRF 50/63 RS	SNEW09T3.. 	5 mm 90°	30-63	○	○			○													G67		
High Speed Finishing of Cast Iron	FMU	FMU 4000 RS	SNEW1203.. 	0.5 mm 45°	80-315																	G68		

Milling Insert ISO Identification Table

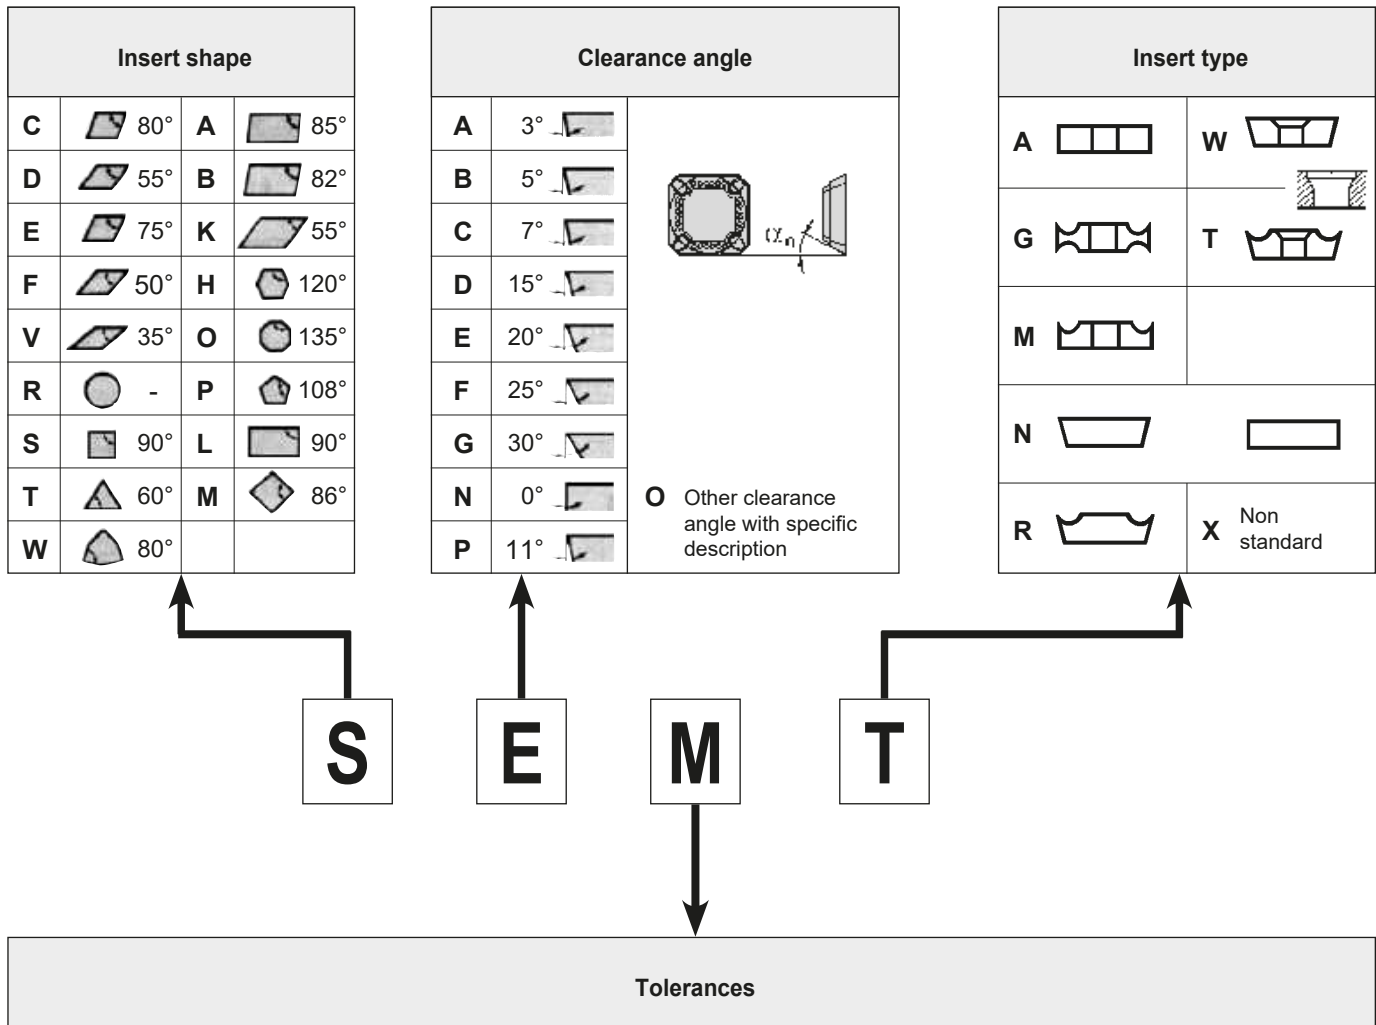


Tolerances

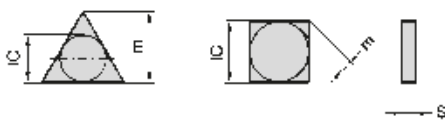

IC: theoretical diameter of inscribed circle
m: nose height
s: thickness

Class	Tolerances (mm)		
	m	IC	s
A	±0,005	±0,025	±0,025
F	±0,005	±0,013	±0,025
C	±0,013	±0,025	±0,025
H	±0,013	±0,013	±0,025
E	±0,025	±0,025	±0,025
G	±0,025	±0,025	±0,13


Class	Tolerances (mm)		
	m	IC	s
J	±0,005	±0,05 – ±0,13*	±0,025
K	±0,013	±0,05 – ±0,13*	±0,025
L	±0,025	±0,05 – ±0,13*	±0,025
M	±0,08~ ±0,18*	±0,05 – ±0,13*	±0,13
N	±0,08~ ±0,18*	±0,05 – ±0,13*	±0,025
U	±0,13~ ±0,38*	±0,08 – ±0,25*	±0,13



* The tolerance is dependent upon the insert size of IC. See tables below.

Tolerance class for dimension m

m	S	T	C	W	V	D
6,35		±0,08			-	±0,11
9,525		±0,08			±0,13	±0,11
12,7		±0,13				±0,15
15,875		±0,15				±0,18
19,05		±0,15				±0,18
25,4		±0,18				




Tolerance class for dimension IC

IC	S	T	C	D	V	W	R
6,35			±0,05				
9,525			±0,05				±0,05
12,7			±0,08				±0,08
15,875			±0,10				±0,10
19,05			±0,10				±0,10
25,4			±0,13				±0,10

Milling Insert ISO Identification Table

Thickness




02 s = 2,38 mm
03 s = 3,18
T3 s = **3,97**
04 s = 4,76
05 s = 5,56
06 s = 6,35
07 s = 7,94
09 s = 9,52

Corner geometry with wiper flat

Entering angle


Feed direction →



A 45°
D 60°
E 75°
F 85°
P 90°
Z - Others


1. Major cutting edge
 2. Chamfered corner
 3. Wiper flat
 4. Side cutting edge

Clearance angle on wiper flat





A 3°
B 5°
C 7°
D 15°
E 20°
F 25°
G 30°
N 0°
P 11°
Z - Others








Radius




02 r = 0,2 mm
04 r = 0,4
08 r = 0,8
12 r = 1,2
16 r = 1,6
20 r = 2,0
24 r = 2,4


M0 - Round insert (metric)
00 - Round insert (inch)

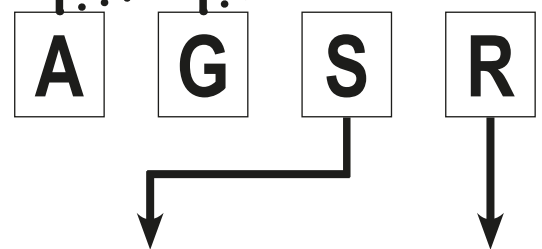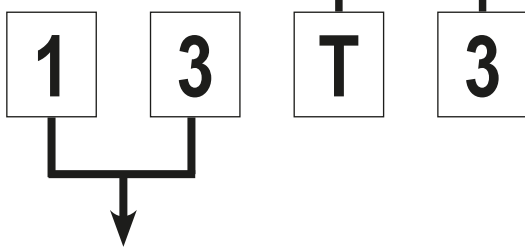



Insert size Symbol and cutting edge length (mm)							
IC d (mm)	Insert type						
	C 	D 	R 	S 	T 	V 	W 
3,97					06 (6,9)		
4,76					08 (8,2)		
5,0			05 (5,0)				
5,56					09 (9,6)	09 (9,7)	03 (3,8)
6,0			06 (6,0)				
6,35	06 (6,4)	07 (7,7)		06 (6,35)	11 (11,0)	11 (11,1)	04 (4,3)
7,94	08 (8,0)			07 (7,94)			05 (5,4)
8,0			08 (8,0)				
9,525	09 (9,7)	11 (11,6)	09 (9,525)	09 (9,525)	16 (16,5)	16 (16,6)	06 (6,5)
10			10 (10,0)				
12			12 (12,0)				
12,7	12 (12,9)	15 (15,5)	12 (12,7)	12 (12,7)	22 (22,0)		08 (8,7)
15,875	16 (16,1)	19 (19,4)	15 (15,875)	15 (15,875)	27 (27,5)		10 (10,9)
16			16 (16,0)				
19,05	19 (19,3)		19 (19,05)	19 (19,05)	33 (33,0)		
20			20 (20,0)				
25			25 (25,0)				
25,4			25 (25,4)	25 (25,4)			
31,75			31 (31,75)	31 (31,75)			
32			32 (32,0)				

Cutting edge condition

F  Sharp


E  Rounded

T  Chamfered


S  Rounded and chamfered

Feed direction


Right hand



Neutral



Left hand



"Sumi Dual Mill" DGC (M/F) Type



General Features

Sumi Dual Mill DGC type utilizes double-sided inserts for excellent economy. This is a general-purpose cutter featuring high cutting edge strength for high efficiency milling and low-burr chipbreaker design that provides high quality machined surface.


The DGC type insert lineup includes double-sided SNMU / SNEU and ONMU / ONEU types. Up to 16 corners can be used for improved economy.




Characteristics

- Same cutting performance as single-sided inserts plus superior economy.
- Achieves level of cutting edge sharpness and machined surface quality equivalent to single-sided cutter at a maximum cutting depth of $a_p \leq 3$ mm.

Recommended Cutting Conditions for General Steel Milling

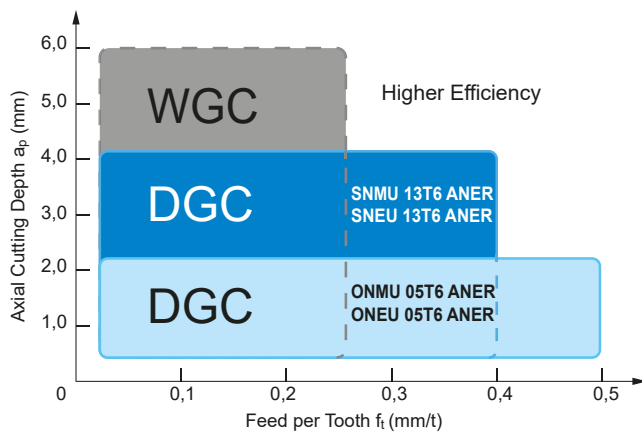

Cutting Force Comparison

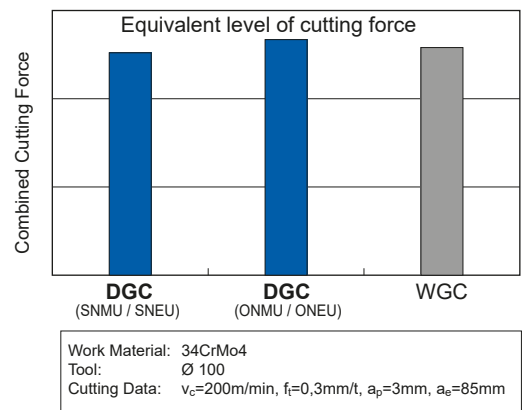

Dual-Purpose Body

Two types of inserts can be used with a single body depending on milling application to help reduce costs. Stronger than single-sided cutters.



- first recommendation
- economical double-sided design offers 8 cutting edges with SN_U inserts
- maximum depth of cut: $a_p = 6$ mm

shim to protect cutter body



Use two types of inserts for different applications.



- double-sided design with 16 corners for improved economy
- maximum depth of cut: $a_p = 3$ mm

"Sumi Dual Mill" DGC (M/F) Type

Line-up


Choose a tool that fits your application from a comprehensive line-up

Cat. No	DGC 13000 RS	DGCM 13000 RS	DGCF 13000 RS	DGC 13000 EW
Type	Standard pitch	Medium pitch	Fine pitch	Endmill type
Cutter Diameter	Ø 40 mm – Ø 250 mm	Ø 50 mm – Ø 250 mm	Ø 50 mm – Ø 250 mm	Ø 40 mm – Ø 63 mm
Cutting Edges	3–10	4–14	5–18	3–4
Shape				 H6


High Reliability

Employs New Super ZX Coating, a multi-layer PVD coating grade and CVD coating grade with enhanced coating strength provided by newly developed stress control technology. Improved run-out precision reduces tool life deviation to achieve highly reliable tool life.

Multi-layer PVD Coating

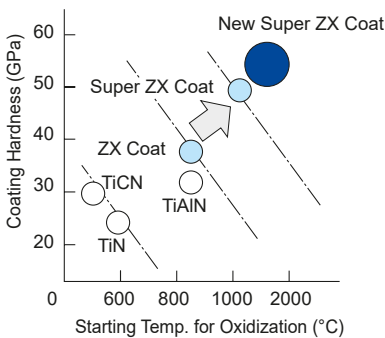


Wear Resistance

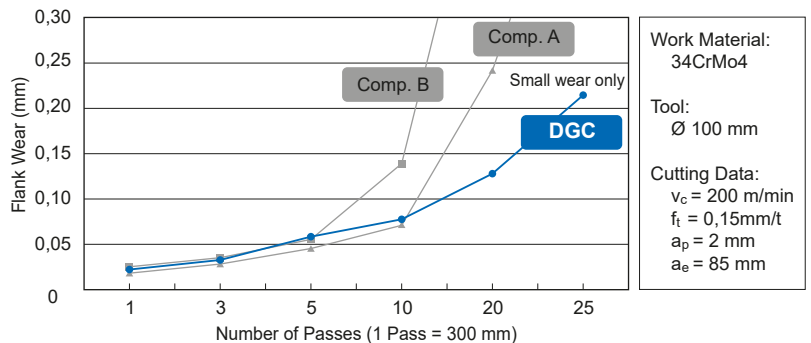



Cutter Diameter and Cutter Body Height

Insert: SN_U 13T6 ANER (square)

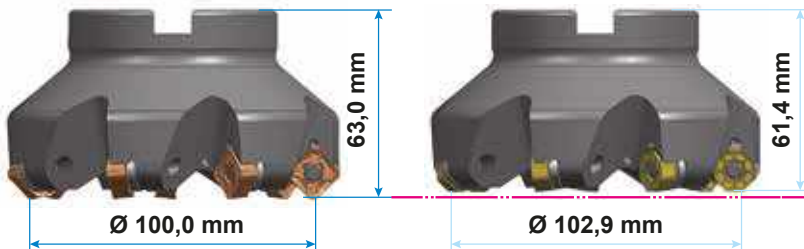Insert: ON_U 05T6 ANER (octagonal)



Example: DC = 100mm	Number of Cutting Edges	Tool Diameter (mm)	Cutter Height (mm)	Max. Depth of Cut (mm)
SNMU/SNEU 	8	100,0	63,0	6,0
ONMU/ONEU 	16	102,9	61,4	3,0

Square inserts (SNMU/SNEU) and octagonal inserts (ONMU/ONEU) can be used interchangeably on the same body. Using these inserts the cutter will have different cutter diameter and cutter body height.

"Sumi Dual Mill" DGC (M/F) Type

General Milling of Steel and Cast Iron

Body – Shell type

Rake Angle	Radial	-10°
	Axial	-5°




Fig. 1




Fig. 2




Fig. 3





Fig. 4



Cutter body Ø DC ≥ 160 mm: no inner coolant

Body

● Type: DGC, Standard Pitch

Cat. No.	Stock	Dimension (mm)									No. of Teeth	Weight (kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	D1	KWW	KDP	CBDP			
DGC 13040 RS	●	40 (42,90)	54	36	40 (38,44)	16	13,5	8,4	5,6	18	3	0,3	1
13050 RS	●	50 (52,90)	64	40	40 (38,44)	22	18,0	10,4	6,3	20	3	0,4	1
13063 RS	●	63 (65,90)	77	50	40 (38,44)	22	18,0	10,4	6,3	20	4	0,5	1
13080 RS	●	80 (82,90)	94	60	50 (48,44)	27	20,0	12,4	7,0	25	4	1,2	1
DGC 13100 RS	●	100 (102,90)	114	70	50 (48,44)	32	46,0	14,4	8,5	32	5	1,6	2
13125 RS	●	125 (127,90)	139	80	63 (61,44)	40	52,0	16,4	9,5	29	6	2,8	1
13160 RS	●	160 (162,90)	174	130	63 (61,44)	40	88,0	16,4	9,5	29	7	4,5	3
DGC 13200 RS	□	200 (202,90)	214	150	63 (61,44)	60	130,0	25,7	14,0	35	8	7,1	4
13250 RS	□	250 (252,90)	264	190	63 (61,44)	60	160,0	25,7	14,0	35	10	11,2	4

● Type: DGCM, Medium Pitch


Cat. No.	Stock	Dimension (mm)									No. of Teeth	Weight (kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	D1	KWW	KDP	CBDP			
DGCM 13050 RS	●	50 (52,90)	64	40	40 (38,44)	22	18	10,4	6,3	20	4	0,3	1
13063 RS	●	63 (65,90)	77	50	40 (38,44)	22	18	10,4	6,3	20	5	0,5	1
13080 RS	●	80 (82,90)	94	60	50 (48,44)	27	20	12,4	7,0	25	6	1,1	1
DGCM 13100 RS	●	100 (102,90)	114	70	50 (48,44)	32	46	14,4	8,5	32	7	1,5	2
13125 RS	●	125 (127,90)	139	80	63 (61,44)	40	52	16,4	9,5	29	8	2,8	1
13160 RS	●	160 (162,90)	174	130	63 (61,44)	40	88	16,4	9,5	29	10	4,6	3
DGCM 13200 RS	□	200 (202,90)	214	150	63 (61,44)	60	130	25,7	14,0	35	12	7,0	4
13250 RS	□	250 (252,90)	264	190	63 (61,44)	60	160	25,7	14,0	35	14	11,1	4

● Type: DGCF, Fine Pitch

Cat. No.	Stock	Dimension (mm)									No. of Teeth	Weight (kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	D1	KWW	KDP	CBDP			
DGCF 13050 RS	●	50 (52,90)	64	40	40 (38,44)	22	18	10,4	6,3	20	5	0,3	1
13063 RS	●	63 (65,90)	77	50	40 (38,44)	22	18	10,4	6,3	20	6	0,5	1
13080 RS	●	80 (82,90)	94	60	50 (48,44)	27	20	12,4	7,0	25	8	1,1	1
DGCF 13100 RS	●	100 (102,90)	114	70	50 (48,44)	32	46	14,4	8,5	32	10	1,4	2
13125 RS	●	125 (127,90)	139	80	63 (61,44)	40	52	16,4	9,5	29	12	2,7	1
13160 RS	●	160 (162,90)	174	130	63 (61,44)	40	88	16,4	9,5	29	14	4,4	3
DGCF 13200 RS	□	200 (202,90)	214	150	63 (61,44)	60	130	25,7	14,0	35	16	6,9	4
13250 RS	□	250 (252,90)	264	190	63 (61,44)	60	160	25,7	14,0	35	18	11,0	4

() Figures in brackets indicate values for ONMU inserts.
Inserts are not included.

Identification Details



● = Euro stock
□ = Delivery on request

Recommended Tightening Torque (N·m)

"Sumi Dual Mill" DGC Type

■ Inserts

Application	Coated Carbide						Fig.	
	P	M	M	K	K	MS		
High Speed/Light cut	P			K		MS		
General Purpose		P/M	M	K		MS		
Roughing		P/M	P/M	K		MS		
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	Fig.
SNMU 13T6ANER L	●	●	●	●	●			1
13T6ANER G	●	●	●	●	●			1
13T6ANER H	●	●	●	●	●			1
13T6ANER FL	●	●	●	●	●			2
13T6ANER FG	●	●	●	●	●			2
SNEU 13T6ANER L						●	●	1
13T6ANER G						●	●	1
13T6ANER FL						●	●	2
13T6ANER FG						●	●	2
XNEU 13T6ANEN W		●			●			3
ONMU05T6ANER L	●	●	●	●	●			4
05T6ANER G	●	●	●	●	●			4
ONEU 05T6ANER L						●	●	4
05T6ANER G						●	●	4

Fig. 1




Fig. 2




Fig. 3






Fig. 4





■ Chipbreaker

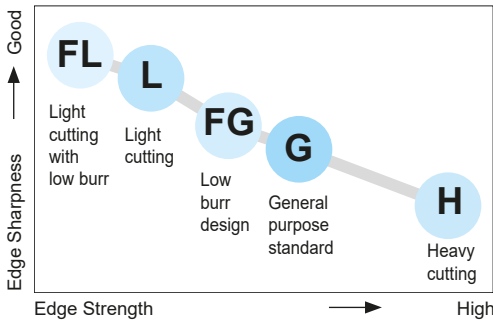

● Improved Milling Quality

FG type chipbreakers feature chamfer to minimize burrs and provide excellent milling quality.



FG type inserts with low-burr design enable high-quality milling with few burrs and little edge chipping.


● Attaching Inserts



Octagonal Inserts

Firmly align insert with supporting face, press down in the direction of the arrow and tighten the screw to fix the insert.

Press down firmly from above



■ Spare Parts

Shim	Shim Screw	L Seat Wrench	Insert Screw	Insert Wrench
DGCS13R	BW0609F	LH040	BFTX0412IP 3.0mm	TRDR15IP

Optional

Insert Screw (*)
BFTX0418IP

*Corners can be changed simply by loosening the screw. (Only suitable for DGC/DGCM types with body size ≥ Ø 80 mm).

■ Recommended Cutting Conditions (SN_U)

ISO	Work Material	Fit-ness	Cutting Speed v _c (m/min)	Feed Rate f _t (min/t)	Depth of Cut (mm)	Grade
P	General Steel	◎	150-200-250	0,10-0,25-0,40	<4	ACP200 ACP300
	Alloyed Steel	◎	180-250-350	0,10-0,30-0,45	<4	ACP200 ACP300
	Die Steel	◎	100-150-200	0,15-0,25-0,35	<4	ACP200 ACP300
M	Stainless Steel	○	160-200-250	0,15-0,23-0,30	<3	ACM200 ACM300 ACP300
K	GG+GGG	◎	100-200-250	0,10-0,25-0,40	<5	ACK200 ACK300

Min. - Optimum - Max.

■ Recommended Cutting Conditions (ON_U)

ISO	Work Material	Fit-ness	Cutting Speed v _c (m/min)	Feed Rate f _t (min/t)	Depth of Cut (mm)	Grade
P	General Steel	◎	150-200-250	0,10-0,30-0,50	<2	ACP200 ACP300
	Alloyed Steel	◎	180-250-350	0,10-0,50-0,50	<2	ACP200 ACP300
	Die Steel	◎	100-150-200	0,15-0,25-0,30	<2	ACP200 ACP300
M	Stainless Steel	○	160-200-250	0,15-0,23-0,30	<2	ACM200 ACM300 ACP300
K	GG+GGG	◎	100-200-250	0,10-0,30-0,50	<2	ACK200 ACK300

◎ Preferred choice

○ Suitable

"Wave Face Mill" WGX (M/F) Type

General Milling of Steel and Cast Iron

■ Body – Shell type

Rake Angle	Radial	20°–24°
	Axial	20°–22°




Fig. 1




Fig. 2




Fig. 3





Fig. 4



Cutter body DC ≥ 160 mm: no inner coolant

■ Body

● Type: WGX, Standard Pitch

Inner coolant available for DC ≤ Ø 125mm

Cat. No.	Stock	Dimension (mm)										No. of Teeth	Weight (kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	D1	D2	KWW	KDP	CBDP			
WGX 13040 RS	●	40	52	32	40	16	14,0	9,0	8,4	5,6	18	3	0,3	1
13050 RS	●	50	62	40	40	22	18,0	11,0	10,4	6,3	20	3	0,4	1
13063 RS	●	63	76	50	40	22	18,0	11,0	10,4	6,3	20	4	0,6	1
13080 RS	●	80	93	55	50	27	20,0	13,5	12,4	7,0	25	4	1,2	1
WGX 13100 RS	●	100	113	70	50	32	46,0	-	14,4	8,5	32	5	1,6	2
13125 RS	●	125	138	80	63	40	52,0	29,0	16,4	9,5	29	6	2,8	1
13160 RS	●	160	173	130	63	40	88,0	-	16,4	9,5	29	7	4,5	3
WGX 13200 RS	●	200	213	150	63	60	130,0	-	25,7	14,0	35	8	7,1	4
13250 RS	□	250	263	190	63	60	160,0	-	25,7	14,0	35	10	11,2	4

● Type: WGXM, Medium Pitch

Cat. No.	Stock	Dimension (mm)										No. of Teeth	Weight (kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	D1	D2	KWW	KDP	CBDP			
WGXM 13050 RS	●	50	62	40	40	22	18,0	11,0	10,4	6,3	20	4	0,4	1
13063 RS	●	63	77	50	40	22	18,0	11,0	10,4	6,3	20	5	0,6	1
13080 RS	●	80	94	55	50	27	20,0	13,5	12,4	7,0	25	6	1,1	1
WGXM 13100 RS	●	100	114	70	50	32	46,0	-	14,4	8,5	32	7	1,6	2
13125 RS	●	125	139	80	63	40	52,0	29,0	16,4	9,5	29	8	2,8	1
13160 RS	●	160	174	130	63	40	88,0	-	16,4	9,5	29	10	4,5	3
WGXM 13200 RS	●	200	214	150	63	60	130,0	-	25,7	14,0	35	12	7,0	4
13250 RS	□	250	264	190	63	60	160,0	-	25,7	14,0	35	14	11,1	4

● Type: WGXF, Fine Pitch

Cat. No.	Stock	Dimension (mm)										No. of Teeth	Weight (kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	D1	D2	KWW	KDP	CBDP			
WGXF 13050 RS	●	50	62	40	40	22	18,0	11,0	10,4	6,3	20	5	0,4	1
13063 RS	●	63	77	50	40	22	18,0	11,0	10,4	6,3	20	6	0,6	1
13080 RS	●	80	94	55	50	27	20,0	13,5	12,4	7,0	25	8	1,1	1
WGXF 13100 RS	●	100	114	70	50	32	46,0	-	14,4	8,5	32	10	1,5	2
13125 RS	●	125	139	80	63	40	52,0	29,0	16,4	9,5	29	12	2,7	1
13160 RS	●	160	174	130	63	40	88,0	-	16,4	9,5	29	16	4,5	3
WGXF 13200 RS	●	200	214	150	63	60	130,0	-	25,7	14,0	35	20	6,9	4
13250 RS	□	250	264	190	63	60	160,0	-	25,7	14,0	35	24	11,0	4

() Figures in brackets indicate values for ONMU inserts.
Inserts are not included.

■ Identification Details

WGX **M** **13** **050** **R** **S**
 Cutter Series M: Medium Insert Size Cutter Diameter Direction Metric
 F: Fine

● = Euro stock
○ = Japan stock

□ = Delivery on request

Recommended Tightening Torque (N·m)

"Wave Face Mill" WGX (M/F) Type



General Features

The Wavemill WGX Type employs unique chipbreaker design to provide lower cutting resistance and higher quality surface finishes than conventional tools.

Series

Type	Cat. No.	Cutter	No. of Teeth
Standard Pitch	WGX 13000RS	Ø 40 – Ø 250	3–10
Medium Pitch	WGXM 13000RS	Ø 50 – Ø 250	4–14
Fine Pitch	WGXF 13000RS	Ø 50 – Ø 250	5–24
Endmill Type	WGX 13000EW	Ø 32 – Ø 63	3–5

Inner coolant available for DC ≤ Ø 125 mm




Characteristics

- **Stable Cutting**
Special chipbreaker designed for WGX enables lower cutting forces.
- **High Quality**
Improved run-out precision and unique wiper edge shape ensure excellent surface finish quality. Optimised chamfer edge reduces burr and edge chipping.
- **Long Tool Life**
Features high precision technology that reduces insert run-out variation and a new coating to provide stable and long tool life.



Insert Shape Characteristics

Unique wiper edge shape for improved surface roughness

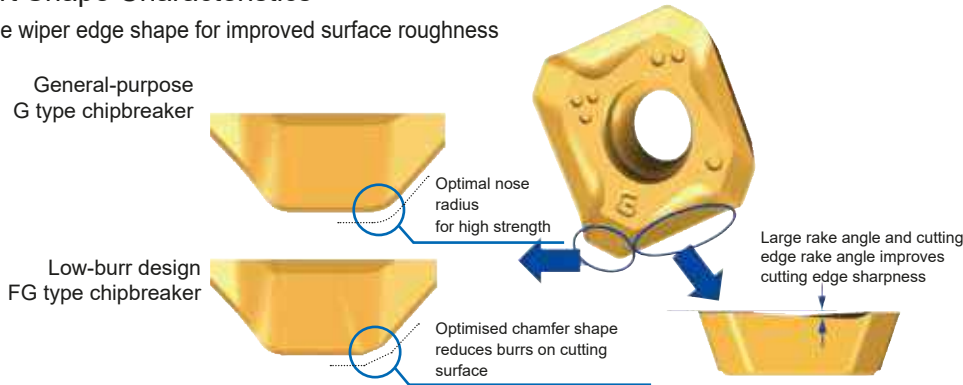

Inserts

Application	Coated Carbide						Carb.	DLC
High Speed/Light Cut	P			K		M	K	N
General Purpose	P _M	M	K		M _S	M _S		N
Roughing	P _M	P _M	K		M _S	M _S		
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	DL1000
SEET 13T3AGFR-L							○	○
SEET 13T3AGSR-L	○	●	○	○	○	●	○	
13T3AGSR-G	○	●	●	●	○	●	○	
SEMT 13T3AGSR-L	●	●	●	●	○	●	●	
13T3AGSR-G	●	●	●	●	●	●	●	
13T3AGSR-H	●	●	●	●	●	●	●	
SEMT 13T3AGSR-FG	○	●	●	○	●	●		
XEEW 13T3AGER-WR		○		○				

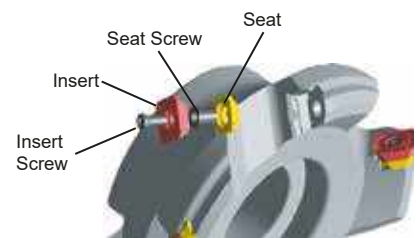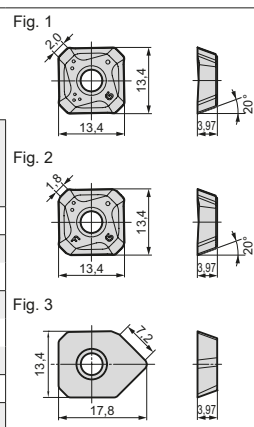

Spare Parts

Applicable Cutters	Shim	Shim Screw	Insert Screw	Insert Wrench	Seat Wrench
WGX (-M/F)	WGCS 13 R	BW 0507 F	BFTX 03512 IP	TRDR 15 IP	LH 035

Recommended Cutting Conditions

ISO	Work Material	Hardness (HB)	Cutting Speed v _c (m/min)	Feed Rate f _t (mm/tooth)	Grade
P	General Steel	180–280	150–200–250	0,15–0,20–0,25	ACP200
	Soft Steel	≤180	180–265–350	0,10–0,25–0,40	ACP200
	Die Steel	200–220	100–150–200	0,15–0,20–0,25	ACP200
M	Stainless Steel	-	160–205–250	0,15–0,23–0,30	ACM300
K	Cast Iron	250	100–175–250	0,15–0,23–0,30	ACK200
N	Non Ferrous Alloy	-	500–750–1000	0,15–0,23–0,30	DL1000
S	Exotic Alloy	-	30–50–80	0,10–0,20–0,30	ACM300

Minimum-Optimum-Maximum

Face Mill WGC (M/F) Type

General Milling for Steel, Cast Iron & Exotic Material



Fig. 1




Fig. 2





Fig. 3



- Body
- Standard WGC - Type

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (Kg)	Fig.
		DC	DCX	DCSFMS	LF	KWW	KDP	DCB	D2	D1	CBDP			
WGC 3032 RS	▲	32	41	32	40	8,4	5,6	16	9	14	18	4	0,2	1
3040 RS	▲	40	49	32	40	8,4	5,6	16	9	14	18	4	0,3	1
3050 RS	▲	50	59	40	40	10,4	6,3	22	11	18	20	5	0,4	1
3063 RS	▲	63	72	50	40	10,4	6,3	22	11	18	20	6	0,6	1
3080 RS	▲	80	89	60	50	12,4	7,0	27	13,5	20	25	6	1,1	1
WGC 3100 RS		100	109	70	50	14,4	8,5	32	-	-	32	7	1,5	2
WGC 4040 RS	▲	40	52	32	40	8,4	5,6	16	9	14	18	3	0,4	1
4050 RS	▲	50	63	40	40	10,4	6,3	22	11	18	20	3	0,5	1
4063 RS	▲	63	76	50	40	10,4	6,3	22	11	18	20	4	0,6	1
4080 RS	▲	80	93	60	50	12,4	7,0	27	13,5	20	25	4	1,0	1
WGC 4100 RS	▲	100	113	70	50	14,4	8,5	32	-	-	32	5	1,5	2
4125 RS	▲	125	138	80	63	16,4	9,5	40	-	-	38	6	2,6	2
4160 RS	▲	160	173	100	63	16,4	9,5	40	-	-	38	7	4,0	2
WGC 4200 RS	▲	200	213	130	63	25,7	14,0	60	-	-	35	8	6,6	3

- Medium Pitch WGCM - Type

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (Kg)	Fig.
		DC	DCX	DCSFMS	LF	KWW	KDP	DCB	D2	D1	CBDP			
WGCM 4050 RS	▲	50	63	40	40	10,4	6,3	22	11	18	20	4	0,5	1
4063 RS	▲	63	76	50	40	10,4	6,3	22	11	18	20	5	0,6	1
4080 RS	▲	80	93	60	50	12,4	7,0	27	13,5	20	25	6	1,0	1
WGCM 4100 RS	▲	100	113	70	50	14,4	8,5	32	-	-	32	7	1,5	2
4125 RS	▲	125	138	80	63	16,4	9,5	40	-	-	38	8	2,6	2
4160 RS	▲	160	173	100	63	16,4	9,5	40	-	-	38	10	4,0	2
WGCM 4200 RS	▲	200	213	130	63	25,7	14,0	60	-	-	35	12	6,6	3

- Fine Pitch WGCF - Type

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (Kg)	Fig.
		DC	DCX	DCSFMS	LF	KWW	KDP	DCB	D2	D1	CBDP			
WGCF 4050 RS	▲	50	63	40	40	10,4	6,3	22	11	18	20	5	0,5	1
4063 RS	▲	63	76	50	40	10,4	6,3	22	11	18	20	6	0,6	1
4080 RS	▲	80	93	60	50	12,4	7,0	27	13,5	20	25	8	1,0	1
WGCF 4100 RS	▲	100	113	70	50	14,4	8,5	32	-	-	32	10	1,5	2
4125 RS	▲	125	138	80	63	16,4	9,5	40	-	-	38	12	2,6	2
4160 RS	▲	160	173	100	63	16,4	9,5	40	-	-	38	16	4,0	2
WGCF 4200 RS	▲	200	213	130	63	25,7	14,0	60	-	-	35	20	6,6	3

- Spare Parts

Cutter	Shim	Shim screw	Insert screw	Wrench	Wrench
WGC 3000 RS	-	-	BFTX 0307 IP	2,0 TRDR 10 IP	-
WGC/F 4000 RS	WGCS 13 R	BW 0507 F	BFTX 03512 IP	3,0 TRDR 15 IP	LH035

- Structure




Features

- Suitable for high speed machining $v_c < 400$ m/min.
- Tough lightweight cutter body with wide chip pockets for fast metal removal.
- Low cost precision moulded inserts give G class performance at greatly reduced cost.
- Wide range of grades for most workpiece materials - including steels, irons, high temperature alloys, aluminium's etc.
- Improves metal removal rates, flatness, dimensional accuracy, and surface finish.



Insert


Application	Coated Carbide					DLC	Carbide			Cermet	PCD	
High Speed/Light Cut	P			K		N	K _S	K _N		P	N	
General Purpose	P _M	M	K			N	K _S	K _N		P	N	
Roughing	P _M	M	K			N	K _S	K _N		P	N	
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	DL1000	EH520	H1	T250A	DA2200	Fig.	Applicable Endmill
SEET 0903 AGFN-L	▲	▲	▲	▲	▲			▲			1	WGC 3000 Type
SEET 0903 AGSN-G	▲	▲	▲	▲	▲						1	
0903 AGSN-N	▲	▲	▲	▲	▲						1	
SEMT 0903 AGSN-L	▲	▲	▲	▲	▲						1	
0903 AGSN-G	▲	▲	▲	▲	▲						1	
SEET 13T3 AGFN-L	▲	▲	▲	▲	▲	▲	▲	▲			2	WGC 4000 Type WGC M/F 4000 Type
SEET 13T3 AGSN-G	▲	▲	▲	▲	▲				▲		2	
13T3 AGSN-N	▲	▲	▲	▲	▲				▲		2	
SEMT 13T3 AGSN-L	▲	▲	▲	▲	▲						2	
13T3 AGSN-G	▲	▲	▲	▲	▲						2	
13T3 AGSN-H	▲	▲	▲	▲	▲						2	
SECW 13T3 AGTN-N-NF											2	
XEEW 13T3 AGFR-W-NF											3	
XEEW 13T3 AGER-W					▲						3	

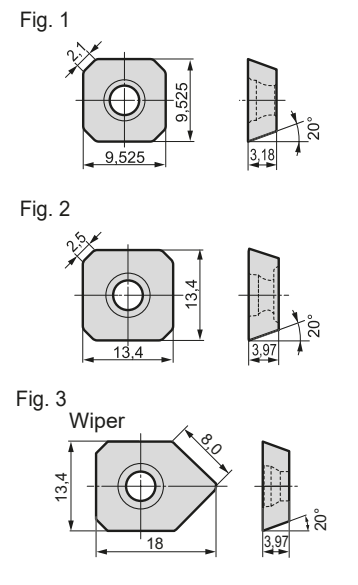


Specifications

Approach angle: 45°
 Axial rake angle: +20° ~ +22° (+20°)
 Radial rake angle: -20° ~ -24° (-10° ~ -19°)
0,03 mm
 Max. depth of cut: 6 mm (4 mm)
0,02 mm
 Run-out with M class insert SEMT13T3

Chip Breaker System

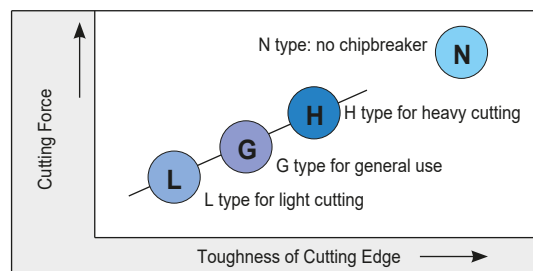

Cutting Edge Geometry



Recommended Cutting Conditions

(v_c = m/min, f_t = mm/tooth) (min. – optimum – max.)


Insert Type		SEMT 13T3 AGSN-G											
Grade		ACP100			ACP200			ACP300		ACK200		ACK300	
Type	Work Material	Low carbon steel	Alloy steel	Die steel	Low carbon steel	Alloy steel	Die steel	Stainless steel		Cast iron	Ductile cast iron	Cast iron	Ductile cast iron
								austenitic	martensitic				
WGC (-M/-F) 4040-4200	v_c	100-250-400	80-220-280	80-150-250	80-200-370	70-150-250	60-130-220	120-180-240	100-140-200	220-270-450	150-180-250	180-220-270	130-160-220
	f_t	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,2-0,3	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,2-0,3	0,1-0,2-0,3	0,1-0,2-0,3	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,25-0,4
	a_p	1,0-3,0-5,0			1,0-3,0-5,0			1,0-2,0-3,0		1,0-3,0-5,0		1,0-3,0-5,0	

Face Mill UFO / UFOF Type

General Milling for Steel, Cast Iron & Exotic Material



Specifications



Approach angle: 45°
 Axial rake angle: +27°
 Radial rake angle: -7°
 (-10° for ø 50 and ø 63)
 max depth of cut: 5,0 mm (UFO 4000 type)
 7,0 mm (UFO 5000 type)

Body

Cat. No.	Stock		Dimensions (mm)								No. of Teeth	Max. Depth of Cut	Weight (Kg)	Fig.
	R	L	DC	DCX	DCSFMS	LF	DCB	KWW	KDP	CBDP				
UFO 4050 R/L-S	●		50	74	45	50	22	10,4	6,3	20	4	5,0	1,3	1
4063 R/L-S	●		63	86	50	50	22	10,4	6,3	20				
4080 R/L-S	●		80	103	60	50	27	12,4	7,0	25				
UFO 4100 R/L-S	●		100	122	75	50	32	14,4	8,5	29				
4125 R/L-S	●		125	146	75	63	40	16,4	9,5	29				
4160 R/L-S	●		160	180	100	63	40	16,4	9,5	29	9	6,6	3	
UFO 4200 R/L-S	●		200	220	130	63	60	25,7	14,0	32				
4250 R/L-S	□		250	270	300	63	60	25,7	14,0	40	13	14,8	4	
UFO 4315 R/L-S	□		315	335	240	80	60	25,7	14,0	40				
UFO 5080 R/L-S	●		80	102	60	50	27	12,4	7,0	25	5	7,0	2,1	1
UFO 5100 R/L-S	●		100	119	75	50	32	14,4	8,5	29				
5125 R/L-S	●		125	143	75	63	40	16,4	9,5	29				
5160 R/L-S	●		160	177	100	63	40	16,4	9,5	29				
UFO 5200 R/L-S	●		200	217	130	63	60	25,7	14,0	32				
5250 R/L-S	□		250	267	200	63	60	25,7	14,0	40	13	14,8	4	
UFO 5315 R/L-S	□		315	332	240	80	60	25,7	14,0	40				

Fig. 1




Fig. 2




Fig. 3




Fig. 4






Fig. 5



Spare Parts

Cutter	Locator	Insert block	Insert clamp	
4050-4063	UF 4 K R/L	S-UF 4 S R/L	UFTW R/L	
4080-4315	UF 4 K R/L	UF 4 S R/L		
5080-5315	UF 5 K R/L	UF 5 S R/L		
Cutter	Locator clamp		Double screw	Wrench
4050-4063	UFWK R/L		WB 7-15 T	TT 25
4080-4315				
5080-5315				

Structure

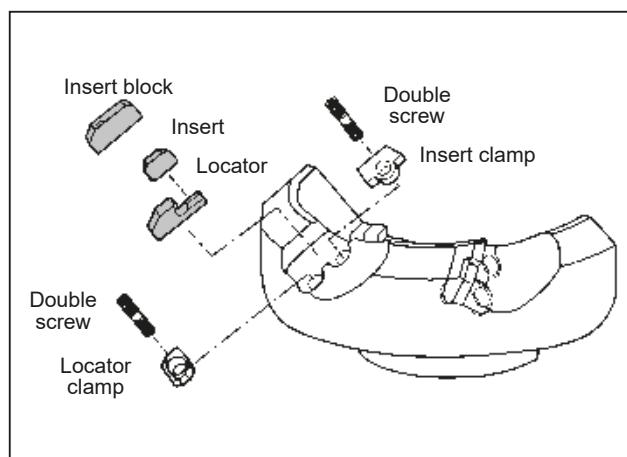

■ Features

- 45° approach face mills
- 27° super high rake multi purpose cutter for outstanding productivity milling steels, irons and alloys
- Substantially improves metal removal rates on low powered machines
- Differential pitched inserts guarantee smooth cutting action
- Rigid body incorporates carbide locators and HSS shims resulting in extremely low run out



■ Body (Fine Pitch Type)

Cat. No.	Stock		Dimensions (mm)								No. of Teeth	Max. Depth of Cut	Weight (Kg)	Fig.
	R	L	DC	DCX	DCSFMS	LF	DCB	KWW	KDP	CBDP				
UFOF 4080 R/L-S	●		80	103	60	50	27	12,4	7,0	25	6	5,0	2,1	1
UFOF 4100 R/L-S	●		100	122	75	50	32	14,4	8,5	29	8		2,9	2
4125 R/L-S	●		125	146	75	63	40	16,4	9,5	29	10		4,2	2
4160 R/L-S	●		160	180	100	63	40	16,4	9,5	29	12		6,6	3
UFOF 4200 R/L-S	□		200	220	130	63	60	25,7	14,0	32	16		9,5	4
4250 R/L-S	□		250	270	300	63	60	25,7	14,0	40	20	14,8	4	
UFOF 4315 R/L-S	□		315	335	240	80	60	25,7	14,0	40	24	26,6	5	

■ Insert

Grade		Coated Carbide					Cermet	Uncoated Carbide				Fig.
		P	M	K			P	P	K	K		
High Speed/Light Cut		P			K						K	
General Purpose			P	M	K		P	P	K	K		
Roughing			P	M	K							
Cat. No.		ACP100	ACP200	ACP300	ACK200	ACK300	T250A	A30N	G10E	H1	H10E	
UFO(F) 4000	SFKN 12T3 AZFN				●	●			●	○		1(2)
	12T3 AZTN	●	●	●			●	○				2
	SFKR 12T3 AZTN	○	○									3
	UW 12500 R										○	4
UFO 5000	SFKN 1504 AZFN				●	○			○			5(6)
	1504 AZTN	●	●	●				○				6
	UW 15500 R										○	7

Fig. 1 (Grades: ACP_, ACK_)

Fig. 2

Fig. 3

Fig. 4

Fig. 5 (Grades: ACP_, ACK_)

Fig. 6

Fig. 7

■ Recommended Cutting Conditions


(v_c = m/min, f_t = mm/tooth) (min. – optimum – max.)

Work Material	Grade	ACP100			ACP200			ACP300		ACK200		ACK300	
		Low carbon steel	Alloy steel	Die steel	Low carbon steel	Alloy steel	Die steel	Stainless steel		Cast iron	Ductile cast iron	Cast iron	Ductile cast iron
								austenitic	martensitic				
UFO (-F) 4000	V_c	100-250-400	80-220-280	80-150-250	80-200-370	70-150-250	60-130-220	120-180-240	100-140-200	220-270-450	150-180-250	180-220-270	130-160-220
	f_t	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,2-0,3	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,2-0,3	0,1-0,2-0,3	0,1-0,2-0,3	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,25-0,4
	a_p	1,0-3,0-5,0			1,0-3,0-5,0			1,0-2,0-3,0		1,0-3,0-5,0		1,0-3,0-5,0	
UFO (-F) 5000	V_c	100-250-400	80-220-280	80-150-250	80-200-370	70-150-250	60-130-220	120-180-240	100-140-200	220-270-450	150-180-250	180-220-270	130-160-220
	f_t	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,2-0,3	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,2-0,3	0,1-0,2-0,3	0,1-0,2-0,3	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,25-0,4
	a_p	1,0-4,0-7,0			1,0-4,0-7,0			1,0-2,0-5,0		1,0-4,0-7,0		1,0-4,0-7,0	

Face Mill DNX / DNXF Type

General Milling for Cast Iron and Steel

Approach angle : 65°
Axial rake angle : +5°
Radial rake angle : -6°

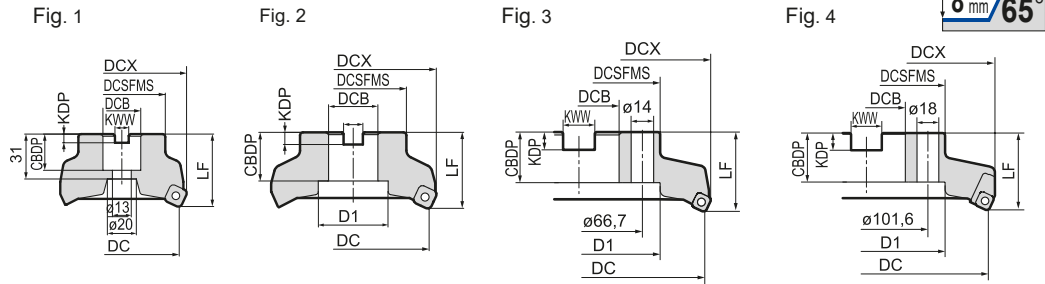

■ Body


● Standard DNX - Type

Cat. No.	Stock	Dimensions (mm)										No of Teeth	Max. Depth of Cut	Weight (Kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	D1	KWW	KDP	CBDP					
DNX 12080 RS	●	80	88	60	50	27	-	12,4	7,0	25	6	8,0	1,2	1	
DNX 12100 RS	●	100	108	80	50	32	46	14,4	8,5	29	7		1,6	2	
12125 RS	●	125	133	80	63	40	56	16,4	9,5	29	8		2,8	2	
12160 RS	●	160	168	100	63	40	88	16,4	9,5	29	10		4,4	3	
DNX 12200 RS	□	200	210	150	63	60	130	25,7	14,0	35	16		8,0	4	
12250 RS	□	250	260	180	63	60	160	25,7	14,0	25	20	12,2	4		


● Fine Pitch DNXF - Type

Cat. No.	Stock	Dimensions (mm)										No of Teeth	Max. Depth of Cut	Weight (Kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	D1	KWW	KDP	CBDP					
DNXF 12080 RS	●	80	88	60	50	27	-	12,4	7,0	25	8	8,0	1,2	1	
DNXF 12100 RS	●	100	108	80	50	32	46	14,4	8,5	29	10		1,6	2	
12125 RS	●	125	133	80	63	40	56	16,4	9,5	29	11		2,7	2	
12160 RS	●	160	168	100	63	40	88	16,4	9,5	29	12		4,4	3	

■ First Recommendation: DNX

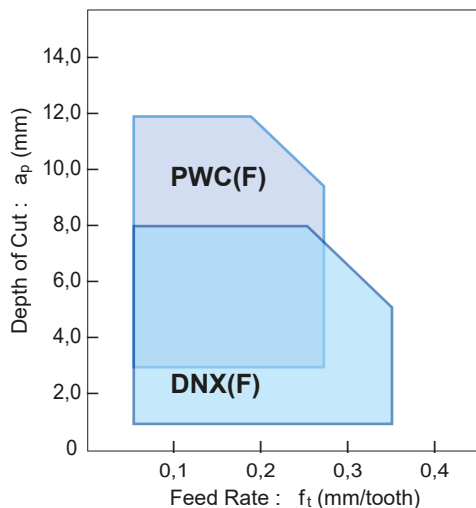

DNX / DNXF



Wiper width = 1,2 mm



Max. depth of cut : 8 mm, Approach angle : 65°

Cutter Type	Diameter Range	Characteristics
DNX 12000 RS	Ø 80–Ø 250 mm	- General purpose - Medium pitch type
DNXF 12000 RS	Ø 80–Ø 160 mm	- General purpose - Fine pitch type

■ Spare Parts

Cutter	Insert Screw	Insert Wrench	Locator	Clamp Screw	Wrench
Ø 80 – Ø 160	BFTX0412 IP	TRDR15 IP	-	-	-
Ø 200, Ø 250			DNXK 12 R	BX 0515	LH 040

■ Identification Details

DNX F 12 080 R S

Cutter type: DNX, Fine pitch: F, Insert size: 12, Diam.: 080, Cutting direction: R, Shell type: S

Face Mill DNX / DNXF Type


■ Features

- Small inserts with 8 cutting edges
- Economic by double-side usage
- Excellent grade for cast iron machining
- Optimised geometry for best results in cast iron
- Special inserts for steel machining



■ Insert

Application	Coated Carbide					Fig.
	ACP200	ACP300	ACK100	ACK200	ACK300	
High Speed/Light cut			K	K		
General Purpose	P	P	K	K		
Roughing	P	P			K	
Cat. No.	ACP200	ACP300	ACK100	ACK200	ACK300	
SNMT 1205 ZNEN-G	●		○	●	○	1
1205 ZNEN-H	●		○	●	●	2
1205 ZNEN-SH	●	□	●	●	●	3

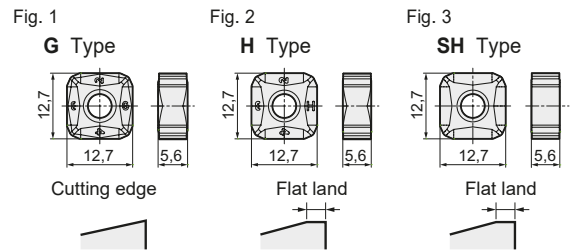


- G Type : For general purpose
- H Type : For heavy machining
- SH Type : For steel machining

- Negative inserts
- Inserts with 8 cutting edges
- Applicable for steel machining



■ Advantage of SH-Type when Steel machining

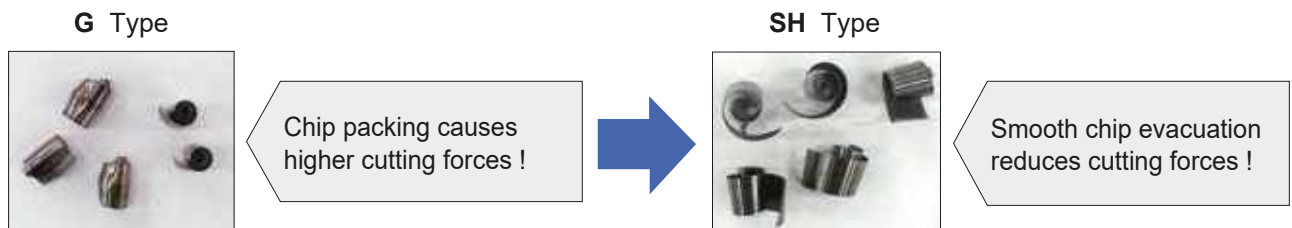

■ Recommended Cutting Conditions

($v_c = \text{m/min}$, $f_t = \text{mm/tooth}$) (min. – optimum – max.)

ISO	Work Material	Hardness (HB)	Cutting Speed v_c (m/min)	Feed Rate f_t (mm/tooth)	Insert Grade
P	Carbon steel	180–280	150–175–200	0,10–0,15–0,20	ACP200
	Alloy steel	180–280	150–175–200	0,10–0,15–0,20	ACP200
K	Grey cast iron (GG)	250	150–225–300	0,10–0,20–0,30	ACK200/ACK300
	Ductile cast iron (GGG)	250	150–225–250	0,10–0,18–0,25	ACK200/ACK300

Wave Radius Mill WRCX Type

High Durable Mill with Polygon Inserts

Grades for Steels, Cast Iron and Aluminium



■ Features

The "Wave Mill" WRCX type is a new multi purpose milling cutter for face milling, slotting, helical boring, plunging and profiling. Its unique design features 16 corner polygon inserts and a durable cutter body manufactured from high tensile alloyed steel protected by a hard surface treatment. Insert rigidity is maximised via close tolerance seat pockets and centre clamped using a torxscrew. Choose from a variety of insert grades such as our award winning Diamond like Carbon DL 1000 capable of high feed machining aluminium, our uncoated H1 grade suitable for non-ferrous metals or our new ACP/ACK grades for steels and irons.

■ Advantages

- Durable cutter body – Special alloyed steel with hard surface.
- High feed cutting – Optimised pitch and high number of cutting edges
- Excellent chip removal – Wide pocket and integral coolant hole
- Maximum rigidity – Rigid clamping of inserts with TORXPLUS screw
- Wide application range – Carbon steels, alloy steels, stainless steels, high temperature alloys, diemould steels, aluminiums, non-ferrous metals etc

■ Insert

Application	Coated Carbide					Uncoated Carbide	Diamond Coated	Dimensions (mm)	Fig.	Applicable Endmill		
	P	M	M	K	K	K _N	N					
High Speed / Light cut	P					K _N	N					
General Purpose		P _M	P _M	K			N					
Roughing		P _M	P _M		K							
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	H1	DL1000	IC	RE	S		
QPMT 120440 PPEN	●	●	●	●	●			12	4,0	4,76	1	WRCX/-F 12000 RS
120440 PPEN-H	●	●	●	●	●						2	WRCX/-F/-X 16000 RS
QPET 120460 PPF-R-S						●	●					
QPMT 160660 PPEN	●	●	●	●	●			16	6,0	6,5	1	WRCXF 20000 RS
160660 PPEN-H	●	●	●	●	●						2	
QPET 160680 PPF-R-S						●	●					
QPMT 200670 PPEN	●	●	●	●	●			20	7,0	6,5	1	
200670 PPEN-H	●	●	●	●	●							

Fig. 1





Fig. 2



QPMT... : Standard 16 cornered polygon type
QPMT...-H: Stronger cutting edge type

QPET...-S: Polished round insert for non-ferrous material

● Anti-Vibration Type (Paired Sets for Vibration Free Machining)

Application	Coated Carbide					Uncoated Carbide	Diamond Coated	Dimensions (mm)	Fig.	Applicable Endmill		
	P	M	M	K	K	K _N	N					
High Speed / Light cut	P					K _N	N					
General Purpose		P _M	P _M	K			N					
Roughing		P _M	P _M		K							
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	H1	DL1000	IC	RE	S		
QPMT 160608 PPEN	●	●	●	●	●			16	0,8	6,5	1	WRCX/-F/-X 16000 RS
160608 PPEN-CP	●	●	●	●	●						3	WRCXF 20000 RS
QPMT 200608 PPEN	●	●	●	●	●			20	0,8	6,5	1	
200608 PPEN-CP	●	●	●	●	●						3	

Fig. 1
08





Fig.3
CP




The combination of different inserts in a staggered formation varies the cut depth and eliminates vibration when feed rate is

$$f_t < 0,15 \quad (IC = 16 \text{ mm})$$

or

$$f_t < 0,2 \quad (IC = 20 \text{ mm}).$$

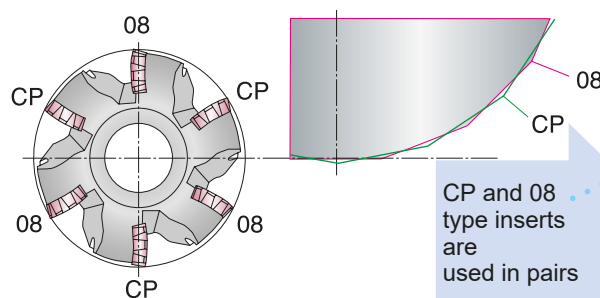

CP and 08 type inserts are used in pairs

● Chip Formation

Anti-vibration Type	Standard Type
Work Material: 50C	
Cutting Data: $f_t = 0,1 \text{ mm/tooth}$, $a_p = 7 \text{ mm}$	
Insert Size: IC = 20 mm	

Wave Radius Mill RSX Series



■ Features

The Wave Radius Mill RSX Series enables stable machining even when using equipment with low clamp rigidity thanks to its body design achieving excellent cutting performance and rigidity.

In addition to the ACM Series for stainless steel and exotic alloys two grades have been added: ACP200 grade for steel machining and ACK300 grade for cast iron machining. Handle an even wider range of milling needs with the RSX(F)08000 and RSX(F)20000 types.




■ Characteristics

Smooth cutting action and low vibration machining provided based on the high rake angle design and high rigidity body.

High reliability achieved with ACM100/ACM200/ACM300 adopted for exotic alloy machining.


ACP200 for steel and ACK300 for cast iron enable stable machining in a wide range of applications.

■ Series


Image	Series	Insert Size	Cat. No.	External Diameter (mm)											
				Ø 20	Ø 25	Ø 32	Ø 40	Ø 50	Ø 52	Ø 63	Ø 66	Ø 80	Ø 100	Ø 125	Ø 160
 H54	Standard	08	RSX 08000 ES	●	●										
		10	10000 ES		●	●									
		12	12000 ES			●									
	Fine Pitch	08	RSXF 08000 ES	●	●										
		10	10000 ES		●	●									
		12	12000 ES			●									
 H55	Standard	10	RSX 10000 RS				●	●	●						
		12	12000 RS				●	●	●	●	●	●	●		
		16	16000 RS							●		●	●	●	
		20	20000 RS									●	●	●	
	Fine Pitch	10	RSXF 10000 RS				●	●	●						
		12	12000 RS				●	●	●	●	●	●	●		
16		16000 RS							●		●	●	□		
20		20000 RS									●	●	●		
 H55	Standard	08	RSX 08000 M	●	●	●									
		10	10000 M		●	●									
		12	12000 M			●	●								
	Fine Pitch	08	RSXF 08000 M	●	●	●									
		10	10000 M		●	●									
		12	12000 M			●	●								

■ Cutting Performance


● Tool Life Comparison (Fracture Resistance)

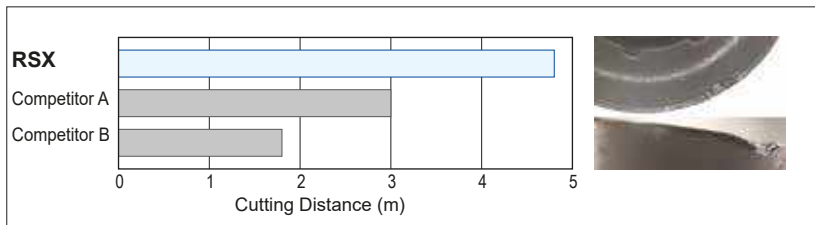

● Cutting Vibration Comparison

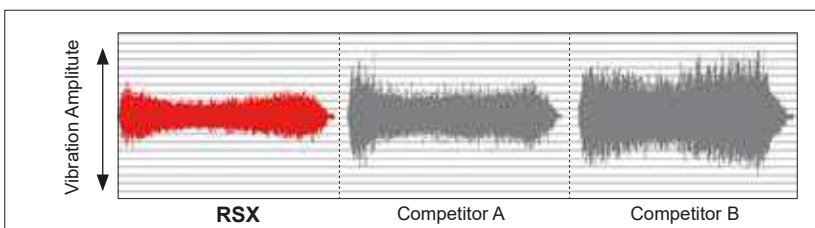


● Cutting Resistance Comparison

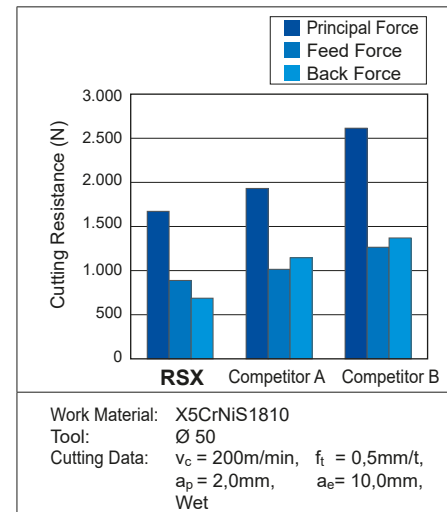

Wave Radius Mill RSX Series


Low Cutting Resistance, Less Vibration

Low cutting resistance and low vibration machining have been achieved with super high rake angle design + high rigidity body.

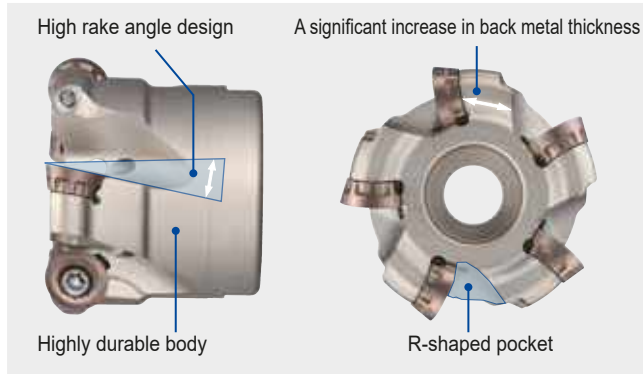

High Operability

Ease of corner control has been achieved with the adoption of a unique positioning mechanism that is highly precise and highly operable.

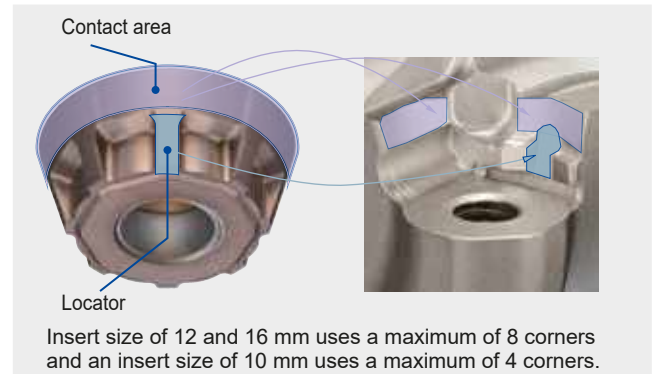


Stable and Long Tool Life

Work Material	Wear Resistance ← → Fracture Resistance	
	P	ACP200
M	ACM100	
	ACM200	
	ACM300	
K	ACK300	
S	ACM100	
	ACM200	
	ACM300	

Coating Type: ▽ CVD ▲ PVD

A long life ensured with the adoption of the ACM series and significant improvements have been made in processing exotic alloy and stainless steel machining.


▲ ACM100/ACM300

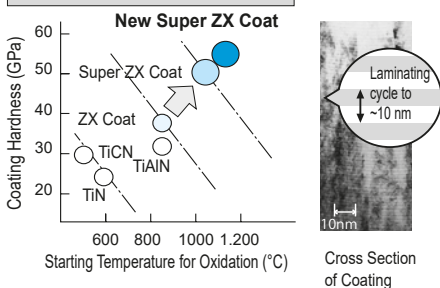

New Super ZX Coat

The product series with a coating film hardness approximately 40 % higher and an oxidation onset temperature 200 °C higher than conventional products. Enables machining at least 1,5 times faster and more efficiently than conventional products. A product life at least twice as long as that of conventional products achieved under the same machining conditions.

▽ ACM200

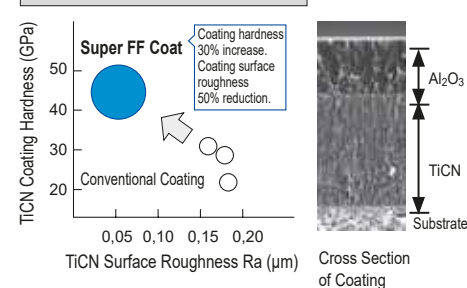

Super FF Coat

Smooth coating surface provides excellent adhesion and chipping resistance. Improved coating adhesion strength. Harder than conventional coatings with high improvements in wear resistance. High speed, high efficiency machining of more than 1,5 times than of conventional grades possible. Achieving more than double the tool life of conventional grades under the same cutting conditions.

Wave Radius Mill

RSX(F)_{10000/12000/16000/20000RS}

Milling of steel, stainless steel, cast iron and exotic alloys

Body – Dimensions



Fig. 1




Fig. 2






Fig. 3



Rake Angle	Radial	-5°
	Axial	10°



Body

● RSX...RS, Standard

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)	Fig.
		DCX	DCSFMS	LF	DCB	KWW	KDP	CDBP	D1	D2				
RSX 10040 RS	●	40	34	40	16	8,4	5,6	18	14	9	4	0,2	1	
10050 RS	●	50	40	40	22	10,4	6,3	20	18	11	5	0,3	1	
10052 RS	●	52	40	40	22	10,4	6,3	20	18	11	5	0,4	1	
RSX 12040 RS	●	40	32	40	16	8,4	5,6	18	13,5	9	3	0,2	1	
12050 RS	●	50	40	40	22	10,4	6,3	20	18	11	4	0,3	1	
12052 RS	●	52	40	40	22	10,4	6,3	20	18	11	4	0,3	1	
12063 RS	●	63	40	40	22	10,4	6,3	20	18	11	5	0,4	1	
12066 RS	●	66	55	50	27	12,4	7,0	25	20	14	6	0,7	1	
12080 RS	●	80	55	50	27	12,4	7,0	25	20	14	6	1,0	1	
RSX 12100 RS	●	100	70	50	32	14,4	8,5	32	46	-	6	1,4	2	
RSX 16063 RS	●	63	50	40	22	10,4	6,3	20	18	11	4	0,5	1	
16080 RS	●	80	55	50	27	12,4	7,0	25	20	14	5	0,9	1	
RSX 16100 RS	●	100	70	50	32	14,4	8,5	32	46	-	6	1,3	2	
16125 RS	●	125	80	63	40	16,4	9,5	29	52	29	6	2,6	1	
RSX 20080 RS	●	80	55	50	27	12,4	7,0	22	20	14	4	0,9	1	
RSX 20100 RS	●	100	70	63	32	14,4	8,0	32	46	-	5	1,8	2	
20125 RS	●	125	80	63	40	16,4	9,0	29	52	29	6	2,6	1	
20160 RS	●	160	130	63	40	16,4	9,0	29	90	-	7	4,7	3	

● RSXF...RS, Fine Pitch

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)	Fig.
		DCX	DCSFMS	LF	DCB	KWW	KDP	CDBP	D1	D2				
RSXF 10040 RS	●	40	34	40	16	8,4	5,6	18	14	9	5	0,2	1	
10050 RS	●	50	40	40	22	10,4	6,3	20	18	11	6	0,3	1	
10052 RS	●	52	40	40	22	10,4	6,3	20	18	11	6	0,3	1	
RSXF 12040 RS	●	40	32	40	16	8,4	5,6	18	13,5	9	4	0,2	1	
12050 RS	●	50	40	40	22	10,4	6,3	20	18	11	5	0,3	1	
12052 RS	●	52	40	40	22	10,4	6,3	20	18	11	5	0,3	1	
12063 RS	●	63	40	40	22	10,4	6,3	20	18	11	6	0,4	1	
12066 RS	●	66	55	50	27	12,4	7,0	25	20	14	7	0,7	1	
12080 RS	●	80	55	50	27	12,4	7,0	25	20	14	7	0,9	1	
RSXF 12100 RS	●	100	70	50	32	14,4	8,5	32	46	-	10	1,3	2	
RSXF 16063 RS	●	63	50	40	22	10,4	6,3	20	18	11	5	0,4	1	
16080 RS	●	80	55	50	27	12,4	7,0	25	20	14	6	0,8	1	
RSXF 16100 RS	●	100	70	50	32	14,4	8,5	32	46	-	7	1,3	2	
16125 RS	●	125	80	63	40	16,4	9,5	29	52	29	8	2,5	1	
16160 RS	□	160	130	63	40	16,4	9,5	29	88	-	10	4,8	3	
RSXF 20080 RS	●	80	55	50	27	12,4	7,0	22	20	14	5	0,9	1	
RSXF 20100 RS	●	100	70	50	32	14,4	8,0	32	46	-	6	1,8	2	
20125RS	●	125	80	63	40	16,4	9,0	29	52	29	7	2,6	1	
20160RS	●	160	130	63	40	16,4	9,0	29	90	-	9	4,6	3	

Identification Details

RSX	F	12	040	R	S
Cutter Series	Fine Pitch Type	Insert Size	Cutter Diameter	Cutting Direction	Metric

● = Euro stock
○ = Japan stock

□ = Delivery on request

Ⓜ Recommended Tightening Torque (N·m)

Wave Radius Mill RSX(F)10000/12000/16000/20000RS

Various Machining Use

Various types of processing, such as mould engraving, slant milling and helical processing.

Helical Milling

Helical Milling $\varnothing D$

\leq Work Diameter $\varnothing D$
Center uncut portion cannot be removed by traverse cutting with the same cutter.

\geq Work Diameter $\varnothing D$
Center uncut portion can be removed by traverse cutting with the same cutter.

Ramping

Use at α° or lower

Recommended Values for Helical and Ramping

Insert Cat. No.	Helical				Taper Ramping Angle α° (max)
	Cutter $\varnothing DC$	Work Diameter			
		Min.	Optimal \varnothing	Max.	
RDET10...	25	33,0	40	49	10°30'
	32	46,0	54	63	6°45'
	40	62,0	70	79	4°30'
	50	82,0	90	99	3°15'
RDET12...	52	86,0	94	103	3°10'
	32	41,5	52	63	12°30'
	40	57,5	68	79	8°00'
	50	77,5	88	99	5°30'
	52	81,5	92	103	5°15'
	63	103,5	114	125	4°00'
RDET16...	66	109,5	120	131	3°45'
	80	137,5	148	159	2°50'
	100	177,5	188	199	2°10'
	63	96,0	110	125	6°00'
	80	130,0	144	159	4°10'
RDET20...	100	170,0	184	199	3°00'
	125	220,0	234	249	2°20'
	80	122,0	140	159	4°15'
	100	162,0	180	199	3°00'
	125	212,0	230	249	2°00'
	160	282,0	300	319	1°15'

Inserts

Application	Grade					Dimens.		Applicable Cutters
High Speed/Light Cut			M S	M S		$\varnothing d$ (IC)	S	
General Purpose	P M		M S	M S	M S			
Roughing	P M	K			M S			
RDET 10T3M0EN G	●	●	●	●	●	10	3,97	RSX(F) 10000RS
10T3M0EN H	●	●	●	●	●	10	3,97	
RDET 1204M0EN G	●	●	●	●	●	12	4,76	RSX(F) 12000RS
1204M0EN H	●	●	●	●	●	12	4,76	
RDET 1606M0EN G	●	●	●	●	●	16	6,5	RSX(F) 16000RS
1606M0EN H	●	●	●	●	●	16	6,5	
RDET 2006M0EN G	●	●	●	●	●	20	6,5	RSX(F) 20000RS
2006M0EN H	○	●	●	●	●	20	6,5	

Cutting Edge Cross Section

G - Type H - Type

M0: IC is metric

Spare Parts

Applicable Cutters	Wrench	Screw	
RSX(F) 10000RS	TRDR15IP	BFTX03584IP	3,0
RSX(F) 12000RS		BFTX0409IP	3,0
RSX(F) 16000RS	TRDR20IP	BFTX0511IP	5,0
RSX(F) 20000RS	TRDR25IP	BFTX0615IP	5,0

Recommended Cutting Conditions

Min.-Optimum-Max.

ISO	Work Material		Hardness (HB)	Cutting Speed v_c (m/min)	Feed Rate f_t (mm/t)	Grade	
P	Carbon Steel		180-280	100-160-200	0,20-0,40-0,60	ACP200	
	Alloy Steel		180-280	100-140-180	0,20-0,30-0,40	ACP200	
M	Stainless Steel	Cr Based	Ferritic	200	150-180-200	0,15-0,25-0,35	ACM300
			Martensitic	200-330	80-120-180	0,15-0,25-0,35	ACM300
		Cr-Ni Based	Austenitic	200	150-180-200	0,15-0,25-0,35	ACM300
			Austenitic, ferritic	230-270	80-120-180	0,15-0,25-0,35	ACM200
			Precipitation hardening	330	60-100-160	0,15-0,25-0,35	ACM200
K	Cast Iron		250	80-120-160	0,10-0,30-0,40	ACK300	
S	Heat resistant alloy	Ni based material		250-350	20-30-40	0,10-0,20-0,30	ACM100 ACM200
		Pure Titanium		(Rm 400)	60-80-100	0,10-0,20-0,30	
	Titanium		$\alpha + \beta$ alloy system		(Rm 1050)	40-50-60	0,10-0,20-0,30

Sumi Dual Mill

DFC Type

General Features

The Sumi Dual Mill DFC type employs cost effective double-sided inserts for high toughness and enhanced accuracy. The double-side inserts are flexible and reduces costs.

Large Line-up

- Diameter from Ø 25 mm to Ø 200 mm
- Available as standard, fine and extra-fine pitch
- Bore diameter: metric
- Insert geometry: L, G, H





Cutter Body

Type		Cat. No.	Diameter (mm)	No. of Teeth	Image
Shank	Standard Pitch	DFC 09000 E	Ø 25–Ø 80	2–5	
	H14 Medium Pitch	DFCM 09000 E	Ø 32–Ø 80	3–7	
Shell	Standard Pitch	DCF 09000 RS	Ø 50–Ø 200	4–8	
	Medium Pitch	DFCM 09000 RS	Ø 50–Ø 200	5–12	
	Fine Pitch	DFCF 09000 RS	Ø 50–Ø 200	6–16	


90 Degree Accuracy

Work material: Carbon steel

Cutting conditions:
 $v_c = 200 \text{ m/min}$, $f_t = 0.1 \text{ mm/t}$
 $a_e = 5.0 \text{ mm}$, $a_p = 5.0 \text{ mm} \times 3 \text{ passes}$

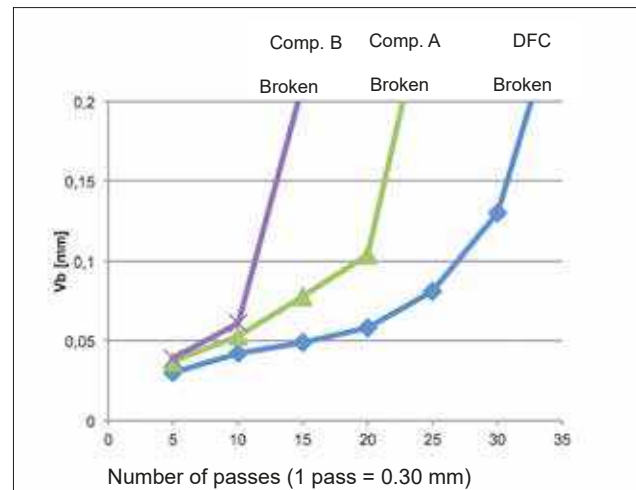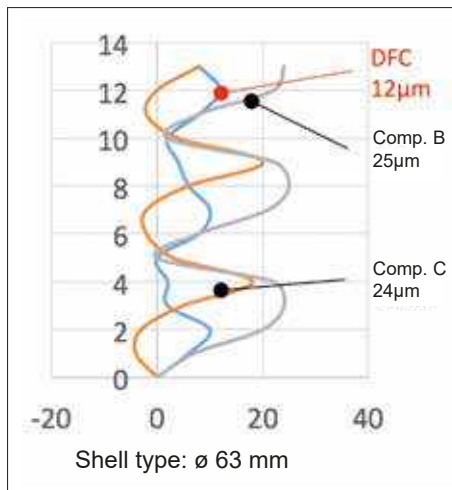

Suitable Applications

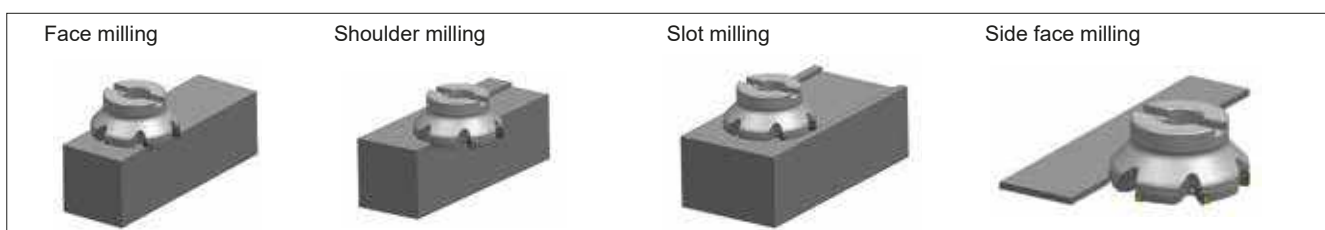


● = Euro stock

Sumi Dual Mill DFC Type

■ New Insert Design Provides Excellent Machining Accuracy







- The new insert design separates the location area and cutting edge producing an optimized solution.
- Machining accuracy is comparable to single sided inserts provided the DOC is less than 3 mm.
- The SEC-Sumi Dual Mill design, equips the user with a highly stable cutter for high feed machining applications.

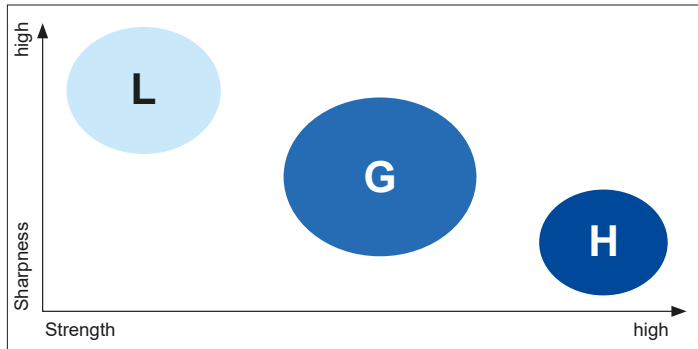● Chipbreaker Selection Map



● Inserts

Cat. No.	RE0,4	RE0,8	RE1,2	RE1,6
XNMMU0606__PNER-L	●	●	●	●
XNMMU0606__PNER-G	●	●	●	●
XNMMU0606__PNER-H	●	●	●	●

Work Material	Steel, Cast Iron		
Chipbreaker	L type	G type	H type
Chipbreaker			
Feature	Low cutting force	General purpose	Strong edge
Cutting edge geometry			
Application	Light cut, low rigidity milling and reduced burrs	Main breaker for general purpose applications	Roughing, heavy interrupted and hardness steel milling

■ Stable and High Cutting Performance Combined with High Toughness

- The excellent cutter performance offers efficient machining, enables high feed rate capability.
- The new insert construction provides extremely accurate edge to edge indexing whilst the location area offers high security and stability.



Sumi Dual Mill

DFC(M/F) 09000RS Type

Body – Shell type

Rake Angle	Radial	-9°
	Axial	-5°

Max. a_p : 6 mm



Fig.1




Fig.2





Fig.3



Body – Dimensions

● Sumi Dual Mill DFC type, Standard Pitch

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)	Fig.
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2				
DFC 09050RS	●	50	41	40	22	10,4	6,3	20	18	11	4	0,3	1	
09063RS	●	63	50	40	22	10,4	6,3	20	18	11	4	0,5	1	
09080RS	●	80	55	50	27	12,4	7	22	20	14	5	1,0	1	
DFC 09100RS	●	100	70	50	32	14,4	8	26	46	-	6	1,4	2	
09125RS	●	125	80	63	40	16,4	9	29	52	29	7	2,8	1	
09160RS	●	160	130	63	40	16,4	9	29	90	-	8	4,6	3	
DFC 09200RS	□	200	150	63	60	25,7	14	35	135	-	10	5,7		

● Sumi Dual Mill DFC type, Medium Pitch

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)	Fig.
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2				
DFCM 09050RS	●	50	41	40	22	10,4	6,3	20	18	11	5	0,3	1	
09063RS	●	63	50	40	22	10,4	6,3	20	18	11	6	0,5	1	
09080RS	●	80	55	50	27	12,4	7	22	20	14	7	0,9	1	
DFCM 09100RS	●	100	70	50	32	14,4	8	26	46	-	8	1,4	2	
09125RS	●	125	80	63	40	16,4	9	29	52	29	11	2,7	1	
09160RS	●	160	130	63	40	16,4	9	29	90	-	12	4,5	3	
DFCM 09200RS	□	200	150	63	60	25,7	14	35	135	-	16	5,6		

● Sumi Dual Mill DFC type, Fine Pitch

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)	Fig.
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2				
DFCF 09050RS	●	50	41	40	22	10,4	6,3	20	18	11	6	0,3	1	
09063RS	●	63	50	40	22	10,4	6,3	20	18	11	7	0,5	1	
09080RS	●	80	55	50	27	12,4	7	22	20	14	9	0,9	1	
DFCF 09100RS	●	100	70	50	32	14,4	8	26	46	-	11	1,3	2	
09125RS	●	125	80	63	40	16,4	9	29	52	29	14	2,6	1	
09160RS	●	160	130	63	40	16,4	9	29	90	-	16	4,6	3	
DFCF 09200RS	□	200	150	63	60	25,7	14	35	135	-	20	5,5		

Identification Details

DFC

Cutter Series

M

M: Medium
F: Fine

09

Insert Size

050

Cutter Diameter



R

Direction

S

Metric

Spare Parts

Screw	Wrench
	
BFTX03512IP	TRDR151P


● = Euro stock
□ = Delivery on request

 Recommended Tightening Torque (N·m)

Sumi Dual Mill DFC Type

■ Inserts

Application	Coated Carbide						P	Steel
High Speed / Light Cutting								Stainless Steel
General Purpose Cutting								Cast Iron
Rough Cutting								Exotic Alloy
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	Radius
								RE
XNMU 060604 PNER-L		●	●					0,4
060608 PNER-L		●	●					0,8
XNMU 060604 PNER-G	●	●	●	●	●	●	●	0,4
060608 PNER-G	●	●	●	●	●	●	●	0,8
060612 PNER-G	●	●	●	●	●	●	●	1,2
060616 PNER-G	●	●	●	●	●	●	●	1,6
XNMU 060608 PNER-H	●	●	●	●	●	●	●	0,8
060612 PNER-H	●	●	●	●	●	●	●	1,2
060616 PNER-H	●	●	●	●	●	●	●	1,6




■ Recommended Cutting Conditions


ISO	Work-material	Hardness (HB)	Cutting Speed (m/min) Min. - Optimum - Max.	Feed Rate Min. - Optimum - Max.	Depth of Cut (mm)	Grade
P	General Steel	180–280	150– 200 –250	0,10– 0,20 –0,30	< 6	ACP200 ACP300
	Soft Steel	≤ 180	180– 250 –350	0,15– 0,25 –0,35	< 6	ACP200 ACP300
	Die Steel	200–220	100– 150 –200	0,10– 0,18 –0,25	< 4	ACP200 ACP300
M	Stainless Steel	-	160– 205 –250	0,12– 0,18 –0,25	< 6	ACM200 ACM300
K	Cast Iron	250	100– 175 –250	0,10– 0,20 –0,30	< 6	ACK200 ACK300

■ Application Examples

Work piece	Breaker	Sumitomo	Comp.
Workpiece material: Steel (HRB 269-330) 	Breaker	G	
	Grade	ACP200	
	v_c (m/min)	226	200
	v_f (mm/min)	1260	
	f_t (mm/t)	0,28	0,2
	a_p (mm)	2	2
	a_e (mm)	5	5
	Dry or Wet	Wet	Wet
	Tool diam. Ø	80	
	No. of Teeth	5	
	Result	Efficiency: 158 % achieved	
	Evaluation	Wear resistance, efficiency	

Work piece	Breaker	Sumitomo	Comp.
Workpiece material: S235 (Carbon steel) Face milling 	Breaker	G	
	Grade	ACP200	
	v_c (m/min)	180	180
	v_f (mm/min)	1092	910
	f_t (mm/t)	0,3	0,2
	a_p (mm)	2 x 2 mm	2 x 2 mm
	a_e (mm)	50	50
	Dry or Wet	Dry	Dry
	Tool diam. Ø	63 mm	63 mm
	No. of Teeth	4	5
	Result	Efficiency: 120 % achieved	
	Evaluation	Wear resistance, efficiency	

Work piece	Breaker	Sumitomo	Comp.
Workpiece material: Cast Iron 	Breaker	G	
	Grade	ACP200	
	v_c (m/min)	156	156
	v_f (mm/min)	536	404
	f_t (mm/t)	0,17	0,09
	a_p (mm)	2,2	2,2
	a_e (mm)	63,5	63,5
	Dry or Wet	Dry	Dry
	Tool diam. Ø	80 mm	80 mm
	No. of Teeth	5	7
	Result	Efficiency: 133 % achieved Tool life: 138 % achieved	
	Evaluation	Efficiency, tool life	


Work piece	Breaker	Sumitomo	Comp.
Workpiece material: Cr-Mo alloy 	Breaker	G	
	Grade	ACP200	
	v_c (m/min)	200	200
	v_f (mm/min)	838	838
	f_t (mm/t)	0,2	0,13
	a_p (mm)	6	6
	a_e (mm)	43	43
	Dry or Wet	Dry	Dry
	Tool diam. Ø	80 mm	80 mm
	No. of Teeth	5	8
	Result	Efficiency: 120 % achieved	
	Evaluation	Efficiency	

"Wave Mill" Series WFX Type



General Features

Wave Mill WFX type for shoulder milling is a screw-locking type cutter capable of using four corners. Ideal cutting edge design delivers good squareness. Series expansion with the high-feed **WFXH** type and the **WFXC** type for chamfering. A comprehensive lineup that covers a wide variety of applications.

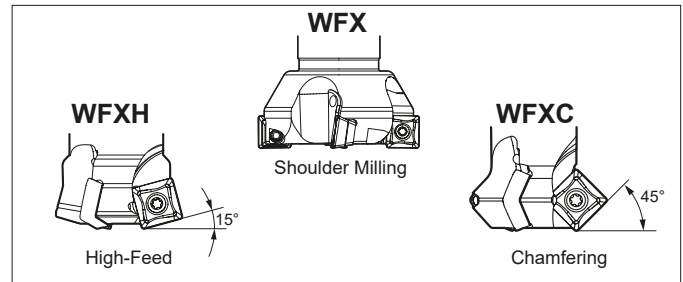

Characteristics


The insert shape, optimized for shoulder milling and combined with a high-precision body, leaves a superior machined surface finish.




Max. Depth of Cut



Optimized Edge Shape



- ① The convex shape ensures the cutting edge strength.
- ② The flat shape minimises differences in step levels.

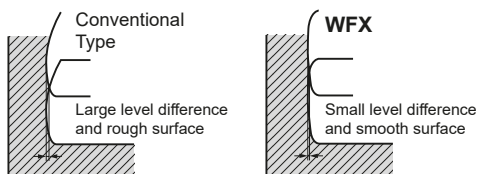

- ③ The wiper edge function improves the surface roughness.

Product Range

Application	Type	Cat. No.	No. of Teeth	Cutter Diameter (mm)	Shape
Shoulder Milling	Shell Type	WFX 08000 RS	3 - 8	40-100	
		WFXM 08000 RS	4 - 10	40-100	
		WFXF 08000 RS	6 - 12	40-100	
		WFX 08000 R	6 - 8	80-100	
		WFXM 08000 R	8 - 10	80-100	
		WFXF 08000 R	10 - 12	80-100	
		WFX 12000 RS	3 - 5	60-100	
		WFXF 12000 RS	4 - 7	60-100	
		WFX 12000 R	4 - 12	80-250	
	WFXF 12000 R	6 - 18	80-250		
	Endmill Type	WFX 08000 E	2 - 5	20-63	
		WFXM 08000 E	3 - 6	25-63	
WFX 12000 E		3 - 4	40-80		
WFXF 12000 E		4 - 6	60-80		
High Efficiency	Shell Type	WFXH 08000 RS	4 - 6	40-63	
		WFXH 12000 RS	4 - 5	60-63	
	Modular Type	WFXH 08000 M	2 - 3	25-32	
		WFXH 12000 M	3	40	
Chamfering	Endmill Type	WFXC 08000 E	1 - 2	8-16	
		WFXC 12000 E	3	25-32	
	Modular Type	WFXC 08000 M	2	16	
		WFXC 12000 M	3	25-32	

H16/17

Inserts



Cat. No.	RE0,2	RE0,4	RE0,8	RE1,2	RE1,6
SOMT 0803_ PZER-L		●	●		
0803_ PZER-G		●	●	●	
0803_ PZER-H			●	●	
SOET 0803_ PZER-G		●	●	●	
0803_ PZFR-S	●	●	●		
SOMT 1204_ PDER-L			●		
1204_ PDER-G		●	●	●	●
1204_ PDER-H			●		
SOET 1204_ PDFR-S			●		



"Wave Mill" Series WFX Type

Cutting Performance

Squareness of Machined Shoulder

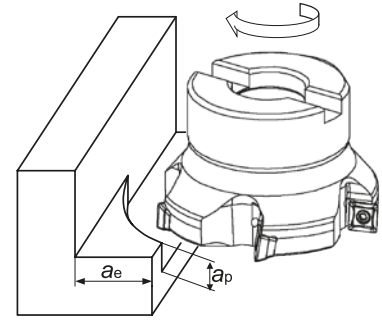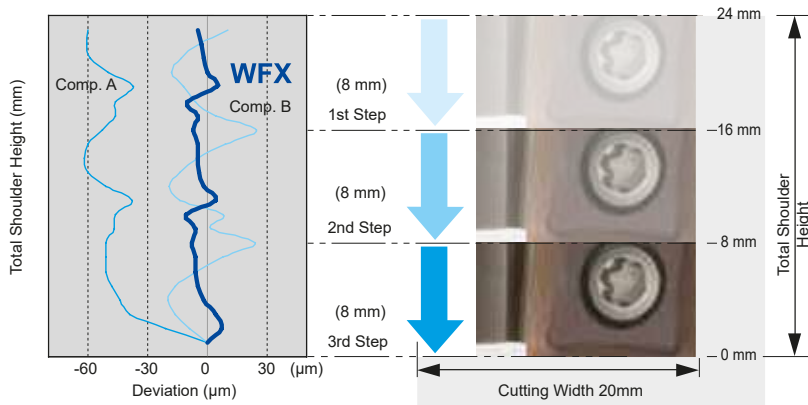

Work Material: C50
 Tool: WFX12100RS (Ø 100 mm x 5 teeth)
 Cutting Conditions: $v_c = 200\text{m/min}$, $a_p = 8,0\text{ mm} \times 3\text{ times}$
 $f_t = 0,15\text{mm/t}$, $a_e = 20\text{ mm}$


Grade Selection

ISO	Grade	Finishing to Light Cutting	Medium Cut	Rough to Heavy Cutting
P	Coated Carbide	ACP100	ACP200	ACP300
		ACM200	ACM300	

ISO	Grade	Finishing to Light Cutting	Medium Cut	Rough to Heavy Cutting
K	Coated Carbide	ACK200	ACK300	
N	Coated Carbide	DL1000		
			H1	

▽ CVD ▲ PVD



Chipbreaker Selection



Work Material	Steel, Cast Iron				Aluminium Alloy
	L Type	G Type	H Type	Wiper Type	S Type
Breaker					
Characteristic	Low Cutting Force	General Purpose	Strong Edge	Wiper Edge	Sharp Edge
Cutting Edge Figure					
Work Material-Application	Light Cutting Low rigidity Milling Low-Burr Design	Main Chipbreaker General to Interrupted Milling	Heavy Cut Heavy Interrupted Machining Tempered Steel	Precision Finishing	Non-Ferrous Metal

Wiper Insert

Optimised wiper edge shape provides superior surface roughness.

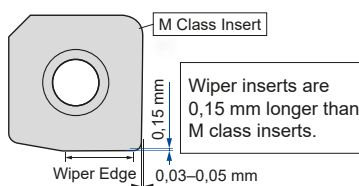

Wiper inserts are single-cornered. Attach the wiper insert so that the chamfered corner is in location ① shown in the figure. Be sure to use the corner with the ID mark (② in the figure). (08 size inserts have no marks)

"Wave Mill" Series

WFX(M/F) 08000 RS

Shoulder Milling for Steel, Stainless Steel,
Die Steel, Cast Iron, Non-Ferrous Metal, Exotic Alloy

Body - Shell Type

Rake Angle	Radial	-6°	6 mm	90°
	Axial	12°		



WFX08000RS



WFXM08000RS



WFXF08000RS

Fig. 1





Fig. 2



Body - WFX, Standard Pitch

Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)	Figure
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
WFX 08040 RS	●	40	33	40	16	8,4	5,6	18	14	9	3	0,2	1
08050 RS	●	50	41	40	22	10,4	6,3	20	18	11	4	0,3	1
08063 RS	●	63	50	40	22	10,4	6,3	20	18	11	5	0,6	1
08080 RS	●	80*	55	50	27	12,4	7,0	25	20	14	6	1,0	1
WFX 08100 RS	●	100*	70	50	32	14,4	8,0	32	46	-	8	1,4	2

Body - WFXM, Medium Pitch

Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)	Figure
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
WFXM 08040 RS	●	40	33	40	16	8,4	5,6	18	14	9	4	0,2	1
08050 RS	●	50	41	40	22	10,4	6,3	20	18	11	5	0,3	1
08063 RS	●	63	50	40	22	10,4	6,3	20	18	11	6	0,5	1
08080 RS	●	80*	55	50	27	12,4	7,0	25	20	14	8	1,0	1
WFXM 08100 RS	●	100*	70	50	32	14,4	8,0	32	46	-	10	1,4	2

Body - WFXF, Fine Pitch

Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)	Figure
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
WFXF 08040 RS	●	40	33	40	16	8,4	5,6	18	14	9	6	0,2	1
08050 RS	●	50	41	40	22	10,4	6,3	20	18	11	7	0,3	1
08063 RS	●	63	50	40	22	10,4	6,3	20	18	11	8	0,5	1
08080 RS	●	80*	55	50	27	12,4	7,0	25	20	14	10	0,9	1
WFXF 08100 RS	●	100*	70	50	32	14,4	8,0	32	46	-	12	1,4	2

Inserts are not included.

*Please use JIS B1176 hexagonal bolt (Ø80: M12x30~35mm, Ø100: M16x40~45mm) for securing Ø80 / Ø100 cutter on the arbor.

Recommended Cutting Conditions

ISO	Work Material	Hardness (HB)	Cutting Speed	Feed Rate	DOC	Grades
P	General Steel	180-280	150-200-250	0,08-0,12-0,18	<6	ACP200 ACP300
	Soft Steel	≤180	180-250-350	0,10-0,15-0,20	<6	ACP200 ACP300
M	Die Steel	200-220	100-150-200	0,08-0,12-0,18	<4	ACP200 ACP300
	Stainless Steel	-	160-200-250	0,10-0,15-0,20	<6	ACM300
K	Cast Iron	250	100-175-250	0,10-0,15-0,20	<6	ACK200 ACK300
N	Non Ferrous Metal	-	300-500-1000	0,10-0,15-0,20	<6	H1 DL1000

Min. - Optimum - Max.


Identification Details

WFX	F	08	040	R	S
Cutter Series	M: Medium Pitch F: Fine Pitch	Insert Size	Cutter Diameter	Direction	Metric Type

Spare Parts

Screw	Wrench
BFTX0306IP	TRDR08IP

Inserts

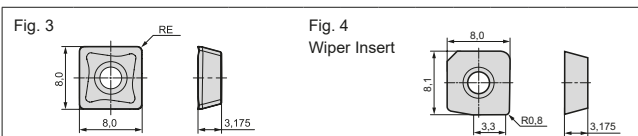

Application	Coated Carbide						Carbide	DLC	Radius	Fig.
	P	M	K	S	N	H				
High Speed / Light cut	P	M	K	S	N	H				
General Purpose	P	M	K	S	N	H				
Roughing	P	M	K	S	N	H				
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	RE
SOMT 080304 PZER L	○	○	○	○	●	○	○	-	-	0,4
080308 PZER L	○	○	○	○	○	○	○	-	-	0,8
SOMT 080304 PZER G	○	●	●	●	○	○	○	-	-	0,4
080308 PZER G	○	●	●	●	○	○	○	-	-	0,8
080312 PZER G	○	●	●	○	○	○	○	-	-	1,2
SOMT 080308 PZER H	○	●	●	○	○	○	○	-	-	0,8
080312 PZER H	○	○	○	○	○	○	○	-	-	1,2
SOET 080304 PZER G	○	○	○	○	●	○	○	-	-	0,4
080308 PZER G	○	○	○	○	○	○	○	-	-	0,8
080312 PZER G	○	○	○	○	○	○	○	-	-	1,2
SOET 080302 PZFR S	-	-	-	-	-	-	-	●	●	0,2
080304 PZFR S	-	-	-	-	-	-	-	●	●	0,4
080308 PZFR S	-	-	-	-	-	-	-	●	●	0,8
XOEW080308 PZTR W	-	-	-	-	○	-	-	-	-	0,8

"Wave Mill" Series WFX(F) 12000 RS

Shoulder Milling for Steel, Stainless Steel,
Die Steel, Cast Iron, Non-Ferrous Metal, Exotic Alloy




Body - Shell Type

Rake Angle	Radial	-8°	10 mm	90°
	Axial	8°		



WFX 12000RS

WFXF12000RS



Body - WFX, Standard Pitch

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)	Figure
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2				
WFX 12050 RS	●	50	40	40	22	10,4	6,3	20	18	11	3	0,2	1	
12063 RS	●	63	50	40	22	10,4	6,3	20	18	11	4	0,4	1	
12080 RS	●	80*	60	50	27	12,4	7,0	25	20	13,5	4	0,9	1	
WFX 12100 RS	●	100*	70	50	32	14,4	8,5	32	46	-	5	1,3	2	
12125 RS	●	125	90	63	40	16,4	9,5	29	52	-	6	2,7	2	
12160 RS	●	160	130	63	40	16,4	9,5	29	88	-	8	4,8	3	

Body - WFXF, Fine Pitch

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)	Figure
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2				
WFXF 12050 RS	●	50	40	40	22	10,4	6,3	20	18	11	4	0,2	1	
12063 RS	●	63	50	40	22	10,4	6,3	20	18	11	5	0,4	1	
12080 RS	●	80*	60	50	27	12,4	7,0	25	20	13,5	6	0,9	1	
WFXF 12100 RS	●	100*	70	50	32	14,4	8,5	32	46	-	7	1,2	2	
12125 RS	●	125	90	63	40	16,4	9,5	29	52	-	8	2,6	2	
12160 RS	●	160	130	63	40	16,4	9,5	29	88	-	12	4,7	3	

Inserts are not included.
*Please use JIS B1176 hexagonal bolt (Ø80: M12x30~35mm, Ø100: M16x40~45mm) for securing Ø80 / Ø100 cutter on the arbor.
Cutters ≥ Ø160 do not have coolant holes.

Recommended Cutting Conditions

ISO	Work Material	Hardness (HB)	Cutting Speed	Feed Rate	DCC	Grades
P	General Steel	180-280	150-200-250	0,10-0,15-0,20	<10	ACP200 ACP300
	Soft Steel	≤180	180-250-350	0,10-0,15-0,20	<10	ACP200 ACP300
	Die Steel	200-220	100-150-200	0,10-0,15-0,20	<6	ACP200 ACP300
M	Stainless Steel	-	160-200-250	0,10-0,15-0,20	<10	ACM300
K	Cast Iron	250	100-175-250	0,10-0,15-0,20	<10	ACK200 ACK300
N	Non Ferrous Metal	-	300-500-1000	0,10-0,15-0,20	<10	H1 DL1000

Min. - Optimum - Max.

Identification Details

WFX	F	12	050	R	S
Cutter Series	F: Fine Pitch	Insert Size	Cutter Diameter	Direction	Metric Type

Inserts

Application	Coated Carbide							Carbide	DLC
High Speed / Light cut	P			K		M	S	K	N
General Purpose		P	M	K		M	S		N
Roughing		P	M	K		M	S		N
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000
SOMT 120408 PDER L	●	●	●	○	○	○	●	-	-
SOMT 120404 PDER G	○	○	●	●	●	●	●	-	-
120408 PDER G	●	●	●	●	●	●	●	-	-
120412 PDER G	○	○	○	○	○	○	○	-	-
120416 PDER G	○	○	○	○	○	○	○	-	-
SOMT 120408 PDER H	○	●	○	●	●	○	○	-	-
SOET 120408 PDR S	-	-	-	-	-	-	-	●	●
XOEW 120408 PDTR W	-	-	-	-	○	-	-	-	-

Spare Parts

Shim	Shim Screw	Insert Screw	Insert Wrench	Wrench (Shim)
WFXS4R	BW0507F	BFTX03512IP	3,0	TRDR15IP
				LH035



"Sumi Dual Mill" Series TSX Type





■ General Features

High-efficient and high precision tangential shoulder milling cutter with tangentially mounted carbide inserts.

■ Characteristics

- **Tough & Sharp cutting edge**
Tangentially mounted carbide insert design and optimized edge geometry realize extremely tough and sharp cutting action.
- **Very accurate and excellent surface finish**
Thanks to newly developed fine carbide press / sintering technology and very accurate grinding technics, very periphery ground inserts generate very accurate and excellent surface finish.
- **Wide product range**
2 different insert size series, 3 chip breaker range and various carbide grade combination offers wide range of machining application.

■ Product Range

	Cat. No.	Series	Diameter Range / No of Teeth											Shape
			Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125	Ø160	
Shell Type	TSX 08000RS	Standard Pitch					4	5	6					
	TSXF 08000RS	Fine Pitch					6	8	10					
	TSX 13000RS	Standard Pitch					3	4	5	5	6	7	8	
	TSXM 13000RS	Medium Pitch					4	5	6	7	8	10	12	
Shank Type	TSX 08000E	Standard Pitch	2	2	3	3	4						 H18	
	TSXF 08000E	Fine Pitch		3	4	5	6							
	TSX 13000E	Standard Pitch			2	2	3	4						
	TSXM 13000E	Medium Pitch				3	4	5						

■ Special TSX Mills

Special orders repeater and side cutter available.



"Sumi Dual Mill" Series TSX Type

■ Insert Grade Selection


We have released ACP100 / ACP200 / ACP300 grades for steel machining, ACM200 / ACM300 grades for stainless steel machining and ACK200 / ACK300 grades for cast iron machining to cover a wide range of work materials.



ISO	Finishing to Light Cut	Medium Cut	Rough to Heavy Cut
P	ACP100	ACP200	ACP300
M	ACM200	ACM300	
K	ACK200	ACK300	
S	ACM200	ACM300	

▲ PVD
▼ CVD

■ Chipbreaker Selection

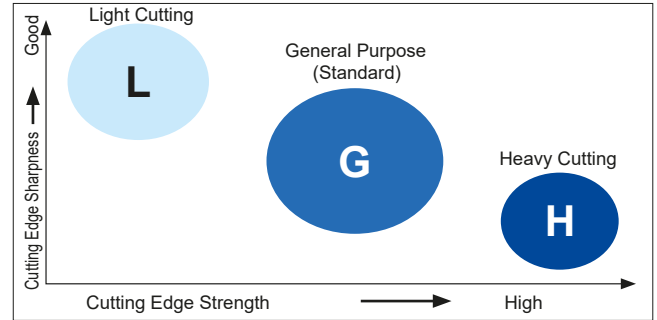


■ Inserts

Cat. No.	RE0,4	RE0,8	RE1,2	RE1,6	RE2,4	RE3,2
LNEX0804_PNER-L	●	●				
LNEX0804_PNER-G	●	●	●	●		
LNEX1306_PNER-L	●	●				
LNEX1306_PNER-G		●		●	●	●
LNEX1306_PNER-H	●	●		●	●	●

■ Chipbreaker Lineup

Work Material	P M K S		
	L type	G type	H type
Chipbreaker			
Feature	Low cutting force	General purpose	Strong edge
LNEX08 Cutting edge geometry			—
LNEX13 Cutting edge geometry			
Application	Light cut, low rigidity milling and reduced burrs	Main breaker for general purpose applications	Roughing, heavy interrupted and hardness steel milling


■ Suitable Applications

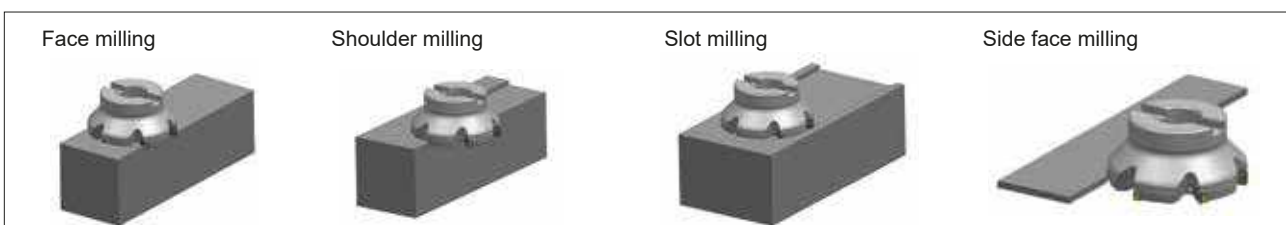

"Sumi Dual Mill" Series TSX(F) 08000 RS

■ Body - Shell Type

Rake Angle	Radial	-20°	8 mm	90°
	Axial	-6°		



● Body - TSX, Standard Pitch

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
TSX 08040 RS	●	40	33	40	16	8,4	5,6	18	14	9	4	0,21	
08050 RS	●	50	41	40	22	10,4	6,3	20	18	11	5	0,30	
08063 RS	●	63	50	40	22	10,4	6,3	20	18	11	6	0,53	

Inserts are not included.

● Body - TSXF, Fine Pitch

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
TSXF 08040 RS	●	40	33	40	16	8,4	5,6	18	14	9	6	0,21	
08050 RS	●	50	41	40	22	10,4	6,3	20	18	11	8	0,31	
08063 RS	●	63	50	40	22	10,4	6,3	20	18	11	10	0,54	

Inserts are not included.

■ Inserts

Application	Coated Carbide							P	Steel
High Speed / Light Cutting	P	M		K		M	S	M	Stainless Steel
General Purpose Cutting	P	M		K		M	S	K	Cast Iron
Rough Cutting		P	M		K		M	S	Exotic Alloy

Cat. No.	Radius							
	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	
LNEX 080404 PNER-L	●	●	●	●	●	●	●	0,4
080408 PNER-L	●	●	●	●	●	●	●	0,8
LNEX 080404 PNER-G	●	●	●	●	●	●	●	0,4
080408 PNER-G	●	●	●	●	●	●	●	0,8
080412 PNER-G	●	●	●	●	●	●	●	1,2
080416 PNER-G	●	●	●	●	●	●	●	1,6

■ Recommended Cutting Conditions

Min. - Optimum - Max.

ISO	Work-material	Hardness (HB)	Cutting Speed v_c (m/min)	Feed Rate f_t (mm/T)	Grade
P	Carbon Steel	180-280	150-225-300	0,08-0,20-0,30	ACP100 ACP200 ACP300
		> 280	75-150-230	0,08-0,20-0,30	
	Alloy Steel	180-280	100-175-250	0,08-0,15-0,25	
M	Stainless Steel	220-280	90-135-180	0,08-0,15-0,25	ACM200 ACM300
		>280	75-125-170	0,08-0,15-0,25	
K	Cast Iron Ductile Cast Iron	250	100-175-250	0,08-0,20-0,30	ACK200 ACK300
S	Exotic Material	-	30-60-90	0,05-0,10-0,15	ACM200 ACM300

■ Identification Details

TSX	F	08	050	R	S
Cutter Series	F: Fine Pitch	Insert Size	Cutter Diameter	Direction	Metric Type

■ Spare Parts



Screw	Wrench
BFTX0308IP	TRDR08IP
2,0	

● = Euro stock


Recommended Tightening Torque (N·m)

"Sumi Dual Mill" Series TSX(M) 13000 RS

Body - Shell Type



Rake Angle	Radial	-15°	12 mm	90°
	Axial	-6°		



Body - TSX, Standard Pitch

Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)	Fig.
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
TSX 13040 RS	●	40	33	40	16	8,4	5,6	18	14	9	3	0,20	1
13050 RS	●	50	41	40	22	10,4	6,3	20	18	11	4	0,30	1
13063 RS	●	63	50	40	22	10,4	6,3	20	18	11	5	0,50	1
13080 RS	●	80	55	50	27	12,4	7,0	22	20	14	5	0,92	1
TSX 13100 RS	●	100	70	50	32	14,4	8,0	32	46	-	6	1,35	2
13125 RS	●	125	80	63	40	16,4	9,0	29	52	29	7	2,55	1
13160 RS	●	160	130	63	40	16,4	9,0	29	90	-	8	4,97	3

Inserts are not included.
*Please use JIS B1176 hexagonal bolt (Ø 80: M12 x 30~35 mm, Ø 100: M16 x 40~45 mm) for securing Ø 80 / Ø 100 cutter on the arbor.

Body - TSXM, Medium Pitch

Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)	Fig.
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
TSXM 13040 RS	●	40	33	40	16	8,4	5,6	18	14	9	4	0,19	1
13050 RS	●	50	41	40	22	10,4	6,3	20	18	11	5	0,28	1
13063 RS	●	63	50	40	22	10,4	6,3	20	18	11	6	0,50	1
13080 RS	●	80	55	50	27	12,4	7,0	22	20	14	7	0,92	1
TSXM 13100 RS	●	100	70	50	32	14,4	8,0	32	46	-	8	1,36	2
13125 RS	●	125	80	63	40	16,4	9,0	29	52	29	10	2,57	1
13160 RS	●	160	130	63	40	16,4	9,0	29	90	-	12	5,02	3

Inserts are not included.
*Please use JIS B1176 hexagonal bolt (Ø 80: M12 x 30 ~ 35 mm, Ø 100: M16 x 40 ~ 45 mm) for securing Ø 80 / Ø 100 cutter on the arbor.

Inserts

Application	Coated Carbide						P	Steel
High Speed / Light Cutting							M	Stainless Steel
General Purpose Cutting							K	Cast Iron
Rough Cutting							S	Exotic Alloy
Cat. No.							Radius	
	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	
LNEX 130604 PNER-L	●	●	●	●	●	●	●	0,4
130608 PNER-L	●	●	●	●	●	●	●	0,8
LNEX 130604 PNER-G	●	●	●	●	●	●	●	0,4
130608 PNER-G	●	●	●	●	●	●	●	0,8
130616 PNER-G	●	●	●	●	●	●	●	1,6
130624 PNER-G	●	●	●	●	●	●	●	2,4
130632 PNER-G	●	●	●	●	●	●	●	3,2
LNEX 130608 PNER-H	●	●	●	●	●	●	●	0,8
130616 PNER-H	●	●	●	●	●	●	●	1,6
130624 PNER-H	●	●	●	●	●	●	●	2,4
130632 PNER-H	●	●	●	●	●	●	●	3,2

Recommended Cutting Conditions

G34

Identification Details

TSX	M	13	100	R	S
Cutter Series	M: Medium Pitch	Insert Size	Cutter Diameter	Direction	Metric Type

Spare Parts

Screw	Wrench
BFTX03510IP	TRDR15IP

"Sumi Power Mill" PWS (-F) Type




■ Features

- Smooth and stable performance under rough milling conditions
Tangentially mounted inserts, offering positive rake angle and unique curved cutting edge, realize stable and long lasting smooth cutting actions.
- Precision 4 cutting edge inserts
The 4 cutting edge inserts offer maximum cost performance.
- Less vibration under unstable condition
Optimized variable pitch design of the serrated inserts minimizes vibration during unstable conditions.
- Tough and durable body
Cutter body shows excellent toughness and durability through special steel and surface treatment.

■ Inserts - Design and Performance


Comparison of Chip Shape

General Purpose: Type G




Work Material: C50
Cutter: DC=100mm
Cutting Data: $v_c=200\text{m/min}$, $f_t=0,20\text{mm/t}$, $a_p=20\text{mm}$, $a_e=10\text{mm}$
Coolant: Dry
Evaluation: The serrated inserts achieve high efficient machining by reducing chattering.

Heavy Cut: Type R




2 different serrated cutting edges generate smaller chips

● Comparison of Cutting Edge Stability (Type G)

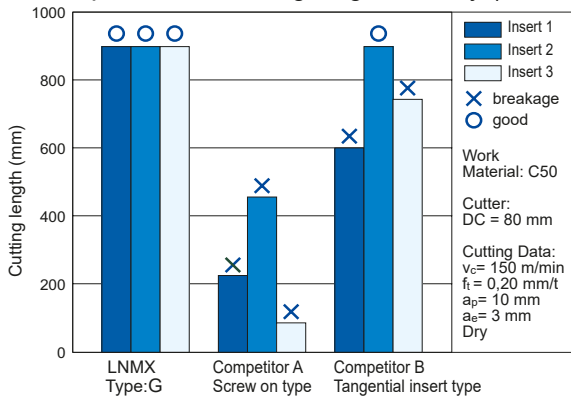


● Serrated Insert Application Guidance (Type R)

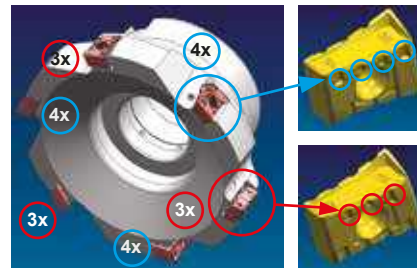


Setting instruction:
Please use two different serrated inserts (3x and 4x) as shown in the left figure.

Remark about cutting conditions:
Adjust feed rate up to $f_t = 0,25\text{mm/tooth}$.

● Comparison of Cutting Force (Type G)

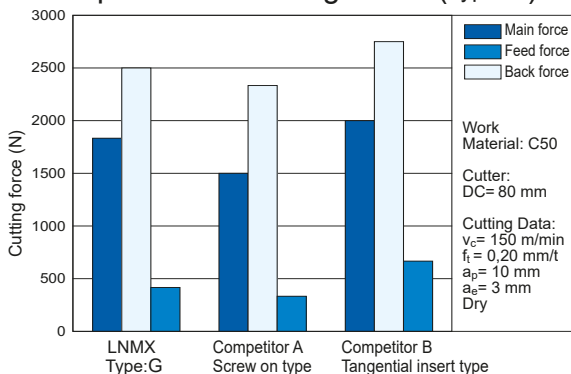

● Comparison of Cutting Force (Type G and R)

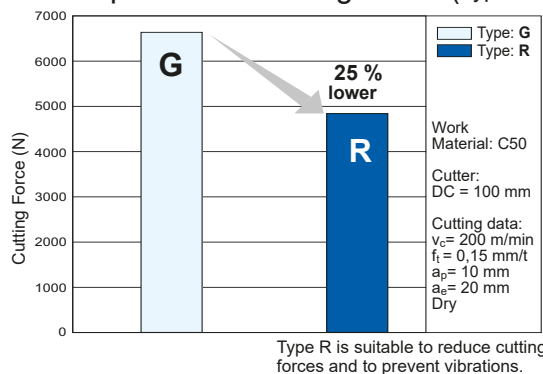


"Sumi Power Mill" PWS(-F) Type

Body - Dimensions



Rake Angle	Radial	-15°	16 mm	90°
	Axial	-6°		

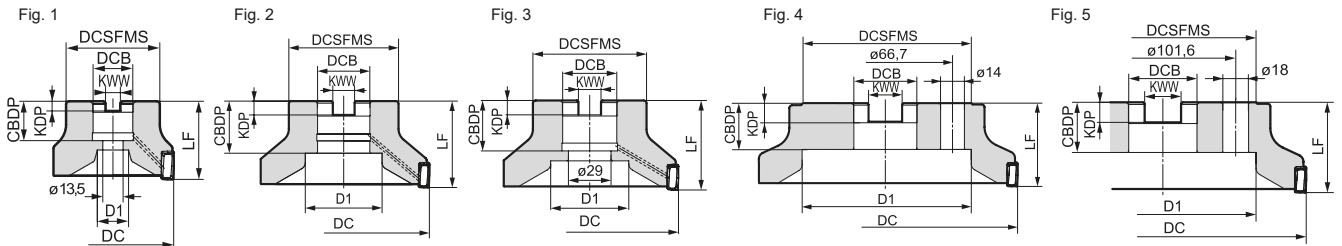

Cutter body DC ≥ 160 mm: no inner coolant
Cutter body DC ≥ 200 mm: with seat PWSS4R

Body - PWS, Standard

Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)	Fig.
		DC	DCSFMS	LF	DCB	D1	KWW	KDP	CBDP				
PWS 4080 RS	▲	80	60	50	27	20	12,4	7	25	4	1,0	1	
PWS 4100 RS	▲	100	70	50	32	46	14,4	8,5	32	6	1,4	2	
4125 RS	▲	125	80	63	40	52	16,4	9,5	29	6	2,4	3	
4160 RS	▲	160	100	63	40	88	16,4	9,5	29	8	4,2	4	

Body - PWSF, Fine pitch

Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)	Fig.
		DC	DCSFMS	LF	DCB	D1	KWW	KDP	CBDP				
PWSF 4080 RS	▲	80	60	50	27	20	12,4	7	25	6	0,9	1	
PWSF 4100 RS	▲	100	70	50	32	46	14,4	8,5	32	8	1,3	2	
4125 RS	▲	125	80	63	40	52	16,4	9,5	29	8	2,3	3	
4160 RS	▲	160	100	63	40	88	16,4	9,5	29	10	4,1	4	

Inserts are not included.

Inserts

Application	Coated Carbide					
High speed/Light cut	P				K	
General purpose	P _M	M			K	
Roughing	P _M	P _M			K	

Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	Application	Remarks	Fig.
LNMX 170808PNSR-L	▲	▲	▲	▲	▲	Light cut		6
170808PNSR-G	▲	▲	▲	▲	▲	General purpose	1 st Choice	6
170808PNSR-R	▲	▲	▲	▲	▲	Heavy cut	Serrated design	7

Fig. 6

Fig. 7

Recommended Cutting Conditions

ISO	Work Material	Hardness (HB)	Cutting Speed v _c (m/min)	Feed Rate f _t (mm/t)	Grade
P	Carbon Steel	180-280	150-250-350	0,10-0,23-0,35	ACP200
	Alloy Steel	180-280	100-175-250	0,10-0,18-0,25	ACP200
M	Stainless Steel	-	100-150-200	0,15-0,18-0,25	ACP300
K	Cast Iron Ductile Iron	250	100-175-250	0,10-0,23-0,35	ACK200

Min.-Optimum-Max.

Spare Parts

Screw	Torx wrench	Sumi-Paste	Seat *
BFTX0412IP	TTR15IP	SUMI-P	PWSS4R

* from DC ≥ 200mm


Cutter Body DC ≥ 200mm
Please use seat PWSS4R for protection of cutter body.

Special Cutter Type PWSR



Rake Angle	Radial	-15°	31 mm	90°
	Axial	-6°		

Delivery on request

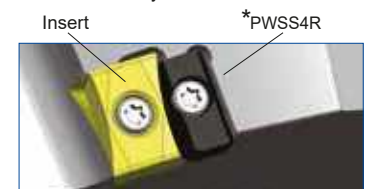

"Wave Mill" Series

WEZ Type



General Features

- Supports Various Machining Operations
Applicable to various machining applications, the cutter lineup includes diameters of Ø 14 mm to Ø 160 mm, enabling large ramping.
- Excellent Machining Quality
With a combination of optimised cutting edge shape and high-precision molding technology, superb wall surface accuracy and surface finish quality are achieved.
- Excellent Sharpness with Low Resistance
Reduces machining noise and suppresses burrs. Lineup includes ground inserts with a focus on sharpness.
- General-purpose Grade Applicable to any Work Material
Introducing the new grade ACU2500, supporting machining in a wide range of fields and applicable to steel, stainless steel and cast iron.

Product Range


Type	Cat. No.	Diameter Range (mm) / No of Teeth																
		Ø14	Ø16	Ø18	Ø20	Ø22	Ø25	Ø28	Ø30	Ø32	Ø35	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125	Ø160
Shell	WEZ 11000RS											4, 6	5, 7	6, 8	7, 10	9, 12		
	WEZ 11000R (Inch)														7, 10	9, 12		
	WEZ 17000RS											3, 4	3, 5	4, 6	4, 7	5, 8	6, 9, 11	8, 10, 12
	WEZ 17000R (Inch)														4, 7	5, 8	6, 9, 11	8, 10, 12
Shank	WEZ 11000E	1	2*	2	2*, 3*	3	2, 3*, 4*	4	4	2, 3, 4, 5*	5	2, 4, 6	5, 7	8	10			
	WEZ 11000EL	1	2*	2	2*	2	2*, 3	2	2	2*, 3	2, 3	2	3					
	WEZ 17000E						2*	2	3	2, 3*	3	3, 4	3*, 5*	4*, 6*	7			
	WEZ 17000EL						2	2	2	2*, 3	2	2, 3, 4	3*, 5*	4*, 6*				

Shank Type H20-31

* Different shank diameters in stock

Suitable Applications

- Supports Ramping, Helical Milling, Plunge Cutting

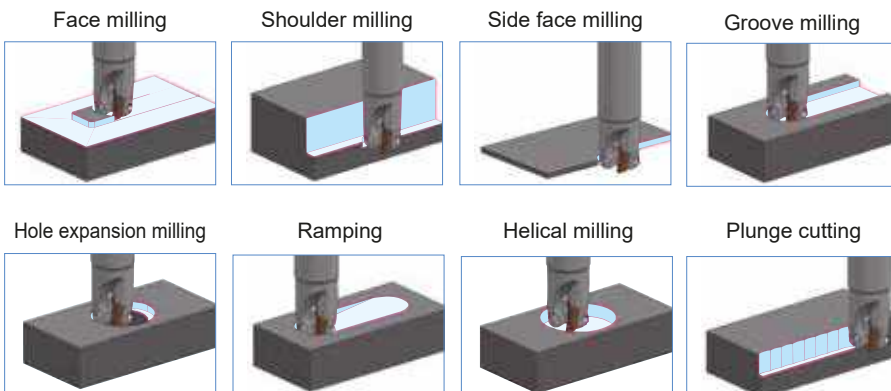

Optimised Body Design

Wide guide face for stable insert clamping.




WEZ11 type

"Wave Mill" Series WEZ Type

Chipbreaker Lineup

Work Material	P		M	K	S	H	N
	L Type	G Type	H Type	F Type	P Type	S Type	
Chipbreaker							
AO_T11 Cutting edge geometry							
AO_T17 Cutting edge geometry							
Applications	Light cut, low rigidity machining	Main breaker for general purpose to interrupted machining	Heavy cut, heavy interrupted machining, hardened steel	Light cut, finishing, low-burr design	Light cut, high-precision machining, high surface wall quality	For non-ferrous metals	

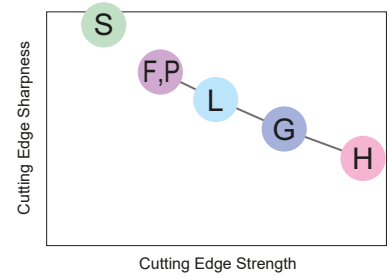


Product Range Inserts

●: Standard stock ○: Planned stock

Cat. No.	Nose Radius (mm)											
	R0,2	R0,4	R0,8	R1,2	R1,6	R2,0	R2,4	R3,0	R3,2	R4,0	R5,0	R6,4
AOMT 11T3 PEER-G	●	●	●	●	●	●	●	●	●			
AOMT 11T3 PEER-H		●	●	●	●							
AOET 11T3 PEER-F	○	●	●	○								
AOET 11T3 PEER-P16	○	○	○	○								
AOET 11T3 PEER-P20	○	○	○	○								
AOET 11T3 PEER-P25	○	○	○	○								
AOET 11T3 PEFR-S	○	●	●	○								
AOMT 1705 PEER-L	●	●	●	●	●							
AOMT 1705 PEER-G	●	●	●	●	●	●	●	●	●	●	●	●
AOMT 1705 PEER-H		●	●	○	●							
AOET 1705 PEER-F	○	●	●	○								
AOET 1705 PEER-P25	○	○	○	○								
AOET 1705 PEER-P32	○	○	○	○								
AOET 1705 PEFR-S	○	●	●	○								


Improved Milling Quality

● Excellent Squareness

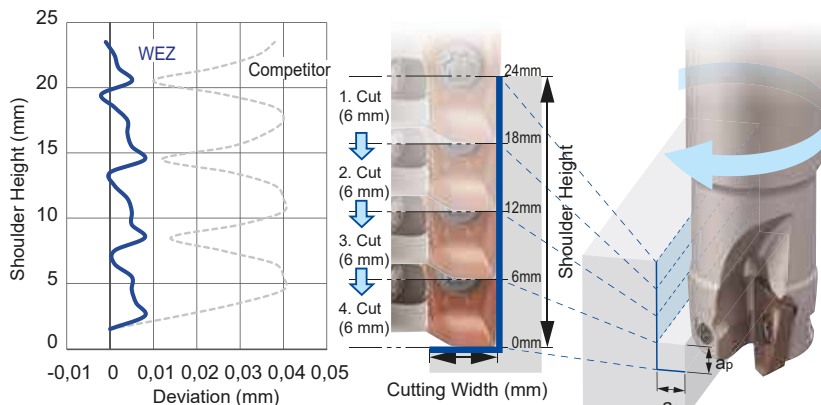


Machine: Vertical Machining Centre BT40,
 Work Material: C50
 Tool: WEZ 11020 E03 (Ø 20, 3 teeth)
 Insert: AOMT11T308PEER-G (ACU2500)
 Cutting Conditions: $v_c = 150$ m/min, $f_z = 0,15$ mm/t, $a_p = 6$ mm x 4 passes, $a_e = 5$ mm, dry

● Excellent Surface Quality

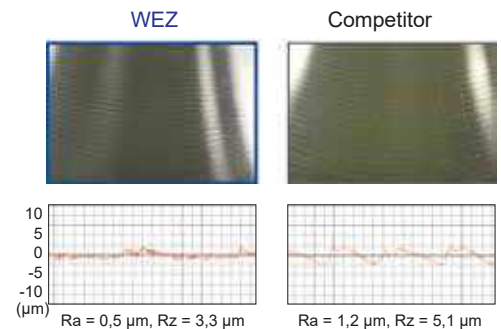


● Lower cutting force helps reduce machining noise

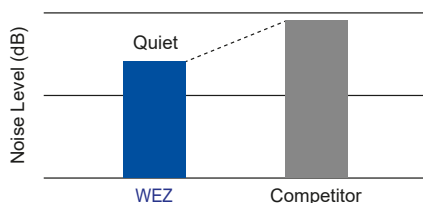

Machine: Vertical Machining Centre BT40,
 Work Material: C50
 Tool: WEZ 11020 E03 (Ø 20, 3 teeth)
 Insert: AOMT11T308PEER-G (ACU2500)
 Cutting Conditions: $v_c = 150$ m/min, $f_z = 0,15$ mm/t, $a_p = 8$ mm, $a_e = 5$ mm, dry

High-precision Ground Class Insert with Excellent Sharpness

Ground Finish on Cutting Edge and Guide Face
The guide face has a ground finish as well as the cutting edge, minimizing corner difference when mounting on the body. Stable runout precision and machining quality.




Lineup of Chipbreakers for Ground Inserts

F Type

Cutting edge specialized for sharpness and machining accuracy

Sharpness from ground finish enables burr control.

Excellent squareness with all diameters.




Machine:	Vertical Machining Centre BT50,
Work Material:	X5CrNiS18 9
Tool:	WEZ 11050 RS07 (Ø 50, 7 teeth)
Insert:	AOET11T308PEER-F (ACU2500)
Cutting Conditions:	$v_c = 120$ m/min, $f_z = 0,12$ mm/t, $a_p = 1$ mm, $a_e = 30$ mm, dry

P Type

Chipbreaker for wall surface squareness equivalent to solid endmills

Premium item with cutting edge shape optimised for each cutter diameter while maintaining the F type chipbreaker's sharpness.

Enables wall surface squareness equal to solid endmills through a blade shape optimised for each tool diameter.

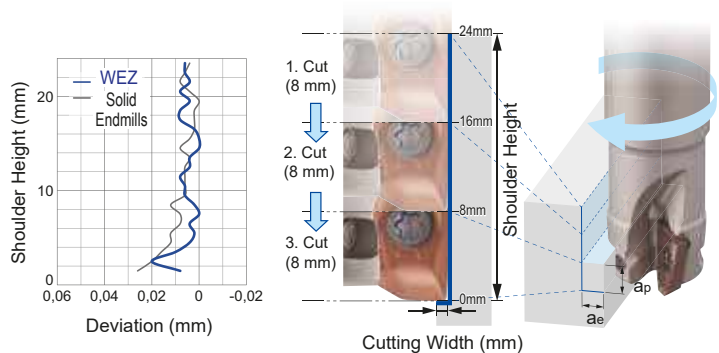

P Type Chipbreaker Selection

Cat. No.	Cutter Diameter (mm)										
	Ø14	Ø16	Ø18	Ø20	Ø22	Ø25	Ø28	Ø30	Ø32	Ø35	⇒ Ø40
AOET11T3_ PEER-P_ _	-P16	-P20	-	-P25	-	-	-	-	-	-	-
AOET11T05_ PEER-P_ _	-	-	-	-	-	-P25	-	-P32	-	-	-

Machine:	Vertical Machining Centre BT50,
Work Material:	C50
Tool:	WEZ 11020 E03 (Ø 20, 3 teeth)
Insert:	AOET11T308PEER-P20 (ACU2500)
Cutting Conditions:	$v_c = 150$ m/min, $f_z = 0,1$ mm/t, $a_p = 8$ mm x 3 passes, $a_e = 1$ mm, dry

S Type

Sharp edge chipbreaker for non-ferrous metals, with excellent adhesion resistance

Suppresses adhesion with rake face lapping.

DLC coat inserts available for further improved adhesion resistance.



Machine:	Vertical Machining Centre BT50,
Work Material:	AlSi12Cu
Tool:	WEZ 11020 E03 (Ø 20, 3 teeth)
Insert:	AOET11T308PEER-S (H20)
Cutting Conditions:	$v_c = 350$ m/min, $f_z = 0,1$ mm/t, $a_p = 3$ mm, $a_e = 10$ mm, dry

■ Insert Grades Selection Guide

Newly developed general-purpose ACU2500 grade suitable for various work materials has been released. Enhanced lineup of coatings, cemented carbide and cermet for milling steel, stainless steel, cast iron and aluminum alloy.

ISO		Finishing – Light Cutting	Medium Cutting	Rough – Heavy Cutting
P	Coated Carbide	ACP2000 ACU2500	ACP3000	
	Cermet	T2500A		
M	Coated Carbide	ACU2500 ACM200	ACM300	
	Coated Carbide	ACK2000 ACK3000 ACU2500		
N	Coated Carbide	DL2000		
	Carbide		H20	


▽ : CVD ▲ : PVD

■ Coating Features

New Absotech™ (absolute technology) coating technology that realises absolute stability.

ABSOTECH

CVD



Special Surface Treatment
Suppresses thermal cracking by introducing high compressive stress, resulting in chipping resistance more than twice as good as conventional types


Crystal Orientation Control Al₂O₃
By controlling the growth direction, Al₂O₃ is reinforced for crater wear resistance more than twice as good as conventional types

High Hardness TiCN
Increased TiCN hardness by using a C-rich composition for flank wear resistance more than twice as good as conventional types.

Grades: ACP2000, ACK2000

ABSOTECH

PVD

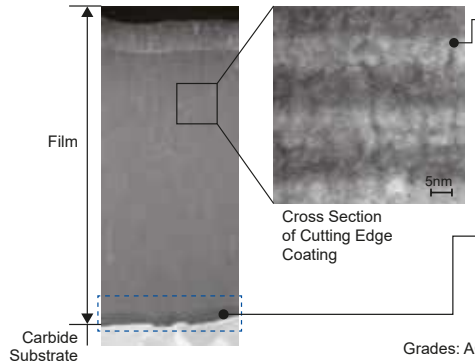

New Super Multi-Layered Composition
Higher hardness and twice the conventional wear resistance due to a fine crystal structure AlTiCrBN-based nano-layered coating.

High Adhesion Strength
Significantly improved coating adhesion. Chipping resistance more than twice as good as conventional types.

Grades: ACU2500, ACP3000, ACK3000

ISO	Grade	Coating Thickness (μm)	Features
P M K	ACU2500	3	General purpose grade applicable to steel and cast iron. Adopts a carbide substrate with excellent fracture resistance and wear resistance plus a new coating with excellent wear resistance and chipping resistance, realising stable long tool life with various work material grades.
P	ACP2000	10	Stable long tool life with high-speed machining is realised by adopting a new coating and a tough carbide substrate with excellent thermal crack resistance.
	ACP3000	3	Adopts a very tough carbide substrate plus a new coating with excellent wear resistance and chipping resistance, realising stable long tool life for wet machining of steel in particular.
	T2500A	–	Thanks to the excellent thermal crack resistance conferred by high thermal conductivity and the improved toughness due to the finer and more uniform structure, this cermet grade achieves high levels of fracture resistance and wear resistance.
M	ACM200	6	Realises superb stability in machining of high-hardness stainless steel, due to a high-strength carbide substrate and highly wear-resistant coating.
	ACM300	3	Realises superb stability in machining of stainless steel, due to a high-strength carbide substrate and highly chipping-resistant coating.
K	ACK2000	10	Stable long tool life with high-speed machining of cast iron is realised by adopting a new coating with excellent thermal resistance and a tough carbide substrate.
	ACK3000	3	Adopts a carbide substrate with excellent wear resistance plus a new coating with excellent wear resistance and chipping resistance, realising stable long tool life in dry machining of cast iron.
N	DL2000	0,5	DLC coating grade for non-ferrous metal machining with a low coefficient of friction and excellent adhesion resistance.
	H20	–	Uncoated grade for non-ferrous metal machining with excellent wear resistance and fracture resistance.


"Wave Mill" Series

WEZ Type

Recommended Cutting Conditions

WEZ11 Type

Cutter: WEZ 11020 E03
 Insert: AO_T11T3 type
 Cutting Data: $a_p = 3 \text{ mm}$, $a_e = 10 \text{ mm}$, dry



Min. - Optimum - Max.


ISO	Material	HB	Chipbreaker	Grade								
				ACU2500	ACP2000	ACP3000	T2500A	ACK2000	ACK3000	ACM200	ACM300	DL2000
				Feed Rate (mm/tooth)								
				0,08-0,15-0,20	0,08-0,15-0,20	0,08-0,15-0,20	0,08-0,15-0,18	0,08-0,15-0,20	0,08-0,15-0,20	0,08-0,15-0,20	0,08-0,15-0,20	0,05-0,10-0,15
				Cutting Speed v_c (m/min)								
P	Unalloyed steel, <0, 15%C, annealed	125	G	270-320-370	300-350-400	250-300-350	230-280-330					
	" , <0, 45%C, annealed	190	G	170-220-270	200-250-300	150-200-250	130-180-230					
	" , <0, 45%C, tempered	250	G	140-180-220	160-200-245	120-160-200	105-145-185					
	" , <0, 75%C, annealed	270	G	110-145-175	130-165-195	100-130-165	85-115-150					
	" , <0, 75%C, tempered	300	G	70-90-110	80-100-120	60-80-100	50-70-90					
	Low alloyed steel, annealed	180	G	160-205-255	190-235-280	140-190-235	120-170-215					
	" , tempered	275	G	90-120-150	110-135-165	80-110-140	70-100-125					
	" , tempered	300	G	85-110-130	100-125-150	75-100-125	65-90-115					
" , tempered	350	G	60-80-100	70-90-110	50-70-90	45-65-85						
High alloyed and tool steel, annealed		200	G	140-180-220	160-200-245	120-160-205						
	" , tempered	325	G	55-70-85	60-80-100	50-65-80						
M	Stainless steel, ferritic/martensitic, annealed	200	G	110-140-170					140-170-190	90-110-140		
	" , martensitic, tempered	240	G	100-125-150					125-150-170	80-100-125		
	" , austenitic, plunged	180	G	120-150-180					150-180-200	100-120-150		
K	Grey cast iron		G	150-200-250			250-300-350	170-220-270				
	Nodular cast iron		G	90-120-150			150-180-210	100-130-160				
S	High tempered resist. alloys, Fe based, annealed		G	30-40-55					35-45-60	25-35-50		
	" , hardened		G	60-80-100					70-90-110	50-70-90		
N	Aluminium alloy, Si < 12,6%		S									500-750-1000
	" , Si > 12,6%		S									170-200-250
	Copper alloy		S									300-330-350

The above recommended cutting conditions are meant as a guide. Actual conditions will depend on the individual machine, work shape and clamping. They will need to be adjusted according to machine rigidity, work clamp rigidity, cutting depth and other factors.

For groove milling, reduce the feed rate approximately 70 % of the corresponding value shown above.

WEZ17 Type

Cutter: WEZ 17032 E03
 Insert: AO_T1705 type
 Cutting Data: $a_p = 5 \text{ mm}$, $a_e = 16 \text{ mm}$, dry




Min. - Optimum - Max.

ISO	Material	HB	Chipbreaker	Grade								
				ACU2500	ACP2000	ACP3000	T2500A	ACK2000	ACK3000	ACM200	ACM300	DL2000
				Feed Rate (mm/tooth)								
				0,10-0,20-0,28	0,10-0,20-0,28	0,10-0,20-0,28	0,10-0,15-0,22	0,10-0,20-0,28	0,10-0,20-0,28	0,10-0,20-0,28	0,05-0,10-0,15	
				Cutting Speed v_c (m/min)								
P	Unalloyed steel, <0, 15%C, annealed	125	G	285-335-390	315-360-420	265-315-370	240-295-345					
	" , <0, 45%C, annealed	190	G	180-230-285	210-265-315	160-210-265	135-190-240					
	" , <0, 45%C, tempered	250	G	145-190-230	170-210-255	130-170-215	110-155-195					
	" , <0, 75%C, annealed	270	G	115-150-185	135-170-205	100-135-170	90-125-155					
	" , <0, 75%C, tempered	300	G	70-90-115	85-105-125	65-85-105	55-75-95					
	Low alloyed steel, annealed	180	G	170-220-265	200-245-295	150-200-250	130-180-225					
	" , tempered	275	G	100-130-155	115-145-175	85-115-145	75-105-135					
	" , tempered	300	G	90-115-140	105-130-155	75-105-130	65-90-120					
" , tempered	350	G	65-85-100	75-95-115	55-75-95	50-70-85						
High alloyed and tool steel, annealed		200	G	145-185-230	170-215-255	130-170-215						
	" , tempered	325	G	55-75-90	65-85-100	50-65-85						
M	Stainless steel, ferritic/martensitic, annealed	200	G	115-145-175					145-175-195	100-115-145		
	" , martensitic, tempered	240	G	105-130-155					130-155-175	85-105-130		
	" , austenitic, plunged	180	G	125-155-190					160-190-210	105-125-160		
K	Grey cast iron		G	160-210-265			265-315-370	180-230-285				
	Nodular cast iron		G	95-125-160			160-190-220	105-140-170				
S	High tempered resist. alloys, Fe based, annealed		G	30-40-60					35-45-60	25-35-50		
	" , hardened		G	60-85-105					75-95-115	50-75-95		
N	Aluminium alloy, Si < 12,6%		S									500-750-1000
	" , Si > 12,6%		S									170-200-250
	Copper alloy		S									300-330-350

The above recommended cutting conditions are meant as a guide. Actual conditions will depend on the individual machine, work shape and clamping. They will need to be adjusted according to machine rigidity, work clamp rigidity, cutting depth and other factors.

For groove milling, reduce the feed rate approximately 70 % of the corresponding value shown above.

■ Ramping / Helical Milling Upper Limits

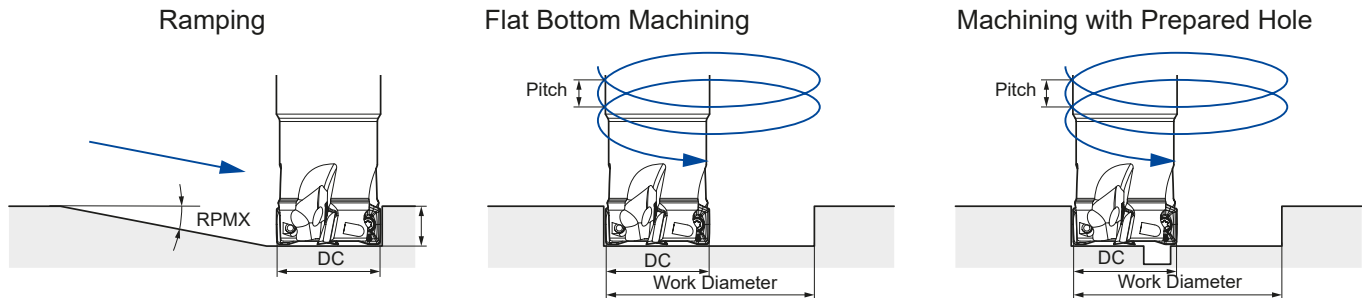

● WEZ11 Type


DC Ø (mm)	Max.Ramping Angle	Flat Bottom Machining				Machining with Prepared Hole	
	RPMX (°)	Max. Machining Diam. (mm)	Max. Pitch (mm/rev)	Min. Machining Diam. (mm)	Max. Pitch (mm/rev)	Min. Machining Diam. (mm)	Max. Pitch (mm/rev)
14	13,2	25,3	8,4	23,1	5,9	19,0	1,9
16	10,5	29,3	7,6	27,0	5,6	21,7	1,5
18	8,1	33,3	6,7	30,9	5,0	25,2	1,4
20	6,5	37,3	6,0	34,9	4,6	29,1	1,3
22	5,3	41,3	5,4	38,8	4,3	32,9	1,3
25	4,1	47,3	4,8	44,8	3,9	38,9	1,3
28	3,4	53,3	4,4	50,7	3,6	44,9	1,3
30	3,0	57,3	4,2	54,7	3,5	48,8	1,3
32	2,7	61,3	4,0	58,7	3,3	52,8	1,2
35	2,3	67,3	3,8	64,6	3,1	58,8	1,2
40	1,8	77,3	3,4	74,6	2,9	68,8	1,2
50	1,2	97,3	3,0	94,6	2,6	88,8	1,1
63	0,8	123,3	2,8	120,5	2,5	114,7	1,1

● WEZ17 Type

DC Ø (mm)	Max.Ramping Angle	Flat Bottom Machining				Machining with Prepared Hole	
	RPMX (°)	Max. Machining Diam. (mm)	Max. Pitch (mm/rev)	Min. Machining Diam. (mm)	Max. Pitch (mm/rev)	Min. Machining Diam. (mm)	Max. Pitch (mm/rev)
25	10,8	47,3	13,0	41,0	8,3	33,1	1,8
28	8,1	53,3	11,1	46,9	7,5	39,0	1,8
30	7,0	57,3	10,2	50,9	7,0	43,0	1,8
32	6,1	61,3	9,5	54,9	6,7	47,0	1,7
35	5,1	67,3	8,7	60,8	6,2	53,0	1,7
40	4,0	77,3	7,7	70,8	5,7	63,0	1,7
50	2,5	97,3	6,5	90,7	5,0	83,0	1,6
63	1,8	123,3	5,6	116,7	4,5	109,0	1,6

* The table above shows values with nose radius 0,8 mm

■ Plunge Cutting - Upper Limit for Radial Width a_e






Type	Max. a_e (mm)
WEZ11	3
WEZ17	5

"Wave Mill" Series WEZ 11000 R(S)



Rake Angle	Radial	-7° - -11°	10 mm	90°
	Axial	14° - 15°		



■ Body - WEZ (Shell Type)

Dimensions (mm)

	Cat. No.	Stock	DC	DCSFMS	LF	DCB	KWW	KDP	CBDFP	D1	D2	D3	No. of Teeth	Weight (kg)	Fig.
Metric	WEZ 11040RS04	●	40	33	40	16	8,4	5,6	18	14	9	-	4	0,21	1
	11040RS06	●	40	33	40	16	8,4	5,6	18	14	9	-	6	0,20	1
	11050RS05	●	50	41	40	22	10,4	6,3	20	18	11	-	5	0,32	1
	11050RS07	●	50	41	40	22	10,4	6,3	20	18	11	-	7	0,31	1
	11063RS06	●	63	50	40	22	10,4	6,3	20	18	11	-	6	0,58	1
	11063RS08	●	63	50	40	22	10,4	6,3	20	18	11	-	8	0,57	1
	11080RS07	●	*80	55	50	27	12,4	7,0	22	20	14	-	7	1,08	1
	11080RS10	●	*80	55	50	27	12,4	7,0	22	20	14	-	10	1,07	1
	11100RS09	●	*100	70	50	32	14,4	8,0	32	46	-	-	9	1,57	3
11100RS12	●	*100	70	50	32	14,4	8,0	32	46	-	-	12	1,56	3	
Inch	WEZ 11080R07	○	*80	55	50	25,4	9,5	6,0	25	20	14	-	7	1,09	1
	11080R10	○	*80	55	50	25,4	9,5	6,0	25	20	14	-	10	1,08	1
	11100R09	○	*100	70	63	31,75	12,7	8,0	32	46	27	18	9	2,12	2
	11100R12	○	*100	70	63	31,75	12,7	8,0	32	46	27	18	12	2,10	2

Inserts are sold separately. Check the arbor mounting size (DCB) when selecting the cutter.

* For securing the Ø 80 mm and Ø 100 mm cutter to the arbors, use JIS B1176 hexagonal bolt.
(Ø 80 mm: M12x30 to 35 mm, Ø 100 mm: M16x40x45 mm)



■ Spare Parts

Applicable Cutters	Insert Screw		Wrench
WEZ 11040RS04 11040RS06 11050RS05 11050RS07 11063RS06 11063RS08 11080R(S)07 11080R(S)10 11100R(S)09 11100R(S)12	BFTX0306IP	1,5	TRDR08IP

■ Identification Details

WEZ	11	050	R	S	07
Cutter Series	Insert Size	Cutter Diameter	Feed Direction	Metric	Number of Teeth


■ Recommended Cutting Conditions

G42

"Wave Mill" Series WEZ 11000 R(S)

Inserts

Application	Coated Carbide						Carbide	DLC	Cermet	RE (mm)	
	ACU2500	ACP2000	ACP3000	ACK2000	ACK3000	ACM200					ACM300
High Speed / Light Cut		P		K		MS		N	N	P	
General Purpose	SPK		P		K	MS	MS	N	N		
Roughing	SPK		P		K	MS	MS				
Cat. No.	ACU2500	ACP2000	ACP3000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A	RE (mm)
AOMT 11T302PEER-G	●	●	●	●	●	●	●	-	-	●	0,2
11T304PEER-G	●	●	●	●	●	●	●	-	-	●	0,4
11T308PEER-G	●	●	●	●	●	●	●	-	-	●	0,8
11T312PEER-G	●	●	●	●	●	●	●	-	-	●	1,2
11T316PEER-G	●	●	●	●	●	●	●	-	-	●	1,6
11T320PEER-G	●	●	●	●	●	●	●	-	-	●	2,0
11T324PEER-G	●	●	●	●	●	●	●	-	-	●	2,4
11T330PEER-G	●	●	●	●	●	●	●	-	-	●	3,0
11T332PEER-G	●	●	●	●	●	●	●	-	-	●	3,2
AOMT 11T304PEER-H	●	●	●	●	●	●	●	-	-	-	0,4
11T308PEER-H	●	●	●	●	●	●	●	-	-	-	0,8
11T312PEER-H	●	●	●	●	●	●	●	-	-	-	1,2
11T316PEER-H	●	●	●	●	●	●	●	-	-	-	1,6
AOET 11T302PEER-F	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-F	●	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-F	●	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-F	○	-	-	-	-	-	-	-	-	-	1,2
AOET 11T302PEER-P16	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-P16	○	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-P16	○	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-P16	○	-	-	-	-	-	-	-	-	-	1,2
11T302PEER-P20	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-P20	○	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-P20	○	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-P20	○	-	-	-	-	-	-	-	-	-	1,2
11T302PEER-P25	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-P25	○	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-P25	○	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-P25	○	-	-	-	-	-	-	-	-	-	1,2
AOET 11T302PEFR-S	-	-	-	-	-	-	-	○	○	-	0,2
11T304PEFR-S	-	-	-	-	-	-	-	●	●	-	0,4
11T308PEFR-S	-	-	-	-	-	-	-	●	●	-	0,8
11T312PEFR-S	-	-	-	-	-	-	-	○	○	-	1,2

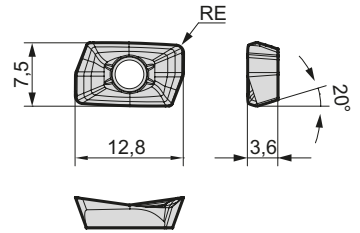


L: Low cutting force
G: General purpose
H: Strong edge
F: Finishing
P: High-precision machining
S: Non ferrous metals

*P16 is applicable to cutter diameters Ø 14 mm and Ø 16 mm.
*P20 is applicable to cutter diameters Ø 18 mm, Ø 20 mm.
*P25 is applicable to cutter diameters Ø 25 mm, Ø 28 mm.

□ = Not available

Precautions for Mounting

- (1) Clean the mounting seat and contact parts.
- (2) Apply screw lubrication to the screw thread as well as the screw head face to prevent seizure.
- (3) While pressing the insert solidly against the seat surface, tighten at the screws with the included wrench.
- (4) After tightening, check that there are no gaps between the surfaces.

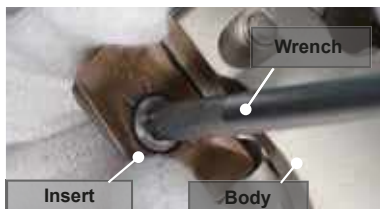

*When mounting inserts with nose radius of $\geq 3,0$ mm, modification of the body is required.



Modify this edge.


Reworking guidelines
Nose radius = 3,0 mm: C = 1 mm (AOMT11T330PEER)
Nose radius = 3,2 mm: C = 1 mm (AOMT11T332PEER)
Standard: R = 1 mm

C: Chamfer
R: Radius

"Wave Mill" Series WEZ 17000 R(S)



Rake Angle	Radial	-4° - -9°	15 mm	90°
	Axial	10° - 15°		

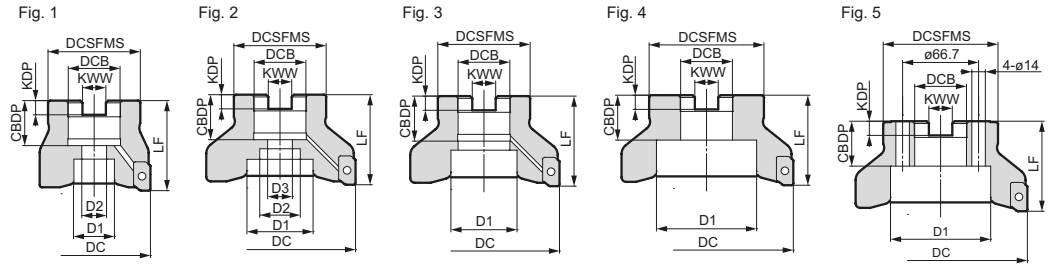

Body - WEZ (Shell Type)

Dimensions (mm)

	Cat. No.	Stock	DC	DCSFMS	LF	DCB	KWW	KDP	CBBDP	D1	D2	D3	No. of Teeth	Weight (kg)	Fig.
Metric	WEZ 17040RS03	●	40	33	40	16	8,4	5,6	18	14	9	-	3	0,19	1
	17040RS04	●	40	33	40	16	8,4	5,6	18	14	9	-	4	0,16	1
	17050RS03	●	50	41	40	22	10,4	6,3	20	18	11	-	3	0,30	1
	17050RS05	●	50	41	40	22	10,4	6,3	20	18	11	-	5	0,26	1
	17063RS04	●	63	50	40	22	10,4	6,3	20	18	11	-	4	0,54	1
	17063RS06	●	63	50	40	22	10,4	6,3	20	18	11	-	6	0,51	1
	17080RS04	●	*80	55	50	27	12,4	7,0	22	20	14	-	4	1,10	1
	17080RS07	●	*80	55	50	27	12,4	7,0	22	20	14	-	7	1,05	1
	17100RS05	●	100	70	50	32	14,4	8,0	32	46	-	-	5	1,58	3
	17100RS08	●	100	70	50	32	14,4	8,0	32	46	-	-	8	1,57	3
	17125RS06	●	125	80	63	40	16,4	9,0	29	52	29	-	6	3,04	1
	17125RS09	●	125	80	63	40	16,4	9,0	29	52	29	-	9	3,07	1
17125RS11	●	125	80	63	40	16,4	9,0	29	52	29	-	11	3,02	1	
17160RS08	●	160	130	63	40	16,4	9,0	29	90	-	-	8	5,24	5	
17160RS10	●	160	130	63	40	16,4	9,0	29	90	-	-	10	5,31	5	
17160RS12	●	160	130	63	40	16,4	9,0	29	90	-	-	12	5,26	5	
Inch	WEZ 17080R04	○	*80	55	50	25,4	9,5	6,0	25	20	14	-	4	1,10	1
	17080R07	○	*80	55	50	25,4	9,5	6,0	25	20	14	-	7	1,06	1
	17100R05	○	*100	70	63	31,75	12,7	8,0	32	46	27	18	5	2,08	2
	17100R08	○	*100	70	63	31,75	12,7	8,0	32	46	27	18	8	2,07	2
	17125R06	○	125	80	63	38,1	15,9	10,0	35,5	55	30	-	6	3,09	1
	17125R09	○	125	80	63	38,1	15,9	10,0	35,5	55	30	-	9	3,11	1
	17125R11	○	125	80	63	38,1	15,9	10,0	35,5	55	30	-	11	3,06	1
	17160R08	○	160	100	63	50,8	19,1	11,0	38	72	-	-	8	5,04	4
	17160R10	○	160	100	63	50,8	19,1	11,0	38	72	-	-	10	5,09	4
	17160R12	○	160	100	63	50,8	19,1	11,0	38	72	-	-	12	5,04	4

Inserts are sold separately. Check the arbor mounting size (DCB) when selecting the cutter.

For securing the Ø 80 mm and Ø 100 mm cutter to the arbors, use JIS B1176 hexagonal bolt. (Ø 80 mm: M12x30 to 35 mm, Ø 100 mm: M16x40x45 mm)

Spare Parts

Applicable Cutters	Insert Screw		Wrench	Handle Grip	Wrench Bit
WEZ 17040RS03	BFTX0409IP	3,0	-	HPS1015	TRB15IP
17040RS04					
17050RS03					
17050RS05					
17063RS04					
17063RS06					
17080R(S)04					
17080R(S)07					
17100R(S)05					
17100R(S)08					
17125R(S)06					
17125R(S)09					
17125R(S)11	TRDR15IP	-	-	-	-
17160R(S)08					
17160R(S)10					
17160R(S)12					

Identification Details


WEZ	17	100	R	S	05
Cutter Series	Insert Size	Cutter Diameter	Feed Direction	Metric	Number of Teeth

Recommended Cutting Conditions

G42

Inserts

Application	Coated Carbide						Carbide	DLC	Cermet	RE (mm)	
		P		K	MS	MS					
High Speed / Light Cut		P		K	MS	MS		N	N	P	
General Purpose	SPK		P		K	MS	MS	N	N		
Roughing	SPK		P		K	MS	MS				
Cat. No.	ACU2500	ACP2000	ACP3000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A	RE (mm)
AOMT 170502PEER-L	●	-	●	-	●	●	●	-	-	●	0,2
170504PEER-L	●	-	●	-	●	●	●	-	-	●	0,4
170508PEER-L	●	-	●	-	●	●	●	-	-	●	0,8
170512PEER-L	●	-	●	-	●	●	●	-	-	●	1,2
170516PEER-L	●	-	●	-	●	●	●	-	-	●	1,6
AOMT 170502PEER-G	●	●	●	●	●	●	●	-	-	●	0,2
170504PEER-G	●	●	●	●	●	●	●	-	-	●	0,4
170508PEER-G	●	●	●	●	●	●	●	-	-	●	0,8
170512PEER-G	●	●	●	●	●	●	●	-	-	●	1,2
170516PEER-G	●	●	●	●	●	●	●	-	-	●	1,6
170520PEER-G	●	●	●	●	●	●	●	-	-	●	2,0
170524PEER-G	●	●	●	●	●	●	●	-	-	●	2,4
170530PEER-G	●	●	●	●	●	●	●	-	-	●	3,0
170532PEER-G	●	●	●	●	●	●	●	-	-	●	3,2
170540PEER-G	●	●	●	●	●	●	●	-	-	●	4,0
170550PEER-G	●	●	●	●	●	●	●	-	-	●	5,0
170564PEER-G	●	●	●	●	●	●	●	-	-	●	6,4
AOMT 170504PEER-H	●	●	●	●	●	●	●	-	-	-	0,4
170508PEER-H	●	●	●	●	●	●	●	-	-	-	0,8
170512PEER-H	○	●	●	●	●	●	●	-	-	-	1,2
170516PEER-H	●	●	●	●	●	●	●	-	-	-	1,6
AOET 170502PEER-F	○	-	-	-	-	-	-	-	-	-	0,2
170504PEER-F	●	-	-	-	-	-	-	-	-	-	0,4
170508PEER-F	●	-	-	-	-	-	-	-	-	-	0,8
170512PEER-F	○	-	-	-	-	-	-	-	-	-	1,2
AOET 170502PEER-P25	○	-	-	-	-	-	-	-	-	-	0,2
170504PEER-P25	○	-	-	-	-	-	-	-	-	-	0,4
170508PEER-P25	○	-	-	-	-	-	-	-	-	-	0,8
170512PEER-P25	○	-	-	-	-	-	-	-	-	-	1,2
170502PEER-P32	○	-	-	-	-	-	-	-	-	-	0,2
170504PEER-P32	○	-	-	-	-	-	-	-	-	-	0,4
170508PEER-P32	○	-	-	-	-	-	-	-	-	-	0,8
170512PEER-P32	○	-	-	-	-	-	-	-	-	-	1,2
AOET 170502PEFR-S	-	-	-	-	-	-	-	○	○	-	0,2
170504PEFR-S	-	-	-	-	-	-	-	●	●	-	0,4
170508PEFR-S	-	-	-	-	-	-	-	●	●	-	0,8
170512PEFR-S	-	-	-	-	-	-	-	○	○	-	1,2

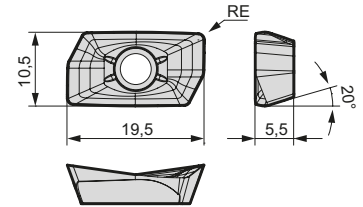


L: Low cutting force
G: General purpose
H: Strong edge
F: Finishing
P: High-precision machining
S: Non ferrous metals

*P25 is applicable to cutter diameters Ø 25 mm and Ø 28 mm.
*P32 is applicable to cutter diameters Ø 30 mm, Ø 32 mm and Ø 35 mm.

○ = Not available

Precautions for Mounting

- (1) Clean the mounting seat and contact parts.
- (2) Apply screw lubrication to the screw thread as well as the screw head face to prevent seizure.
- (3) While pressing the insert solidly against the seat surface, tighten at the screws with the included wrench.
- (4) After tightening, check that there are no gaps between the surfaces.

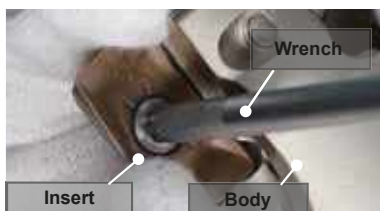

*When mounting inserts with nose radius of $\geq 3,0$ mm, modification of the body is required.




Modify this edge.

Reworking guidelines
Nose radius = 3,0 mm: C = 1 mm (AOMT170530PEER)
Nose radius = 3,2 mm: C = 1 mm (AOMT170532PEER)
Nose radius = 4,0 mm: C = 2 mm (AOMT170540PEER)
Nose radius = 5,0 mm: C = 5 mm (AOMT170550PEER)
Nose radius = 6,4 mm: C = 5 mm (AOMT170564PEER)
Standard: R = 1 mm


C: Chamfer
R: Radius

"Wave Mill" Series WEX (-F) Type


5 mm 90°

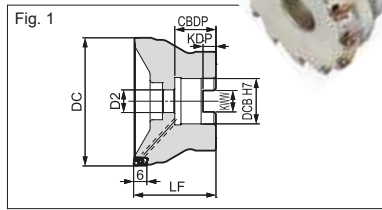

10 mm 90°

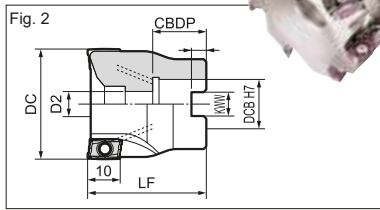

14 mm 90°

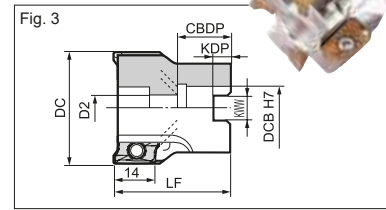

Body (Shell Type "F")

Cat. No.	Dimensions (mm)								No. of Teeth	Fig.
	Stock	DC	DCB	D2	KWW	KDP	LF	CBDP		
WEX 1032 F	●	32	16	9	8,4	5,6	40	18	8	1
1040 F	●	40	16	11	8,4	5,6	40	18	10	1
1050 F	●	50	22	11	10,4	6,3	40	20	12	1
1063 F	●	63	22	11	10,4	6,3	40	20	14	1
WEX 2040 F	●	40	16	9	8,4	5,6	40	18	6	2
2050 F	●	50	22	11	10,4	6,3	40	20	7	2
2063 F	●	63	22	11	10,4	6,3	40	20	8	2
2080 F	●	80	27	13,5	12,4	7,0	50	25	10	2
WEX 2100 F	□	100	32	32	14,4	8,5	50	26	12	2
WEX 3040 F	●	40	16	9	8,4	5,6	40	18	4	3
3050 F	●	50	22	11	10,4	6,3	40	20	5	3
3063 F	●	63	22	11	10,4	6,3	40	20	6	3
3080 F	●	80	27	13,5	12,4	7,0	50	25	7	3
WEX 3100 F	●	100	32	32	14,4	8,5	50	26	8	3

Inserts for WEX1000 / 2000 Type

Application	Coated Carbide							Carbide		DLC
	P	K	M	S	H	N	K	N		
High Speed / Light cut	P									N
General Purpose	P	K	M	S	H	N				N
Roughing	P	K	M	S	H	N				N
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Radius
AXMT 060204 PDER-L	○	○	○	○	○	○	○			0,4
060208 PDER-L	○	○	○	○	○	○	○			0,8
060212 PDER-L	○	○	○	○	○	○	○			1,2
AXMT 060204 PDER-G	○	●	●	○	○	○	○			0,4
060208 PDER-G	○	●	●	○	○	○	○			0,8
060212 PDER-G	○	●	●	○	○	○	○			1,2
AXMT 060204 PDER-H	○	●	●	○	○	○	○			0,4
060208 PDER-H	○	●	●	○	○	○	○			0,8
060212 PDER-H	○	○	○	○	○	○	○			1,2
AXMT 123504 PEER-G	●	●	●	●	●			-	-	0,4
123508 PEER-G	●	●	●	●	●			-	-	0,8
123512 PEER-G	●	●	●	●	●			-	-	1,2
AXMT 123504 PEER-H	●	●	●	●	●			-	-	0,4
123508 PEER-H	●	●	●	●	●			-	-	0,8
123512 PEER-H	●	●	○	●	●			-	-	1,2
AXMT 123504 PEER-E			▲			●	●	-	-	0,4
123508 PEER-E			▲			●	●	-	-	0,8
123512 PEER-E						●	●	-	-	1,2
AXMT 123508 PEER-EH			▲			●	●	-	-	0,8
AXMT 060202 PDFR-S	-	-	-	-	-	-	○	○		0,2
AXET 123502 PEFR-S	-	-	-	-	-	-	●	●		0,2
123504 PEFR-S	-	-	-	-	-	-	●	●		0,4
123508 PEFR-S	-	-	-	-	-	-	●	●		0,8

Inserts for WEX3000 Type

Application	Coated Carbide							Carbide		DLC
	P	K	M	S	H	N	K	N		
High Speed / Light cut	P									N
General Purpose	P	K	M	S	H	N				N
Roughing	P	K	M	S	H	N				N
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Radius
AXMT 170508 PEER-L	○	○	○	○	○			-	-	0,8
AXMT 170504 PEER-G	○	●	●	○	○			-	-	0,4
170508 PEER-G	○	●	●	○	○			-	-	0,8
170512 PEER-G	○	●	●	○	○			-	-	1,2
170516 PEER-G	○	●	●	○	○			-	-	1,6
170520 PEER-G*	○	●	●	○	○			-	-	2,0
170530 PEER-G*	○	●	●	○	○			-	-	3,0
AXMT 170508 PEER-H	○	●	●	○	○			-	-	0,8
170512 PEER-H	○	○	○	○	○			-	-	1,2
AXMT 170504 PEER-E			▲			●	●	-	-	0,4
170508 PEER-E						●	●	-	-	0,8
170512 PEER-E						●	●	-	-	1,2
170516 PEER-E						○	○	-	-	1,6
170520 PEER-E*						○	○	-	-	2,0
170530 PEER-E*						○	○	-	-	3,0
AXMT 170508 PEER-EH			▲			●	●	-	-	0,8
AXET 170502 PEFR-S	-	-	-	-	-	-	-	●	●	0,2
170504 PEFR-S	-	-	-	-	-	-	-	●	●	0,4
170508 PEFR-S	-	-	-	-	-	-	-	●	●	0,8

* Cutter body modification is required.



- Unable to produce
- L - Low cutting force
- G - General type
- H - Strong cutting edge
- E - For stainless steel
- EH - Strong edge for stainless steel
- S - For aluminium

Spare Parts


Screw	Wrench	Applicable Endmill
BFTX 01804 IP	TRX 06 IP	0,5 WEX 1000 F
BFTX 0306 IP	TRDR 08 IP	2,0 WEX 2000 F
BFTX 0409 IP	TRDR 15 IP	3,0 WEX 3000 F

Identification Details


WEX	2	016	F
Cutter Series	2000 Series	Cutter Diameter	Shell Type

Wave Repeater Mill WRX (-F) Type

18-36 mm 90°

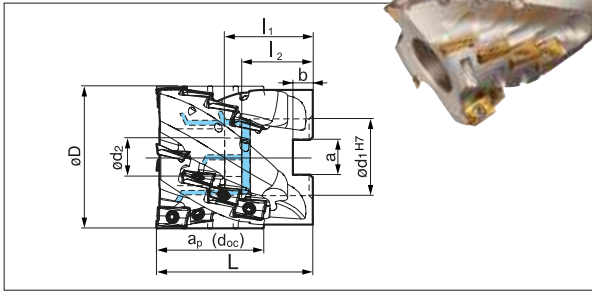

27-53 mm 90°

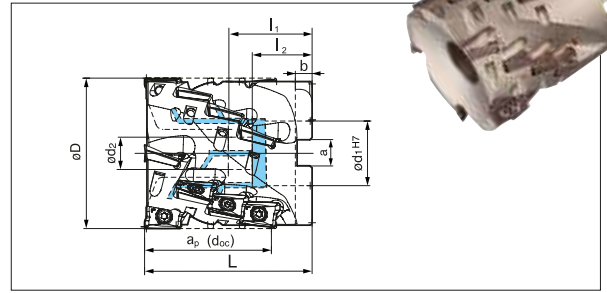

Body (Shell Type "F")

Cat. No.	Stock	Depth of cut (a _p)	Dimensions (mm)									No. of teeth	No. of rows	Effective teeth
			øD	ød ₁	ød ₂	a	b	l ₁	l	l				
WRX2040RH18F16	□	18	40	16	9	8,4	5,6	50	39	18	10	2	5	
WRX2040RH36F16	●	36	40	16	9	8,4	5,6	55	44	18	16	4	4	
WRX2050RH18F22	□	18	50	22	11	10,4	6,3	50	36	20	10	2	5	
WRX2050RH36F22	●	36	50	22	11	10,4	6,3	55	41,5	20	16	4	4	

Body (Shell Type "F")

Cat. No.	Stock	Depth of Cut (a _p)	Dimensions (mm)									No. of teeth	No. of rows	Effective teeth
			øD	ød ₁	ød ₂	a	b	l ₁	l	l				
WRX3050RH27F22	□	27	50	22	11	10	6,3	50	36	20	8	2	4	
WRX3050RH53F22	●	53	50	22	11	10	6,3	70	56	20	12	4	3	
WRX3063RH27F27	□	27	63	27	13,5	12	7	70	34	2	10	2	5	
WRX3063RH53F27	●	53	63	27	13,5	12	7	70	54	2	16	4	4	
WRX3080RH27F32	□	27	80	32	17	14	8	50	30	2	12	2	6	
WRX3080RH53F32	●	53	80	32	17	14	8	85	63	2	20	4	5	
WRX3100RH27F40	□	27	100	40	21	16	9,5	85	40	30	14	2	7	
WRX3100RH53F40	●	53	100	40	21	16	9,5	85	59	30	24	4	6	

Inserts (Same as for Wavemill WEX 2000 Type)

Application	Coated Carbide							Carbide	DLC	
High Speed / Light cut	P		K		MS			KN	N	
General Purpose	P		K		MS	MS			N	
Roughing	P	P	K		MS					
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Radius
AXMT 123504 PEER-G	●	●	●	●	●			-	-	0,4
123508 PEER-G	●	●	●	●	●			-	-	0,8
123512 PEER-G	●	●	●	●	●			-	-	1,2
AXMT 123504 PEER-H	●	●	●	●	●			-	-	0,4
123508 PEER-H	●	●	●	●	●			-	-	0,8
123512 PEER-H	●	●	●	○	●			-	-	1,2
AXMT 123504 PEER-E						●	●	-	-	0,4
123508 PEER-E			▲			●	●	-	-	0,8
123512 PEER-E						●	●	-	-	1,2
AXMT 123508 PEER-EH			▲			●	●	-	-	0,8
AXET 123502 PEFR-S	-	-	-	-	-	-	-	●	●	0,2
123504 PEFR-S	-	-	-	-	-	-	-	●	●	0,4
123508 PEFR-S	-	-	-	-	-	-	-	●	●	0,8

- Unable to produce
- L - Low cutting force
- G - General type
- H - Strong cutting edge
- E - For stainless steel
- EH - Strong edge for stainless steel
- S - For aluminium

Spare Parts

Screw	Wrench	Applicable Endmill
BFTX 0306 IP	TRDR 08 IP	WRX 2 ___ RH _F _
BFTX 0409 IP	TRDR 15 IP	WRX 3 ___ RH _F _


Inserts (Same as for Wavemill WEX 3000 Type)

Application	Coated Carbide							Carbide	DLC	
High Speed / Light cut	P		K		MS			KN	N	
General Purpose	P		K		MS	MS			N	
Roughing	P	P	K		MS					
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Radius
AXMT 170508 PEER-L	●	●	○	●	●			-	-	0,8
AXMT 170504 PEER-G	○	●	●	●	●			-	-	0,4
170508 PEER-G	●	●	●	●	●			-	-	0,8
170512 PEER-G	○	●	●	○	●			-	-	1,2
170516 PEER-G	○	●	●	○	●			-	-	1,6
170520 PEER-G*	○	●	●	●	●			-	-	2,0
170530 PEER-G*	○	●	●	●	●			-	-	3,0
AXMT 170508 PEER-H	●	●	●	●	●			-	-	0,8
170512 PEER-H	●	●	●	●	●			-	-	1,2
AXMT 170504 PEER-E						●	●	-	-	0,4
170508 PEER-E						●	●	-	-	0,8
170512 PEER-E						●	●	-	-	1,2
170516 PEER-E						○	●	-	-	1,6
170520 PEER-E*						○	●	-	-	2,0
170530 PEER-E*						●	●	-	-	3,0
AXMT 170508 PEER-EH			▲			●	●	-	-	0,8
AXET 170502 PEFR-S	-	-	-	-	-	-	-	●	●	0,2
170504 PEFR-S	-	-	-	-	-	-	-	●	●	0,4
170508 PEFR-S	-	-	-	-	-	-	-	●	●	0,8

* Cutter body modification is required.

H36




Identification Details

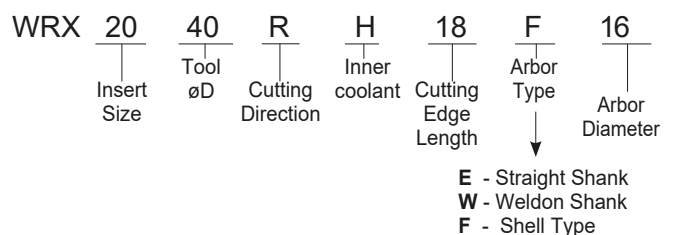

"Sumi Power Mill" PWC Type

Powerful Tangential Milling System for Cast Iron

Approach angle	: 88°
Axial rake angle	: +5°
Radial rake angle	: -5°





■ Body (Standard, PWC Type)

Cat. No.	Stock		Dimensions (mm)								No of Teeth	Max. Depth of Cut	Weight (Kg)	Fig.
	R	L	DC	DCSFMS	LF	DCB	D1	KWW	KDP	CBDP				
PWC 4080 R/L-S	▲	▲	80	60	50	27	29,5	12,4	7,0	25	12,0	0,9	1	
PWC 4100 R/L-S	▲	▲	100	70	50	32	46	14,4	8,5	29		1,3	2	
4125 R/L-S	▲	▲	125	80	63	40	56	16,4	9,5	29		2,5	2	
4160 R/L-S	▲	▲	160	100	63	40	88	16,4	9,5	29		4,2	3	
PWC 4200 R/L-S	▲	▲	200	150	63	60	130	25,7	14,0	35		7,2	3	

■ Body (Fine Pitch, PWCF Type)

Cat. No.	Stock		Dimensions (mm)								No of Teeth	Max. Depth of Cut	Weight (Kg)	Fig.
	R	L	DC	DCSFMS	LF	DCB	D1	KWW	KDP	CBDP				
PWCF 4080 R/L-S	▲	▲	80	60	50	27	29,5	12,4	7,0	25	12,0	0,9	1	
PWCF 4100 R/L-S	▲	▲	100	70	50	32	46	14,4	8,5	29		1,4	2	
4125 R/L-S	▲	▲	125	80	63	40	56	16,4	9,5	29		2,6	2	
4160 R/L-S	▲	▲	160	100	63	40	88	16,4	9,5	29		4,3	3	
PWCF 4200 R/L-S	▲	▲	200	150	63	60	130	25,7	14,0	35		7,4	3	

■ Performance

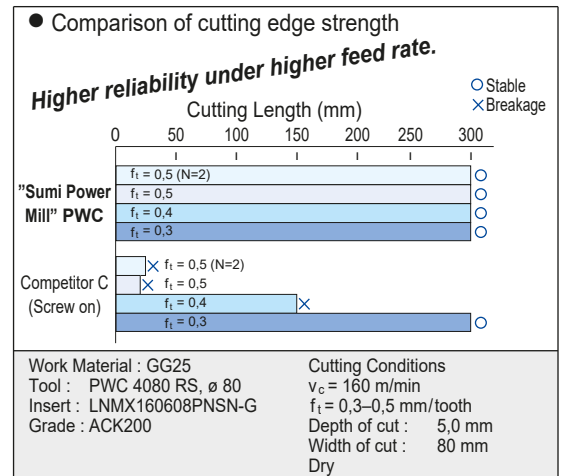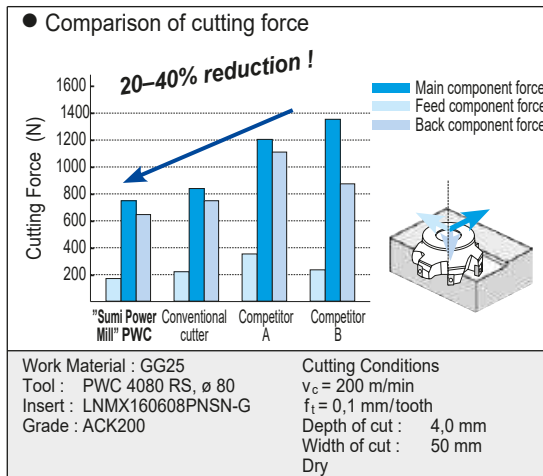

■ Recommended Cutting Conditions

Material	Grey Cast Iron (GG)	Ductile Cast Iron (GGG)
Cutting speed (m/min)	100 — 150 — 200 — 250 — 300	100 — 150 — 200 — 250
Feed rate (mm/tooth)	0,1 — 0,2 — 0,3 — 0,4 — 0,5	0,05 — 0,1 — 0,2 — 0,25 — 0,3
Grade	ACK200, ACK300	

■ Spare Parts

Cutter	Screw	Wrench
PWC (F) 4000	BFTX 0412 N 3,0 Nm	TTX 15 W

"Sumi Power Mill" PWC Type

High Metal Removal
High Volume Insert Capacity
High Performance Inserts



● Geometry



Rake angle
G type : 20°
H type : 15°



Wiper width = 2,4 mm

■ Advantages

- High volume insert capacity
The tangential orientation of the strong carbide inserts increases the number of cutting edges (eg 3 edges /inch) maximising edge contact with the workpiece.
- Cost effective tooling
Using M Class precision sintered inserts with 8 cutting edges both acquisition and operating costs are substantially reduced.
- Increased tool life
New Cast Iron grades ACK200 for general cutting and ACK300 for heavy cutting provide increased tool life and high productivity
- Durable cutter body
The robust cutter body is manufactured from a special alloyed steel then coated with a hard surface to resist swarf damage, scratching, and corrosion.


■ Inserts

Application	Coated Carbide		
High speed/Light cut	K	K	
General purpose	K	K	
Roughing			K

Cat. No.	ACK100	ACK200	ACK300	Fig.	Application	Remarks
LNMX 160608 PNSN-G	▲	▲	▲	1	General application	First remommendation
160608 PNSN-L	▲	▲	▲	2	Instable machining, heavy interruption	Suitable for instable condition

Grade	Characteristic · Application
ACK100	High wear resistance with special hard substrate and fine Ti-based Al ₂ O ₃ CVD coating for high speed machining
ACK200	Excellent wear resistance with fine Ti-based and tough Al ₂ O ₃ CVD coating
ACK300	Excellent toughness with fine grain carbide substrate. Cr added new PVD coating could improve hardness and oxidation resistance.

■ New Coated Grade for Cast Iron



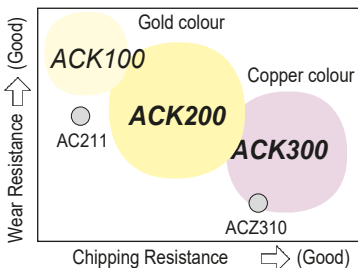


Cast Iron (K) (GG, GGG)					Grade	Characteristic · Application
K 01	K 10	K 20	K 30	K 40		
					ACK100	High wear resistance with special hard substrate and fine Ti-based Al ₂ O ₃ CVD coating for high speed machining
					ACK200	Excellent wear resistance with fine Ti-based and tough Al ₂ O ₃ CVD coating
					ACK300	Excellent toughness with fine grain carbide substrate. Cr added new PVD coating could improve hardness and oxidation resistance.

Shoulder Mill CNP / CNPF Type

Shoulder Milling for Steel, Stainless Steel & Cast Iron

Approach angle : 90°
Axial rake angle : +10° - 17°
Radial rake angle : +10° - 16°



Body (Standard, CNP Type)

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Max. Depth of Cut	Weight (Kg)	Fig.
		DC	DCSFMS	LF	DCB	D1	D2	KWW	KDP	CBDP					
CNP 13040 RS	▲	40	36	40	22	14	9	8,4	5,6	18	12,0	4	0,3	1	
13050 RS	▲	50	40	40	27	18	11	10,4	6,3	20					
13063 RS	▲	63	40	40	22	18	11	10,4	6,3	20					
13080 RS	▲	80	60	50	27	20	13	12,4	7,0	25					
CNP 13100 RS	▲	100	70	50	32	-	-	14,4	8,5	32	12,0	6	1,3	2	
13125 RS	▲	125	80	63	40	-	-	16,4	9,5	38					
13160 RS	▲	160	100	63	40	-	-	16,4	9,5	38					
CNP 13200 RS	▲	200	150	63	60	-	-	25,7	14,0	34	12,0	10	7,2	3	

Body (Fine Pitch, CNPF Type)

CNPF 13063 RS	▲	63	40	40	22	18	11	10,4	6,3	20	12,0	7	0,4	1
13080 RS	▲	80	60	50	27	20	13	12,4	7,0	25				
CNPF 13100 RS	▲	100	70	50	32	-	-	14,4	8,5	32				
13125 RS	▲	125	80	63	40	-	-	16,4	9,5	38				
13160 RS	▲	160	100	63	40	-	-	16,4	9,5	38	12,0	11	4,3	2
CNPF 13200 RS	▲	200	150	63	60	-	-	25,7	14,0	34				

Inserts

Application	Coated Carbide					Fig.
High Speed / Light cut	P	P/M	P/M	K		1.
General Purpose		P/M	P/M	K		
Roughing				K		
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	
CNMU 130608 N-G	▲	▲	▲	▲	▲	1.
130608 N-H	▲	▲	▲	▲	▲	
CNMQ 130608 N						2.
130616 N	▲	▲	▲	▲	▲	

G: General purpose
H: Strong cutting edge

Spare Parts

Cutter	Screw	Wrench
CNP-(F) 13000	BFTX 0412 N 3,0 Nm	TTX 15 W

Recommended Cutting Conditions

[v_c = m/min, f_t = mm/tooth] [min. - optimum - max.]

Type	Insert Type	CNMU / CNMQ 130600 N / -G/ -H											
		ACP100			ACP200			ACP300		ACK200		ACK300	
		Low carbon steel	Alloy steel	Die steel	Low carbon steel	Alloy steel	Die steel	Stainless steel		Cast iron	Ductile cast iron	Cast iron	Ductile cast iron
CNP 13000	v_c	100-250-400	80-220-280	80-150-250	80-200-370	70-150-250	60-130-220	120-180-240	100-140-200				
	f_t	0,1-0,25-0,4	0,1-0,25-0,35	0,1-0,2-0,3	0,1-0,25-0,4	0,1-0,25-0,35	0,1-0,2-0,3	0,1-0,2-0,25	0,1-0,2-0,25	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,25-0,4	0,1-0,25-0,4
	a_p	-10			-10			-10		-10		-10	

"Metal Slash Mill" MSX Type

High Feed Milling of Steel, Stainless Steel, Die Steel and Cast Iron



H8-10






Fig. 1






Fig. 2




Body

Cat. No.	Stock	Dimensions (mm)									No. of teeth	Helical Boring $\phi B_{(max-min)}$	Ramping α_{max}	Weight (Kg)	Fig.
		DCX	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2					
MSX 08040 RS	●	40	37	45	16	8,4	5,6	18	13,5	9	4	65 ~ 78	1°30'	0,2	1
MSX 12050 RS	●	50	47	50	22	10,4	6,3	20	18	11	4	78 ~ 99	2°30'	0,3	1
12052 RS	●	52	47	50	22	10,4	6,3	20	18	11	4	82 ~ 103	2°00'	0,3	1
12063 RS	●	63	60	50	22	10,4	6,3	20	18	11	5	104 ~ 125	1°30'	0,4	1
12066 RS	●	66	60	63	27	12,4	7,0	25	20	13,5	5	110 ~ 131	1°00'	0,4	1
MSX 14050 RS	●	50	47	50	22	10,4	6,3	20	17	11	3	73 ~ 98	3°30'	0,3	1
14063 RS	●	63	60	50	22	10,4	6,3	20	18	11	4	99 ~ 124	2°00'	0,6	1
14066 RS	●	66	60	63	27	12,4	7,0	25	13,5	20	4	107 ~ 132	2°00'	0,7	1
14080 RS	●	80	76	63	27	12,4	7,0	25	13,5	20	5	133 ~ 158	1°30'	1,2	1
MSX 14100 RS	●	100	96	63	32	14,4	8,5	32	-	44	6	173 ~ 198	1°00'	1,8	2

Ramping (Slant Milling)



Helical Boring

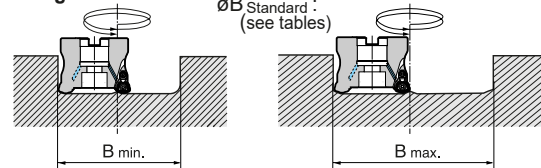

Recommended Cutting Conditions

Depth of cut : a_p (mm)
Feed rate : f_t (mm/tooth)

Inserts

Application	Coated Carbide			Dimensions (mm)		
	ACP200	ACP300	ACK300	IC	S	RE
High Speed / Light cut	●	●	○	8,5	4,0	2,0
General Purpose	●	●	●	12	5,0	2,0
Roughing	●	●	●	14	6,0	2,0
Cat. No.	ACP200	ACP300	ACK300	IC	S	RE
WDMT 0804 ZDTR	●	●	○	8,5	4,0	2,0
0804 ZDTR-H	●	●	○	8,5	4,0	2,0
WDMT 1205 ZDTR	●	●	●	12	5,0	2,0
1205 ZDTR-H	●	●	●	12	5,0	2,0
WDMT 1406 ZDTR	●	●	●	14	6,0	2,0
1406 ZDTR-H	●	●	●	14	6,0	2,0

ZDTR-H : Stronger cutting edge

Work Material	Insert Type	Cutting Speed v_c (m/min)	Insert Cat. No.	$\phi 40$		$\phi 50-66$		$\phi 80-100$		
				a_p	f_t	a_p	f_t	a_p	f_t	
General Steel (Below HB200)	ACP200	100-150-200	WDMT 0804	1,0	1,2	-	-	-	-	
				WDMT 1205	-	-	1,2	1,4	-	-
				WDMT 1406	-	-	1,5	1,5	1,5	1,5
Alloy Steel (Below HRC45)	ACP200	80-130-180	WDMT 0804	0,8	1,2	-	-	-	-	
				WDMT 1205	-	-	1,0	1,4	-	-
				WDMT 1406	-	-	1,3	1,5	1,3	1,5
Stainless Steel (X5CRN11810)	ACP300	80-120-150	WDMT 0804	1,0	0,8	-	-	-	-	
				WDMT 1205	-	-	1,2	1,2	-	-
				WDMT 1406	-	-	1,5	1,3	1,5	1,3
Cast Iron GG, GGG	ACK300	100-150-200	WDMT 0804	1,0	1,4	-	-	-	-	
				WDMT 1205	-	-	1,2	1,5	-	-
				WDMT 1406	-	-	1,5	1,8	1,5	1,8
Hardened Steel (Below HRC50)	ACK300	40-80-100	WDMT 0804	0,5	0,8	-	-	-	-	
				WDMT 1205	-	-	0,6	1,0	-	-
				WDMT 1406	-	-	1,0	1,2	1,0	1,2

- The above recommended cutting conditions may require adjustment according to machine rigidity and work rigidity.
- The above figures are guidelines for use with the BT50 machine tool.

Spare Parts

Screw	Wrench	Clamp	C Ring	Cramp screw	Applicable endmill
BFTX 0306 IP 2,0	TRDR 08 IP	CCH 3,5	CR 03	BFTX 03510 IP 08	MSX 08000RS
BFTX 0409 IP 3,0	TRDR 15 IP	CCH 3,5	CR 03	BFTX 03510 IP 15	MSX 12000RS
BFTX 0511 IP 5,0	TRDR 20 IP	CCH 4,5	CR 03	BFTX 04513 IP 20	MSX 14000RS

Remark: If depth-of-cut exceeds 5 mm, reduce recommended feedrates by 50 %.

The conditions above are meant as a guide, please adjust the cutting conditions according to actual work material and machine rigidity.

"Wave Mill" Series WFXH Type




General Features

WaveMill WFXH type is a high efficiency, multi-purpose cutter, that uses the WFX series inserts for high-feed roughing and a variety of processes.

Characteristics

Stable, high-efficiency milling with superior cutting edge sharpness. Supports various types of processes (ramping and helical milling). Able to use the selection of inserts from the WFX series.

Chipbreaker Selection



Work Material	P M K	Steel, Stainless Steel, Cast Iron			N	Aluminium Alloy
Breaker	L Type	G Type	H Type	S Type		
Characteristic	Low Cutting Force	General Purpose	Strong Edge	Sharp Edge		
Cutting Edge Figure						
Work Material Application	Light Cutting Low rigidity Milling Low-Burr Design	Main Chipbreaker General to Interrupted Milling	Heavy Cut Heavy Interrupted Machining Tempered Steel	Non-Ferrous Metal		

Notes on Corner Finishing - Remaining Material

Actual machined corners will have uncut and overcut portions due to the shape of the inserts.

Fig. 1


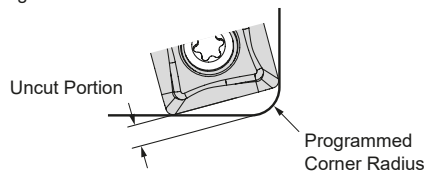


Fig. 2

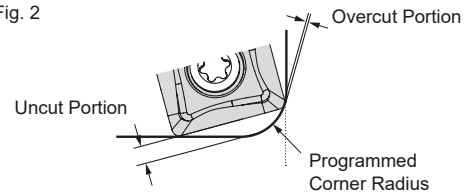

WFXH 08000 RS Type



Programmed Corner R	SOMT 080004-□			SOMT 080008-□			SOMT 080012-□		
	Uncut Portion	Overcut Portion	Shape	Uncut Portion	Overcut Portion	Shape	Uncut Portion	Overcut Portion	Shape
2,0	1,41	0	Fig. 1	1,30	0	Fig. 1	1,21	0	Fig. 1
2,5	1,30	0,02	Fig. 2	1,19	0,01	Fig. 2	1,09	0	Fig. 2
3,0	-	-	-	-	-	-	0,98	0,05	Fig. 2

WFXH 12000 RS Type

Programmed Corner R	SOMT 120004-□			SOMT 120008-□			SOMT 120012-□			SOMT 120016-□		
	Uncut Portion	Overcut Portion	Shape	Uncut Portion	Overcut Portion	Shape	Uncut Portion	Overcut Portion	Shape	Uncut Portion	Overcut Portion	Shape
2,0	2,58	0	Fig. 1	2,48	0	Fig. 1	2,37	0	Fig. 1	2,25	0	Fig. 1
2,5	2,47	0	Fig. 1	2,37	0	Fig. 1	2,25	0	Fig. 1	2,14	0	Fig. 1
3,0	2,36	0	Fig. 1	2,26	0	Fig. 1	2,14	0	Fig. 1	2,11	0	Fig. 1
3,5	2,24	0,01	Fig. 2	2,14	0	Fig. 1	2,03	0	Fig. 1	1,91	0	Fig. 1
4,0	-	-	-	2,03	0,04	Fig. 2	1,91	0,03	Fig. 2	1,8	0,01	Fig. 2

Minimum Cutting Diameter


Minimum cutting diameter (DCN) will depend on the insert that is used. Using an insert with a large nose radius is recommended for the WFXH type.



Body Cat. No.	DC	DCN based on insert nose			
		RE0,4	RE0,8	RE1,2	RE1,6
WFXH 08025 M1Z22	25	10,4	10,9	11,5	-
08032 M1Z23	32	17,4	17,9	18,5	-
WFXH 08040 RS	40	25,4	25,9	26,5	-
08050 RS	50	35,4	35,9	36,5	-
08050 RSZ6	50	35,4	35,9	36,5	-
08063 RS	63	48,4	48,9	49,5	-
WFXH 12040 M1Z23	40	16,6	17,1	17,5	18,1
WFXH 12050 RS	50	26,6	27,2	27,7	28,2
12063 RS	63	39,5	40,0	40,4	41,1

"Wave Mill" Series WFXH Type

■ Taper Cutting and Helical Milling

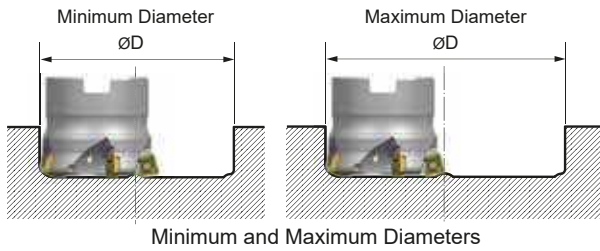

Minimum and Maximum Diameters




Ramping Angle

Insert Cat. No.	DC	Helical Milling		Taper Cutting
		Min.	Max.	Max. Ramping Angle
SOMT 080004-□	25	35	49	1°30'
	32	49	63	0°30'
	40	65	79	0°30'
	50	Impossible	Impossible	0°30'
	63	Impossible	Impossible	Impossible
SOMT 080008-□	25	35	48	3°
	32	49	62	1°30'
	40	65	78	1°
	50	85	98	0°30'
	63	111	124	0°30'
SOMT 080012-□	25	34	47	4°30'
	32	48	61	2°30'
	40	64	77	1°30'
	50	84	97	1°
	63	110	123	0°30'

Insert Cat. No.	DC	Helical Milling		Taper Cutting
		Min.	Max.	Max. Ramping Angle
SOMT 120004-□	40	56	79	1°
	50	76	99	0°30'
	63	Impossible	Impossible	Impossible
SOMT 120008-□	40	56	78	1°30'
	50	76	98	1°
	63	102	124	0°30'
SOMT 120012-□	40	55	77	2°30'
	50	75	97	1°30'
	63	101	123	1°
SOMT 120016-□	40	55	76	3°30'
	50	75	96	2°
	63	101	122	1°30'

■ Maximum Width of Cut when Plunge Milling



Insert Cat. No.	Max. Width of Cut ae (max)
SOMT08	6 mm
SOMT12	10 mm

Lower the feed rate when plunge milling.

■ Recommended Cutting Conditions

ISO	Work Material	Grade	Cutting Speed (vc (m/min))	Insert Cat. No.	ø 25		ø 32		ø 40		ø 50		ø 63	
					ap (mm)	ft (mm/t)	ap (mm)	ft (mm/t)	ap (mm)	ft (mm/t)	ap (mm)	ft (mm/t)	ap (mm)	ft (mm/t)
P	General Steel <200HB	ACP200	100 - 150 - 200	SOMT08	0,8	0,8	0,8	0,8	-	-	0,8	0,8	0,8	0,8
				SOMT12	-	-	-	-	1,0	1,0	1,0	1,0	1,0	1,0
P	Alloy Steel <HRC45	ACP200	80 - 130 - 180	SOMT08	0,7	0,8	0,7	0,8	-	-	0,7	0,8	0,7	0,8
				SOMT12	-	-	-	-	0,8	1,0	0,8	1,0	0,8	1,0
K	Stainless Steel (X5CrNiS18 10, other)	ACM300	80 - 120 - 150	SOMT08	0,8	0,7	0,8	0,7	-	-	0,8	0,7	0,8	0,7
				SOMT12	-	-	-	-	1,0	0,8	1,0	0,8	1,0	0,8
M	Cast Iron FC, FCD	ACK300	100 - 150 - 200	SOMT08	0,8	1,0	0,8	1,0	-	-	0,8	1,0	0,8	1,0
				SOMT12	-	-	-	-	1,0	1,2	1,0	1,2	1,0	1,2
H	Hardened Steel <HRC50	ACK300	40 - 80 - 100	SOMT08	0,5	0,5	0,5	0,5	-	-	0,5	0,5	0,5	0,5
				SOMT12	-	-	-	-	0,6	0,8	0,6	0,8	0,6	0,8

The above recommended cutting conditions may require adjustment according to machine rigidity and work rigidity. The above figures are guidelines for use with the BT50 machine tool.

The above conditions assume a tool overhang length of L/D = 3 (i.e. overhang length is 3 times tool diameter) or less.

When tool overhang is more than L/D = 3 and less or equal L/D = 5, settings should be adjusted to approximately 70 % to 80 % of those indicated in the above cutting conditions (i.e. ap and fz).


When tool overhang is more than L/D = 5 and less or equal L/D = 8, settings should be adjusted to approximately 50 % to 60 % of those indicated in the above cutting conditions (i.e. ap and fz).

"Wave Mill" Series

WFXH 08000 RS

High Efficiency Machining for Steel, Stainless Steel, Die Steel and Non-Ferrous Metal

Rake Angle	Radial	-6°	1,5 mm 15°
	Axial	6°	



Body - WFXH08000RS

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
WFXH 08040 RS	○	40	33	40	16	8,4	5,6	18	14	9	4	0,2	
08050 RS	○	50	41	40	22	10,4	6,3	20	18	11	5	0,3	
08050 RSZ6	○	50	41	40	22	10,4	6,3	20	18	11	6	0,3	
08063 RS	○	63	50	40	22	10,4	6,3	20	18	11	6	0,5	


Inserts are not included.

Identification Details

WFX	H	08	040	R	S	- Z6
Cutter Series	High Efficiency Milling	Insert Size	Cutter Diameter	Direction	Metric Type	Fine Pitch Type (Value is number of teeth)

Inserts

Application	Coated Carbide							Carbide	DLC	Radius (mm)
High Speed / Light cut	P			K		MS		KN		
General Purpose		PM	PM	K		MS	MS		N	
Roughing		PM	PM		K		MS		N	
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	RE
SOMT 080304 PZER L	○	○	○	○	●	○	○	-	-	0,4
080308 PZER L	○	○	○	○	○	○	●	-	-	0,8
SOMT 080304 PZER G	○	●	●	●	○	○	●	-	-	0,4
080308 PZER G	○	●	●	●	○	○	●	-	-	0,8
080312 PZER G	○	●	○	○	○	○	●	-	-	1,2
SOMT 080308 PZER H	○	●	●	○	○	○	●	-	-	0,8
080312 PZER H	○	○	○	○	○	○	●	-	-	1,2
SOET 080304 PZER G	○	○	○	○	○	○	●	-	-	0,4
080308 PZER G	○	○	○	○	○	○	●	-	-	0,8
080312 PZER G	○	○	○	○	○	○	●	-	-	1,2
SOET 080302 PZFR S*	-	-	-	-	-	-	-	●	●	0,2
080304 PZFR S*	-	-	-	-	-	-	-	●	●	0,4
080308 PZFR S*	-	-	-	-	-	-	-	●	●	0,8



* If the cutting edge lacks strength when performing high efficiency milling of non-ferrous metals, try G type chipbreakers (ACK300).

Spare Parts

Screw	Wrench
BFTX0306IP	TRDR08IP
2,0	

Recommended Cutting Conditions

G55


Programming and Dimension Information

G54

"Wave Mill" Series WFXH 12000 RS

High Efficiency Machining for Steel, Stainless Steel, Die Steel and Non-Ferrous Metal

Rake Angle	Radial	-6°	
	Axial	6°	



■ Body - WFXH12000RS

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)
		DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
WFXH 12050 RS	○	50	41	40	22	10,4	6,3	20	18	11	4	0,3	
12063 RS	○	63	50	40	22	10,4	6,3	20	18	11	5	0,4	


Inserts are not included.

■ Identification Details

WFX	H	12	050	R	S
Cutter Series	High Efficiency Milling	Insert Size	Cutter Diameter	Direction	Metric Type

■ Inserts

Application	Coated Carbide							Carbide	DLC	Radius (mm)
	P	PM	PM	K	K	MS	MS	KN	N	
High Speed / Light cut	P			K		MS	MS	KN		
General Purpose		PM	PM	K		MS	MS		N	
Roughing		PM	PM	K		MS	MS		N	
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	RE
SOMT 120408 PDER L	●	●	●	○	○	○	●	-	-	0,8
SOMT 120404 PDER G	○	○	●	○	●	○	●	-	-	0,4
120408 PDER G	●	●	●	●	○	●	●	-	-	0,8
120412 PDER G	○	○	○	○	○	○	●	-	-	1,2
120416 PDER G	○	●	○	○	○	○	○	-	-	1,6
SOMT 120408 PDER H	○	●	○	●	●	○	○	-	-	0,8
SOET 120408 PDFR S*	-	-	-	-	-	-	-	●	●	0,8



* If the cutting edge lacks strength when performing high efficiency milling of non-ferrous metals, try G type chipbreakers (ACK300).

■ Spare Parts

Screw	Wrench
BFTX03512IP	3,0 TRDR15IP

■ Recommended Cutting Conditions


G55

■ Programming and Dimension Information


G54

Wavemill Series WAX 3000 RS Type

16-18mm 90°



(Shellmill)



Body (For inserts with nose radius ≤ 3,2 mm)


Cat. No.	Stock	Dimensions (mm)							No. of teeth	Weight (Kg)
		DC	DCB	LF	D2	KWW	KDP	CBDP		
WAX 3050 RS-3.2	●	50	22	50	11	10,4	6.3	21	4	0,34
3063 RS-3.2	●	63	22	50	11	10,4	6.3	21	5	0,6
3080 RS-3.2	●	80	27	50	13,5	12,4	7	23	5	1,0
WAX 3100 RS-3.2	●	100	32	63	18	14,4	8	26	6	2,2
3125 RS-3.2	●	125	40	63	22	16,4	9	29	7	3,5

Body (For inserts with nose radius ≥ 4,0mm)

Cat. No.	Stock	Dimensions (mm)							No. of teeth	Weight (Kg)
		DC	DCB	LF	D2	KWW	KDP	CBDP		
WAX 3050 RS-4.0	●	50	22	50	11	10,4	6.3	21	4	0,34
3063 RS-4.0	●	63	22	50	11	10,4	6.3	21	4	0,6
3080 RS-4.0	●	80	27	50	13,5	12,4	7	23	5	1,0
WAX 3100 RS-4.0	●	100	32	63	18	14,4	8	26	6	2,2
3125 RS-4.0	●	125	40	63	22	16,4	9	29	7	3,5

Inserts for WAX 3000 Type

Application	DLC Coated	Carbide	Dimensions (mm)						
High Speed / Light cut									
General Purpose									
Roughing									
Cat. No.	DL1000	H1	Dimensions (mm)						D1
			APMX	INSL	BS	RE	S		
AECT 160404 PEFRA	●	●	18	16,4	1,4	0,4	5	4,4	
160408 PEFRA	●	●	18	16,4	1,0	0,8	5	4,4	
160412 PEFRA	●	●	18	16,4	0,6	1,2	5	4,4	
160416 PEFRA	●	●	17,5	16,4	0,5	1,6	5	4,4	
160420 PEFRA	●	●	17,5	16,4	0,5	2,0	5	4,4	
160430 PEFRA	●	●	17	16,4	0,7	3,0	5	4,4	
160432 PEFRA	●	●	17	16,4	0,5	3,2	5	4,4	
AECT 160440 PRFRA	●	●	16,5	16,4	0,5	4,0	5	4,4	
160450 PEFRA	●	●	16	16,4	0,4	5,4	5	4,4	

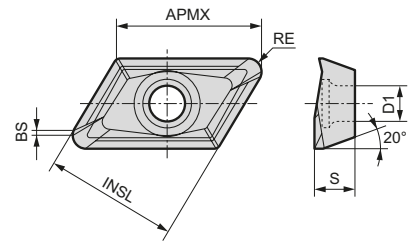

Spare Parts

Screw	Insert Wrench	Applicable Endmill
3,0 (N·m)		
BFTX 0408	TRD 15	Ø 50 – Ø 125

● = Euro stock
□ = Delivery on request


H39-40

Recommended Tightening Torque (N·m)

Wavemill Series WAX 4000 RS Type

22-24mm 90°

(Shellmill)



Body

(For inserts with nose radius ≤ 3,2 mm)

Cat. No.	Stock	Dimensions (mm)								No. of teeth	Weight (Kg)
		DC	DCB	LF	D2	KWW	KDP	CBDP			
WAX 4050RS-3.2	☐	50	16	50	9	8,4	5,6	18	2	0,37	
4063RS-3.2	☐	63	22	50	11	10,4	6,3	21	3	0,54	
4080RS-3.2	☐	80	27	50	13,5	12,4	7	23	4	0,81	
WAX 4100RS-3.2	☐	100	32	63	18	14,4	8	26	5	1,7	
4125RS-3.2	☐	125	40	63	22	16,4	9	29	6	2,6	


Body

(For inserts with nose radius ≥ 4,0 mm)

Cat. No.	Stock	Dimensions (mm)								No. of teeth	Weight (Kg)
		DC	DCB	LF	D2	KWW	KDP	CBDP			
WAX 4050RS-4.0	☐	50	16	50	9	8,4	5,6	18	2	0,37	
4063RS-4.0	☐	63	22	50	11	10,4	6,3	21	3	0,54	
4080RS-4.0	☐	80	27	50	13,5	12,4	7	23	4	0,81	
WAX 4100RS-4.0	☐	100	32	63	18	14,4	8	26	5	1,7	
4125RS-4.0	☐	125	40	63	22	16,4	9	29	6	2,6	

Inserts for WAX 4000 Type

Application	DLC Coated	Carbide	Dimensions (mm)						
High Speed / Light cut									
General Purpose									
Roughing									
Cat. No.	DL1000	H1	Dimensions (mm)						
			APMX	INSL	BS	RE	S	D1	
AECT 220604 PEFRA	☐	☐	24	21,8	1,5	0,4	6,35	6	
220608 PEFRA	☐	☐	24	21,8	1,2	0,8	6,35	6	
220612 PEFRA	☐	☐	24	21,8	0,8	1,2	6,35	6	
220616 PEFRA	☐	☐	24	21,8	0,4	1,6	6,35	6	
220620 PEFRA	☐	☐	24	21,8	0,5	2,0	6,35	6	
220630 PEFRA	☐	☐	23	21,8	0,6	3,0	6,35	6	
220632 PEFRA	☐	☐	23	21,8	0,4	3,2	6,35	6	
AECT 220640 PRFRA	☐	☐	22	21,8	1,2	4,0	6,35	6	
220650 PEFRA	☐	☐	22	21,8	0,4	5,0	6,35	6	

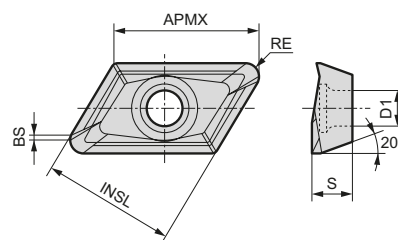

Spare Parts

Screw	Insert Wrench	Applicable Endmill
5,0 (Nm)		
BFTX0511N	TRD20	Ø 50 – Ø 125

Alnex ANX Series


New




■ Features







- **Drastically Reduced Runout Adjustment Time**
Simple screw-fastening structure enables fine adjustments to be made easily.
- **Blade Through Coolant**
Secures a supply of coolant to the cutting edge and breaks chips thoroughly.
- **Lightweight Aluminum Alloy Body**
Utilizing aluminum alloy to achieve a total weight of less than 1,3 kg for a Ø 125 mm cutter with 22 teeth.

■ Product Range

Type	Cat. No.	Body Material	Diameter Range (mm) / No of Teeth							
			Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125	Ø160
Shell	ANXA 16000RS	Aluminum Alloy					10, 14	12, 18	14, 22	20, 28
	ANXA 16000R (Inch)	Aluminum Alloy					10, 14	12, 18	14, 22	20, 28
	ANXS 16000RS	Steel		6	6, 9	8, 12	10, 14	12, 18	14, 22	
	ANXS 16000R (Inch)	Steel				8, 12	10, 14	12, 18	14, 22	
Shank	ANXS 16000E  H61	Steel	4	6						

 Inch Bore


■ Blade Selection Guide

Work Material	N					
Type	L	G	GX	H	—	W
Cutting Edge Shape						
Features	Low Cutting Force	Standard	Long Edge	High Strength		
Applications	Finishing / Light Cutting	General Purpose	Roughing		Corner Radius	Wiper
Edge Length*	6,0 mm	6,0 mm	9,0 mm	6,0 mm		





*Edge length
GX type = 9,0 mm

■ Edge Selection Guide

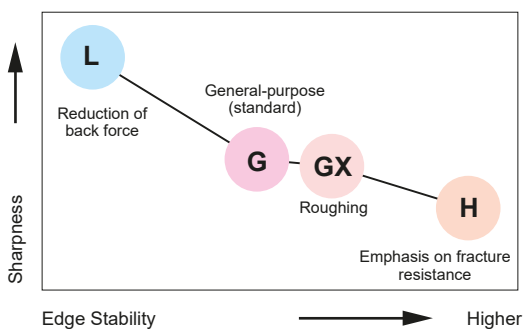

- **Reduces Running Costs by Drastically Increasing Blade, Insert Regrinding Allowance (to 1,0 mm)**

Assuming 0,2 mm of regrinding each time, an edge can be used up to 6 times. (Peripheral edge cannot be reground.)

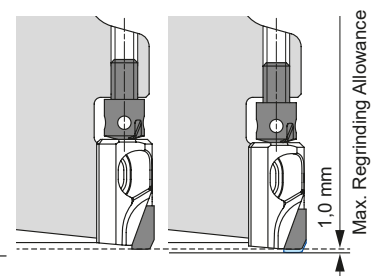

If you wish to use reground blades you shall use sets of blades with matching size of the same level in order to keep the balance.

■ Performances


● High-Speed / High-Efficiency Cutting

Realizes ultra-high efficiency machining with $v_f = 30.000$ mm/min





Comparison: Cutter Diameter \varnothing 100 mm

	Spindle Speed min^{-1}	Number of Teeth	Feed Rate v_f (mm/min)
ANX Series	18.000	18	32.400
Competitor	9.500	12	11.400

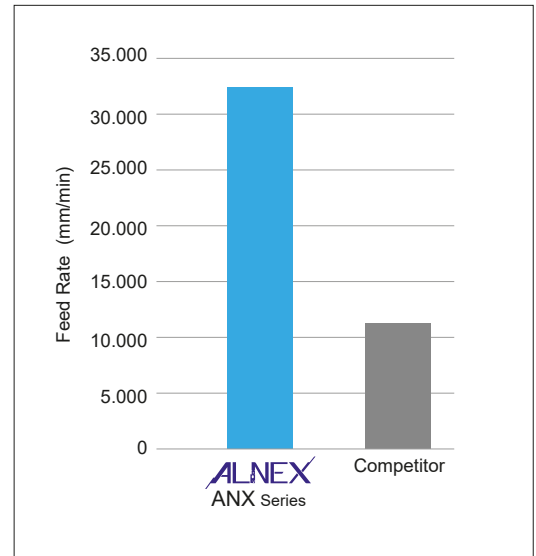

● Drastically Reduces Runout Adjustment Time

- Simple screw-fastening structure
- Enables fine adjustments to be made easily
- High-rigidity body

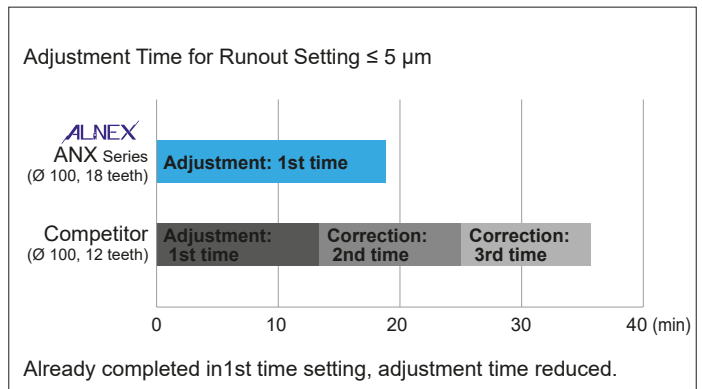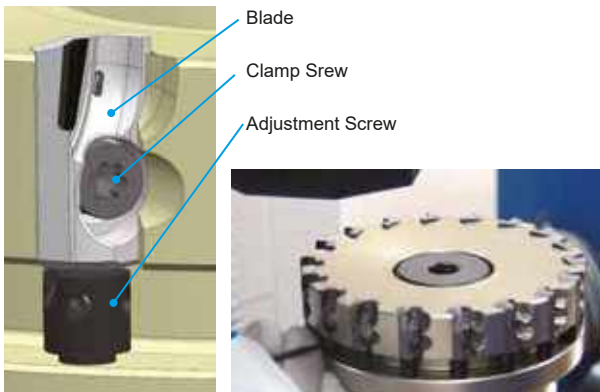

● Chip Control



Blade-Through Coolant Chip Breaking





Work Material: G-AlSi12Cu
Cutting Conditions: $v_c = 2500$ m/min, $f_z = 0,05$ mm/t, $a_p = 0,5$ mm, wet

Alnex ANXS 16000 R(S)



Rake Angle	Radial	+5°	3 mm	90°
	Axial	+5°		



Body - ANXS (Steel)

Dimensions (mm)

Cat. No.	Stock	DC	DCX	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2	No. of Teeth	Weight (kg)	Fig.	
Metric	ANXS 16040RS06	○	38	40	38,5	40	16	8,4	5,6	26	14	9	6	0,3	1
	16050RS06	○	48	50	48,5	40	22	10,4	6,3	26	18	11	6	0,4	1
	16050RS09	○	48	50	48,5	40	22	10,4	6,3	26	18	11	9	0,5	1
	16063RS08	○	61	63	50	40	22	10,4	6,3	26	18	11	8	0,7	1
	16063RS12	○	61	63	50	40	22	10,4	6,3	26	18	11	12	0,7	1
	16080RS10	○	78	80	50	50	27	12,4	7	34	35	14	10	1,2	1
	16080RS14	○	78	80	50	50	27	12,4	7	34	35	14	14	1,2	1
	16100RS12	○	98	100	80	50	32	14,4	8	32	46	-	12	2,0	2
	16100RS18	○	98	100	80	50	32	14,4	8	32	46	-	18	2,0	2
	16125RS14	○	123	125	80	63	40	16,4	9	35	52	-	14	3,9	2
16125RS22	○	123	125	80	63	40	16,4	9	35	52	-	22	3,9	2	
Inch	ANXS 16063R08	○	61	63	50	50	25,4	9,5	6	31	20	14	8	0,9	1
	16063R12	○	61	63	50	50	25,4	9,5	6	31	20	14	12	0,9	1
	16080R10	○	78	80	50	50	25,4	9,5	6	34	35	14	10	1,2	1
	16080R14	○	78	80	50	50	25,4	9,5	6	34	35	14	14	1,2	1
	16100R12	○	98	100	80	50	31,75	12,7	8	36	42	-	12	2,0	2
	16100R18	○	98	100	80	50	31,75	12,7	8	36	42	-	18	2,0	2
	16125R14	○	123	125	80	63	38,1	15,9	10	42,5	52	-	14	3,9	2
	16125R22	○	123	125	80	63	38,1	15,9	10	42,5	52	-	22	3,9	2

Blades are sold separately. If using a blade for corner radius machining (ANB1604R), DC = DCX.

Identification Details

ANX	S	16	100	R	S	18
Cutter Series	Steel Body	Blade Size	Cutter Diameter	Feed Direction	Metric	Number of Teeth

Blades



Max. Allowable Spindle Speed

Cat. No.	n max (min ⁻¹)
ANXS 16040RS06	25.000
16050RS06	25.000
16050RS09	25.000
16063RS08	22.000
16063RS12	22.000
16080RS10	20.000
16080RS14	20.000
16100RS12	18.000
16100RS18	18.000
16125RS14	16.000
16125RS22	16.000
ANXS 16063R08	22.000
16063R12	22.000
16080R10	20.000
16080R14	20.000
16100R12	18.000
16100R18	18.000
16125R14	16.000
16125R22	16.000

Recommended Cutting Conditions



Spare Parts


Applicable Cutters	Clamp Screw		Adjustment Screw	Wrench	Adjustment Wrench	Centre Bolt	Assembly Wrench
ANXS 16040RS06 16050RS__ 16063RS__ 16080RS__ 16100RS__ 16125RS__ 16063R__ 16080R__ 16100R__ 16125R__	BXA0310IP	2,0	HFJ	TRXW10IP	ANT	BXH0825-D13 BXH1030-D16 BXH1235-D33 BXH1635-D40 BXH2036-D50 BXH1235-D18 BXH1235-D33 BXH1635-D40 BXH2036-D50	HFVT

Sold separately.

Alnex ANXA 16000 R(S)

New

Rake Angle	Radial	+5°	3 mm	90°
	Axial	+5°		



Body - ANXA (Aluminum Alloy)

Dimensions (mm)

	Cat. No.	Stock	DC	DCX	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2	No. of Teeth	Weight (kg)
Metric	ANXA 16080RS10	○	78	80	50	50	27	12,4	7	34	35	14	10	0,5
	16080RS14	○	78	80	50	50	27	12,4	7	34	35	14	14	0,5
	16100RS12	○	98	100	50	50	27	12,4	7	34	35	14	12	0,8
	16100RS18	○	98	100	50	50	27	12,4	7	34	35	14	18	0,9
	16125RS14	○	123	125	50	50	27	12,4	7	34	35	14	14	1,2
	16125RS22	○	123	125	50	50	27	12,4	7	34	35	14	22	1,3
	16160RS20	○	158	160	80	63	40	16,4	9	35	52	29	20	2,6
16160RS28	○	158	160	80	63	40	16,4	9	35	52	29	28	2,6	
Inch	ANXA 16080R10	○	78	80	50	50	25,4	9,5	6	34	35	14	10	0,5
	16080R14	○	78	80	50	50	25,4	9,5	6	34	35	14	14	0,5
	16100R12	○	98	100	50	50	25,4	9,5	6	34	35	14	12	0,9
	16100R18	○	98	100	50	50	25,4	9,5	6	34	35	14	18	0,9
	16125R14	○	123	125	50	50	25,4	9,5	6	34	35	14	14	1,2
	16125R22	○	123	125	50	50	25,4	9,5	6	34	35	14	22	1,3
	16160R20	○	158	160	80	63	38,1	15,9	10	42,5	55	30	20	2,4
16160R28	○	158	160	80	63	38,1	15,9	10	42,5	55	30	28	2,6	

Blades are sold separately. If using a blade for corner radius machining (ANB1604R), DC = DCX.

Identification Details

ANX A 16 100 R S 18

Cutter Series	Aluminum Alloy Body	Blade Size	Cutter Diameter	Feed Direction	Metric	Number of Teeth
---------------	---------------------	------------	-----------------	----------------	--------	-----------------

Blades

G64

Recommended Cutting Conditions

G64

Max. Allowable Spindle Speed

Cat. No.	n max (min ⁻¹)
ANXA 16080RS10	20.000
16080RS14	20.000
16100RS12	18.000
16100RS18	18.000
16125RS14	16.000
16125RS22	16.000
16160RS20	14.000
16160RS28	14.000
ANXA 16080R10	20.000
16080R14	20.000
16100R12	18.000
16100R18	18.000
16125R14	16.000
16125R22	16.000
16160R20	14.000
16160R28	14.000

Spare Parts


Applicable Cutters	Clamp Screw		Adjustment Screw	Wrench	Adjustment Wrench	Centre Bolt	Assembly Wrench
ANXA 16080RS__	BXA0310IP	2,0	HFJ	TRXW10IP	ANT	BXH1235-D33	HFVT
16100RS__							
16125RS__							
16160RS__							
16080R__							
16100R__							
16125R__							
16160R__							

Sold separately.

Blades

Application	SUMIDIA
High Speed / Light Cut	N
General Purpose	N
Roughing	N

Cat. No.	DA1000	Cutting Edge Length	Wiper Edge Shape	Applications	Fig.
ANB 1600R-L	○	6,0	Linear	Low Cutting Force	1
1600R-G	○	6,0	Arc-Shaped	General Purpose	1
1600R-H	○	6,0	Arc-Shaped	Strong Edge	1
1600R-GX	○	9,0	Arc-Shaped	Long Edge	2
1604R	○	6,0	Linear	Corner Radius	3
1600R-W	○	—	Arc-Shaped	Wiper	4

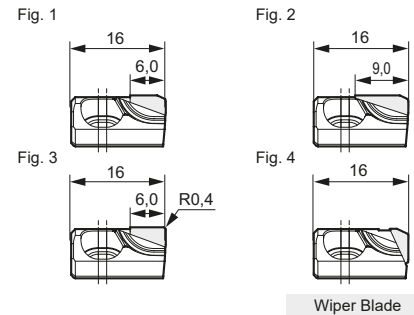

Recommended Cutting Conditions

Si content ≤ 12,6 %

Min. - **Optimum** - Max.

ISO	Work Material	Hardness	Cutting Speed v_c (m/min)	Feed Rate f_z (mm/t)	Grade
N	Aluminium alloy	—	2.000– 2.500 –3.000	0,05– 0,13 –0,20	DA1000

Si content ≥ 12,6 %

Min. - **Optimum** - Max.


ISO	Work Material	Hardness	Cutting Speed v_c (m/min)	Feed Rate f_z (mm/t)	Grade
N	Aluminium alloy	—	400– 600 –800	0,05– 0,13 –0,20	DA1000

The above recommended cutting conditions are meant as a guide. Actual conditions will depend on the individual machine rigidity, work clamp rigidity, depth of cut and other factors.

■ ALNEX Series Usage Manual


● Adjustment of the Blades, Runout Alignment

- ① Before inserting the blade, make sure that the seat and screws are free of debris by cleaning those areas.
- ② Insert the blade into its seat.
- ③ While holding the blade against the seat, install the clamping bolt using the provided wrench, pre-tightening the bolt (recommended pre-torque is 1 N·m).
- ④ Using the provided wrench for the height adjustment screw, set the height to your predetermined value.
- ⑤ Fully tighten the clamp bolt (recommended torque is 2 N·m).
- ⑥ Use 1 blade as a datum point and adjust all blade heights to match.
- ⑦ After tightening, verify that there is no gap between the seat and blade.

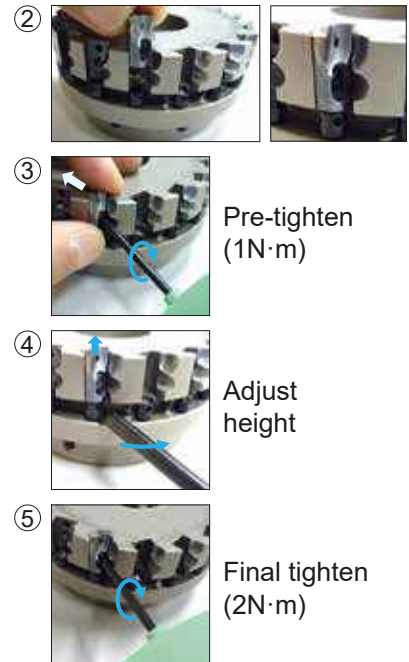

● Balance Adjustments

The cutter comes pre-balanced to a G 6,3 specification. Under normal circumstances, it is not necessary to adjust the balance of the cutter.

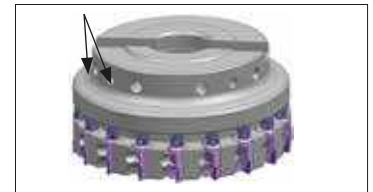

● Clamp Bolts for Arbor

Work Material	Dim.			Max. Torque	Applicable Cutters
	M	L	D		
BXH0825-D13	8	25	13	15	ANXS16040RS_ _
BXH1030-D16	10	30	16	25	ANXS16040RS_ _ , ANXS16063RS_ _
BXH1235-D18	12	35	18	40	ANXS16063R_ _
BXH1235-D33	12	35	33	50	ANXS16080R(S)_ _ , ANXA16080/100/125R(S)_ _
BXH1635-D40	16	35	40	100	ANXS16100R(S)_ _
BXH2036-D50	20	36	50	200	ANXS16125R(S)_ _ , ANXA16160R(S)_ _

● Other Precautions

- Please use only Sumitomo genuine parts.
- Please regularly replace clamp bolts.
- If you wish to reduce the # of effective blades in use, to maintain balance and protect the body, please use dummy blades (set height well below effective blades).
- Please do not operate after releasing the interlock or opening the cover.
- Please avoid use and consult with Sumitomo if you mistakenly crash the body.
- As the blades are very sharp, it is very easy to get hurt when touching the blades with your hands directly, so please wear gloves when taking the blade out of the case to set into the cutter or when setting the cutter into machine tool.

SUMIDIA Face Mill RF Type

High Speed Finishing of Aluminium Alloy



Fig. 1





Fig. 2



Body

Cat. No.	Stock	Dimensions (mm)								No. of Teeth	Max. Depth of Cut	Weight (Kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	KWW	KDP	CDBP				
RF 4080 RS	●	80	82	60	50	27	12,4	7,0	29	6	3,0	0,7	1
RF 4100 RS	●	100	102	75	50	32	14,4	8,5	29	6		1,0	1
4125 RS	●	125	127	75	63	40	16,4	9,5	29	8		1,6	1
4160 RS	□	160	162	100	63	40	16,4	9,5	29	10		2,6	2

Remark: PCD blades and inserts are not included.

Insert for Roughing and Finishing




Fig. 1




Fig. 2




Fig. 3

Application	Carbide			SUMIDIA	
	H1	DA1000	DA2200	Fig.	
High Speed / Light cut	N	N	N	1	
General Purpose	N	N	N	2	
Roughing	N	N	N	3	

"Sumidia" Blade

PCD grade DA2200	Cat. No.	Stock
Standard type	RFB	□
Wiper type	RFBW	□


Dummy Blade

	RFD	□
--	-----	---

Cartridge

Shape	Cat. No.	Stock
For carbide insert	RFR	●
For Sumidia insert	RFF	●

Structure

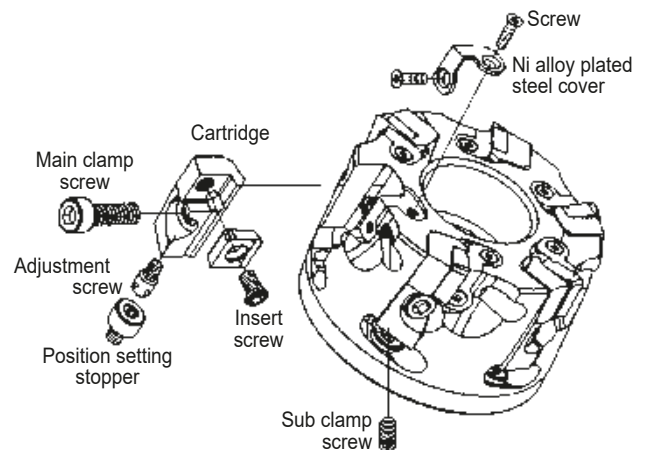

Cutting Insert Selection

For easy assembling:

PCD blade **RFB**
PCD blade **RFB** (wiper type)

For finishing:

Cartridge **RFF**
PCD insert SNEW 1204 ADFR-NF (standard type)
SNEW 1204 ADFR-W-NF (wiper type)
PCD grade: DA1000


For roughing:

Cartridge **RFR**
Uncoated carbide insert
SDET 1204 ZDFR, grade: H1

Spare Parts

RFC	RFS	BX0620	BTD0510	FBUP2-A0-8	RFJ	BFTX0509N	TH050 TH015, TH025 TH015, TH025 TH050	TTX20

Setting Gauge



Dial-gauge is not included.

SUMIDIA Face Mill SRF Type

High Speed Finishing of Aluminium Alloy



Fig. 1





Fig. 2




Body

Cat. No.	Stock	Dimensions (mm)		No. of teeth	Fig.	Weight (Kg)
		DC	DCSFMS			
SRF 30 R-ST	○	30	-	3	1	0,34
SRF 40 R-ST	○	40	-	4	1	0,50
SRF 50 RS	□	50	46,5	5	2	0,59
SRF 63 RS	□	63	45,0	6	2	0,67

Inserts are sold separately.

Inserts

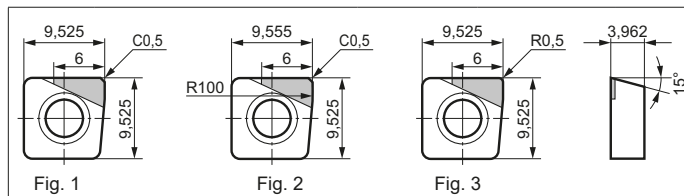


Application	SUMIDIA
High Speed / Light cut	N
General Purpose	N
Roughing	N

Cat. No.	DA1000	Cutting Edge	Fig.
SNEW 09T3 ADTR-NF	○	Standard	1
09T3 ADTR-U-NF	○	Wiper	2
09T3 ADTR-R-NF	○	Nose Radius	3

- Standard inserts and Wiper inserts can be used on the same cutter body.
- Standard inserts with nose radius should be used where vibration is present. As such, Wiper-inserts will not be applicable.
- Inserts can be regrind 3 times (up to minimum IC diameter 9,225 mm).
- When using reground inserts, it is advisable to reconfirm insert height and cutting diameter with a tool pre-setter.
- Do not mix new and reground inserts, or even inserts with different regrind amount on the same cutter.

Spare Parts

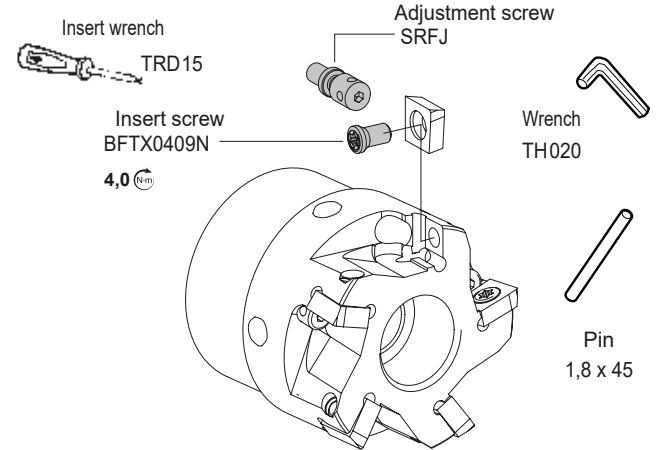

Maximum D.O.C. Guide (SRF50RS, 5 teeth)

The contains guidelines on the maximum D.O.C., determined from internal tests. "O" mark indicates the possible application range. Actual cutting conditions should be set, based on actual machine and work characteristics.

Feed D.O.C. (mm)	Feed Speed, v_f (mm/min)		
	2.500	4.000	5.000
	Feed Rate, f_t (mm/tooth)		
	0,05	0,08	0,10
0,5	○	○	○
1,0	○	○	○
1,5	○	○	○
2,0	○	○	○
2,5	○	○	○
3,0	○	○	○
3,5	○	○	-
4,0	○	-	-
4,5	○	-	-
5,0	○	-	-

Cutting Conditions

Cutter: SRF 50 RS
 Insert: SNEW 09T3 ADFR-NF (DA1000)
 n : 10.000 rpm
 Width: 35mm at D.O.C. indicated above



Recommended Cutting Conditions for RF and SRF Type Cutters

Work Material		Process	Grade	Cutting Speed (m/min)		Feed Rate (mm/tooth)	Depth of Cut (mm)	
				RF Type	SRF Type		RF Type	SRF Type
Aluminium Alloy	Si < 13 %	Finishing	DA1000 (PCD)	2.000-5.000	-4.000	0,05-0,2	-3,0	-5,0
		Roughing	H1 (Carbide)	1.000-2.500	-			
	Si ≥ 13 %	Finishing	DA1000 (PCD)	400-800	-800			
		Roughing	H1 (Carbide)	200-400	-			

SUMIBORON "BN Finish Mill" FMU Type

High Speed Finishing of Grey Cast Iron



■ Features

- High speed machining $v_c=1.500\text{m/min}$
- Excellent surface roughness $R_z = 3,2$ ($R_a = 1,0$)
- Safety structure for the centrifugal force under high speed cutting conditions
- Run-out is less than $10\ \mu\text{m}$
- Easy assembling method using the setting gauge
- Running cost is reduced because of economical insert

SUMIBORON "BN Finish Mill"

■ Application

GG25–GG30 (HB200–250) grey cast iron with pearlite matrix, and ferrite matrix (HB130–160)

Application examples: engine block, cylinder block, etc

■ Specifications

FMU Type: $\varnothing 80\text{--}\varnothing 315\ \text{mm}$
 Insert: SNEW1203ADTR/L
 Low cutting force type: SNEW1203ADTR/L-S


■ Recommended Cutting Conditions

Speed: $v_c = 800\text{--}2000\ \text{m/min}$
 Feed: $f_t = 0,1\text{--}0,3\ \text{mm/tooth}$
 Depth: $a_p = 0,5\ \text{mm or less}$
 Dry cutting




■ Performance

● Tool Life Diagram

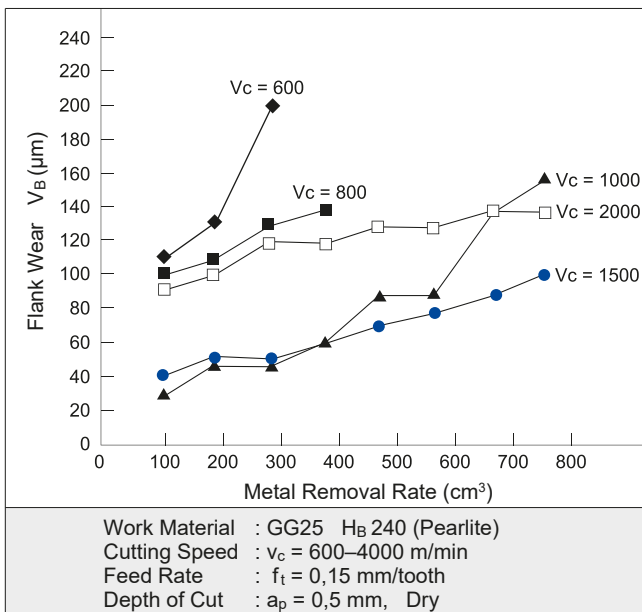

● Estimated Tool Life

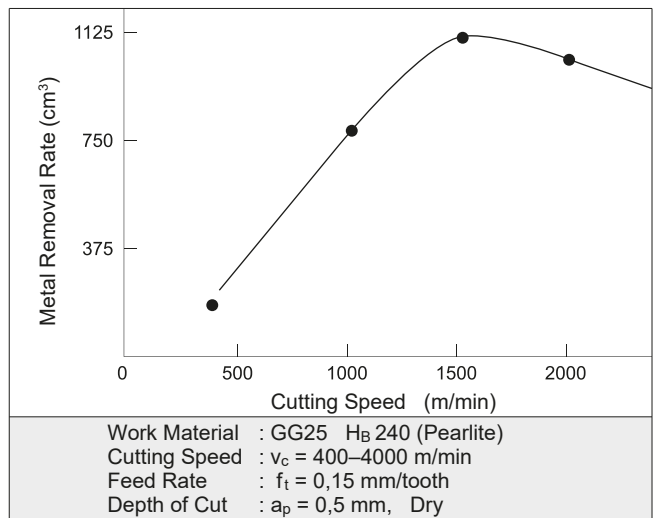


- Milling of ductile cast iron and alloy steel casting do not produce the best results.
- Dry cutting is recommended. Wet cutting will result in chipping of cutting edges in the early stages due to thermal cracking.


SUMIBORON "BN Finish Mill" FMU Type

Specifications


Approach angle: 90°
Axial rake angle: + 8°
Radial rake angle: + 2°

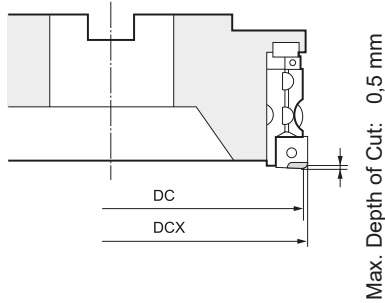

Structure

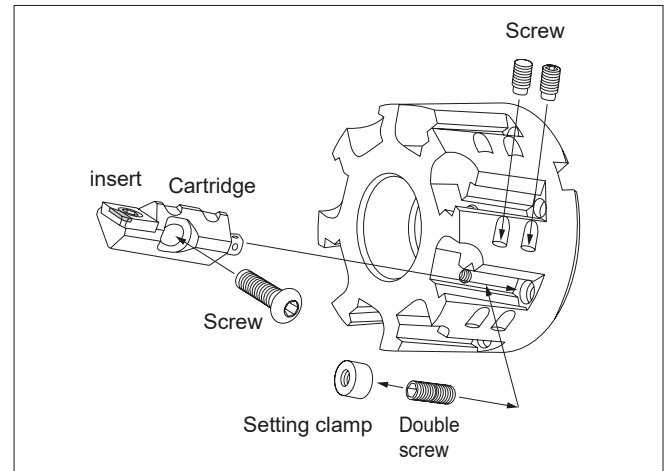


Body

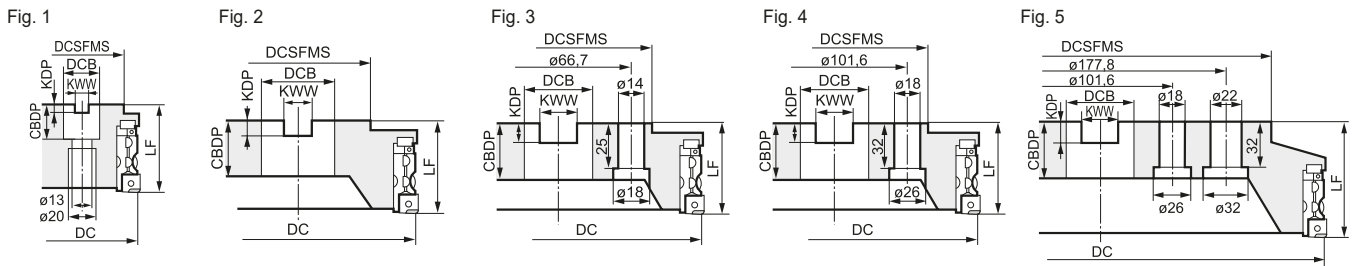


Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Max. Depth of Cut	Weight (Kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	KWW	KDP	CBDP					
FMU 4080 RS	●	80	82,8	60	63	27	12,4	7,0	25	6	0,5	1,6	1	
FMU 4100 RS	●	100	102,8	76	63	32	14,4	8,5	29	8		2,4	2	
4125 RS	□	125	127,8	75	63	40	16,4	9,5	29	10		3,4	2	
4160 RS	□	160	162,8	100	63	40	16,4	9,5	29	12		5,6	3	
FMU 4200 RS	□	200	202,8	130	63	60	25,7	14,0	38	16		9,2	4	
4250 RS	□	250	252,8	130	63	60	25,7	14,0	38	20	14,3	4		
FMU 4315 RS		315	317,8	240	80	60	25,7	14,0	40	24	27,8	5		


Inserts

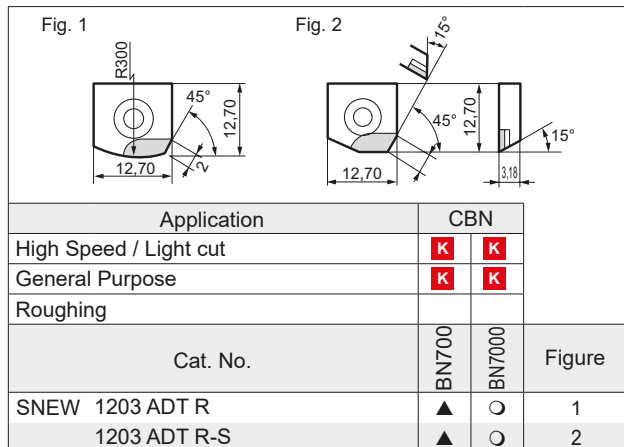


Cartridge

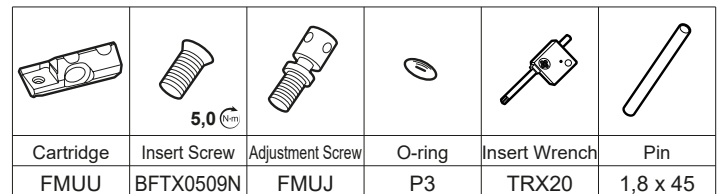

Spare Parts

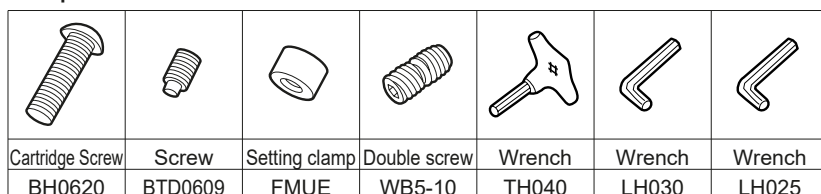


Gauge



Dial-gauge is not included.

Indexable Endmills

H1-H62

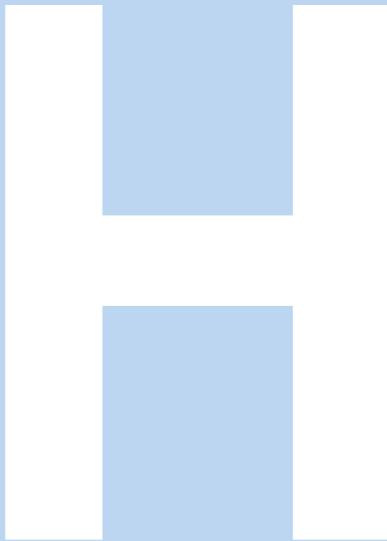

Face Milling

General Purpose Face Mills

Milling Cutter Selection Guide H 2-3
According to Work Materials / Applications
Modular Tools..... H 4-5

High Feed Milling

DGC 13000 EW H 6
WGX 13000 EW H 7

High Feed Milling

MSX 06000/08000/12000/14000 ES/EM/EW H 8-9
06000/08000/12000/12000 **M** H10-11
WFXH 08000/12000 M H12-13

Shoulder Milling

"Sumi Dual Mill"
"Wave Mill" for Shoulder Milling

DFC(M) 09000 E H14-15
WFX(F/M) 08000/12000 E H16-17
WFX 08000 M H16

"Sumi Dual Mill", tangential
"Sumi Wave" for Shoulder Milling

TSX(F/M) 08000/13000E H18-19
WEZ 11000/17000 E/EL ^{New} H20-31

"Wave Mill" for Aluminium

WEX 1000/2000/3000 E/EL/EW/M H32-38
WAX 3000 E/EL H39-40
4000 **E/EL** H41

"Wave Multi-Function Mill"
"Wave Repeater Mill"

WMM(H) 2000 / 3000 E/EL/EW/ELW H42-43
WRX 2000 / 3000 H44-47

Others

"Wave Ball-Mill" for Roughing
"Wave Ball-Mill" for Finishing

WBMR 2000/2000L H48-49
WBMF 1000 H50-51

"Wave Radius Mill"

WRCX 08000/10000 E H52
08000/10000/12000 **M** H53

Round Insert Mill

RSX(F) 08000/10000/12000 ES H54
08000/10000/12000 **M** H55

"Wave Mill" for Chamfering

WFXC 08000/12000 E H56-57
WFXC 08000/12000 M H58

High Speed Non-Ferrous Mill


































ANXS 16000 E ^{New} H59-62

Indexable Endmill Selection Guide

Application	Cutter Type	Series	Insert Type	Approach Angle Max. Depth of Cut (mm)	Cutter Diameter (mm)	Application											Work Material						Ref. Page
						Face Milling		Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile Finishing	Carbon Steel / Alloy Steel	Tempered Steel / Die Steel	Stainless Steel	Cast Iron / Ductile Cast Iron	Non-Ferrous Metal	Aluminium Alloy	Ti Alloy / Heat Resistant Alloy	Hardened Steel HRC 45-55	
						General Purpose	Finishing																
Face Milling	DGC	DGC 13000-EW	SNMU13T6.. ONMU05T6..	 3-6 mm 45°	40(42,9)- 63 (65,9)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H6
	WGX	WGX 13000-EW	SEE/MT 13T3..	 6 mm 45°	32-63	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H7
High Feed Milling	MSX	MSX(ES/EM/EW) 06000 08000 12000 14000	WDMT0603.. WDMT0804.. WDMT1205.. WDMT1406..	 1,0-2,5 mm 20°	16-63	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H9
	MSX-M	MSX 06000-M 08000-M 12000-M		 1,0-2,0 mm 20°	16-40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H10
	WFXH-M	WFXH 08000-M WFXH 12000-M	(12000 Type) SOMT 1204..	 1,5 mm 15° 2,5 mm 15°	25-32 40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H13
Shoulder Milling	DFC	DFC (M) 09000-E	XNMU 0606..	 6 mm 90°	25-80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H15
	WFX	WFX(M/F) 08000-E 12000-E	SOMT 0803..	 6 mm 90°	20-80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H16 H17
	WFX-M	WFX 08000-M	SOMT 1204..	 10 mm 90°		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	TSX	TSX (-F) 08000E TSX (-M) 13000E	LNEX 0804.., LNEX1306..	 8 mm 90° 12 mm 90°	40-63 40-160	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H19
	WEZ	New WEZ 11000-E/EL WEZ 17000-E/EL	AOMT 170502-PEER-G	 10 mm 90° 15 mm 90°	14-80 25-80	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H24 H26 H28 H30
	WEX	WEX 1000-E/EL WEX 2000-E/EL WEX 3000-E/EL	AXMT0602 (WEX 1000 E/F) AXMT1235 (WEX 2000 E/F/M)	 5 mm 90° 10 mm 90° 14 mm 90°	10-25 14-63 25-63	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H34 H35 H36
	WEX-M	WEX 2000-M WEX 3000-M	AXMT1705.. (WEX 3000 E/F/M)	 10 mm 90° 14 mm 90°	16-40 25-40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H35 H36
	WRX	WRX 2000-E/W WRX 3000-E/W	AXMT1235.. (WRX2000) AXMT1705.. (WRX3000)	 18-36 mm 90° 27-53 mm 90°	20-40 32-50	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H45 H46

○ : Preferred choice
○ : Suitable

Indexable Endmill Selection Guide

Application	Cutter Type	Series	Insert Type	Approach Angle Max. Depth of Cut (mm) 	Cutter Diameter (mm)	Application												Work Material					Ref. Page
						Face Milling		Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile Finishing	Carbon Steel / Alloy Steel	Tempered Steel / Die Steel	Stainless Steel	Cast Iron / Ductile Cast Iron	Non-Ferrous Metal	Aluminium Alloy	Ti Alloy / Heat Resistant Alloy	Hardened Steel HRC 45-55	
						General Purpose	Finishing																
Multi-Purpose	 WRCX	WRCX 08000-E 10000-E	QPMT 0803../10T3../1204.. QPET 10T35../1204..		12-32	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H52
	 WRCX-M	WRCX 08000-M 12000-M			20-40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H53
	 RSX	RSX(F) 08000-ES 10000-ES 12000-ES	RDET0803...RDET10T3.. RDET1204..		20-32(ES) 40(M)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H54 H55
	 RSX-M	RSX(F) 08000-M 10000-M 12000-M				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	 WMM(H)	WMM(H) 2000 3000	APMT 1035../1605.. APET 1035../1605..		17-26 mm	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H43
				39 mm	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
Aluminium	 WAX	WAX 3000-E/EL	AECT1604.. (WAX 3000E/EL)		16-18 mm	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H40 H41	
		WAX 4000-E/EL	AECT2206.. (WAX 4000E/EL)		22-24 mm	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		○
3D Profiling	 WBMR	WBMR 2000	ZNMT 1804100-C 2004100-S		R10 (20)- R25 (50)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H49	
	 WBMR	WBMR 2000-L				○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		○
	 WBMF	WBMF 1000	ZPGU 1551050		R5 (10)- R15 (30)	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H51	
Chamfering	 WFXC-E	WFXC 08000-E	SOMT0803../1204.. SOET0803../1204..		08-16	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H57	
		WFXC 12000-E			25-32	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		○
	 WFXC-M	WFXC 08000-M			16	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H58
		WFXC 12000-M			25-32	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
	 ANX New	ANXS 16000-E	ANB 1600R-L		32-40	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	H61	

Indexable Endmills

Exchangeable Head Endmills Modular Tools




General Features


- Exchangeable head endmills are available in 7 types !
 - Endmill for Shoulder Milling
 - WFX** Type
 - WEX** Type
 - High Feed Endmill
 - WFXH** Type
 - MSX** Type
 - Radius Endmill
 - RSX** Type
 - WRCX** Type
 - Endmill for Chamfering
 - WFXC** Type
- A wide variety of possible combinations with carbide arbors (16 items) and steel arbors (4 items) !

Characteristics ● Up to 6 x D from Modular End Mill with Carbide Arbor

Modular Head + Carbide Arbor

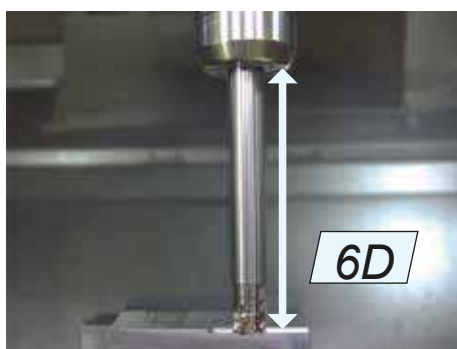


Standard Shank Type Endmill

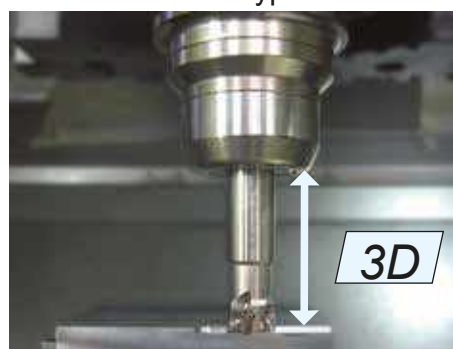


Work Material : C50
 Tool : WEX2025M12Z4 (ø D = 25, 4 teeth)
 Cutting Conditions: $v_c = 100$ m/min, $f_t = 0,1$ mm/tooth
 $a_p = 8$ mm x 3 passes, $a_e = 2,0$ mm, Equipment: M/C BT50

Note
 Cutting conditions can vary according to cutter reach, rigidity of machine tool / workpiece etc.


Performance ● A Carbide Arbor improves feed rates, surface finish, sizing, and tool life.



Shoulder Milling Squariness

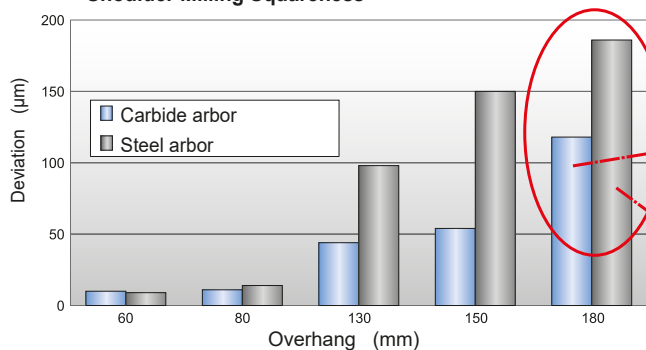

Carbide Arbor Comparison ...

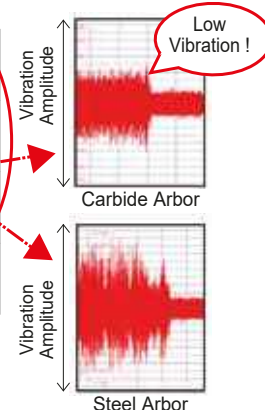

Work Material : C50
 Tool : WEX2025M12Z4 (ø D = 25, 4 teeth)
 Cutting Conditions: $v_c = 100$ m/min, $f_t = 0,1$ mm/tooth
 $a_p = 8$ mm x 3 passes, $a_e = 2,0$ mm, Equipment: M/C BT50

Suitable for milling with **long overhangs** when combined with carbide or steel arbors!

Economically designed exchangeable head!





Easy to change screw-on endmill type WEX and carbide arbor

Exchangeable Head Endmills Modular Tools

Modular Type

Carbide and Steel Arbor

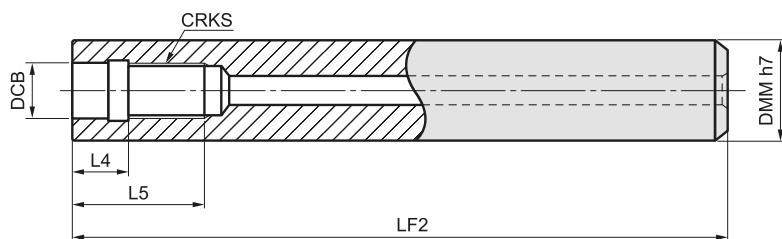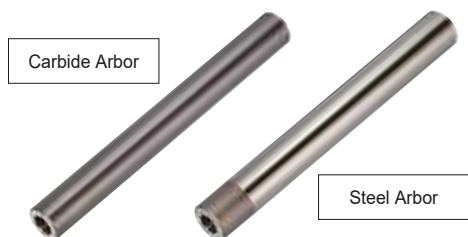


Carbide Arbor

Cat. No.	Stock	Dimensions (mm)						
		CRKS	DCB	DMM	LF2	L4	L5	LF*
MA 15 M08 L120C	●	M8	8,5	15	120	10	18	145
15 M08 L160C	●	M8	8,5	15	160	10	18	185
MA 16 M08 L120C	●	M8	8,5	16	120	10	18	145
16 M08 L160C	●	M8	8,5	16	160	10	18	185
MA 18 M10 L150C	●	M10	10,5	18	150	10	20	180
18 M10 L200C	●	M10	10,5	18	200	10	20	230
MA 20 M10 L150C	●	M10	10,5	20	150	10	20	180
20 M10 L200C	●	M10	10,5	20	200	10	20	230
MA 23 M12 L200C	●	M12	12,5	23	200	10	22	235
23 M12 L250C	●	M12	12,5	23	250	10	22	285
MA 25 M12 L200C	●	M12	12,5	25	200	10	22	235
25 M12 L250C	●	M12	12,5	25	250	10	22	285
MA 28 M16 L200C	●	M16	17,0	28	200	10	24	240
28 M16 L300C	●	M16	17,0	28	300	10	24	340
MA 32 M16 L200C	●	M16	17,0	32	200	10	24	240
32 M16 L300C	●	M16	17,0	32	300	10	24	340

Steel Arbor

Cat. No.	Stock	Dimensions (mm)						
		CRKS	DCB	DMM	LF2	L4	L5	LF*
MA 16 M08 L120S	●	M8	8,5	16	120	10	18	145
MA 20 M10 L150S	●	M10	10,5	20	150	10	20	180
MA 25 M12 L200S	●	M12	12,5	25	200	10	22	235
MA 32 M16 L200S	●	M16	17,0	32	200	10	24	240

Identification of Catalogue No.

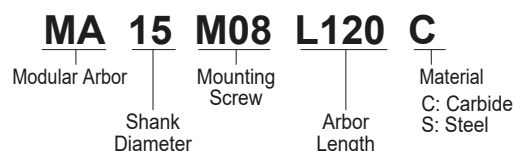

Recommended Tightening Torque


Screw	Wrench		N·m
	W	S	
M 8	8	13	23
M10	8	15	46
M12	10	19	60
M16	10	24	80



Notes about tightening the head:

- Refer to the Head Cat. No. chart on pages H18, H19, H35 and H37 to select the arbor size in the table above.
- Check the mounting screw size of the head and arbor beforehand.
- When attaching head to an arbor, follow the standard tightening torque in the table above.

* Modular Tool System

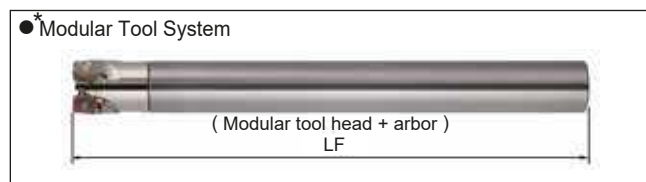

Product Range


Application	Work Material	Series	Cat. No.	Page
Shoulder Milling	Shoulder milling of Steel, Die Steel, Cast Iron, Stainless Steel and Non-Ferrous Metal	„Wave Mill“ - Series	WFX 08000-M	H16
	High efficiency milling of Steel, Cast Iron, Stainless Steel and Non-Ferrous Metal	„Wave Mill“ - Series	WEX 2000-M 3000-M	H35 H36
High Feed Milling	High feed milling of Steel, Die Steel, Cast Iron, Stainless Steel and Non-Ferrous Metal	„Wave Mill“ - Series	WFXH 08000-M 12000-M	H13
	High feed milling of Steel, Cast Iron and Stainless Steel	„Metal Slash Mill“ - Series	MSX 06000-M 08000-M 12000-M	H10
Radius Milling	Milling of Exotic Alloy	„Wave Radius Mill“ - Series	WRCX 08000-M 12000-M 16000-M	H53
	Milling of Steel, Cast Iron, Stainless Steel and Non-Ferrous Metal	„Wave Radius Mill“ - Series	RSX(F) 10000-M 12000-M	H55
Chamfering	Chamfering of Steel, Die Steel, Cast Iron, Stainless Steel and Non-Ferrous Metal	„Wave Mill“ - Series	WFCX 08000-M	H58

"Sumi Dual Mill" Face Mill


DGC (EW) Type

General Milling for Steel and Cast Iron

Body – Shank Type



Rake Angle	Radial	-10°
	Axial	-5°



Body

Cat. No.	Stock	Dimensions (mm)						No. of Teeth	Weight (kg)
		DC	DCX	DMM	LH	LS	LF		
DGC 13040 EW	●	40 (42,90)	54	32	40 (38,44)	85	125	3	0,7
13050 EW	●	50 (52,90)	65	32	40 (38,44)	85	125	3	0,9
13063 EW	●	63 (65,90)	77	32	40 (38,44)	85	125	4	1,1

() Figures in brackets indicate values for inserts of type ONMU

Identification Details

DGC	13	040	EW
Cutter Series	Insert Size	Cutter Diameter	Endmill Type Weldon

Inserts

Application	Coated Carbide						Fig.	
	P	M	K	M	S			
High Speed/Light cut	P		K		M	S		
General Purpose		P	M	K	M	S		
Roughing		P	M	K		M	S	
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	Fig.
SNMU 13T6ANER L	●	●	●	●	●			1
13T6ANER G	●	●	●	●	●			1
13T6ANER H	●	●	●	●	●			1
13T6ANER FL	●	●	●	●	●			2
13T6ANER FG	●	●	●	●	●			2
SNEU 13T6ANER L						●	●	1
13T6ANER G						●	●	1
13T6ANER FL						●	●	2
13T6ANER FG						●	●	2
XNEU 13T6ANEN W		●		●				3
ONMU 05T6ANER L	●	●	●	●	●			4
05T6ANER G	●	●	●	●	●			4
ONEU 05T6ANER L						●	●	4
05T6ANER G						●	●	4

Fig. 1




Fig. 2




Fig. 3






Fig. 4



Attaching Octagonal Inserts

Firmly align insert with supporting face, press down in the direction of the arrow and tighten the screw to fix the insert.

Press down firmly from above



Align with supporting faces

Spare Parts

Shim	Shim Screw	L Seat Wrench	Insert Screw	Insert Wrench
DGCS 13 R	BW 0609 F	LH 040	BFTX 0412 IP 3,0 (Nm)	TRDR 15 IP

Optional

Insert Screw (*)
BFTX 0418 IP

*Corners can be changed simply by loosening the screw. (Only suitable for DGC / DGCM types with body size ≥ Ø 80).

SNMU – Recommended Cutting Conditions

ISO	Work Material	Fit-ness	Cutting Speed v _c (m/min)	Feed Rate f _t (min/t)	Depth of Cut (mm)	Grade
P	General Steel	◎	150–200–250	0,10–0,25–0,40	<4	ACP200 ACP300
	Alloyed Steel	◎	180–250–350	0,10–0,30–0,45	<4	ACP200 ACP300
	Die Steel	◎	100–150–200	0,15–0,25–0,35	<4	ACP200 ACP300
M	Stainless Steel	○	160–200–250	0,15–0,23–0,30	<3	ACM200 ACM300 ACP300
K	GG+GGG	◎	100–200–250	0,10–0,25–0,40	<5	ACK200 ACK300

Min. – Optimum – Max.

ONMU – Recommended Cutting Conditions


ISO	Work Material	Fit-ness	Cutting Speed v _c (m/min)	Feed Rate f _t (min/t)	Depth of Cut (mm)	Grade
P	General Steel	◎	150–200–250	0,10–0,30–0,50	<2	ACP200 ACP300
	Alloyed Steel	◎	180–250–350	0,10–0,50–0,50	<2	ACP200 ACP300
	Die Steel	◎	100–150–200	0,15–0,25–0,30	<2	ACP200 ACP300
M	Stainless Steel	○	160–200–250	0,15–0,23–0,30	<2	ACM200 ACM300 ACP300
K	GG+GGG	◎	100–200–250	0,10–0,30–0,50	<2	ACK200 ACK300

◎ Preferred choice ○ Suitable

"Sumi Wave" Face Mill WGX (EW) Type

General Milling for Steel and Cast Iron

Body – Shank Type

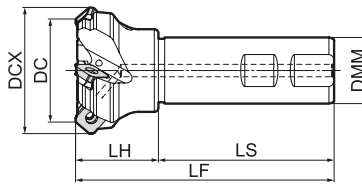

Rake Angle	Radial	-20°–24°	6 mm 45°
	Axial	20°–22°	

Body – Dimensions

Cat. No.	Stock	Dimensions (mm)						No. of Teeth
		DC	DCX	DMM	LH	LS	LF	
WGX 13032 EW	○	32	44	32	40	85	125	3
13040 EW	○	40	52	32	40	85	125	3
13050 EW	○	50	62	32	40	85	125	4
13063 EW	○	63	76	32	40	85	125	5

Inserts are not included.
ø32 mm cutters do not have a seat.

Identification Details


WGX	13	032	EW
Cutter Series	Insert Size	Cutter Diameter	Endmill Type Weldon

Insert Shape Characteristics

Unique wiper edge shape for improved surface roughness



General-purpose
G type chipbreaker

Low-burr design
FG type chipbreaker

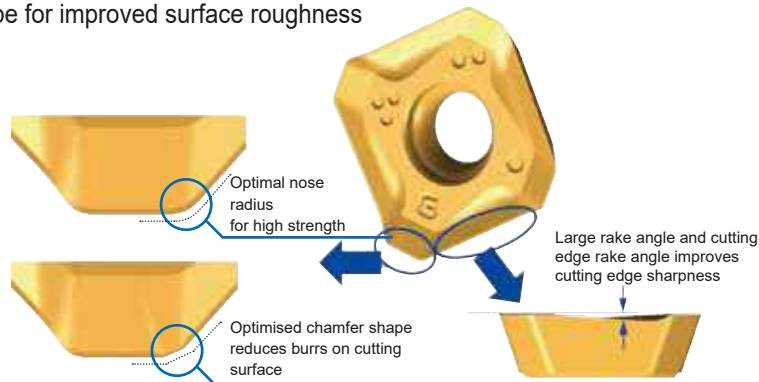

Inserts

Application	Coated Carbide						Carb. DLC		
High Speed/Light Cut	P			K		M, S	K, N		
General Purpose	P, M	M	K		M, S	M, S	N		
Roughing	P, M	P, M	K		M, S	M, S			
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000
SEET 13T3AGFR-L								○	○
SEET 13T3AGSR-L	○	●	○	○	○	●	○		
13T3AGSR-G	○	●	●	○	○	●	○		
SEMT 13T3AGSR-L	●	●	●	○	○	●	●		
13T3AGSR-G	●	●	●	●	●	●	●		
13T3AGSR-H	●	●	●	●	●	●	●		
SEMT 13T3AGSR-FG	○	●	●	○	●	●	●		
XEEW 13T3AGER-WR		○		○					

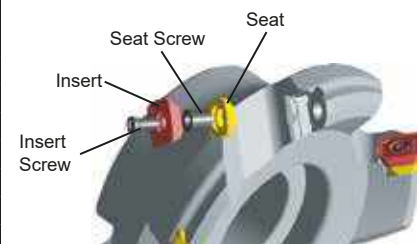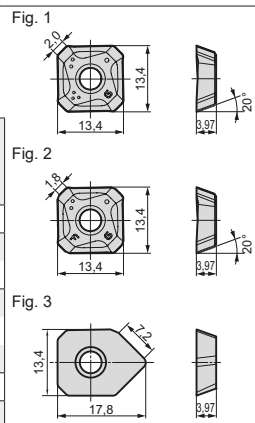

Spare Parts

Applicable Cutters	Seat	Seat Screw	Insert Screw	Insert Wrench	(N·m)	Spanner (for Seat)
WGX 130__EW						
øD = 32	-	-	BFTX 03512 IP	TRDR 15 IP	3,0	-
øD = 40–63	WGCS 13 R	BW 0507 F	BFTX 03512 IP	TRDR 15 IP	3,0	LH 035

Recommended Cutting Conditions

ISO	Work Material	Hardness (HB)	Cutting Speed v _c (m/min)	Feed Rate f _t (mm/tooth)	Grade
P	General Steel	180–28	150–200–250	0,15–0,20–0,25	ACP200
	Soft Steel	≤ 180	180–265–350	0,10–0,25–0,40	ACP200
	Die Steel	200–220	100–150–200	0,15–0,20–0,25	ACP200
M	Stainless Steel	-	160–205–250	0,15–0,23–0,30	ACM300
K	Cast Iron	250	100–175–250	0,15–0,23–0,30	ACK200
S	Exotic Alloy	-	30–50–80	0,10–0,20–0,30	ACM300

Minimum-Optimum-Maximum

"METAL SLASH MILL" MSX Type

Ultra High Feed

Boosts Productivity – Cuts Costs



■ Features

The Metal Slash Mill type MSX is a new multi function high shear milling cutter with ultra high feed capability suitable for face milling, slotting, plunging and helical boring. At 50GPa the ultra hard Super ZX coated inserts feature a sharp cutting edge which demonstrates extreme resistance to wear and heat massively boosting productivity and tool life.


The vibration free cutting action ensures accurate sizing, improved surface finish, and protection of the machine tool/workpiece from damage. Inserts are double clamped in wide chip gullets to maximise rigidity and chip evacuation with temperature at the cutting edge being easily controlled via an optional air blast through integral coolant holes. The MSX cutter is readily applied to general purpose machining across the P (steel) M (stainless) and K (cast iron) range of workpiece materials with impressive results.

■ Advantages

Integral Coolant Hole
Optimised chip removal – massive chip evacuation pockets


Wide Application Range
Face milling, slotting, helical boring and plunging

Low Cutting Force
Unique insert shape reduces cutting force

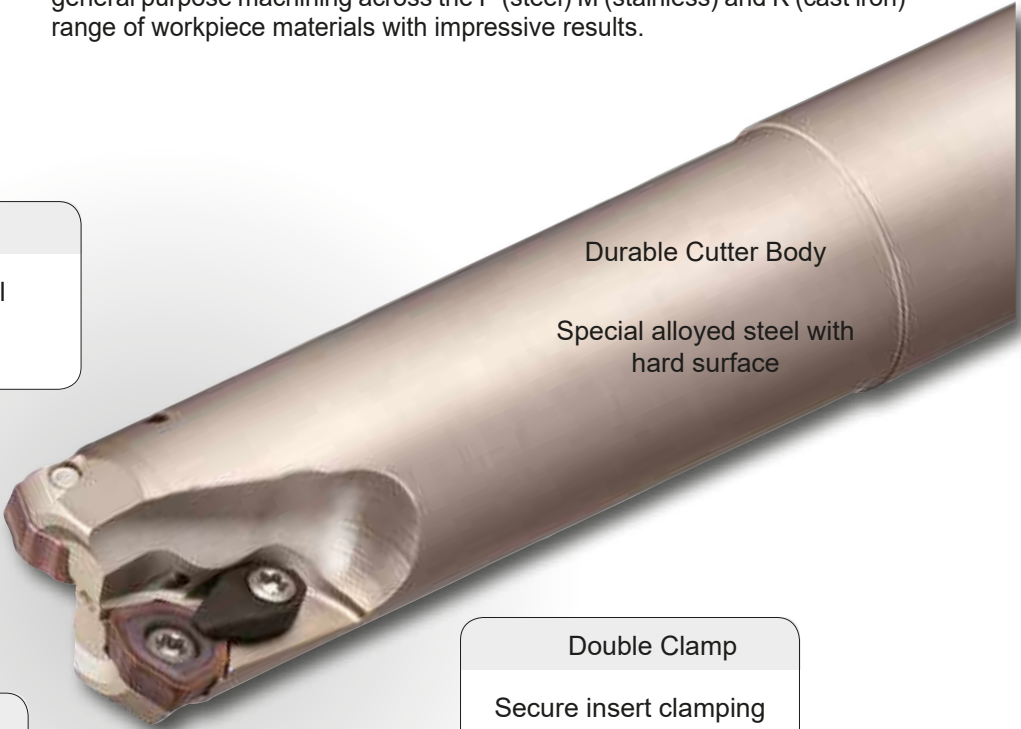





Double Clamp
Secure insert clamping for stable cutting

■ Application Range

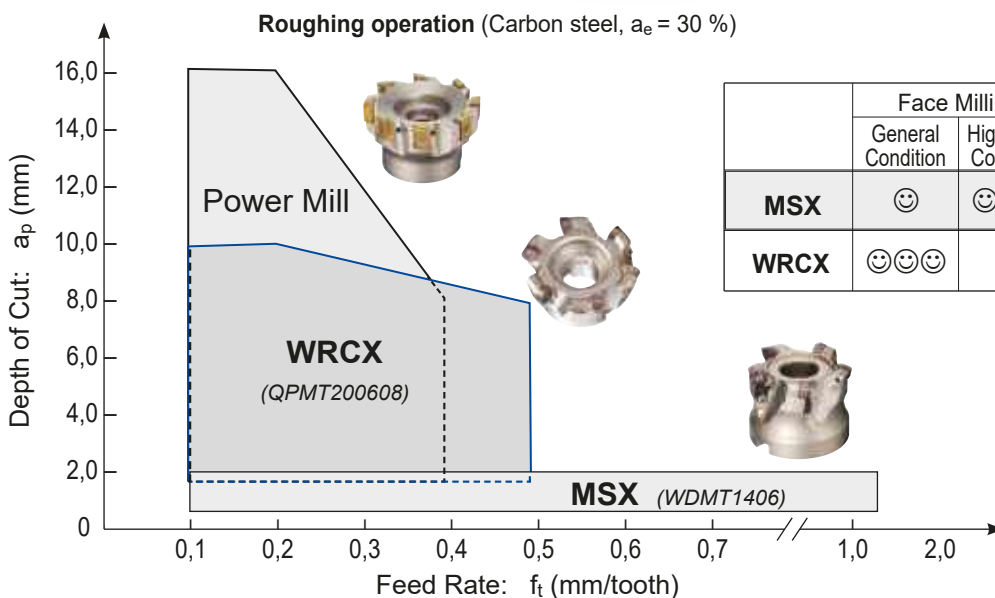

"METAL SLASH MILL" MSX 06000/08000 ES/EM/EW

"METAL SLASH MILL" MSX 12000/14000 ES/EM/EW

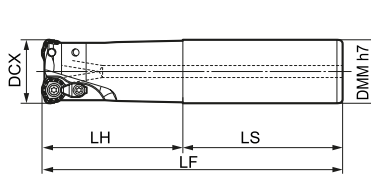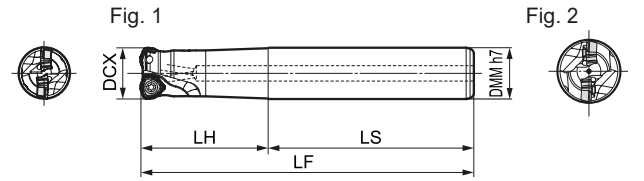

Body

For insert type : WDMT 0603 □□□□

Cat. No.	Stock	Dimensions (mm)					No. of teeth	Fig.
		DCX	DMM	LH	LS	LF		
MSX 06016 ES	□	16	16	30	80	110	2	1
06016 EM	●	16	16	70	80	150	2	1
06016 EM15	□	16	15	30	120	150	2	1
MSX 06017 EM	□	17	16	20	130	150	2	1
MSX 06018 EM	□	18	16	20	130	150	2	1
MSX 06020 ES	●	20	20	50	80	130	3	1
06020 EM	●	20	20	100	80	180	3	1
06020 EM19	□	20	19	50	130	180	3	1
MSX 06022 EM	□	22	20	30	150	180	3	1
MSX 06025 ES	●	25	25	60	80	140	3	1
06025 ES24	□	25	24	60	80	140	3	1
06025 EM	●	25	25	120	130	250	3	1
06025 EM24	□	25	24	60	190	250	3	1
MSX 06020 EW	●	20	20	50	80	130	3	1
MSX 06025 EW	●	25	25	60	80	140	3	1

Body

For insert type : WDMT 0804 □□□□

Cat. No.	Stock	Dimensions (mm)					No. of teeth	Fig.
		DCX	DMM	LH	LS	LF		
MSX 08020 ES	●	20	20	50	80	130	2	1
08020 EM	●	20	20	100	80	180	2	1
08020 EM19	□	20	19	50	130	180	2	1
MSX 08022 EM	□	22	20	30	150	180	2	1
MSX 08025 ES	●	25	25	60	80	140	2	2
08025 EM	●	25	25	120	130	250	2	2
08025 EM24	□	25	24	60	190	250	2	2
MSX 08028 EM	□	28	25	40	210	250	2	2
MSX 08032 ES	□	32	32	70	80	150	3	2
08032 EM	□	32	32	120	130	250	3	2
MSX 08035 EM	□	35	32	50	200	250	3	2
MSX 08020 EW	●	20	20	50	80	130	2	1
MSX 08025 EW	●	25	25	60	80	140	2	2
MSX 08032 EW	●	32	32	70	80	150	3	2

Identification Details

MSX 06 016 E S

Cutter type Insert size Cutter Diameter Shank Type S: Short type with cylindrical shank
M: Long type with cylindrical shank
W: Short type with Weldon shank

Body

For insert type : WDMT 1205 □□□□

Cat. No.	Stock	Dimensions (mm)					No. of teeth	Fig.
		DCX	DMM	LH	LS	LF		
MSX 12032 ES	●	32	32	70	80	150	2	2
12032 EM	●	32	32	120	130	250	2	2
MSX 12035 EM	□	35	32	50	200	250	2	2
MSX 12040 ES	□	40	32	50	100	150	3	2
12040 EM	□	40	32	50	200	250	3	2
MSX 12050 EM	□	50	42	50	200	250	4	2
MSX 12032 EW	●	32	32	70	80	150	2	2


Body

For insert type : WDMT 1406 □□□□

Cat. No.	Stock	Dimensions (mm)					No. of teeth	Fig.
		DCX	DMM	LH	LS	LF		
MSX 14040 ES	□	40	32	50	100	150	2	2
14040 EM	□	40	32	50	200	250	2	2
MSX 14050 ES	□	50	42	50	100	150	3	2
MSX 14050 EM	□	50	42	50	200	250	3	2
14063 ES	□	63	42	50	100	150	4	2
MSX 14063 EM	□	63	42	50	200	250	4	2

Inserts

Application	Coated Carbide				IC	S	RE	Applicable Endmill
	ACP200	ACP300	ACK200	ACK300				
High Speed / Light cut			●	○	6,35	3,0	1,5	MSX06000E□
General Purpose	●	●	●	○	8,5	4,0	2,0	MSX08000E□
Roughing	●	●	●	○	12	5,0	2,0	MSX12000E□
	●	●	●	○	14	6,0	2,0	MSX14000E□




ZDTR-H : Stronger cutting edge

Spare Parts


Insert Screw	Insert Wrench	Clamp	C Ring	Clamp Screw	Applicable Endmill
BFTX 02505 IP	TRDR 08 IP	-	-	-	MSX 06000E□
BFTX 0306 IP	TRDR 08 IP	-	-	-	MSX 08020E□, MSX 08022E□
BFTX 0306 IP	TRDR 08 IP	CCH 3,5	CR 03	BFTX 03510 IP 08	MSX 08025E□, MSX 08028E□, MSX 08032E□, MSX 08035E□
BFTX 0409 IP	TRDR 15 IP	CCH 3,5	CR 03	BFTX 03510 IP 15	MSX 12000E□
BFTX 0511 IP	TRDR 20 IP	CCH 4,5	CR 03	BFTX 04513 IP 20	MSX 14000E□

Exchangeable Head Endmills MSX 06000/08000 M Type

Exchangeable Head Endmills MSX 08000/12000 M Type

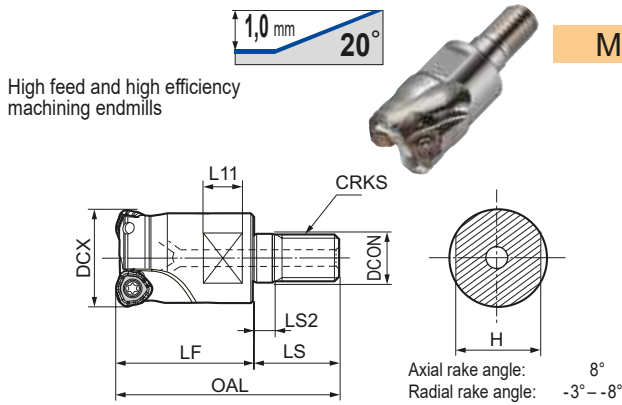

Modular Type

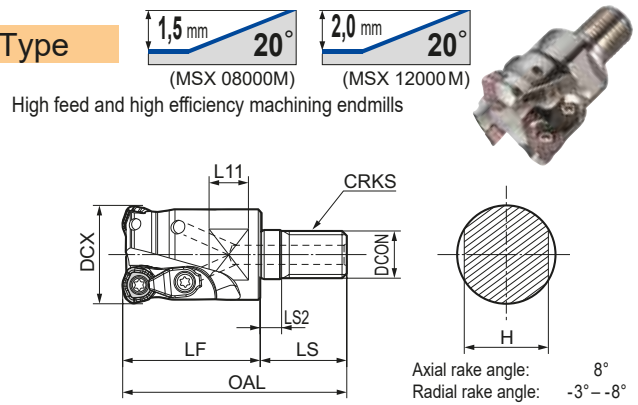

Heads

For insert type : WDMT 0603

Cat. No.	Stock	Dimensions (mm)									No. of teeth
		DC	DCON	CRKS	OAL	LF	LS2	LS	L11	H	
MSX 06016M08Z2	●	16	8,5	M8	42	25	5	17	8	13	2
06018M08Z2	□	18	8,5	M8	42	25	5	17	8	13	2
MSX 06020M10Z3	●	20	10,5	M10	49	30	5	19	8	15	3
06022M10Z3	□	22	10,5	M10	49	30	5	19	8	15	3
MSX 06025M12Z3	●	25	12,5	M12	56	35	5	21	10	19	3

Inserts are not included.

Heads

For insert type : WDMT 0804

Cat. No.	Stock	Dimensions (mm)									No. of teeth
		DC	DCON	CRKS	OAL	LF	LS2	LS	L11	H	
MSX 08025M12Z2	●	25	12,5	M12	56	35	5	21	10	19	2
08028M12Z2	○	28	12,5	M12	56	35	5	21	10	19	2
MSX 08030M16Z3	○	30	17,0	M16	63	40	5	23	10	24	3
08032M16Z3	●	32	17,0	M16	63	40	5	23	10	24	3
MSX 08035M16Z3	□	35	17,0	M16	63	40	5	23	10	24	3

Inserts are not included.

Heads


For insert type : WDMT 1205

Cat. No.	Stock	Dimensions (mm)									No. of teeth
		DC	DCON	CRKS	OAL	LF	LS2	LS	L11	H	
MSX 12032M16Z2	●	32	17,0	M16	63	40	5	23	10	24	2
12035M16Z2	□	35	17,0	M16	63	40	5	23	10	24	2
MSX 12040M16Z3	●	40	17,0	M16	63	40	5	23	10	24	3

Inserts are not included.

Inserts

Application	Coated Carbide				Dimensions (mm)			Applicable Endmill
	ACP200	ACP300	ACK200	ACK300				
General Purpose	●	●	●	●	IC	S	RE	
Roughing	●	●	●	●				
Cat. No.								
WDMT 0603 ZDTR	●	●	○	○	6,35	3,0	1,5	MSX06000M□
0603 ZDTR-H	●	●	○	○				
WDMT 0804 ZDTR	●	●	○	○	8,5	4,0	2,0	MSX08000M□
0804 ZDTR-H	●	●	○	○				
WDMT 1205 ZDTR	●	●	○	○	12	5,0	2,0	MSX12000M□
1205 ZDTR-H	●	●	○	○				



H - Strong Cutting Edge

Identification Details

MSX **06** **016** **M08** **Z2**

Cutter type Insert size Diameter Mounting screw No. of teeth



Spare Parts

Clamp Screw	Insert Wrench	Clamp	C Ring	Insert Screw	Applicable Endmill
(N·m)					
BFTX 02505 IP	1,5	TRDR 08 IP	-	-	MSX 06016M - MSX 06025M
BFTX 0306 IP	2,0	TRDR 08 IP	CCH 3,5	CR 03	MSX 08025M - MSX 08035M
BFTX 0409 IP	3,0	TRDR 15 IP	CCH 3,5	CR 03	MSX 12032M - MSX 12040M

"METAL SLASH MILL" MSX Type

Recommended Cutting Conditions

Work Material	Coated Carbide Grade	Cutting Speed v_c (m/min)	Insert Cat. No.	Endmill Type (ϕ DC)								Shell Type (ϕ DC)					
				16		20		25		32		40		50-66		80-100	
				a_p (mm)	Feed rate (mm/tooth)	a_p (mm)	Feed rate (mm/tooth)	a_p (mm)	Feed rate (mm/tooth)	a_p (mm)	Feed rate (mm/tooth)	a_p (mm)	Feed rate (mm/tooth)	a_p (mm)	Feed rate (mm/tooth)	a_p (mm)	Feed rate (mm/tooth)
General Steel (Below HB200)	ACP200	100-150-200	WDMT 0603	0,8	0,8	0,8	0,8	0,8	0,8	-	-	-	-	-	-	-	-
			WDMT 0804	-	-	1,0	1,0	1,0	1,2	1,0	1,2	-	-	-	-	-	-
			WDMT 1205	-	-	-	-	-	-	1,2	1,4	1,2	1,4	1,2	1,4	-	-
			WDMT 1406	-	-	-	-	-	-	-	-	1,5	1,5	1,5	1,5	1,5	1,5
Alloy Steel (Below HRC45)	ACP200	80-130-180	WDMT 0603	0,7	0,8	0,7	0,8	0,7	0,8	-	-	-	-	-	-	-	-
			WDMT 0804	-	-	0,8	1,0	0,8	1,2	0,8	1,2	-	-	-	-	-	-
			WDMT 1205	-	-	-	-	-	-	1,0	1,4	1,0	1,4	1,0	1,4	-	-
			WDMT 1406	-	-	-	-	-	-	-	-	1,3	1,5	1,3	1,5	1,3	1,5
Stainless Steel X5CRNI1810, Others	ACP300	80-120-150	WDMT 0603	0,8	0,7	0,8	0,7	0,8	0,7	-	-	-	-	-	-	-	-
			WDMT 0804	-	-	1,0	0,8	1,0	0,8	1,0	0,8	-	-	-	-	-	-
			WDMT 1205	-	-	-	-	-	-	1,2	1,2	1,2	1,2	1,2	1,2	-	-
			WDMT 1406	-	-	-	-	-	-	-	-	1,5	1,3	1,5	1,3	1,5	1,3
Cast Iron GG, GGG	ACK300	100-150-200	WDMT 0603	0,8	1,0	0,8	1,0	0,8	1,0	-	-	-	-	-	-	-	-
			WDMT 0804	-	-	1,0	1,2	1,0	1,4	1,0	1,4	-	-	-	-	-	-
			WDMT 1205	-	-	-	-	-	-	1,2	1,5	1,2	1,5	1,2	1,5	-	-
			WDMT 1406	-	-	-	-	-	-	-	-	1,5	1,8	1,5	1,8	1,5	1,8
Hardened Steel (Below HRC50)	ACK300	40-80-100	WDMT 0603	0,5	0,5	0,5	0,5	0,5	0,5	-	-	-	-	-	-	-	
			WDMT 0804	-	-	0,5	0,6	0,5	0,8	0,5	0,8	-	-	-	-	-	-
			WDMT 1205	-	-	-	-	-	-	0,6	1,0	0,6	1,0	0,6	1,0	-	-
			WDMT 1406	-	-	-	-	-	-	-	-	1,0	1,2	1,0	1,2	1,0	1,2


Insert Cat. No.	Max a_p	RE
WDMT 0603....	1,0	1,5
WDMT 0804....	1,5	2,0
WDMT 1205....	2,0	2,0
WDMT 1406....	2,5	2,0

- The above recommended cutting conditions may require adjustment according to machine rigidity and work rigidity. The above figures are guidelines for use with the BT50 machine tool.
- The above cutting conditions assume a tool overhang length of $L/D = 3$ (i.e. overhang length is 3 times tool diameter) or less. When tool overhang is **more than $L/D = 3$ and less than or equal $L/D = 5$** , settings should be adjusted to approximately **70 to 80 %** of those indicated in the above cutting conditions (i.e. a_p and Feed Rate). When tool overhang is **more than $L/D = 5$ and less than or equal $L/D = 8$** , settings should be adjusted to approximately **50 to 60 %** of those indicated in the above cutting conditions (i.e. a_p and Feed Rate).



Information for Programming

For machine programming, please use the theoretical corner radius (R) shown in the list.

Maximum depth (d) between theoretical radius and actual profile will be left on the finished surface, as shown below.

	Body	Insert	Theoretical Radius (R)	Remaining Depth (d)
	MSX 06000	WDMT 0603....	2,0	0,403
	MSX 08000	WDMT 0804....	2,5	0,593
	MSX 12000	WDMT 1205....	3,0	1,030
	MSX 14000	WDMT 1406....	3,5	1,219

Plunging and Helical Boring

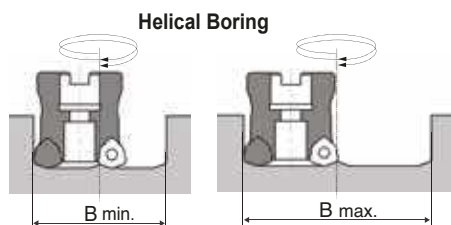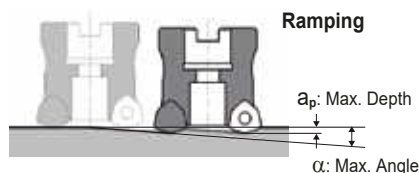

Cutter ϕ	WDMT0603ZDTR			WDMT0804ZDTR			WDMT1205ZDTR			WDMT1406ZDTR		
	a_p : max 1,0			a_p : max 1,5			a_p : max 2,0			a_p : max 2,5		
	Ramping α max.	Helical boring min. ϕB	max. ϕB	Ramping α max.	Helical boring min. ϕB	max. ϕB	Ramping α max.	Helical boring min. ϕB	max. ϕB	Ramping α max.	Helical boring min. ϕB	max. ϕB
16	6°00'	21	31									
17	5°00'	23	33									
18	4°30'	25	35									
20	3°30'	29	39	7°30'	25	38						
22	3°00'	33	43	5°30'	29	42						
25	2°00'	39	48	4°00'	35	48						
28				3°00'	41	54						
32				2°30'	49	62	6°30'	42	63			
35				2°00'	55	68	5°00'	48	69			
40				1°30'	65	78	4°00'	58	79	6°00'	53	78
50							2°30'	78	99	3°30'	73	98
63							2°00'	103	124	2°00'	99	124
66							1°30'	109	130	1°45'	105	130
80										1°30'	133	158
100										1°00'	173	198

"Wave Mill" Series

WFXH - M Type



General Features

WaveMill WFXH type is a high efficiency, multi-purpose cutter, that uses the WFX series inserts for high-feed roughing and a variety of processes.

Characteristics

Stable, high-efficiency milling with superior cutting edge sharpness. Supports various types of processes (ramping and helical milling). Able to use the selection of inserts from the WFX series.

Notes on Corner Finishing - Remaining Material

Actual machined corners will have uncut and overcut portions due to the shape of the inserts.

Fig. 1


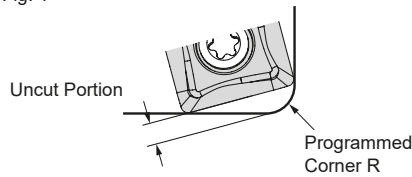


Fig. 2

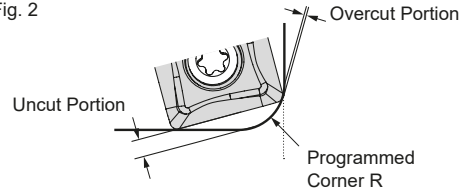

WFXH 08000 Type


Programmed Corner R	SOMT 080004-□			SOMT 080008-□			SOMT 080012-□		
	Uncut Portion	Overcut Portion	Shape	Uncut Portion	Overcut Portion	Shape	Uncut Portion	Overcut Portion	Shape
2,0	1,41	0	Fig. 1	1,30	0	Fig. 1	1,21	0	Fig. 1
2,5	1,30	0,02	Fig. 2	1,19	0,01	Fig. 2	1,09	0	Fig. 2
3,0	-	-	-	-	-	-	0,98	0,05	Fig. 2

WFXH 12000 Type

Programmed Corner R	SOMT 120004-□			SOMT 120008-□			SOMT 120012-□			SOMT 120016-□		
	Uncut Portion	Overcut Portion	Shape	Uncut Portion	Overcut Portion	Shape	Uncut Portion	Overcut Portion	Shape	Uncut Portion	Overcut Portion	Shape
2,0	2,58	0	Fig. 1	2,48	0	Fig. 1	2,37	0	Fig. 1	2,25	0	Fig. 1
2,5	2,47	0	Fig. 1	2,37	0	Fig. 1	2,25	0	Fig. 1	2,14	0	Fig. 1
3,0	2,36	0	Fig. 1	2,26	0	Fig. 1	2,14	0	Fig. 1	2,11	0	Fig. 1
3,5	2,24	0,01	Fig. 2	2,14	0	Fig. 1	2,03	0	Fig. 1	1,91	0	Fig. 1
4,0	-	-	-	2,03	0,04	Fig. 2	1,91	0,03	Fig. 2	1,8	0,01	Fig. 2


Minimum Cutting Diameter

Minimum cutting diameter (DCN) will depend on the insert that is used. Using an insert with a large nose radius is recommended for the WFXH type.

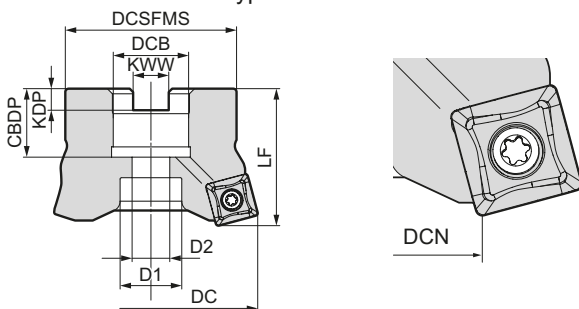


Body Cat. No.	DC	DCN based on insert nose			
		R0,4	R0,8	R1,2	R1,6
WFXH 08025 M	25	9,69	9,48	9,27	-
08032 M	32	16,6	16,4	16,2	-
WFXH 12040 M	40	15,8	15,5	15,3	15,1

Taper Cutting and Helical Milling

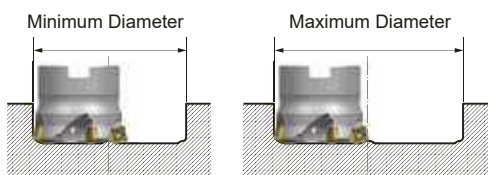

Minimum and Maximum Diameters

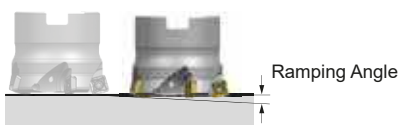


Ramping Angle

Insert Cat. No.	DC	Helical Milling		Taper Cutting
		Min.	Max.	Max. Ramping Angle
SOMT 080004-□	25	35	49	1°30'
	32	49	63	0°30'
SOMT 080008-□	25	35	48	3°
	32	49	62	1°30'
SOMT 080012-□	25	34	47	4°30'
	32	48	61	2°30'
SOMT 120004-□	40	56	79	1°
SOMT 120008-□	40	56	78	1°30'
SOMT 120012-□	40	55	77	2°30'
SOMT 120016-□	40	55	76	3°30'

"Wave Mill" Series

WFXH 08000/12000 M Type

Modular Type

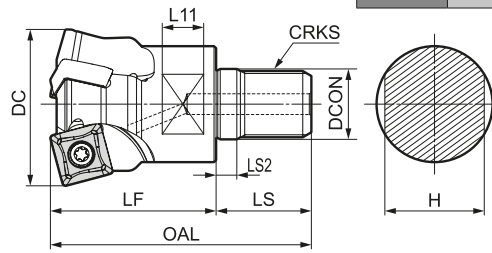

Rake Angle	Radial	-6°	1,5 mm / 15°	2,5 mm / 15°
	Axial	6°		
			(08000M Type)	(12000M Type)

Head

Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)
		DC	DCON	CRKS	OAL	LF	LS2	LS	L11	H		
WFXH08025M12Z2	○	25	12,5	M12	56	35	5	21	10	19	2	0,1
08032M12Z3	○	32	17,0	M16	63	40	5	23	10	24	3	0,2

Inserts are not included.

Identification Details

WFX	08	020	M10	Z2
Cutter Series	Insert Size	Cutter Diameter	Screw Size	No. of Teeth

Head

Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)
		DC	DCON	CRKS	OAL	LF	LS2	LS	L11	H		
WFXH12040M12Z3	○	40	17,0	M16	63	40	5	23	10	24	3	0,2

Inserts are not included.



Inserts

Application	Coated Carbide							Carbide	DLC	Radius (mm)	Fig.
	P	PM	PM	K	MS	MS	MS				
High Speed / Light cut	P			K		MS		KN			
General Purpose		PM	PM	K		MS	MS		N		
Roughing		PM	PM		K		MS		N		
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	RE	Fig.
SOMT 080304 PZER L	○	○	○	○	●	○	○	-	-	0,4	1
SOMT 080308 PZER L	○	○	○	○	○	○	○	-	-	0,8	1
SOMT 080304 PZER G	○	●	●	●	○	○	○	-	-	0,4	1
SOMT 080308 PZER G	○	●	●	●	○	○	○	-	-	0,8	1
SOMT 080312 PZER G	○	●	○	○	○	○	○	-	-	1,2	1
SOMT 080308 PZER H	○	●	●	○	●	○	○	-	-	0,8	1
SOMT 080312 PZER H	○	○	●	○	○	○	○	-	-	1,2	1
SOET 080304 PZER G	○	○	○	○	○	○	○	-	-	0,4	1
SOET 080308 PZER G	○	○	○	○	○	○	○	-	-	0,8	1
SOET 080312 PZER G	○	○	○	○	○	○	○	-	-	1,2	1
SOET 080302 PZFR S	-	-	-	-	-	-	-	●	●	0,2	1
SOET 080304 PZFR S	-	-	-	-	-	-	-	●	●	0,4	1
SOET 080308 PZFR S	-	-	-	-	-	-	-	●	●	0,8	1
SOMT 120408 PDER L	●	●	●	○	○	○	○	-	-	0,8	2
SOMT 120404 PDER G	○	○	○	○	○	○	○	-	-	0,4	2
SOMT 120408 PDER G	○	○	○	○	○	○	○	-	-	0,8	2
SOMT 120412 PDER G	○	○	○	○	○	○	○	-	-	1,2	2
SOMT 120416 PDER G	○	○	○	○	○	○	○	-	-	1,6	2
SOMT 120408 PDER H	○	○	○	○	○	○	○	-	-	0,8	2
SOET 120408 PDFR S	-	-	-	-	-	-	-	●	●	0,8	2

Fig. 1





Fig. 2



Spare Parts

Applicable Cutter	Screw	Insert Wrench
	WFXH08000M	BFTX0306IP 2,0
WFXH12000M	BFTX03512IP 3,0	TRDR15IP

Recommended Cutting Conditions

ISO	Work Material	Grade	Cutting Speed (vc (m/min))	Insert Cat. No.	Ø 25		Ø 32		Ø 40	
					ap (mm)	ft (mm/t)	ap (mm)	ft (mm/t)	ap (mm)	ft (mm/t)
P	General Steel <200HB	ACP200	100-150-200	SOMT08	0,8	0,8	0,8	0,8	-	-
				SOMT12	-	-	-	-	1,0	1,0
P	Alloy Steel <HRC45	ACP200	80-130-180	SOMT08	0,7	0,8	0,7	0,8	-	-
				SOMT12	-	-	-	-	0,8	1,0
M	Stainless Steel (X5CrNiS18 10, other)	ACM300	80-120-150	SOMT08	0,8	0,7	0,8	0,7	-	-
				SOMT12	-	-	-	-	1,0	0,8
K	Cast Iron FC, FCD	ACK300	100-150-200	SOMT08	0,8	1,0	0,8	1,0	-	-
				SOMT12	-	-	-	-	1,0	1,2
H	Hardened Steel <HRC50	ACK300	40-80-100	SOMT08	0,5	0,5	0,5	0,5	-	-
				SOMT12	-	-	-	-	0,6	0,8

The above recommended cutting conditions may require adjustment according to machine rigidity and work rigidity. The above figures are guidelines for use with the BT50 machine tool.

The above conditions assume a tool overhang length of L/D = 3 (i.e. overhang length is 3 times tool diameter) or less.

When tool overhang is more than L/D = 3 and less or equal L/D = 5, settings should be adjusted to approximately 70 % to 80 % of those indicated in the above cutting conditions (i.e. ap and ft).

When tool overhang is more than L/D = 5 and less or equal L/D = 8, settings should be adjusted to approximately 50 % to 60 % of those indicated in the above cutting conditions (i.e. ap and ft).

Sumi Dual Mill DFC Type

General Features




The Sumi Dual Mill DFC type employs cost effective double-sided inserts for high toughness and enhanced accuracy.
The double-side inserts are flexible and reduces costs.

Large Line-up

- Diameter from Ø 25 mm to Ø 200 mm
- Available as standard, fine and extra-fine pitch
- Bore diameter: metric
- Insert geometry: L, G, H



Cutter Body


Type		Cat. No.	Diameter (mm)	No. of Teeth	Image
Shank 	Standard Pitch	DFC 09000 E	Ø 25 – Ø 80	2–5	
	Fine Pitch	DFCM 09000 E	Ø 32 – Ø 80	3–7	
Shell	Standard Pitch	DFC 09000 RS	Ø 50 – Ø 200	4–8	
	Fine Pitch	DFCM 09000 RS	Ø 50 – Ø 200	5–12	
	Extra-Fine Pitch	DFCF 09000 RS	Ø 50 – Ø 200	6–16	







New Insert Design Provides Excellent Machining Accuracy

Inserts


Cat. No.	RE0,4	RE0,8	RE1,2	RE1,6
XNMMU0606__PNER-L	●	●	●	●
XNMMU0606__PNER-G	●	●	●	●
XNMMU0606__PNER-H	●	●	●	●

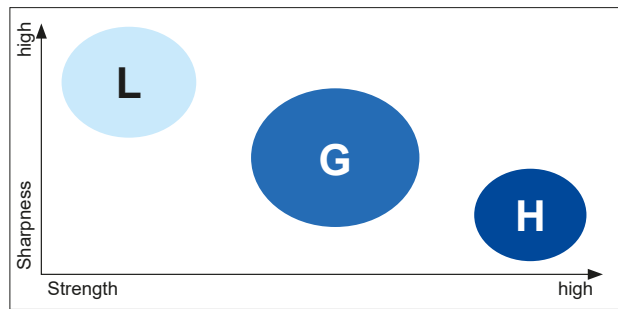Chipbreaker Selection Map



Work Material	Steel, Cast Iron		
	L type	G type	H type
Chipbreaker			
Feature	Low cutting force	General purpose	Strong edge
Cutting edge geometry			
Application	Light cut, low rigidity milling and reduced burrs	Main breaker for general purpose applications	Roughing, heavy interrupted and hardness steel milling

Stable and High Cutting Performance Combined with High Toughness

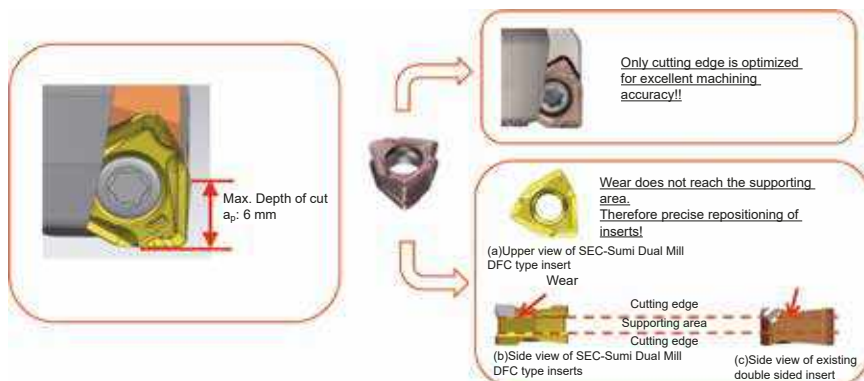


Sumi Dual Mill DFC(M) 09000 E Type

Body – Shank Type



Rake Angle	Radial	-9°
	Axial	-5°

Max. a_p: 6 mm

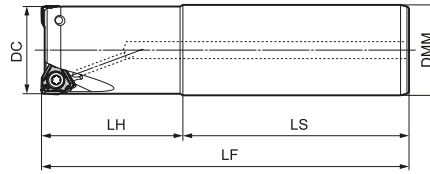

Body – Dimensions

DFC type, Standard Pitch

Cat. No.	Stock	Dimensions (mm)					No. of Teeth
		DC	DMM	LH	LS	LF	
DFC 09025E	●	25	25	40	80	120	2
DFC 09032E	●	32	32	50	80	130	2
09040E	●	40	32	50	80	130	3
09050E	●	50	32	50	80	130	3
DFC 09050E-42		50	42	50	100	150	3
DFC 09063E	□	63	32	50	80	130	4
DFC 09063E-42		63	42	50	100	150	4
DFC 09080E	□	80	32	50	80	130	5
DFC 09080E-42		80	42	50	100	150	5

DFCM type, Medium Pitch


Cat. No.	Stock	Dimensions (mm)					No. of Teeth
		DC	DMM	LH	LS	LF	
DFCM 09032E	●	32	32	50	80	130	3
09040E	●	40	32	50	80	130	4
09050E	●	50	32	50	80	130	5
DFCM 09050E-42		50	42	50	100	150	5
DFCM 09063E	□	63	32	50	80	130	6
DFCM 09063E-42		63	42	50	100	150	6
DFCM 09080E	□	80	32	50	80	130	7
DFCM 09080E-42		80	42	50	100	150	7

Identification Details

DFC	M	09	050	E
Cutter Series	M: Medium	Insert Size	Cutter Diameter	Shank Type

Inserts

Application	Coated Carbide						Radius	
	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200		
High Speed / Light Cutting	●	●	●	●	●	●	RE	
General Purpose Cutting	●	●	●	●	●	●	RE	
Rough Cutting	●	●	●	●	●	●	RE	
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	Radius
XNMU 060604 PNER-L	●	●	●	●	●	●	●	0,4
060608 PNER-L	●	●	●	●	●	●	●	0,8
XNMU 060604 PNER-G	●	●	●	●	●	●	●	0,4
060608 PNER-G	●	●	●	●	●	●	●	0,8
060612 PNER-G	●	●	●	●	●	●	●	1,2
060616 PNER-G	●	●	●	●	●	●	●	1,6
XNMU 060608 PNER-H	●	●	●	●	●	●	●	0,8
060612 PNER-H	●	●	●	●	●	●	●	1,2
060616 PNER-H	●	●	●	●	●	●	●	1,6




Spare Parts

Screw	Wrench
BFTX03512IP	TRDR15IP 5,0 mm

Recommended Cutting Conditions

ISO	Work-material	Hardness (HB)	Cutting Speed (m/min) Min. - Optimum - Max.	Feed Rate Min. - Optimum - Max.	Depth of Cut (mm)	Grade
P	General Steel	180-280	150-200-250	0,10-0,20-0,30	< 6	ACP200 ACP300
	Soft Steel	≤ 180	180-250-350	0,15-0,25-0,35	< 6	ACP200 ACP300
	Die Steel	200-220	100-150-200	0,10-0,18-0,25	< 4	ACP200 ACP300
M	Stainless Steel	-	160-205-250	0,12-0,18-0,25	< 6	ACM200 ACM300
K	Cast Iron	250	100-175-250	0,10-0,20-0,30	< 6	ACK200 ACK300


Suitable Applications

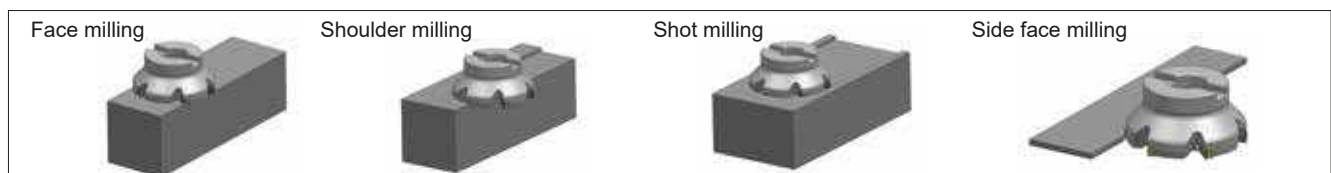


"Sumi Wave" Shoulder Mill WFX (M) 08000 E Type

"Sumi Wave" Shoulder Mill WFX 08000 M Type

Body - Shank Type

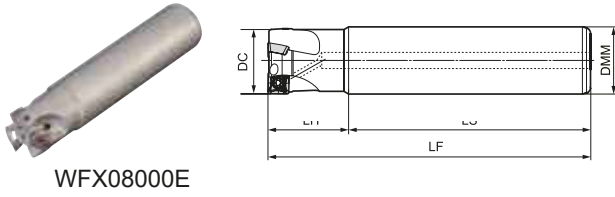

Modular Type

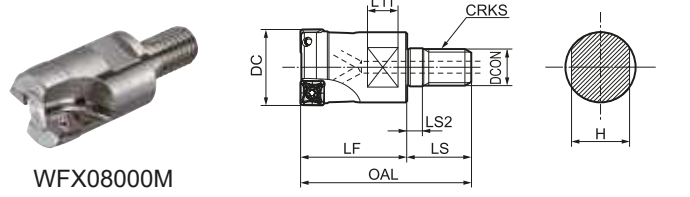

Body - WFX_E, Standard Pitch

Cat. No.	Stock	Dimensions (mm)					No. of Teeth
		DC	DMM	LH	LS	LF	
WFX 08020 E-16	●	20	16	30	80	110	2
WFX 08020 E	●	20	20	30	80	110	2
08022 E	●	22	20	30	90	120	2
WFX 08025 E-20	●	25	20	30	90	120	2
WFX 08025 E	●	25	25	30	90	120	2
08028 E	●	28	25	30	90	120	2
08030 E	●	30	25	30	90	120	3
WFX 08032 E	●	32	32	30	90	120	3
08033 E	●	33	32	30	90	120	3
08040 E	●	40	32	30	90	120	3
08050 E	●	50	32	30	90	120	4
08063 E	●	63	32	30	90	120	5

Inserts are not included.

Body - WFXM_E, Medium Pitch

Cat. No.	Stock	Dimensions (mm)					No. of Teeth
		DC	DMM	LH	LS	LF	
WFXM 08025 E	●	25	25	30	90	120	3
WFXM 08032 E	●	32	32	30	90	120	4
08040 E	●	40	32	30	90	120	4
08050 E	●	50	32	30	90	120	5
08063 E	●	63	32	30	90	120	6

Inserts are not included.

Identification Details

WFX	M	08	025	E
Cutter Series	M: Medium	Insert Size	Cutter Diameter	Endmill Type

Recommended Cutting Conditions

ISO	Work Material	Hardness (HB)	Cutting Speed	Feed Rate	DOC	Grades
P	General Steel	180-280	150-200-250	0,08-0,12-0,18	<6	ACP200 ACP300
	Soft Steel	≤180	180-250-350	0,10-0,15-0,20	<6	ACP200 ACP300
M	Die Steel	200-220	100-150-200	0,08-0,12-0,18	<4	ACP200 ACP300
	Stainless Steel	-	160-200-250	0,10-0,15-0,20	<6	ACM300
K	Cast Iron	250	100-175-250	0,10-0,15-0,20	<6	ACK200 ACK300
	Non Ferrous Metal	-	300-500-1000	0,10-0,15-0,20	<6	H1 DL1000

Min. - Optimum - Max.

Head


Cat. No.	Stock	Dimensions (mm)										No. of Teeth
		DC	DCON	CRKS	OAL	LF	LS2	LS	L11	H		
WFX 08020 M10Z2	●	20	10,5	M10	49	30	5	19	8	15	2	
08022 M10Z2	●	22	10,5	M10	49	30	5	19	8	15	2	
WFX 08025 M12Z2	●	25	12,5	M12	56	35	5	21	10	19	2	
08028 M10Z2	●	28	12,5	M12	56	35	5	21	10	19	2	
WFX 08030 M16Z3	●	30	17,0	M16	63	40	5	23	10	24	3	
08032 M16Z3	●	32	17,0	M16	63	40	5	23	10	24	3	
08040 M16Z3	●	40	17,0	M16	63	40	5	23	10	24	3	

Identification Details

WFX	08	020	M10	Z2
Cutter Series	Insert Size	Cutter Diameter	Screw Size	No. of Teeth



Inserts

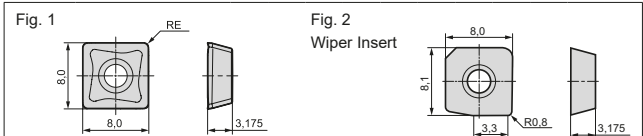

Application	Coated Carbide						Carbide	DLC			
	P	P/M	P/M	K	M/S	M/S					
High Speed / Light cut	P			K	M/S		K/N	N			
General Purpose		P/M	P/M	K	M/S	M/S		N			
Roughing		P/M	P/M	K	M/S	M/S					
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Radius RE	Fig.
SOMT 080304 PZER L	○	○	○	○	○	○	○	-	-	0,4	1
080308 PZER L	○	○	○	○	○	○	○	-	-	0,8	1
SOMT 080304 PZER G	○	●	●	●	○	○	○	-	-	0,4	1
080308 PZER G	○	●	●	●	○	○	○	-	-	0,8	1
080312 PZER G	○	●	●	○	○	○	○	-	-	1,2	1
SOMT 080308 PZER H	○	●	●	○	○	○	○	-	-	0,8	1
080312 PZER H	○	○	○	○	○	○	○	-	-	1,2	1
SOET 080304 PZER G	○	○	○	○	●	○	○	-	-	0,4	1
080308 PZER G	○	○	○	○	○	○	○	-	-	0,8	1
080312 PZER G	○	○	○	○	○	○	○	-	-	1,2	1
SOET 080302 PZFR S	-	-	-	-	-	-	-	●	●	0,2	1
080304 PZFR S	-	-	-	-	-	-	-	●	●	0,4	1
080308 PZFR S	-	-	-	-	-	-	-	●	●	0,8	1
XOEW 080308 PZTR W	-	-	-	-	○	-	-	-	-	-	2


Spare Parts

Screw	Wrench
BFTX0306IP	2,0 TRDR08IP

Indexable Endmills

Body - Shank Type

Rake Angle	Radial	-8°	10mm	90°
	Axial	8°		

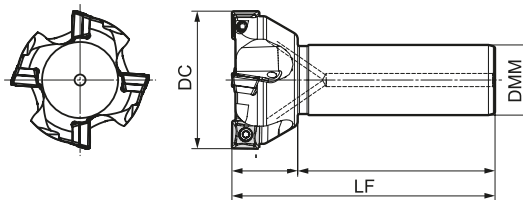

Body - WFX_E, Standard Pitch

Cat. No.	Stock	Dimensions (mm)					No. of Teeth
		DC	DMM	LH	LS	LF	
WFX 12040 E	●	40	32	30	90	120	3
12050 E	●	50	32	30	90	120	3
12063 E	●	63	32	30	90	120	4
12080 E	●	80	32	30	90	120	4

Inserts are not included.

Body - WFXF_E, Fine Pitch

Cat. No.	Stock	Dimensions (mm)					No. of Teeth
		DC	DMM	LH	LS	LF	
WFXF 12050 E	●	50	32	30	90	120	4
12063 E	●	63	32	30	90	120	5
12080 E	●	80	32	30	90	120	6

Inserts are not included.

Identification Details

WFX	F	12	050	E
Cutter Series	F: Fine	Insert Size	Cutter Diameter	Endmill Type

Recommended Cutting Conditions

ISO	Work Material	Hardness (HB)	Cutting Speed	Feed Rate	DOC	Grades
P	General Steel	180-280	150-200-250	0,10-0,15-0,20	<10	ACP200 ACP300
	Soft Steel	≤180	180-250-350	0,10-0,15-0,20	<10	ACP200 ACP300
	Die Steel	200-220	100-150-200	0,10-0,15-0,20	<6	ACP200 ACP300
M	Stainless Steel	-	160-200-250	0,10-0,15-0,20	<10	ACM300
K	Cast Iron	250	100-175-250	0,10-0,15-0,20	<10	ACK200 ACK300
N	Non Ferrous Metal	-	300-500-1000	0,10-0,15-0,20	<10	H1 DL1000

Min. - Optimum - Max.

Inserts

Fig. 1

Fig. 2
Wiper Insert

Application	Coated Carbide						Carbide	DLC	Radius	Fig.
High Speed / Light cut	P			K		M S		K N	N	
General Purpose		P M	P M	K		M S	M S		N	
Roughing		P M	P M	K		M S	M S			
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	
SOMT 120408 PDER L	●	●	●	○	○	○	●	-	-	0,8 1
SOMT 120404 PDER G	○	○	●	○	●	○	●	-	-	0,4 1
120408 PDER G	○	○	●	○	●	○	●	-	-	0,8 1
120412 PDER G	○	○	○	○	○	○	●	-	-	1,2 1
120416 PDER G	○	○	○	○	○	○	○	-	-	1,6 1
SOMT 120408 PDER H	○	●	○	●	●	○	○	-	-	0,8 1
SOET 120408 PDFR S	-	-	-	-	-	-	-	●	●	0,8 1
XOEW 120408 PDTR W	-	-	-	-	○	-	-	-	-	- 2

Spare Parts

Shim	Shim Screw	Insert Screw	Insert Wrench	Seat Wrench
WFXS4R	BW0507F	BFTX03512IP	3,0	TRDR15IP
				LH035



"Sumi Dual Mill" Series TSX Type





General Features

High-efficient and high precision tangential shoulder milling cutter with tangentially mounted carbide inserts.

Characteristics

- Tough & Sharp cutting edge
- Very accurate and excellent surface finish
- Wide product range


Product Range

Type		Cat. No.	Diameter Range	No. of Teeth	Shape
Shank Type	Standard Pitch	TSX 08000 E	Ø16 – Ø40	2–4	
	Fine Pitch	TSXF 08000 E	Ø20 – Ø40	3–6	
	Standard Pitch	TSX 13000 E	Ø25 – Ø50	2–4	
	Medium Pitch	TSXM 13000 E	Ø32 – Ø50	3–6	
Shell Type	Standard Pitch	TSX 08000 RS	Ø40 – Ø63	4–6	
	Fine Pitch	TSXF 08000 RS	Ø40 – Ø63	6–10	
	Standard Pitch	TSX 13000 RS	Ø40 – Ø160	2–4	
	Medium Pitch	TSXM 13000 RS	Ø40 – Ø160	3–6	






Inserts

Cat. No.	RE0,4	RE0,8	RE1,2	RE1,6	RE2,4	RE3,2
LNEX0804_PNER-L	●	●				
LNEX0804_PNER-G	●	●	●	●		
LNEX1306_PNER-L	●	●				
LNEX1306_PNER-G	●	●		●	●	●
LNEX1306_PNER-H	●	●		●	●	●

Chipbreaker Selection

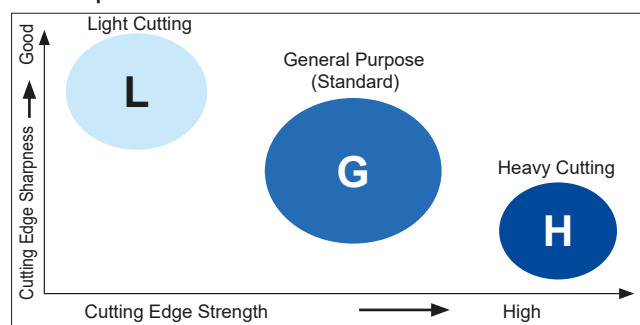

Chipbreaker Lineup

Work Material	P M K S		
Chipbreaker	L type	G type	H type
Feature	Low cutting force	General purpose	Strong edge
LNEX08 Cutting edge geometry			—
LNEX13 Cutting edge geometry			
Application	Light cut, low rigidity milling and reduced burrs	Main breaker for general purpose applications	Roughing, heavy interrupted and hardness steel milling

Recommended Cutting Conditions

ISO	Work Material	Hardness (HB)	Cutting Speed v_c (m/min)	Feed Rate f_t (mm/t)	Grade
P	Carbon Steel	180–280	150– 225 –300	0,08– 0,20 –0,30	ACP100, ACP200, ACP300
	Alloy Steel	> 280	75– 150 –230	0,08– 0,20 –0,30	
M	Stainless Steel	220–280	90– 135 –180	0,08– 0,15 –0,25	
		> 280	75– 125 –170	0,08– 0,15 –0,25	
K	Cast Iron, Ductile Cast Iron	250	100– 175 –250	0,08– 0,20 –0,30	ACK200, ACK300
S	Exotic Material	-	30– 60 –90	0,05– 0,10 –0,15	ACM200, ACM300

Min. - Optimum - Max.

● = Euro stock


 Recommended Tightening Torque (N·m)

"Sumi Dual Mill" Series TSX(F) 08000 E Type

"Sumi Dual Mill" Series TSX(M) 13000 E Type

Shank Type

Rake Angle	Radial	-20°	8 mm	90°
	Axial	-6°		

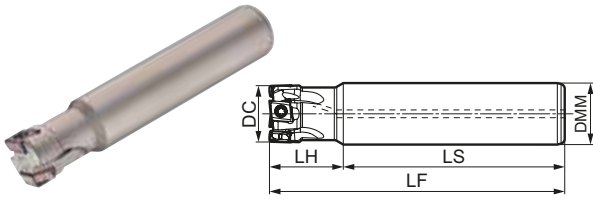


Body - TSX, Standard Pitch

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
TSX 08016 E	●	16	16	25	75	100	2	0,13
08020 E	●	20	20	30	80	110	2	0,22
08025 E	●	25	25	30	90	120	3	0,40
08032 E	●	32	32	30	90	120	3	0,67
08040 E	●	40	32	30	90	120	4	0,72

Inserts are not included.

Shank Type

Rake Angle	Radial	-15°	12 mm	90°
	Axial	-6°		

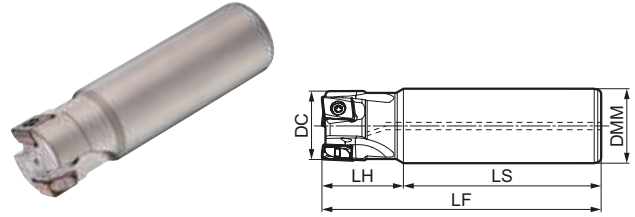

Body - TSX, Standard Pitch

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
TSX 13025 E	●	25	25	35	85	120	2	0,38
13032 E	●	32	32	35	85	120	2	0,66
13040 E	●	40	32	30	90	120	3	0,71
13050 E	●	50	32	30	90	120	4	0,81

Inserts are not included.

Body - TSXF, Fine Pitch

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
TSXF 08020 E	●	20	20	30	80	110	3	0,22
08025 E	●	25	25	30	90	120	4	0,40
08032 E	●	32	32	30	90	120	5	0,67
08040 E	●	40	32	30	90	120	6	0,73

Inserts are not included.

Body - TSXM, Medium Pitch

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
TSXM 13032 E	●	32	32	35	85	120	3	0,65
13040 E	●	40	32	30	90	120	4	0,71
13050 E	●	50	32	30	90	120	5	0,80

Inserts are not included.

Spare Parts

Insert Screw	Insert Wrench	Applicable Cutters	
BFTX0306IP	2,0	TRDR08IP	TSX08016E, TSX08020E, TSXF08020E
BFTX0308IP			TSX08025E - 40E, TSXF08025E - 40E
BFTX03510IP	3,0	TRDR15IP	TSX13000E, TSXM13000E

Identification Details

TSX	F	08	032	E
Cutter Series	F: Fine Pitch M: Medium Pitch	Insert Size	Cutter Diameter	Endmill Type

Inserts

Application	Grade	Coated Carbide						Radius	
		P	M	K	S	M	S		
Application	High Speed / Light Cutting	●	●	●	●	●	●	LNEX 08000 type	
	General Purpose Cutting	●	●	●	●	●	●		
	Rough Cutting	●	●	●	●	●	●		
Applicable Cutters	Inserts Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	RE
TSX(F) 08000E	LNEX 080404 PNER-L	●	●	●	●	●	●	●	0,4
	080408 PNER-L	●	●	●	●	●	●	●	0,8
	LNEX 080404 PNER-G	●	●	●	●	●	●	●	0,4
	080408 PNER-G	●	●	●	●	●	●	●	0,8
	080412 PNER-G	●	●	●	●	●	●	●	1,2
	080416 PNER-G	●	●	●	●	●	●	●	1,6
TSX(M) 13000E	LNEX 130604 PNER-L	●	●	●	●	●	●	●	0,4
	130608 PNER-L	●	●	●	●	●	●	●	0,8
	LNEX 130604 PNER-G	●	●	●	●	●	●	●	0,4
	130608 PNER-G	●	●	●	●	●	●	●	0,8
	130616 PNER-G	●	●	●	●	●	●	●	1,6
	130624 PNER-G	●	●	●	●	●	●	●	2,4
	130632 PNER-G	●	●	●	●	●	●	●	3,2
	LNEX 130608 PNER-H	●	●	●	●	●	●	●	0,8
	130616 PNER-H	●	●	●	●	●	●	●	1,6
	130624 PNER-H	●	●	●	●	●	●	●	2,4
130632 PNER-H	●	●	●	●	●	●	●	3,2	

LNEX 08000 type

LNEX 13000 type

Recommended Cutting Conditions

H18

"Wave Mill" Series WEZ Type

New



General Features

- Supports various machining operations
- Excellent machining quality
- Excellent sharpness with low resistance
- General-purpose grade applicable to any work material

Product Range

Type	Cat. No.	Diameter Range (mm) / No of Teeth																
		Ø14	Ø16	Ø18	Ø20	Ø22	Ø25	Ø28	Ø30	Ø32	Ø35	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125	Ø160
Shell	WEZ 11000RS											4, 6	5, 7	6, 8	7, 10	9, 12		
	WEZ 11000R (Inch)														7, 10	9, 12		
	WEZ 17000RS											3, 4	3, 5	4, 6	4, 7	5, 8	6, 9, 11	8, 10, 12
	WEZ 17000R (Inch)														4, 7	5, 8	6, 9, 11	8, 10, 12
Shank	WEZ 11000E	1	2*	2	2*, 3*	3	2, 3*, 4*	4	4	2, 3, 4, 5*	5	2, 4, 6	5, 7	8	10			
	WEZ 11000EL	1	2*	2	2*	2	2*, 3	2	2	2*, 3	2, 3	2	3					
	WEZ 17000E						2*	2	3	2, 3*	3	3, 4	3*, 5*	4*, 6*	7			
	WEZ 17000EL						2	2	2	2*, 3	2	2, 3, 4	3*, 5*	4*, 6*				


* Different shank diameters in stock

Suitable Applications

- Supports Ramping, Helical Milling, Plunge Cutting

Optimised Body Design


Wide guide face for stable insert clamping.

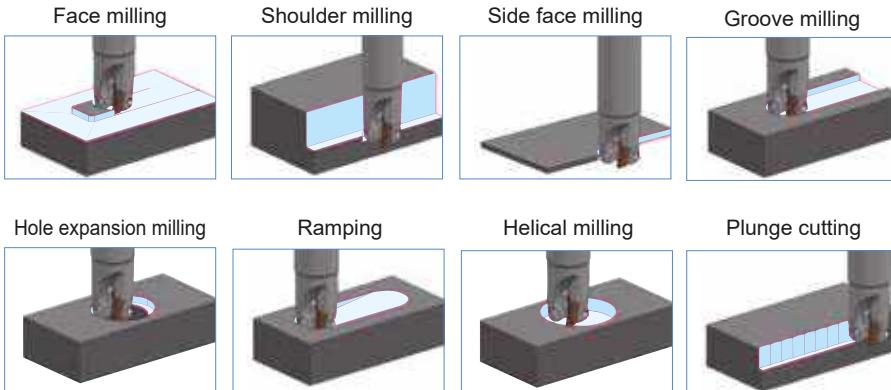

WEZ11 type

Chipbreaker Lineup

Work Material	P M K S H					N
	L Type	G Type	H Type	F Type	P Type	S Type
Chipbreaker						
AO_T11 Cutting edge geometry						
AO_T17 Cutting edge geometry						
Applications	Light cut, low rigidity machining	Main breaker for general purpose to interrupted machining	Heavy cut, heavy interrupted machining, hardened steel	Light cut, finishing, low-burr design	Light cut, high-precision machining, high surface wall quality	For non-ferrous metals

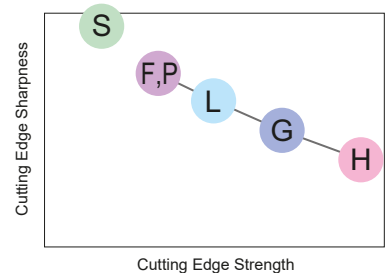


Product Range Inserts

Cat. No.	Nose Radius (mm)											
	R0,2	R0,4	R0,8	R1,2	R1,6	R2,0	R2,4	R3,0	R3,2	R4,0	R5,0	R6,4
AOMT 11T3 PEER-G	●	●	●	●	●	●	●	●	●			
AOMT 11T3 PEER-H		●	●	●	●	●						
AOET 11T3 PEER-F	○	●	●	○								
AOET 11T3 PEER-P16	○	○	○	○								
AOET 11T3 PEER-P20	○	○	○	○								
AOET 11T3 PEER-P25	○	○	○	○								
AOET 11T3 PEFR-S	○	●	●	○								
AOMT 1705 PEER-L	●	●	●	●	●	●	●	●	●	●	●	●
AOMT 1705 PEER-G	●	●	●	●	●	●	●	●	●	●	●	●
AOMT 1705 PEER-H		●	●	○	●							
AOET 1705 PEER-F	○	●	●	○								
AOET 1705 PEER-P25	○	○	○	○								
AOET 1705 PEER-P32	○	○	○	○								
AOET 1705 PEFR-S	○	●	●	○								

Lineup of Chipbreakers for Ground Inserts




F Type

Cutting edge specialized for sharpness and machining accuracy



Sharpness from ground finish enables burr control.


Excellent squareness with all diameters.

Machine: Vertical Machining Centre BT50,
 Work Material: X5CrNiS18 9
 Tool: WEZ 11050 RS07 (Ø 50, 7 teeth)
 Insert: AOET11T308PEER-F (ACU2500)
 Cutting Conditions: $v_c = 120$ m/min, $f_z = 0,12$ mm/t, $a_p = 1$ mm, $a_e = 30$ mm, dry


P Type

Chipbreaker for wall surface squareness equivalent to solid endmills



Premium item with cutting edge shape optimised for each cutter diameter while maintaining the F type chipbreaker's sharpness.

Enables wall surface squareness equal to solid endmills through a blade shape optimised for each tool diameter.

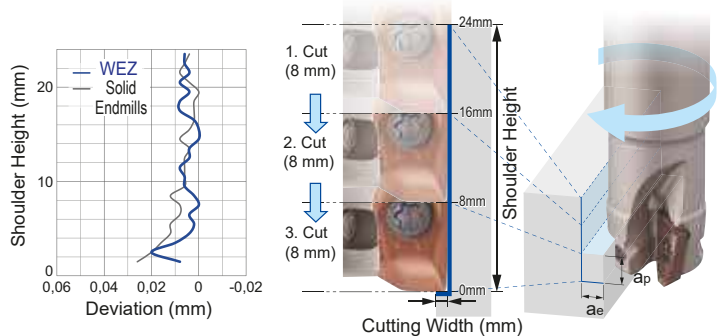


P Type Chipbreaker Selection

Cat. No.	Cutter Diameter (mm)										
	Ø14	Ø16	Ø18	Ø20	Ø22	Ø25	Ø28	Ø30	Ø32	Ø35	⇒ Ø40
AOET11T3 PEER-P_	-P16	-P20	-	-P25	-	-	-	-	-	-	-
AOET1705 PEER-P_	-	-	-	-P25	-	-P32	-	-	-	-	-

Machine: Vertical Machining Centre BT50,
 Work Material: C50
 Tool: WEZ 11020 E03 (Ø 20, 3 teeth)
 Insert: AOET11T308PEER-P20 (ACU2500)
 Cutting Conditions: $v_c = 150$ m/min, $f_z = 0,1$ mm/t, $a_p = 8$ mm x 3 passes, $a_e = 1$ mm, dry

S Type

Sharp edge chipbreaker for non-ferrous metals, with excellent adhesion resistance



Suppresses adhesion with rake face lapping.

DLC coat inserts available for further improved adhesion resistance.

WEZ



No Adhesion

Competitor A



Adhesion

Competitor B



Adhesion

Machine: Vertical Machining Centre BT50,
 Work Material: AISi12Cu
 Tool: WEZ 11020 E03 (Ø 20, 3 teeth)
 Insert: AOET11T308PEER-S (H20)
 Cutting Conditions: $v_c = 350$ m/min, $f_z = 0,1$ mm/t, $a_p = 3$ mm, $a_e = 10$ mm, dry

"Wave Mill" Series


WEZ Type

Recommended Cutting Conditions

WEZ11 Type

Cutter: WEZ 11020 E03
 Insert: AO_T11T3 type
 Cutting Data: $a_p = 3 \text{ mm}$, $a_e = 10 \text{ mm}$, dry

Min. - Optimum - Max.



ISO	Material	HB	Chipbreaker	Grade								
				ACU2500	ACP2000	ACP3000	T2500A	ACK2000	ACK3000	ACM200	ACM300	DL2000
				Feed Rate (mm/tooth)								
				0,08-0,15-0,20	0,08-0,15-0,20	0,08-0,15-0,20	0,08-0,15-0,18	0,08-0,15-0,20	0,08-0,15-0,20	0,08-0,15-0,20	0,08-0,15-0,20	0,05-0,10-0,15
				Cutting Speed v_c (m/min)								
P	Unalloyed steel, <0, 15%C, annealed	125	G	270-320-370	300-350-400	250-300-350	230-280-330					
	" , <0, 45%C, annealed	190	G	170-220-270	200-250-300	150-200-250	130-180-230					
	" , <0, 45%C, tempered	250	G	140-180-220	160-200-245	120-160-200	105-145-185					
	" , <0, 75%C, annealed	270	G	110-145-175	130-165-195	100-130-165	85-115-150					
	" , <0, 75%C, tempered	300	G	70-90-110	80-100-120	60-80-100	50-70-90					
	Low alloyed steel, annealed	180	G	160-205-255	190-235-280	140-190-235	120-170-215					
	" , tempered	275	G	90-120-150	110-135-165	80-110-140	70-100-125					
	" , tempered	300	G	85-110-130	100-125-150	75-100-125	65-90-115					
" , tempered	350	G	60-80-100	70-90-110	50-70-90	45-65-85						
High alloyed and tool steel, annealed		200	G	140-180-220	160-200-245	120-160-205						
	" , tempered	325	G	55-70-85	60-80-100	50-65-80						
M	Stainless steel, ferritic/martensitic, annealed	200	G	110-140-170					140-170-190	90-110-140		
	" , martensitic, tempered	240	G	100-125-150					125-150-170	80-100-125		
	" , austenitic, plunged	180	G	120-150-180					150-180-200	100-120-150		
K	Grey cast iron		G	150-200-250			250-300-350	170-220-270				
	Nodular cast iron		G	90-120-150			150-180-210	100-130-160				
S	High tempered resist. alloys, Fe based, annealed		G	30-40-55					35-45-60	25-35-50		
	" , hardened		G	60-80-100					70-90-110	50-70-90		
N	Aluminium alloy, Si < 12,6%		S									500-750-1000
	" , Si > 12,6%		S									170-200-250
	Copper alloy		S									300-330-350


The above recommended cutting conditions are meant as a guide. Actual conditions will depend on the individual machine, work shape and clamping. They will need to be adjusted according to machine rigidity, work clamp rigidity, cutting depth and other factors.

For groove milling, reduce the feed rate approximately 70 % of the corresponding value shown above.

WEZ17 Type

Cutter: WEZ 17032 E03
 Insert: AO_T1705 type
 Cutting Data: $a_p = 5 \text{ mm}$, $a_e = 16 \text{ mm}$, dry

Min. - Optimum - Max.




ISO	Material	HB	Chipbreaker	Grade								
				ACU2500	ACP2000	ACP3000	T2500A	ACK2000	ACK3000	ACM200	ACM300	DL2000
				Feed Rate (mm/tooth)								
				0,10-0,20-0,28	0,10-0,20-0,28	0,10-0,20-0,28	0,10-0,15-0,22	0,10-0,20-0,28	0,10-0,20-0,28	0,10-0,20-0,28	0,05-0,10-0,15	
				Cutting Speed v_c (m/min)								
P	Unalloyed steel, <0, 15%C, annealed	125	G	285-335-390	315-360-420	265-315-370	240-295-345					
	" , <0, 45%C, annealed	190	G	180-230-285	210-265-315	160-210-265	135-190-240					
	" , <0, 45%C, tempered	250	G	145-190-230	170-210-255	130-170-215	110-155-195					
	" , <0, 75%C, annealed	270	G	115-150-185	135-170-205	100-135-170	90-125-155					
	" , <0, 75%C, tempered	300	G	70-90-115	85-105-125	65-85-105	55-75-95					
	Low alloyed steel, annealed	180	G	170-220-265	200-245-295	150-200-250	130-180-225					
	" , tempered	275	G	100-130-155	115-145-175	85-115-145	75-105-135					
	" , tempered	300	G	90-115-140	105-130-155	75-105-130	65-90-120					
" , tempered	350	G	65-85-100	75-95-115	55-75-95	50-70-85						
High alloyed and tool steel, annealed		200	G	145-185-230	170-215-255	130-170-215						
	" , tempered	325	G	55-75-90	65-85-100	50-65-85						
M	Stainless steel, ferritic/martensitic, annealed	200	G	115-145-175					145-175-195	100-115-145		
	" , martensitic, tempered	240	G	105-130-155					130-155-175	85-105-130		
	" , austenitic, plunged	180	G	125-155-190					160-190-210	105-125-160		
K	Grey cast iron		G	160-210-265			265-315-370	180-230-285				
	Nodular cast iron		G	95-125-160			160-190-220	105-140-170				
S	High tempered resist. alloys, Fe based, annealed		G	30-40-60					35-45-60	25-35-50		
	" , hardened		G	60-85-105					75-95-115	50-75-95		
N	Aluminium alloy, Si < 12,6%		S									500-750-1000
	" , Si > 12,6%		S									170-200-250
	Copper alloy		S									300-330-350

The above recommended cutting conditions are meant as a guide. Actual conditions will depend on the individual machine, work shape and clamping. They will need to be adjusted according to machine rigidity, work clamp rigidity, cutting depth and other factors.

For groove milling, reduce the feed rate approximately 70 % of the corresponding value shown above.

■ Ramping / Helical Milling Upper Limits

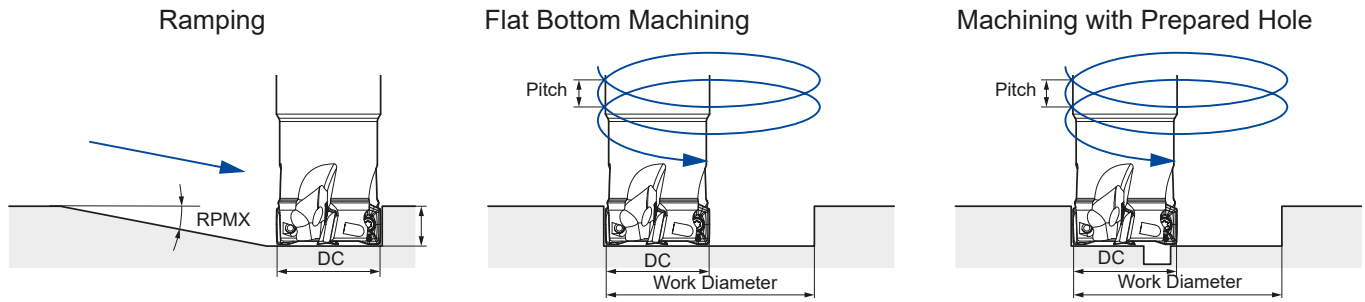

● WEZ11 Type


DC Ø (mm)	Max.Ramping Angle	Flat Bottom Machining				Machining with Prepared Hole	
	RPMX (°)	Max. Machining Diam. (mm)	Max. Pitch (mm/rev)	Min. Machining Diam. (mm)	Max. Pitch (mm/rev)	Min. Machining Diam. (mm)	Max. Pitch (mm/rev)
14	13,2	25,3	8,4	23,1	5,9	19,0	1,9
16	10,5	29,3	7,6	27,0	5,6	21,7	1,5
18	8,1	33,3	6,7	30,9	5,0	25,2	1,4
20	6,5	37,3	6,0	34,9	4,6	29,1	1,3
22	5,3	41,3	5,4	38,8	4,3	32,9	1,3
25	4,1	47,3	4,8	44,8	3,9	38,9	1,3
28	3,4	53,3	4,4	50,7	3,6	44,9	1,3
30	3,0	57,3	4,2	54,7	3,5	48,8	1,3
32	2,7	61,3	4,0	58,7	3,3	52,8	1,2
35	2,3	67,3	3,8	64,6	3,1	58,8	1,2
40	1,8	77,3	3,4	74,6	2,9	68,8	1,2
50	1,2	97,3	3,0	94,6	2,6	88,8	1,1
63	0,8	123,3	2,8	120,5	2,5	114,7	1,1

● WEZ17 Type

DC Ø (mm)	Max.Ramping Angle	Flat Bottom Machining				Machining with Prepared Hole	
	RPMX (°)	Max. Machining Diam. (mm)	Max. Pitch (mm/rev)	Min. Machining Diam. (mm)	Max. Pitch (mm/rev)	Min. Machining Diam. (mm)	Max. Pitch (mm/rev)
25	10,8	47,3	13,0	41,0	8,3	33,1	1,8
28	8,1	53,3	11,1	46,9	7,5	39,0	1,8
30	7,0	57,3	10,2	50,9	7,0	43,0	1,8
32	6,1	61,3	9,5	54,9	6,7	47,0	1,7
35	5,1	67,3	8,7	60,8	6,2	53,0	1,7
40	4,0	77,3	7,7	70,8	5,7	63,0	1,7
50	2,5	97,3	6,5	90,7	5,0	83,0	1,6
63	1,8	123,3	5,6	116,7	4,5	109,0	1,6

* The table above shows values with nose radius 0,8 mm

■ Plunge Cutting - Upper Limit for Radial Width a_e



Type	Max. a_e (mm)
WEZ11	3
WEZ17	5

"Wave Mill" Series WEZ 11000 E

New



Rake Angle	Radial	-7° - -18°	10 mm	90°
	Axial	6° - 15°		

Fig. 1


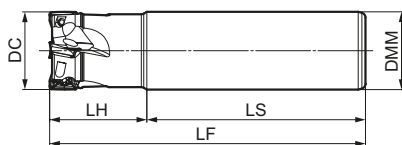


Fig. 2

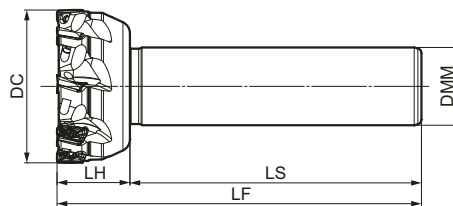

■ Body - WEZ (Shank Type)

Dimensions (mm)

Cat. No.	Stock	DC	DMM	LH	LS	LF	No. of Teeth	Weight (kg)	Fig.
WEZ 11014E01	●	14	16	25	55	80	1	0,10	1
11016E02	●	16	16	25	75	100	2	0,13	1
11016E02-12	●	16	12	25	75	100	2	0,07	2
11018E02	●	18	16	25	75	100	2	0,13	2
11020E02	●	20	20	30	80	110	2	0,23	1
11020E02-16	●	20	16	30	80	110	2	0,15	2
11020E03	●	20	20	30	80	110	3	0,22	1
11020E03-16	●	20	16	30	80	110	3	0,14	2
11022E03	●	22	20	30	80	110	3	0,23	1
11025E02	●	25	25	35	85	120	2	0,40	1
11025E03	●	25	25	35	85	120	3	0,40	1
11025E03-20	●	25	20	35	85	120	3	0,26	2
11025E04	●	25	25	35	85	120	4	0,39	2
11025E04-20	●	25	20	35	85	120	4	0,26	2
11028E04	●	28	25	35	85	120	4	0,41	1
11030E04	●	30	25	40	90	130	4	0,46	1
11032E02	●	32	32	40	90	130	2	0,74	1
11032E03	●	32	32	40	90	130	3	0,73	1
11032E04	●	32	32	40	90	130	4	0,73	2
11032E05	●	32	32	40	90	130	5	0,72	2
11032E05-25	●	32	25	40	90	130	5	0,46	2
11035E05	●	35	32	40	90	130	5	0,75	2
11040E02	●	40	32	30	120	150	2	0,96	2
11040E04	●	40	32	30	120	150	4	0,94	2
11040E06	●	40	32	30	120	150	6	0,93	2
11050E05	●	50	32	30	120	150	5	1,04	2
11050E07	●	50	32	30	120	150	7	1,04	2
11063E08	●	63	32	30	120	150	8	1,24	2
11080E10	●	80	32	30	120	150	10	1,52	2

Inserts are sold separately.

■ Spare Parts

Applicable Cutters	Insert Screw		Wrench
WEZ 11014E01 11016E02(-12) 11018E02 11020E02(-16) 11020E03(-16) 11022E03 11025E02 11025E03(-20) 11025E04(-20) 11028E04 11030E04 11032E02 11032E03 11032E04 11032E05(-25) 11035E05 11040E02 11040E04 11040E06 11050E05 11050E07 11063E08 11080E10	BFTX0305IP	2,0	 TRDR08IP
	BFTX0306IP	1,5	

■ Identification Details

WEZ 11 025 E 02 - 22


Cutter Series	Insert Size	Cutter Diameter	Round Shank	Number of Teeth	Shank Diameter
---------------	-------------	-----------------	-------------	-----------------	----------------

■ Recommended Cutting Conditions

H22

Inserts

Application	Coated Carbide							Carbide	DLC	Cermet	RE (mm)
	ACU2500	ACP2000	ACP3000	ACK2000	ACK3000	ACM200	ACM300				
High Speed / Light Cut		P		K		MS			N	N	P
General Purpose	SPK		P		K	MS	MS	N	N		
Roughing	SPK		P		K	MS	MS				
Cat. No.	ACU2500	ACP2000	ACP3000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A	RE (mm)
AOMT 11T302PEER-G	●	●	●	●	●	●	●	-	-	●	0,2
11T304PEER-G	●	●	●	●	●	●	●	-	-	●	0,4
11T308PEER-G	●	●	●	●	●	●	●	-	-	●	0,8
11T312PEER-G	●	●	●	●	●	●	●	-	-	●	1,2
11T316PEER-G	●	●	●	●	●	●	●	-	-	●	1,6
11T320PEER-G	●	●	●	●	●	●	●	-	-	●	2,0
11T324PEER-G	●	●	●	●	●	●	●	-	-	●	2,4
11T330PEER-G	●	●	●	●	●	●	●	-	-	●	3,0
11T332PEER-G	●	●	●	●	●	●	●	-	-	●	3,2
AOMT 11T304PEER-H	●	●	●	●	●	●	●	-	-	-	0,4
11T308PEER-H	●	●	●	●	●	●	●	-	-	-	0,8
11T312PEER-H	●	●	●	●	●	●	●	-	-	-	1,2
11T316PEER-H	●	●	●	●	●	●	●	-	-	-	1,6
AOET 11T302PEER-F	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-F	●	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-F	●	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-F	○	-	-	-	-	-	-	-	-	-	1,2
AOET 11T302PEER-P16	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-P16	○	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-P16	○	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-P16	○	-	-	-	-	-	-	-	-	-	1,2
11T302PEER-P20	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-P20	○	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-P20	○	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-P20	○	-	-	-	-	-	-	-	-	-	1,2
11T302PEER-P25	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-P25	○	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-P25	○	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-P25	○	-	-	-	-	-	-	-	-	-	1,2
AOET 11T302PEFR-S	-	-	-	-	-	-	-	○	○	-	0,2
11T304PEFR-S	-	-	-	-	-	-	-	●	●	-	0,4
11T308PEFR-S	-	-	-	-	-	-	-	●	●	-	0,8
11T312PEFR-S	-	-	-	-	-	-	-	○	○	-	1,2

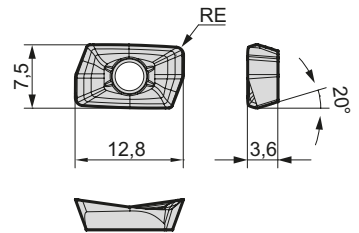


L: Low cutting force
G: General purpose
H: Strong edge
F: Finishing
P: High-precision machining
S: Non ferrous metals

*P16 is applicable to cutter diameters Ø 14 mm and Ø 16 mm.
*P20 is applicable to cutter diameters Ø 18 mm, Ø 20 mm.
*P25 is applicable to cutter diameters Ø 25 mm, Ø 28 mm.

□ = Not available

Precautions for Mounting

- (1) Clean the mounting seat and contact parts.
- (2) Apply screw lubrication to the screw thread as well as the screw head face to prevent seizure.
- (3) While pressing the insert solidly against the seat surface, tighten at the screws with the included wrench.
- (4) After tightening, check that there are no gaps between the surfaces.

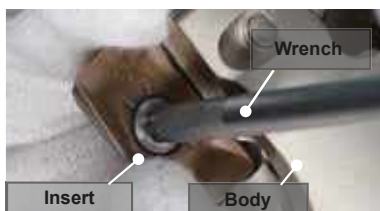

*When mounting inserts with nose radius of $\geq 3,0$ mm, modification of the body is required.



Modify this edge.

Reworking guidelines
Nose radius = 3,0 mm: C = 1 mm
(AOMT11T330PEER)
Nose radius = 3,2 mm: C = 1 mm
(AOMT11T332PEER)
Standard: R = 1 mm

C: Chamfer
R: Radius

"Wave Mill" Series WEZ 11000 EL

New

Rake Angle	Radial	-7° - -18°	10 mm	90°
	Axial	6° - 15°		



Fig. 1


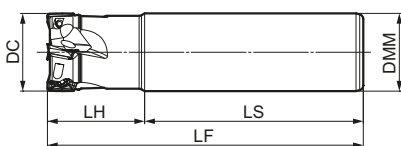


Fig. 2

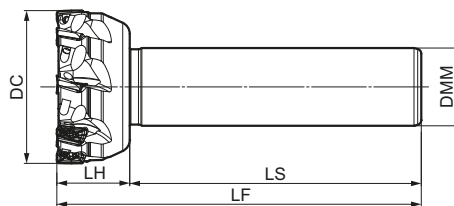

■ Body - WEZ (Long Type)

Dimensions (mm)

Cat. No.	Stock	DC	DMM	LH	LS	LF	No. of Teeth	Weight (kg)	Fig.
WEZ 11014EL01	●	14	16	25	95	120	1	0,16	1
11016EL02	●	16	16	25	120	145	2	0,19	1
11016EL02-14	●	16	14	25	120	145	2	0,15	2
11018EL02	●	18	16	25	120	145	2	0,20	2
11020EL02	●	20	20	40	110	150	2	0,31	1
11020EL02-18	●	20	18	25	125	150	2	0,26	2
11022EL02	●	22	20	30	120	150	2	0,32	2
11025EL02	●	25	25	50	120	170	2	0,57	1
11025EL02-22	●	25	22	30	140	170	2	0,46	2
11025EL03	●	25	25	50	120	170	3	0,57	1
11028EL02	●	28	25	30	140	170	2	0,60	2
11030EL02	●	30	25	30	140	170	2	0,62	2
11032EL02	●	32	32	60	110	170	2	0,97	1
11032EL02-30	●	32	30	30	140	170	2	0,88	2
11032EL03	●	32	32	60	110	170	3	0,96	1
11035EL02	●	35	32	30	140	170	2	1,02	2
11035EL03	●	35	32	30	140	170	3	1,00	2
11040EL02	●	40	32	30	140	170	2	1,08	2
11050EL03	●	50	32	30	140	170	3	1,19	2

Inserts are sold separately.

■ Spare Parts

Applicable Cutters	Insert Screw		Wrench
WEZ 11014EL01		2,0	
11016EL02(-14)	BFTX0305IP	1,5	
11018EL02			
11020EL02(-18)			
11022EL02			
11025EL02(-22)			
11025EL03			
11028EL02			
11030EL02			
11032EL02(-30)	BFTX0306IP		
11032EL03			
11035EL02			
11035EL03			
11040EL02			
11050EL03			

■ Identification Details

WEZ 11 025 E L 02 - 22


Cutter Series	Insert Size	Cutter Diameter	Round Shank	Long Type	Number of Teeth	Shank Diameter
---------------	-------------	-----------------	-------------	-----------	-----------------	----------------

■ Recommended Cutting Conditions

H22

■ Inserts

Application	Coated Carbide						Carbide	DLC	Cermet	RE (mm)	
		P		K	MS	MS					
High Speed / Light Cut		P		K	MS	MS		N	N	P	
General Purpose	SPK		P		K	MS	MS	N	N		
Roughing	SPK		P		K	MS	MS				
Cat. No.	ACU2500	ACP2000	ACP3000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A	RE (mm)
AOMT 11T302PEER-G	●	●	●	●	●	●	●	-	-	●	0,2
11T304PEER-G	●	●	●	●	●	●	●	-	-	●	0,4
11T308PEER-G	●	●	●	●	●	●	●	-	-	●	0,8
11T312PEER-G	●	●	●	●	●	●	●	-	-	●	1,2
11T316PEER-G	●	●	●	●	●	●	●	-	-	●	1,6
11T320PEER-G	●	●	●	●	●	●	●	-	-	●	2,0
11T324PEER-G	●	●	●	●	●	●	●	-	-	●	2,4
11T330PEER-G	●	●	●	●	●	●	●	-	-	●	3,0
11T332PEER-G	●	●	●	●	●	●	●	-	-	●	3,2
AOMT 11T304PEER-H	●	●	●	●	●	●	●	-	-	-	0,4
11T308PEER-H	●	●	●	●	●	●	●	-	-	-	0,8
11T312PEER-H	●	●	●	●	●	●	●	-	-	-	1,2
11T316PEER-H	●	●	●	●	●	●	●	-	-	-	1,6
AOET 11T302PEER-F	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-F	●	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-F	●	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-F	○	-	-	-	-	-	-	-	-	-	1,2
AOET 11T302PEER-P16	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-P16	○	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-P16	○	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-P16	○	-	-	-	-	-	-	-	-	-	1,2
11T302PEER-P20	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-P20	○	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-P20	○	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-P20	○	-	-	-	-	-	-	-	-	-	1,2
11T302PEER-P25	○	-	-	-	-	-	-	-	-	-	0,2
11T304PEER-P25	○	-	-	-	-	-	-	-	-	-	0,4
11T308PEER-P25	○	-	-	-	-	-	-	-	-	-	0,8
11T312PEER-P25	○	-	-	-	-	-	-	-	-	-	1,2
AOET 11T302PEFR-S	-	-	-	-	-	-	-	○	○	-	0,2
11T304PEFR-S	-	-	-	-	-	-	-	●	●	-	0,4
11T308PEFR-S	-	-	-	-	-	-	-	●	●	-	0,8
11T312PEFR-S	-	-	-	-	-	-	-	○	○	-	1,2

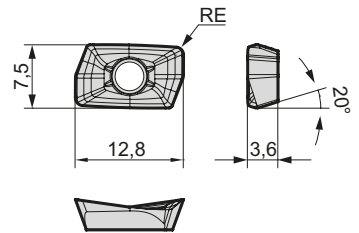


L: Low cutting force
G: General purpose
H: Strong edge
F: Finishing
P: High-precision machining
S: Non ferrous metals

*P16 is applicable to cutter diameters Ø 14 mm and Ø 16 mm.
*P20 is applicable to cutter diameters Ø 18 mm, Ø 20 mm.
*P25 is applicable to cutter diameters Ø 25 mm, Ø 28 mm.

□ = Not available

Precautions for Mounting

- (1) Clean the mounting seat and contact parts.
- (2) Apply screw lubrication to the screw thread as well as the screw head face to prevent seizure.
- (3) While pressing the insert solidly against the seat surface, tighten at the screws with the included wrench.
- (4) After tightening, check that there are no gaps between the surfaces.

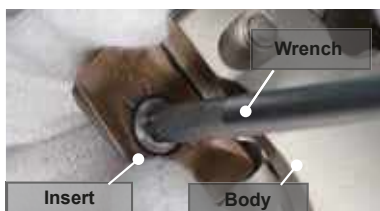

*When mounting inserts with nose radius of $\geq 3,0$ mm, modification of the body is required.



Modify this edge.

Reworking guidelines
Nose radius = 3,0 mm: C = 1 mm (AOMT11T330PEER)
Nose radius = 3,2 mm: C = 1 mm (AOMT11T332PEER)
Standard: R = 1 mm

C: Chamfer
R: Radius

"Wave Mill" Series WEZ 17000 E

New

Rake Angle	Radial	-6° - -12°	15 mm	90°
	Axial	6° - 15°		



Fig. 1


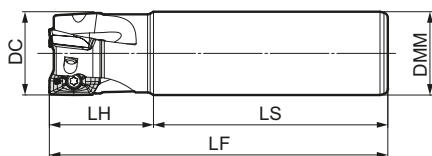


Fig. 2

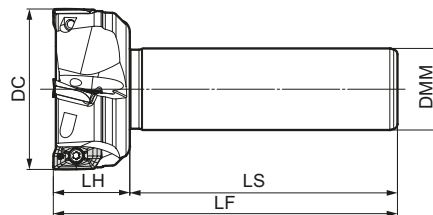

■ Body - WEZ (Shank Type)

Dimensions (mm)

Cat. No.	Stock	DC	DMM	LH	LS	LF	No. of Teeth	Weight (kg)	Fig.
WEZ 17025E02	●	25	25	35	85	120	2	0,38	1
17025E02-20	●	25	20	35	85	120	2	0,25	2
17028E02	●	28	25	35	85	120	2	0,40	2
17030E03	●	30	25	40	90	130	3	0,43	2
17032E02	●	32	32	40	90	130	2	0,71	1
17032E03	●	32	32	40	90	130	3	0,69	1
17032E03-25	●	32	25	40	90	130	3	0,44	2
17035E03	●	35	32	40	90	130	3	0,72	2
17040E03	●	40	32	30	105	135	3	0,81	2
17040E04	●	40	32	30	105	135	4	0,79	2
17050E03	●	50	32	30	105	135	3	0,93	2
17050E03-42	●	50	42	30	105	135	3	1,41	2
17050E05	●	50	32	30	105	135	5	0,89	2
17050E05-42	●	50	42	30	105	135	5	1,37	2
17063E04	●	63	32	30	105	135	4	1,10	2
17063E04-42	●	63	42	30	105	135	4	1,58	2
17063E06	●	63	32	30	105	135	6	1,08	2
17063E06-42	●	63	42	30	105	135	6	1,56	2
17080E07	●	63	32	30	105	135	7	1,39	2

Inserts are sold separately.

■ Spare Parts

Applicable Cutters	Insert Screw		Wrench
WEZ 17025E02(-20)	BFTX0407IP	3,0	TRDR15IP
17028E02			
17030E03	BFTX0409IP	3,0	TRDR15IP
17032E02			
17032E03(-25)			
17035E03			
17040E03			
17040E04			
17050E03(-42)			
17050E05(-42)			
17063E04(-42)			
17063E06(-42)			
17080E07			

■ Identification Details

WEZ 17 032 E 02 - 30


Cutter Series	Insert Size	Cutter Diameter	Round Shank	Number of Teeth	Shank Diameter
---------------	-------------	-----------------	-------------	-----------------	----------------

■ Recommended Cutting Conditions

H22

Inserts

Application	Coated Carbide							Carbide	DLC	Cermet	RE (mm)
		P		K	MS	MS	MS				
High Speed / Light Cut		P		K	MS	MS	MS		N	N	P
General Purpose	MS		P		K	MS	MS	N	N		
Roughing	MS		P		K	MS	MS				
Cat. No.	ACU2500	ACP2000	ACP3000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A	RE (mm)
AOMT 170502PEER-L	●	-	●	-	●	●	●	-	-	●	0,2
170504PEER-L	●	-	●	-	●	●	●	-	-	●	0,4
170508PEER-L	●	-	●	-	●	●	●	-	-	●	0,8
170512PEER-L	●	-	●	-	●	●	●	-	-	●	1,2
170516PEER-L	●	-	●	-	●	●	●	-	-	●	1,6
AOMT 170502PEER-G	●	●	●	●	●	●	●	-	-	●	0,2
170504PEER-G	●	●	●	●	●	●	●	-	-	●	0,4
170508PEER-G	●	●	●	●	●	●	●	-	-	●	0,8
170512PEER-G	●	●	●	●	●	●	●	-	-	●	1,2
170516PEER-G	●	●	●	●	●	●	●	-	-	●	1,6
170520PEER-G	●	●	●	●	●	●	●	-	-	●	2,0
170524PEER-G	●	●	●	●	●	●	●	-	-	●	2,4
170530PEER-G	●	●	●	●	●	●	●	-	-	●	3,0
170532PEER-G	●	●	●	●	●	●	●	-	-	●	3,2
170540PEER-G	●	●	●	●	●	●	●	-	-	●	4,0
170550PEER-G	●	●	●	●	●	●	●	-	-	●	5,0
170564PEER-G	●	●	●	●	●	●	●	-	-	●	6,4
AOMT 170504PEER-H	●	●	●	●	●	●	●	-	-	-	0,4
170508PEER-H	●	●	●	●	●	●	●	-	-	-	0,8
170512PEER-H	○	●	●	●	●	●	●	-	-	-	1,2
170516PEER-H	●	●	●	●	●	●	●	-	-	-	1,6
AOET 170502PEER-F	○	-	-	-	-	-	-	-	-	-	0,2
170504PEER-F	●	-	-	-	-	-	-	-	-	-	0,4
170508PEER-F	●	-	-	-	-	-	-	-	-	-	0,8
170512PEER-F	○	-	-	-	-	-	-	-	-	-	1,2
AOET 170502PEER-P25	○	-	-	-	-	-	-	-	-	-	0,2
170504PEER-P25	○	-	-	-	-	-	-	-	-	-	0,4
170508PEER-P25	○	-	-	-	-	-	-	-	-	-	0,8
170512PEER-P25	○	-	-	-	-	-	-	-	-	-	1,2
170502PEER-P32	○	-	-	-	-	-	-	-	-	-	0,2
170504PEER-P32	○	-	-	-	-	-	-	-	-	-	0,4
170508PEER-P32	○	-	-	-	-	-	-	-	-	-	0,8
170512PEER-P32	○	-	-	-	-	-	-	-	-	-	1,2
AOET 170502PEFR-S	-	-	-	-	-	-	-	○	○	-	0,2
170504PEFR-S	-	-	-	-	-	-	-	●	●	-	0,4
170508PEFR-S	-	-	-	-	-	-	-	●	●	-	0,8
170512PEFR-S	-	-	-	-	-	-	-	○	○	-	1,2

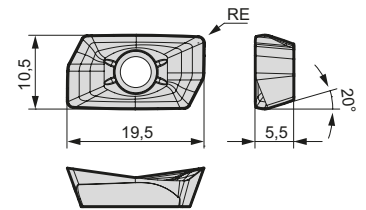


L: Low cutting force
G: General purpose
H: Strong edge
F: Finishing
P: High-precision machining
S: Non ferrous metals

*P25 is applicable to cutter diameters Ø 25 mm and Ø 28 mm.
*P32 is applicable to cutter diameters Ø 30 mm, Ø 32 mm and Ø 35 mm.

□ = Not available

Precautions for Mounting

- (1) Clean the mounting seat and contact parts.
- (2) Apply screw lubrication to the screw thread as well as the screw head face to prevent seizure.
- (3) While pressing the insert solidly against the seat surface, tighten at the screws with the included wrench.
- (4) After tightening, check that there are no gaps between the surfaces.

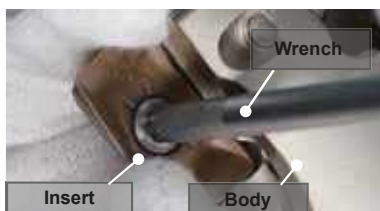

*When mounting inserts with nose radius of $\geq 3,0$ mm, modification of the body is required.



Modify this edge.



Reworking guidelines
Nose radius = 3,0 mm: C = 1 mm (AOMT170530PEER)
Nose radius = 3,2 mm: C = 1 mm (AOMT170532PEER)
Nose radius = 4,0 mm: C = 2 mm (AOMT170540PEER)
Nose radius = 5,0 mm: C = 5 mm (AOMT170550PEER)
Nose radius = 6,4 mm: C = 5 mm (AOMT170564PEER)
Standard: R = 1 mm

C: Chamfer
R: Radius

"Wave Mill" Series WEZ 17000 EL



Rake Angle	Radial	-6° - -12°	15 mm	90°
	Axial	6° - 15°		

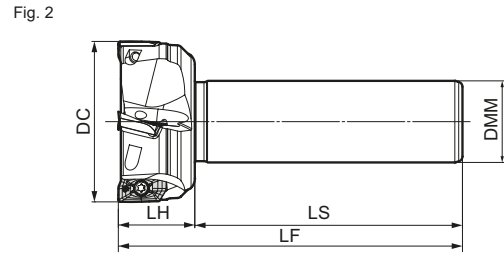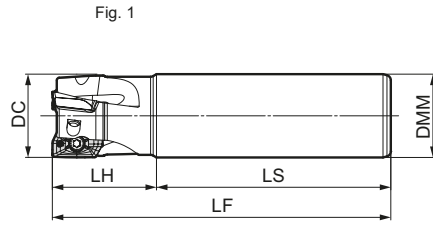

Body - WEZ (Long Type)

Dimensions (mm)

Cat. No.	Stock	DC	DMM	LH	LS	LF	No. of Teeth	Weight (kg)	Fig.
WEZ 17025EL02	●	25	25	50	120	170	2	0,55	1
17028EL02	●	28	25	50	120	170	2	0,57	2
17030EL02	●	30	25	50	120	170	2	0,59	2
17032EL02	●	32	32	60	110	170	2	0,94	1
17032EL02-30	●	32	30	50	120	170	2	0,85	2
17032EL03	●	32	32	60	110	170	3	0,92	1
17035EL02	●	35	32	50	120	170	2	0,98	2
17040EL02	●	40	32	50	120	170	2	1,09	2
17040EL03	●	40	32	50	120	170	3	1,08	2
17040EL04	●	40	32	50	120	170	4	1,05	2
17050EL03	●	50	32	50	120	170	3	1,29	2
17050EL03-42	●	50	42	50	120	170	3	1,83	2
17050EL05	●	50	32	50	120	170	5	1,25	2
17050EL05-42	●	50	42	50	120	170	5	1,79	2
17063EL04	●	63	32	50	120	170	4	1,61	2
17063EL04-42	●	63	42	50	120	170	4	2,16	2
17063EL06	●	63	32	50	120	170	6	1,58	2
17063EL06-42	●	63	42	50	120	170	6	2,13	2

Inserts are sold separately.

Spare Parts

Applicable Cutters	Insert Screw		Wrench
WEZ 17025EL02	BFTX0407IP	3,0	TRDR15IP
17028EL02			
17030EL02	BFTX0409IP	3,0	TRDR15IP
17032EL02(-30)			
17032EL03			
17035EL02			
17040EL02			
17040EL03			
17040EL04			
17050EL03(-42)			
17050EL05(-42)			
17063EL04(-42)			
17063EL06(-42)			

Identification Details

WEZ 11 025 E L 02 - 22

Cutter Series	Insert Size	Cutter Diameter	Round Shank	Long Type	Number of Teeth	Shank Diameter
---------------	-------------	-----------------	-------------	-----------	-----------------	----------------

Recommended Cutting Conditions


H22

Inserts

Application	Coated Carbide						Carbide	DLC	Cermet	RE (mm)	
		P		K	MS	MS					
High Speed / Light Cut		P		K	MS	MS		N	N	P	
General Purpose	SPK		P		K	MS	MS	N	N		
Roughing	SPK		P		K	MS	MS				
Cat. No.	ACU2500	ACP2000	ACP3000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A	RE (mm)
AOMT 170502PEER-L	●	-	●	-	●	●	●	-	-	●	0,2
170504PEER-L	●	-	●	-	●	●	●	-	-	●	0,4
170508PEER-L	●	-	●	-	●	●	●	-	-	●	0,8
170512PEER-L	●	-	●	-	●	●	●	-	-	●	1,2
170516PEER-L	●	-	●	-	●	●	●	-	-	●	1,6
AOMT 170502PEER-G	●	●	●	●	●	●	●	-	-	●	0,2
170504PEER-G	●	●	●	●	●	●	●	-	-	●	0,4
170508PEER-G	●	●	●	●	●	●	●	-	-	●	0,8
170512PEER-G	●	●	●	●	●	●	●	-	-	●	1,2
170516PEER-G	●	●	●	●	●	●	●	-	-	●	1,6
170520PEER-G	●	●	●	●	●	●	●	-	-	●	2,0
170524PEER-G	●	●	●	●	●	●	●	-	-	●	2,4
170530PEER-G	●	●	●	●	●	●	●	-	-	●	3,0
170532PEER-G	●	●	●	●	●	●	●	-	-	●	3,2
170540PEER-G	●	●	●	●	●	●	●	-	-	●	4,0
170550PEER-G	●	●	●	●	●	●	●	-	-	●	5,0
170564PEER-G	●	●	●	●	●	●	●	-	-	●	6,4
AOMT 170504PEER-H	●	●	●	●	●	●	●	-	-	-	0,4
170508PEER-H	●	●	●	●	●	●	●	-	-	-	0,8
170512PEER-H	○	●	●	●	●	●	●	-	-	-	1,2
170516PEER-H	●	●	●	●	●	●	●	-	-	-	1,6
AOET 170502PEER-F	○	-	-	-	-	-	-	-	-	-	0,2
170504PEER-F	●	-	-	-	-	-	-	-	-	-	0,4
170508PEER-F	●	-	-	-	-	-	-	-	-	-	0,8
170512PEER-F	○	-	-	-	-	-	-	-	-	-	1,2
AOET 170502PEER-P25	○	-	-	-	-	-	-	-	-	-	0,2
170504PEER-P25	○	-	-	-	-	-	-	-	-	-	0,4
170508PEER-P25	○	-	-	-	-	-	-	-	-	-	0,8
170512PEER-P25	○	-	-	-	-	-	-	-	-	-	1,2
170502PEER-P32	○	-	-	-	-	-	-	-	-	-	0,2
170504PEER-P32	○	-	-	-	-	-	-	-	-	-	0,4
170508PEER-P32	○	-	-	-	-	-	-	-	-	-	0,8
170512PEER-P32	○	-	-	-	-	-	-	-	-	-	1,2
AOET 170502PEFR-S	-	-	-	-	-	-	-	○	○	-	0,2
170504PEFR-S	-	-	-	-	-	-	-	●	●	-	0,4
170508PEFR-S	-	-	-	-	-	-	-	●	●	-	0,8
170512PEFR-S	-	-	-	-	-	-	-	○	○	-	1,2

□ = Available from April 2020

☐ = Not available

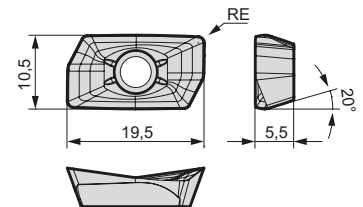


L: Low cutting force
G: General purpose
H: Strong edge
F: Finishing
P: High-precision machining
S: Non ferrous metals

*P25 is applicable to cutter diameters Ø 25 mm and Ø 28 mm.

*P32 is applicable to cutter diameters Ø 30 mm, Ø 32 mm and Ø 35 mm.

Precautions for Mounting

- (1) Clean the mounting seat and contact parts.
- (2) Apply screw lubrication to the screw thread as well as the screw head face to prevent seizure.
- (3) While pressing the insert solidly against the seat surface, tighten at the screws with the included wrench.
- (4) After tightening, check that there are no gaps between the surfaces.

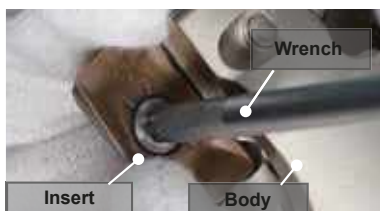

*When mounting inserts with nose radius of $\geq 3,0$ mm, modification of the body is required.



Modify this edge.

Reworking guidelines
Nose radius = 3,0 mm: C = 1 mm (AOMT170530PEER)
Nose radius = 3,2 mm: C = 1 mm (AOMT170532PEER)
Nose radius = 4,0 mm: C = 2 mm (AOMT170540PEER)
Nose radius = 5,0 mm: C = 5 mm (AOMT170550PEER)
Nose radius = 6,4 mm: C = 5 mm (AOMT170564PEER)
Standard: R = 1 mm

C: Chamfer
R: Radius


"Wave Mill" Series WEX Type

For the Smooth and Reliable Cutting Action



General Features

Wide Application Range

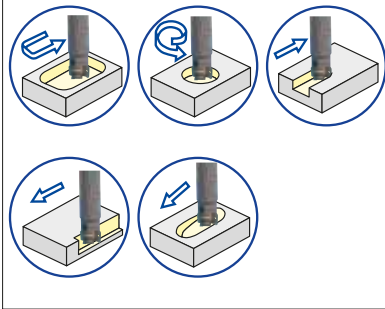

Ramping (Slant Milling)

Tool Diam. Ø D	Max. Ramping Angle		
	Type 1000	Type 2000	Type 3000
10	2°30'		
12	1°45'		
14	1°25'	1°40'	
16	1°00'	1°20'	
18	0°45'	0°10'	
20	0°30'	1°00'	
25	0°30'	0°45'	1°30'
32	0°25'	0°35'	1°00'
40	0°20'	0°25'	0°45'
50	0°15'	0°20'	0°30'
63	0°10'	0°15'	0°20'
80			0°15'
100			-

Maximum ramping angle (α max. max.) depends on cutter diameter.


Precision insert with strong cutting edge and low cutting force

Wave shaped cutting edge design lowers cutting resistance yet improves cutting edge strength.

Achieving high quality finish with high precision cutting edge.

Smooth cutting even for deep grooves and low rigidity machines.


High precision curved cutting edge



Screw hole size increased

High rake wave cutting edge

Large angle

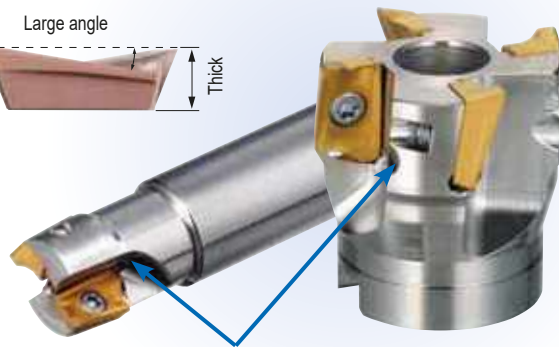

● Internal Coolant Holes
Improved chip evacuation with air or coolant supply.

Wide Variety of Inserts

6 types of chipbreaker design (L, G, H, E, EH and S)

9 milling grades for a wide range of work materials and applications.

- ACP100, ACP200, ACP300 (steel milling grades)

- ACK200, ACK300 (cast iron milling grades)

- ACM200, ACM300 (stainless steel, exotic alloy milling grades)

- DL1000, H1

(aluminium milling grades)

High Durable Body

Special surface treatment improves corrosion resistance as well as scratch resistance.

Increased screw size improves clamping force and durability.

Product Range

Type	Cat. No.	Series	Diameter Range (mm)				Image
			Ø 10	Ø 20	Ø 40	Ø 60	
Shank	WEX 1000E	Short Type	10 ----- 25				<p>WEX3000 WEX2000 WEX1000</p>
	WEX 1000EL	Long Type	10 ----- 20				
	WEX 2000E	Short Type	14 ----- 63				
	WEX 2000EL	Long Type	14 ----- 40				
	WEX 2000EW	Weldon Shank Short Type	16 ----- 20				
	WEX 3000E	Short Type	25 ----- 63				
	WEX 3000EL	Long Type	25 ----- 40				
	WEX 3000EW	Weldon Shank Short Type	25 ----- 32				
Shell	WEX 1000F	Shell Type	32 ----- 63				<p>G48</p>
	WEX 2000F	Shell Type	40 ----- 63				
	WEX 3000F	Shell Type	40 ----- 63				
Modular	WEX 2000M	Modular Type	16 ----- 40				
	WEX 3000M	Modular Type	25 ----- 40				

"Wave Mill" Series Inserts for WEX Type

■ WEX1000 Type Expansion


- Efficient machining via high number of inserts
- Precise insert change tolerance provides high surface roughness quality
- High shoulder accuracy due to optimized cutting edge
- Stable cutting conditions when utilising low rigidity machines
- Economic advantages using small AXMT06 inserts




WEX3000 WEX2000 WEX1000

■ Application Range

Shoulder Milling

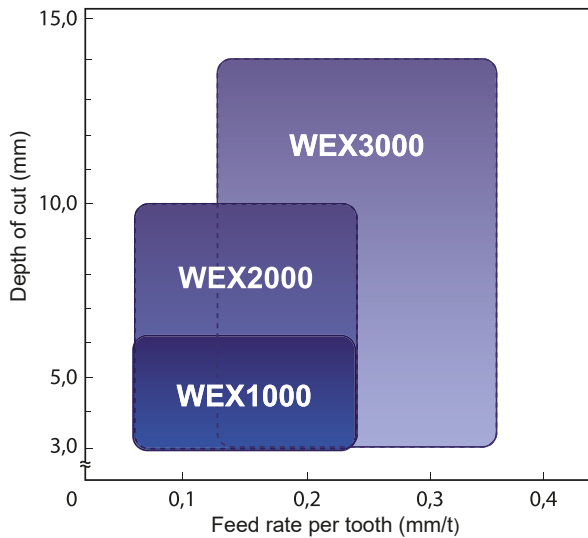

■ Chipbreaker Selection

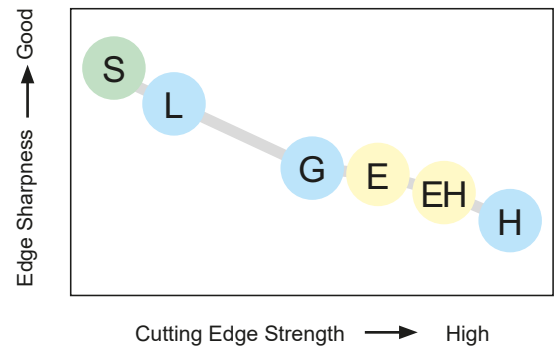

● Characteristics

Work Material	Steel, Cast Iron			Stainless Steel, Exotic Alloy		Aluminium
	L	G	H	E	EH	S
Chipbreaker						
Features	Low Cutting Force	General Purpose	Strong Edged	General Purpose	Strong Edged	High Rake
Chipbreaker Profile for 1000 Series Insert						
Chipbreaker Profile for 2000 Series Insert						
Chipbreaker Profile for 3000 Series Insert						
Application	Light cut, low rigidity milling and reduced burrs	Main chipbreaker general purpose to interrupted milling	Roughing, heavy interrupted and hardened steel milling	Light cutting to general purpose	Heavy interrupted machining	Aluminium, non-ferrous metal

■ Grade Selection

ISO	Grade	Finishing to Light Cutting	Medium Cut	Rough to Heavy Cutting
P	Coated Carbide	ACP100	ACP200	ACP300
		ACM200	ACM300	


ISO	Grade	Finishing to Light Cutting	Medium Cut	Rough to Heavy Cutting
K	Coated Carbide	ACK200	ACK300	
N	Coated Carbide	DL1000		
	Carbide		H1	

"Wave Mill" Series WEX 1000 E Type

WEX 1000 E/EL

Shank Type

Rake Angle	Radial	8°-15°
	Axial	16°-24°

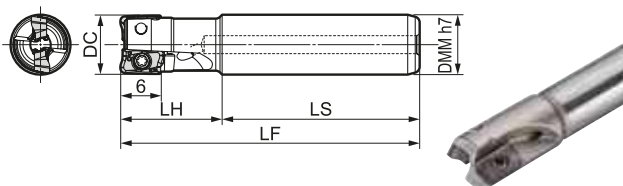

Body (Short Type „E“)


Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
WEX 1010 E	●	10	10	17	33	50	2	0,03
1012 E	●	12	12	20	60	80	3	0,06
1014 E	●	14	16	22	59	80	3	0,10
1016 E	●	16	16	20	72	90	4	0,12
1018 E	●	18	20	20	80	100	4	0,21
WEX 1020 E	●	20	20	22	78	100	5	0,22
1025 E	●	25	20	25	90	115	7	0,27

Body (Long Type „EL“)

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
WEX 1010 EL	●	10	8	17	83	100	2	0,03
1012 EL	●	12	10	20	100	120	2	0,06
1014 EL	●	14	12	20	125	145	3	0,11
1016 EL	●	16	14	20	140	160	3	0,17
1016 EL15	●	16	15	20	140	160	3	0,19
1018 EL	●	18	16	20	160	180	3	0,25
WEX 1020 EL	●	20	18	25	175	200	4	0,36
1020 EL19	●	20	19	25	175	200	4	0,38

Inserts are not included.

Inserts for WEX1000 Type



Application	Coated Carbide						Carbide DLC			
	P	K	M	S	N	H	DL1000			
High Speed / Light cut	●	●	●	●	●	○	○			
General Purpose	●	●	●	●	●	○	○			
Roughing	●	●	●	●	●	○	○			
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Radius
AXMT 060204 PDER-L	○	●	○	○	○	○	○	○	○	0,4
060208 PDER-L	○	○	○	○	○	○	○	○	○	0,8
060212 PDER-L	○	○	○	○	○	○	○	○	○	1,2
AXMT 060204 PDER-G	○	●	●	○	○	○	○	○	○	0,4
060208 PDER-G	○	●	●	○	○	○	○	○	○	0,8
060212 PDER-G	○	●	●	○	○	○	○	○	○	1,2
AXMT 060204 PDER-H	○	○	○	○	○	○	○	○	○	0,4
060208 PDER-H	○	○	○	○	○	○	○	○	○	0,8
060212 PDER-H	○	○	○	○	○	○	○	○	○	1,2
AXMT 060202 PDFR-S	○	○	○	○	○	○	○	○	○	0,2

L - Low cutting force S - For aluminium alloy
G - General type
H - Strong cutting edge

Identification Details

WEX 1 016 EL 15

Cutter Series 1000 Series Cutter Diameter 016 Shank Type EL Shank Diameter 15

Spare Parts

Screw	Wrench	Applicable Endmill
0,5 Nm BFTX 01804 IP	TRX 06 IP	

● = Euro stock
○ = Japan stock

□ = Delivery on request
▲ = To be replaced by new item


Recommended Tightening Torque (N·m)

"Wave Mill" Series WEX 2000 E Type

WEX 2000 E/EL

Shank Type

Rake Angle	Radial	8°-15°
	Axial	16°-24°
DMM		10 mm
		90°

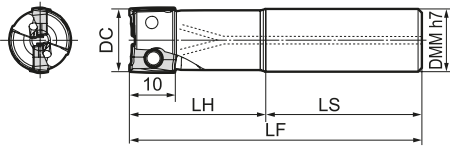

Body (Short Type „E“)

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
WEX 2014 E	●	14	16	25	55	80	1	0,10
2016 E	●	16	16	25	75	100	2	0,13
2018 E	●	18	16	25	75	100	2	0,14
WEX 2020 E	●	20	20	30	80	110	3	0,22
2022 E	●	22	20	30	80	110	3	0,23
WEX 2025 E	●	25	25	35	85	120	4	0,38
2028 E	□	28	25	35	85	120	4	0,39
2030 E	●	30	25	35	85	120	4	0,40
WEX 2032 E	●	32	32	40	90	130	5	0,70
2040 E	○	40	32	30	120	150	6	0,91
WEX 2050 E	○	50	32	30	120	150	7	1,02
2063 E	○	63	32	30	120	150	8	1,22

Body (Long Type „EL“)

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
WEX 2014 EL	●	14	16	25	95	120	1	0,14
2016 EL	●	16	16	25	120	145	2	0,19
2018 EL	□	18	16	25	120	145	2	0,19
WEX 2020 EL	●	20	20	40	110	150	2	0,32
2022 EL	□	22	20	30	120	150	2	0,33
WEX 2025 EL	●	25	25	50	120	170	2	0,55
2028 EL	○	28	25	30	140	170	2	0,59
2030 EL	○	30	25	30	140	170	2	0,60
WEX 2032 EL	○	32	32	60	120	180	2	0,99
2040 EL	□	40	32	30	150	180	2	1,12

Body (Long Type „E“ + Small Shank)

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
WEX 2016 EL15	□	16	15	25	120	145	2	0,17
2020 EL19	●	20	19	40	110	150	2	0,30
2025 EL24	●	25	24	50	120	170	2	0,53
2025 EL24Z3	□	25	24	50	120	170	3	0,50
2032 EL30Z4	□	32	30	60	120	180	2	0,95

Body (Weldon Shank Short Type „EW“)

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
WEX 2016 EW	●	16	16	25	75	100	2	0,12
2020 EW	●	20	20	30	80	110	3	0,21

Inserts are not included.

Identification Details

WEX	2	016	EL	15
Cutter Series	2000 Series	Cutter Diameter	Shank Type	Shank Diameter

Spare Parts


Screw	Wrench	Applicable Endmill
2,0 N _m		
BFTX 0305 IP	TRDR 08 IP	WEX 2014 – WEX 2018
BFTX 0306 IP		WEX 2020 – WEX 2063

"Wave Mill" Series WEX 2000 M Type

WEX 2000 M

Modular Type

Rake Angle	Radial	10°-18°
	Axial	14°-25°
DMM		10 mm
		90°

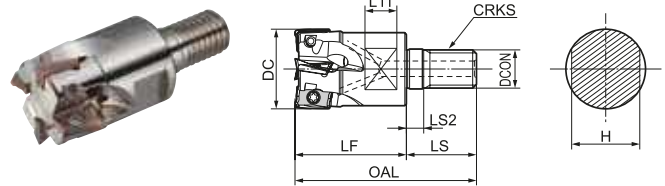

Head

Cat. No.	Stock	Dimensions (mm)									No. of Teeth
		DC	DCON	CRKS	OAL	LF	LS2	LS	L11	H	
WEX 2016M08Z2	●	16	8,5	M8	42	25	5	17	8	13	2
2018M08Z2	□	18	8,5	M8	42	25	5	17	8	13	2
WEX 2020M10Z3	●	20	10,5	M10	49	30	5	19	8	15	3
2022M10Z3	□	22	10,5	M10	49	30	5	19	8	15	3
WEX 2025M12Z4	●	25	12,5	M12	56	35	5	21	10	19	4
2028M12Z4	□	28	12,5	M12	56	35	5	21	10	19	4
WEX 2030M16Z4	□	30	17,0	M16	63	40	5	23	10	24	4
2032M16Z5	●	32	17,0	M16	63	40	5	23	10	24	5
2040M16Z6	□	40	17,0	M16	63	40	5	23	10	24	6

Inserts are not included.

Inserts for WEX2000 Type

Application	Coated Carbide						Carbide	DLC
	P	P	K	M/S	M/S	K/N		
High Speed / Light cut	●		●	●	●	●	●	●
General Purpose		●	●	●	●	●		●
Roughing		●	●	●	●	●		

Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Radius
										RE
AXMT 123504 PEER-G	●	●	●	●	●			-	-	0,4
123508 PEER-G	●	●	●	●	●			-	-	0,8
123512 PEER-G	●	●	●	●	●			-	-	1,2
AXMT 123504 PEER-H	●	●	●	●	●			-	-	0,4
123508 PEER-H	●	●	●	●	●			-	-	0,8
123512 PEER-H	●	●	●	○	●			-	-	1,2
AXMT 123504 PEER-E			▲			●	●	-	-	0,4
123508 PEER-E			▲			●	●	-	-	0,8
123512 PEER-E			▲			●	●	-	-	1,2
AXMT 123508 PEER-EH			▲			●	●	-	-	0,8
AXET 123502 PEFR-S	-	-	-	-	-	-	-	●	●	0,2
123504 PEFR-S	-	-	-	-	-	-	-	●	●	0,4
123508 PEFR-S	-	-	-	-	-	-	-	●	●	0,8

G - General type
 H - Strong cutting edge
 E - For stainless steel / exotic alloy
 EH - Strong edge for stainless steel / exotic alloy
 S - For aluminium alloy
 - - Unable to produce

Identification Details

WEX	2	016	M08	Z2
Cutter Series	2000 Series	Cutter Diameter	Mounting Screw Size	No. of Teeth



Spare Parts


Screw	Wrench	Applicable Endmill
2,0 N _m		
BFTX 0305 IP	TRDR 08 IP	WEX 2016M, WEX 2018M
BFTX 0306 IP		WEX 2020M – WEX 2040M
BFTX 0407 IP	TRDR 15 IP	WEX 3025M – WEX 3030M
BFTX 0409 IP		WEX 3032M – WEX 3040M

"Wave Mill" Series WEX 3000 E Type

WEX 3000 E/EL

Shank Type

Rake Angle	Radial	8°-15°	14 mm	90°
	Axial	16°-24°		

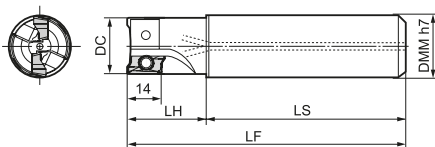

Body (Short Type „E“)

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
WEX 3025 E	●	25	25	35	85	120	2	0,37
3028 E	□	28	25	35	85	120	2	0,39
3030 E	□	30	25	40	90	130	3	0,42
WEX 3032 E	●	32	32	40	90	130	3	0,67
3035 E	□	35	32	40	90	130	3	0,69
3040 E	●	40	32	50	120	170	4	1,01
3050 E	□	50	32	50	120	170	5	1,23
3063 E	□	63	32	50	120	170	6	1,58

Body (Short Type „E“ + Small Shank)

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
WEX 3025 E20	□	25	20	35	85	120	2	0,25
3032 E25	□	32	25	40	90	130	3	0,43

Body (Long Type „EL“)


Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
WEX 3025 EL	●	25	25	50	120	170	2	0,54
3028 EL	□	28	25	50	120	170	2	0,56
3030 EL	□	30	25	60	120	180	2	0,60
WEX 3032 EL	●	32	32	60	120	180	2	0,95
3035 EL	□	35	32	60	120	180	2	0,98
3040 EL	●	40	32	80	140	220	2	1,38

Body (Weld on Shank Short Type „EW“)

Cat. No.	Stock	Dimensions (mm)					No. of Teeth	Weight (kg)
		DC	DMM	LH	LS	LF		
WEX 3025 EW	●	25	25	35	85	120	2	0,36
3032 EW	●	32	32	40	90	130	3	0,65

Inserts are not included.

* **ATTENTION:** If nose radius of inserts is 2,0 mm or more please modify cutter body as indicated.

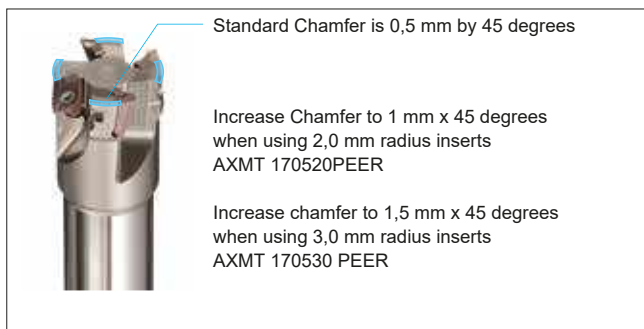

Spare Parts

Screw	Wrench	Applicable Endmill
3,0 (Nm)		
BFTX 0407 IP BFTX 0409 IP	TRDR 15 IP	WEX 3025 - WEX 3030 WEX 3032 - WEX 3063

● = Euro stock
○ = Japan stock


□ = Delivery on request
▲ = To be replaced by new item

"Wave Mill" Series WEX 3000 M Type

WEX 3000 M

Modular Type

Rake Angle	Radial	8°-15°	14 mm	90°
	Axial	16°-24°		

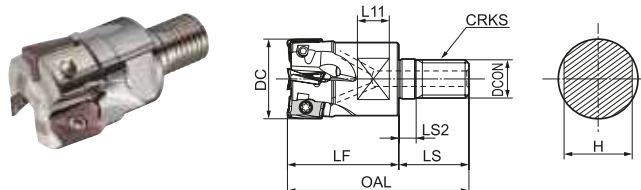

Head

Cat. No.	Stock	Dimensions (mm)									No. of Teeth
		DC	DCON	CRKS	OAL	LF	LS2	LS	L11	H	
WEX 3025M12Z2	●	25	12,5	M12	56	35	5	21	10	19	2
3028M12Z2	□	28	12,5	M12	56	35	5	21	10	19	2
WEX 3030M16Z3	□	30	17,0	M16	63	40	5	23	10	24	3
3032M16Z3	●	32	17,0	M16	63	40	5	23	10	24	3
3035M16Z3	□	35	17,0	M16	63	40	5	23	10	24	3
3040M16Z4	□	40	17,0	M16	63	40	5	23	10	24	4

Inserts are not included.

Inserts for WEX3000 Type

Application	Coated Carbide						Carbide		DLC		Radius
	High Speed / Light cut	General Purpose	Roughing				H1	DL1000	RE		
	P	P	P	K	M/S	M/S	K/N	N			
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Radius	
AXMT 170508 PEER-L	●	●	●	○	○			-	-	0,8	
AXMT 170504 PEER-G	○	●	●	●	●			-	-	0,4	
170508 PEER-G	●	●	●	●	●			-	-	0,8	
170512 PEER-G	○	●	●	○	○			-	-	1,2	
170516 PEER-G	○	●	●	○	○			-	-	1,6	
170520 PEER-G*	○	●	●	○	○			-	-	2,0	
170530 PEER-G*	●	●	●	●	●			-	-	3,0	
AXMT 170508 PEER-H	●	●	●	●	●			-	-	0,8	
170512 PEER-H	●	●	●	●	●			-	-	1,2	
AXMT 170504 PEER-E						●	●	-	-	0,4	
170508 PEER-E			▲			●	●	-	-	0,8	
170512 PEER-E						●	●	-	-	1,2	
170516 PEER-E						○	○	-	-	1,6	
170520 PEER-E*						○	○	-	-	2,0	
170530 PEER-E*						●	●	-	-	3,0	
AXMT 170508 PEER-EH			▲			●	●	-	-	0,8	
AXET 170502 PEFR-S	-	-	-	-	-	-	-	●	●	0,2	
170504 PEFR-S	-	-	-	-	-	-	-	●	●	0,4	
170508 PEFR-S	-	-	-	-	-	-	-	●	●	0,8	

L - Low cutting force
G - General type
H - Strong cutting edge
E - For stainless steel / exotic alloy
EH - Strong edge for stainless steel / exotic alloy
S - For aluminium alloy

- Unable to produce
* Cutter body modification is required

Identification Details

WEX 3 025 M12 Z2

Cutter Series 3000 Series Cutter Diameter Mounting Screw Size No. of Teeth



Recommended Tightening Torque (N·m)

"Wave Mill" Series WEX Type


Recommended Cutting Conditions

WEX3000 Series

Cutter: WEX30325E

Insert: AXMT170508PEER - □

Cutting Data: $a_p = 5 \text{ mm}$, $a_e = 16 \text{ mm}$, dry



ISO	Material	HB	Chipbreaker	Coated Carbide											Diamond like Carbon Coated Carbide								
				ACP100			ACP200			ACP300			ACK200		ACK300		ACM200		ACM300		DL1000		
				Feed Rate (mm/tooth)																			
				0,12	0,25	0,35	0,12	0,25	0,35	0,12	0,25	0,35	0,12	0,25	0,35	0,12	0,25	0,35	0,12	0,25	0,35	0,05	0,15
Cutting Speed v_c (m/min)																							
P	Unalloyed steel, <0, 15%C, annealed	125	G	400	370	350	370	350	330	350	330	310											
	" , <0, 45%C, annealed	190	G	300	270	250	270	250	230	250	230	210											
	" , <0, 45%C, tempered	250	G	250	220	200	220	200	180	200	180	160											
	" , <0, 75%C, annealed	270	G	200	170	150	180	160	140	160	140	120											
	" , <0, 75%C, tempered	300	G	150	120	100	120	100	80	100	80	60											
	Low alloyed steel, annealed	180	G	280	250	230	250	230	210	230	210	190											
" , tempered	275	G	180	150	130	160	140	120	140	120	100												
" , tempered	300	G	160	130	110	140	120	100	120	100	80												
" , tempered	350	G	130	100	80	110	90	70	90	70	50												
High alloyed and tool steel, annealed	" , annealed	200	G	250	220	200	220	200	180	200	180	160											
	" , tempered	325	G	130	100	80	100	80	60	80	60	40											
M	Stainless steel, ferritic/martensitic, annealed	200	E												185	165	135	165	150	120			
	Martensitic, tempered	240	EH												170	150	120	150	135	110			
	Austenitic, plunged	180	E												200	180	150	180	160	135			
K	Grey cast iron		G										300	270	250	270	250	230					
	Nodular cast iron		G										200	170	150	170	150	130					
S	High tempered resist. alloys, Fe based, annealed	300	E												50	30		45	25				
	" , hardened	330	E												50	30		45	25				
N	Aluminium alloy, Si < 13%		S																	1000	750	500	
	Aluminium alloy, Si > 13%		S																	250	200	170	
	Copper alloy		S																	350	330	300	


The above recommended cutting conditions are meant as a guide. Actual conditions will depend on the individual machine, work shape and clamping. They will need to be adjusted according to machine rigidity, work clamp rigidity, cutting depth and other factors.

For groove milling, reduce the feed rate approximately 70 % of the corresponding value shown above.

Recommended Values for Helical Milling and Ramping


Helical Boring

\leq Min. Diameter



Center uncut portion cannot be removed by traverse cutting with the same cutter.


\geq Max. Diameter



Center uncut portion can be removed by traverse cutting with the same cutter.

Plunging

Use at \leq RMPX



Recommended Values for Helical and Plunging

Cutter External Diameter DC	WEX1000 (AXMT06...)			WEX2000 (AX□T12...)			WEX3000 (AX□T17...)		
	Helical		Plunging	Helical		Plunging	Helical		Plunging
	Work Diameter Min.	Max.	Max. Ramping Angle	Work Diameter Min.	Max.	Max. Ramping Angle	Work Diameter Min.	Max.	Max. Ramping Angle
10	16,0	18,0	2°30'						
12	20,0	22,0	1°45'						
14	24,0	26,0	1°25'	25,0	27,0	1°40'			
16	28,0	30,0	1°00'	29,0	31,0	1°20'			
18	32,0	34,0	0°45'	33,0	35,0	1°10'			
20	36,0	38,0	0°30'	37,0	39,0	1°00'			
22				41,0	43,0	0°50'			
25	46,0	48,0	0°30'	47,0	49,0	0°45'	44,5	48,0	1°30'
28				53,0	55,0	0°45'	50,5	54,0	1°10'
30				57,0	59,0	0°40'	54,5	58,0	1°10'
32	60,0	62,0	0°25'	61,0	63,0	0°35'	58,5	62,0	1°00'
35							64,5	68,0	0°50'
40	76,0	78,0	0°20'	77,0	79,0	0°25'	74,5	78,0	0°45'
50	96,0	98,0	0°15'	97,0	99,0	0°20'	94,5	98,0	0°30'
63	122,0	124,0	0°10'	123,0	125,0	0°15'	120,5	124,0	0°20'
80							154,5	158,0	0°15'
100									
125									

The above recommended values are for a nose radius of 0,8 mm.

"Wave Mill" Series WAX Type




Overview

Based on our proven Wavemill design this new range of WAX cutters is capable of rough and finishing Aluminium Alloys and other Non Ferrous Metals. It is ideal for high productivity Aluminium machining to exacting tolerances in the Aircraft, Electronics, and Automotive industries. The award winning Auroracoat DLC (diamond like carbon) inserts resist chip adhesion and substantially increase both tool life and productivity when dry machining Aluminium helping customers boost compliance with ISO14001 accreditation standards


Advantages

- High Productivity
- Dry machining capability with MQL system
- DLC (diamond like carbon) inserts
- True 90 degree shoulder milling
- Chip adhesion resistance
- Wide range of nose radius

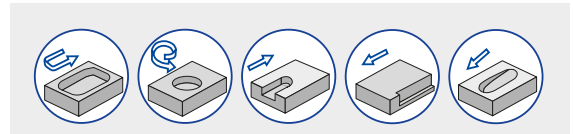

Ramping (Slant Milling)

Maximum ramping angle (α_{max}) depends on cutter diameter.
Minimum milling length (L min) is the ramping distance required to reach the maximum cutting depth (a_p max) at the maximum ramping angle of that cutter.
Minimum milling length (L) for any depth can be calculated by the equation below:

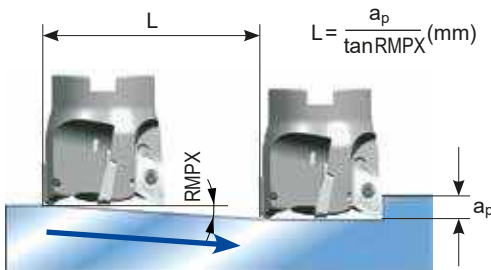


WAX3000 E/EL Type (mm)

Cutter Diameter DC	Ramping Angle RMPX max.	Depth-of Cut a_p max.	Milling Distance L min
20	8°	10	72
25	17°	10	33
32	12°	10	47
40	9°	10	64

WAX3000 RS Type (mm)

Cutter Diameter DC	Ramping Angle RMPX max.	Depth-of Cut a_p max.	Milling Distance L min
50	7°	10	82
60	5°	10	115
80	3°	10	191
100	3°	10	191
125	2°	10	287

Helical Milling



Helical Milling Diameter (mm)

Cutter Diameter DC	Milling Diameter øD	
	Min.	Max.
20	22	33
25	29	43
32	43	57
40	59	73
50	79	93
63	105	119
80	139	153
100	179	193
125	229	243

Maximum Allowable Spindle Speed

Cutter Diameter DC	Spindle Revolution n (min ⁻¹)	Cutting Speed v_c (m/min)
20	14.000	880
25	29.000	2.200
32	25.000	2.500
40	23.000	2.900
50	20.000	3.100
63	18.000	3.500
80	16.000	4.000
100	14.000	4.400
125	13.000	5.100

Recommended Cutting Conditions

Work Material	Aluminum Alloy
Cutting Speed	600–1.200 m/min
Feed Rate	0,05–0,25 mm/tooth

"Wave Mill" Series


WAX 3000 E/EL Type

16-18mm 90°

Axial rake angle 6°
Radial rake angle 19-25°

(Endmill)

Short Type "E"
Long Type "EL"

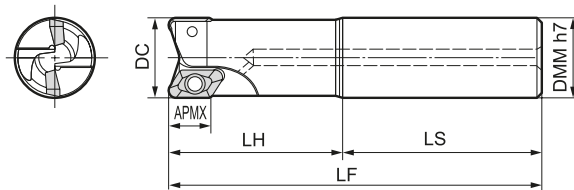

Body

(For inserts with nose radius ≤ 3,2 mm)


Cat. No.	Stock	Dimensions (mm)					No. of teeth	Weight (Kg)
		DC	DMM	LF	LH	LS		
WAX 3020 E -3.2	●	20	20	130	60	70	1	0,25
WAX 3025 E -3.2	●	25	25	140	60	80	2	0,42
3025 EL-3.2	●	25	25	200	60	140	2	0,63
WAX 3032 E -3.2	●	32	32	150	70	80	2	0,75
3032 EL-3.2	●	32	32	220	70	150	2	1,2
WAX 3040 E -3.2	●	40	32	160	70	90	3	1,0
3040 EL-3.2	●	40	32	220	70	150	3	1,4

Body

(For inserts with nose radius ≥ 4,0 mm)

Cat. No.	Stock	Dimensions (mm)					No. of teeth	Weight (Kg)
		DC	DMM	LF	LH	LS		
WAX 3020 E -4.0	●	20	20	130	60	70	1	0,25
WAX 3025 E -4.0	●	25	25	140	60	80	2	0,42
3025 EL-4.0	●	25	25	200	60	140	2	0,63
WAX 3032 E -4.0	●	32	32	150	70	80	2	0,75
3032 EL-4.0	●	32	32	220	70	150	2	1,2
WAX 3040 E -4.0	●	40	32	160	70	90	3	1,0
3040 EL-4.0	●	40	32	220	70	150	3	1,4

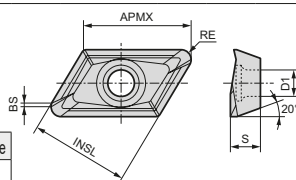

Inserts for WAX 3000 Type



Application	DLC Coated	Carbide
High Speed / Light cut	K	N
General Purpose		N
Roughing		

Cat. No.	DL 1000	H1	Dimensions (mm)					
			APMX	INSL	BS	RE	S	D1
AECT 160404 PEFRA	●	●	18	16,4	1,4	0,4	5	4,4
160408 PEFRA	●	●	18	16,4	1,0	0,8	5	4,4
160412 PEFRA	●	●	18	16,4	0,6	1,2	5	4,4
160416 PEFRA	●	●	17,5	16,4	0,5	1,6	5	4,4
160420 PEFRA	●	●	17,5	16,4	0,5	2,0	5	4,4
160430 PEFRA	●	●	17	16,4	0,7	3,0	5	4,4
160432 PEFRA	●	●	17	16,4	0,5	3,2	5	4,4
AECT 160440 PEFRA	●	●	16,5	16,4	0,5	4,0	5	4,4
160450 PEFRA	●	●	16	16,4	0,4	5,0	5	4,4

Spare Parts

Insert Screw	Insert Wrench	Applicable Endmill
 BFTX 0408	 TRD 15	


"Wave Mill" Series WAX 4000 E/EL Type

22-24mm 90°

Axial rake angle 6°
Radial rake angle 19-25°

(Endmill)

Short Type "E"
Long Type "EL"

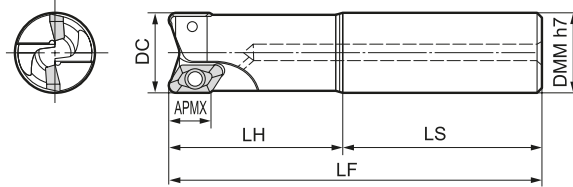

Body

(For inserts with nose radius ≤ 3,2 mm)

Cat. No.	Stock	Dimensions (mm)					No. of teeth	Weight (Kg)
		DC	DMM	LF	LH	LS		
WAX 4025E -3.2	<input type="checkbox"/>	25	25	140	60	80	1	0,41
4025EL-3.2	<input type="checkbox"/>	25	25	200	60	140	1	0,63
WAX 4032E -3.2	<input type="checkbox"/>	32	32	150	70	80	1	0,72
4032EL-3.2	<input type="checkbox"/>	32	32	220	70	150	1	1,2
WAX 4040E -3.2	<input type="checkbox"/>	40	32	160	70	90	2	0,88
4040EL-3.2	<input type="checkbox"/>	40	32	220	70	150	2	1,2


Body

(For inserts with nose radius ≥ 4,0 mm)

Cat. No.	Stock	Dimensions (mm)					No. of teeth	Weight (Kg)
		DC	DMM	LF	LH	LS		
WAX 4025E -4.0	<input type="checkbox"/>	25	25	140	60	80	1	0,41
4025EL-4.0	<input type="checkbox"/>	25	25	200	60	140	1	0,63
WAX 4032E -4.0	<input type="checkbox"/>	32	32	150	70	80	1	0,72
4032EL-4.0	<input type="checkbox"/>	32	32	220	70	150	1	1,2
WAX 4040E -4.0	<input type="checkbox"/>	40	32	160	70	90	2	0,88
4040EL-4.0	<input type="checkbox"/>	40	32	220	70	150	2	1,2

Inserts for WAX 4000 Type

Application	DLC Coated	Carbide	Dimensions (mm)						
			APMX	INSL	BS	RE	S	D1	
High Speed / Light cut	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	24	21,8	1,5	0,4	6,35	6,0	
General Purpose	<input type="checkbox"/>	<input checked="" type="checkbox"/>	24	21,8	1,2	0,8	6,35	6,0	
Roughing	<input type="checkbox"/>	<input type="checkbox"/>	24	21,8	0,8	1,2	6,35	6,0	
	DL 1000	HE							
Cat. No.			APMX	INSL	BS	RE	S	D1	
AECT 220604 PEFRA	<input type="checkbox"/>	<input type="checkbox"/>	24	21,8	1,5	0,4	6,35	6,0	
220608 PEFRA	<input type="checkbox"/>	<input type="checkbox"/>	24	21,8	1,2	0,8	6,35	6,0	
220612 PEFRA	<input type="checkbox"/>	<input type="checkbox"/>	24	21,8	0,8	1,2	6,35	6,0	
220616 PEFRA	<input type="checkbox"/>	<input type="checkbox"/>	24	21,8	0,4	1,6	6,35	6,0	
220620 PEFRA	<input type="checkbox"/>	<input type="checkbox"/>	24	21,8	0,5	2,0	6,35	6,0	
220630 PEFRA	<input type="checkbox"/>	<input type="checkbox"/>	23	21,8	0,6	3,0	6,35	6,0	
220632 PEFRA	<input type="checkbox"/>	<input type="checkbox"/>	23	21,8	0,4	3,2	6,35	6,0	
AECT 220640 PEFRA	<input type="checkbox"/>	<input type="checkbox"/>	22	21,8	1,2	4,0	6,35	6,0	
220650 PEFRA	<input type="checkbox"/>	<input type="checkbox"/>	22	21,8	0,4	5,0	6,35	6,0	



Spare Parts

Insert Screw	Insert Wrench	Applicable Endmill
BFTX 0509 N	TRD 20	
BFTX 0511 N	TRD 20	Ø 40 – Ø 125

Wave Multi-Function Mill WMM Type



Features


Utilising some of the design features, which made the Wave-Mill so successful, this multi-functional cutter, which utilizes standard wavy shaped inserts mounted radially and axially, performs a variety of operations.

These include slotting, shoulder milling, ramping, pocketing, drilling, helical cutting etc and eliminates the need to stock a variety of application specific tools.

Advantages

- Multi-functional cutter efficiently performs a number of cutting operations.
- Excellent for ramping, helical cutting, and pocketing.
- Uses standard inserts interchangeable with those used on other Wave-Mill cutters
- Strong high rake inserts gives smooth cutting action.
- Good dimensional stability thanks to long life inserts

Insert Orientation of WMM Type Cutter

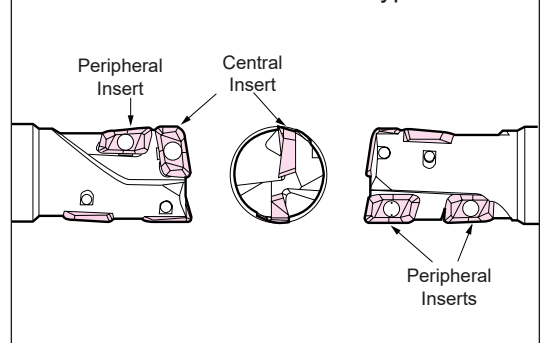

Multi-purpose Applications

<p>● Shoulder Cutting</p> <p>DIN X5CrNi810</p> <p><i>Cutting of stainless steel tool</i></p> <p>Tool Dia. : 25 mm Insert : APMT103504PDER (Grade : ACZ350) $v_c = 200$ m/min, $f_t = 0,1$ mm/tooth Axial a_p: 15 mm, Radial a_e: 25 mm, Air blow</p>	<p>● Slotting</p> <p>GG25</p> <p><i>Deep grooving can be performed easily. Easy chip removal</i></p> <p>Tool Dia. : 25 mm Insert : APMT103504PDER (Grade : ACZ310) $v_c = 180$ m/min, $f_t = 0,12$ mm/tooth Axial a_p: 15 mm, R adial a_e: 25 mm, Air blow</p>	<p>● Ramping (Slant Milling)</p> <p>C50</p> <p><i>Capable of tapered recess cutting of a prepared hole</i></p> <p>Tool Dia. : 25 mm Insert : APMT103504PDER (Grade : ACZ310) $v_c = 180$ m/min, $f_t = 0,12$ mm/tooth Axial a_p: 15 mm, Radial a_e: 25 mm, Air blow</p>
<p>● Pocketing</p> <p>C50</p> <p><i>Capable of pocketing with continuous lateral feed from initial drilling or taper cutting process</i></p> <p>Tool Dia. : 25 mm Insert : APMT103504PDER (Grade : ACZ350) $v_c = 200$ m/min, $f_t = 0.1$ mm/tooth Axial a_p: 15 mm, Radial a_e: 2.5 mm Air blow</p>	<p>● Drilling</p> <p>C50</p> <p><i>Capable of easy chip removal and drilling without tool damage</i></p> <p>Tool Dia. : 25 mm Insert : APMT103504PDER (Grade : ACZ350) Bore size : 25 mm, Depth : d=15 mm $v_c = 200$ m/min, $f = 0.1$ mm/rev Step feed : 0,5 mm, Air blow</p>	<p>● Helical Cutting</p> <p>C50</p> <p><i>Capable of large boring in diameter of 1,2-1,8 times the cutter diameter without prepared hole</i></p> <p>Tool Dia. : 25 mm Insert : APMT103504PDER (Grade : ACZ350) Bore size : 40 mm, Depth : d=30 mm $v_c = 300$ m/min, $f = 0.1$ mm/rev Axial feed : t = 15 mm/pitch, Air blow</p>

Recommended Cutting Conditions for WMM(H) 2000

Material Type of milling	Carbon steel (ex. C50)	Stainless steel (ex. 10CrNiS189)	Cast iron (ex. GG20)	Aluminium alloy	
					ϕD (mm)
20 ~ 26	Shoulder milling	80-120-160 0,05-0,20	80-100-120 0,05-0,15	70-150-180 0,05-0,20	200-300-500 0,1-0,15-0,2
	Slotting	0,05-0,12	0,05-0,10	0,05-0,12	0,05-0,10
	Drilling	0,05-0,18	0,05-0,12	0,05-0,18	0,05-0,10
Grade	ACZ330	ACZ350	ACZ310	DL1000 (H1)	

[v_c = m/min, f_t = mm/tooth] [min. - optimum - max.]

Recommended Cutting Conditions for WMM(H) 3000


Material Type of milling	Carbon steel (ex. C50)	Stainless steel (ex. 10CrNiS189)	Cast iron (ex. GG20)	Aluminium alloy	
					ϕD (mm)
32 ~ 40	Shoulder milling	80-120-160 0,05-0,25	80-100-120 0,05-0,20	70-150-180 0,05-0,25	200-300-500 0,1-0,15-0,2
	Slotting	0,05-0,15	0,05-0,12	0,05-0,15	0,05-0,10
	Drilling	0,05-0,20	0,05-0,18	0,05-0,20	0,05-0,10
Grade	ACZ330	ACZ350	ACZ310	DL1000 (H1)	

[v_c = m/min, f_t = mm/tooth] [min. - optimum - max.]

"Wave Mill" Series

WMM (H) 2000 E/EL EW/ELW Type

WMMH ...EW

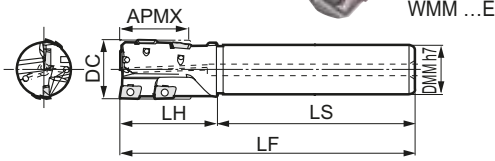

Body

Cat. No.	Stock	Dimensions (mm)						Total teeth	Effective teeth
		DC	DMM	APMX	LF	LH	LS		
WMM 2020 E	▲	20	20	17	130	35	95	3	1
WMM 2025 E	▲	25	25	26	140	40	100	4	1

(Long type)

WMM 2020 EL	▲	20	20	17	185	60	125	3	1
WMM 2025 EL	▲	25	25	26	220	75	145	4	1

(Weldon shank type)

WMM 2020 EW	▲	20	20	17	130	35	95	3	1
WMM 2025 EW	▲	25	25	26	140	40	100	4	1

(Long type with weldon shank)

WMM 2020 ELW	▲	20	20	17	185	60	125	3	1
WMM 2025 ELW	▲	25	25	26	220	75	145	4	1


(WMMH Standard type with coolant holes and weldon shank)

WMMH 2020 EW	▲	20	20	17	130	35	95	3	1
WMMH 2025 EW	▲	25	25	26	140	40	100	4	1

(WMMH Long type with coolant holes and weldon shank)

WMMH 2020 ELW	▲	20	20	17	185	60	125	3	1
WMMH 2025 ELW	▲	25	25	26	220	75	145	4	1

Inserts for WMM 2000 Series



Application	Coated			Diamond coated	Un-coated	Radius
	M	P	K	K _N	N	
High Speed / Light cut				▲	▲	
General Purpose	▲	▲	▲			
Roughing						
Cat. No.	ACZ350	ACZ330	ACZ310	DL1000	H1	RE
APMT 103504 PDER	▲	▲	▲	-	-	0,4
103508 PDER	▲	▲	▲	-	-	0,8
103512 PDER	▲	▲	▲	-	-	1,2
APMT 103504 PDER-H	▲	▲	▲	-	-	0,4
103508 PDER-H	▲	▲	▲	-	-	0,8
103512 PDER-H	▲	▲	▲	-	-	1,2
APET 103504 PDER-F	▲	▲	▲	-	-	0,4
APET 103504 PDFR-S	-	-	-	▲	▲	0,4

PDER-H : Stronger cutting edge

PDER-F : Ground insert for finishing

PDFR-S : Round honed sharp cutting edge for aluminium


Spare Parts

Screw	Wrench
BFTX 02506 N	1,5 TRD 08

"Wave Mill" Series

WMM (H) 3000 E/EL EW/ELW Type

WMMH ...EW

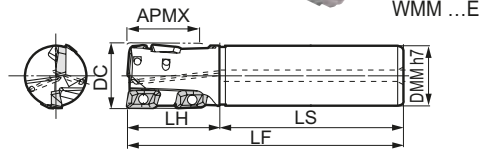

Body

Cat. No.	Stock	Dimensions (mm)						Total teeth	Effective teeth
		DC	DMM	APMX	LF	LH	LS		
WMM 3032 E	▲	32	32	39	150	50	100	4	1
WMM 3040 E	▲	40	32	39	160	55	105	4	1

(Long type)

WMM 3032 EL	▲	32	32	39	230	90	140	4	1
WMM 3040 EL	▲	40	32	39	230	55	185	4	1

(Weldon shank type)

WMM 3032 EW	▲	32	32	39	150	50	100	4	1
WMM 3040 EW	▲	40	32	39	160	55	105	4	1

(Long type with weldon shank)

WMM 3032 ELW	▲	32	32	39	230	90	140	4	1
WMM 3040 ELW	▲	40	32	39	230	55	185	4	1


(WMMH Standard type with coolant holes and weldon shank)

WMMH 3032 EW	▲	32	32	39	150	50	100	4	1
WMMH 3040 EW	▲	40	32	39	160	55	105	4	1

(WMMH Long type with coolant holes and weldon shank)

WMMH 3032 ELW	▲	32	32	39	230	90	140	4	1
WMMH 3040 ELW	▲	40	32	39	230	55	185	4	1

Inserts for WMM 3000 Series



Application	Coated			Diamond coated	Un-coated	Radius
	M	P	K	K _N	N	
High Speed / Light cut				▲	▲	
General Purpose	▲	▲	▲			
Roughing						
Cat. No.	ACZ350	ACZ330	ACZ310	DL1000	H1	RE
APMT 160508 PDER	▲	▲	▲	-	-	0,8
160512 PDER	▲	▲	▲	-	-	1,2
160516 PDER	▲	▲	▲	-	-	1,6
APMT 160508 PDER-H	▲	▲	▲	-	-	0,8
160512 PDER-H	▲	▲	▲	-	-	1,2
160516 PDER-H	▲	▲	▲	-	-	1,6
APMT 160520 PDER-H	▲	▲	▲	-	-	2,0
160530 PDER-H	▲	▲	▲	-	-	3,0
160540 PDER-H	▲	▲	▲	-	-	4,0
160550 PDER-H	▲	▲	▲	-	-	5,0
160560 PDER-H	▲	▲	▲	-	-	6,0
APET 160508 PDER-F	▲	▲	▲	-	-	0,8
APET 160504 PDFR-S	-	-	-	▲	▲	0,4
160508 PDFR-S	-	-	-	▲	▲	0,8

Spare Parts

Screw	Wrench
BFTX 03584	3,0 TRD 15



● APET--- S, uncoated grade "H1" for Aluminium

Wave Repeater Mill WRX Type



General Features

The WRX Wave repeater end mill system features AXMT style inserts vertically mounted and positioned to provide a long continuous cutting edge suitable for deep shoulder milling. Designed to run at elevated feed rates the soft cutting action reduces cutting resistance, vibration and noise to substantially improve tool life and surface finish.


Available with our new generation Super FF and Super ZX coated inserts for unbeatable performance.

Product Range


- WRX 2000 series with 12 mm inserts
- WRX 3000 series with 17 mm inserts
- Cutter Diameters - 20 mm ($a_p = 18$ mm) to 100 mm ($a_p = 53$ mm)
- Special Order Options – WRX Cutter with integrated arbor
Shell type with detachable head
- Wide ISO Application Range – P/M/K/N classification

Advantages


- Optimised insert positions reduce cutting resistance and vibration
- Integral coolant improves chip flow
- Primary chip slot for smooth and fast chip evacuation
- Optimised insert pocket maximises rigidity
- Bottom edge support improves tool life and cutting performance

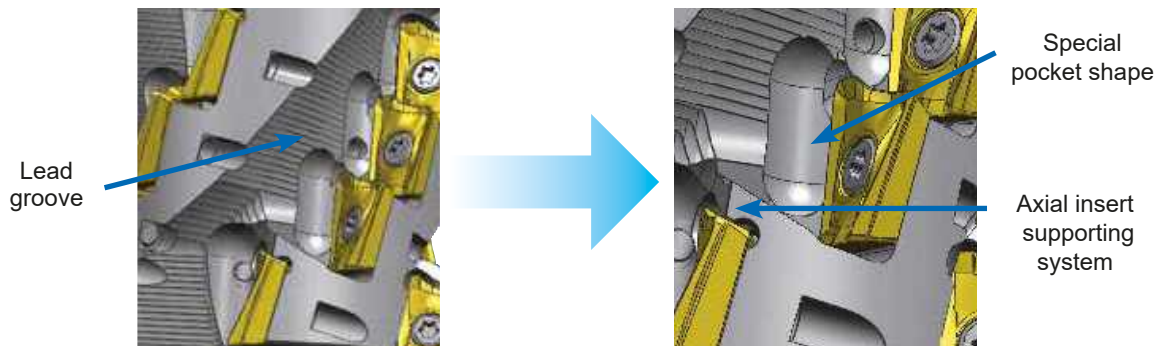

Cutting Resistance Comparison

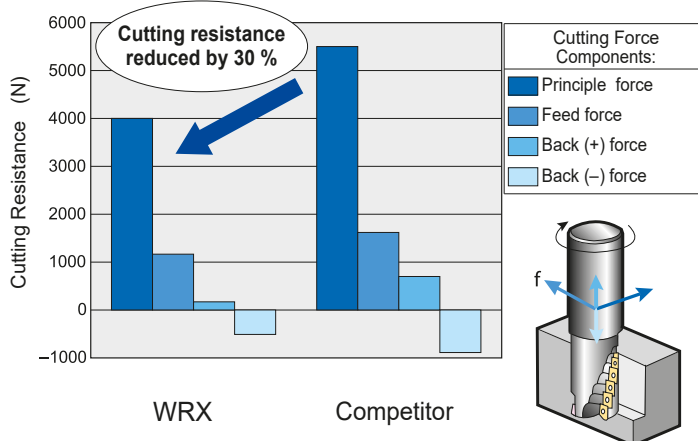


Vibration Comparison

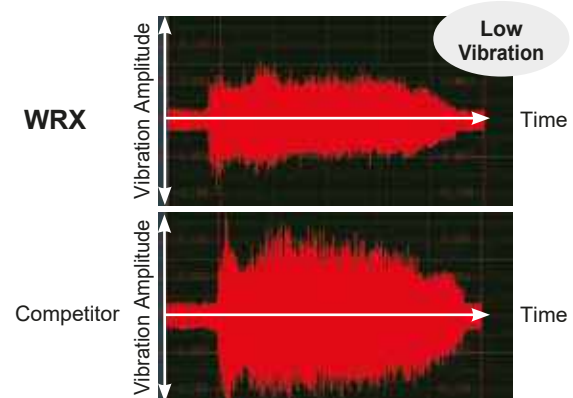

Work Material: C50
 Tool: WRX2025RH27E25
 Cutting Conditions: $v_c = 100$ m/min, $f_t = 0,15$ mm/tooth
 $a_p = 25$ mm, $a_e = 10$ mm, Dry

Work Material: C50
 Tool: WRX3080RH53F32
 Cutting Conditions: $v_c = 150$ m/min, $f_t = 0,15$ mm/tooth
 $a_p = 25$ mm, $a_e = 10$ mm, Dry

WRX 2000 Series with AXMT 12 mm inserts

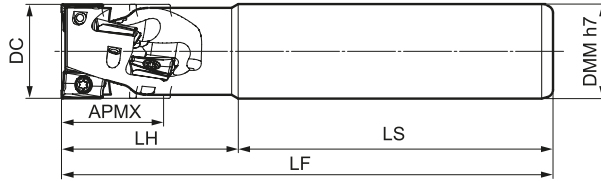



Body (Cylindrical Shank Type)

Cat. No.	Stock	Dimensions (mm)						No. of teeth	No. of rows	Effective teeth
		DC	APMX	DMM	LF	LH	LS			
WRX2020RH18E20	●	20	18	20	120	40	80	4	2	2
WRX2020RH36E20	□	20	36	20	130	45	85	4	4	1
WRX2025RH18E25	●	25	18	25	130	45	85	6	2	3
WRX2025RH27E25	●	25	27	25	130	45	85	6	3	2
WRX2032RH18E32	●	32	18	32	140	50	90	8	2	4
WRX2032RH27E32	●	32	27	32	130	45	85	9	3	3
WRX2040RH18E40	□	40	18	40	160	40	120	10	2	5
WRX2040RH36E40	●	40	36	40	130	45	85	16	4	4

Body (Weldon Shank Type)

Cat. No.	Stock	Dimensions (mm)						No. of teeth	No. of rows	Effective teeth
		DC	APMX	DMM	LF	LH	LS			
WRX2020RH18W20	●	20	18	20	120	40	80	4	2	2
WRX2020RH36W20	□	20	36	20	130	45	85	4	4	1
WRX2025RH18W25	●	25	18	25	130	45	85	6	2	3
WRX2025RH27W25	●	25	27	25	130	45	85	6	3	2
WRX2032RH18W32	●	32	18	32	140	50	90	8	2	4
WRX2032RH27W32	●	32	27	32	130	45	85	9	3	3
WRX2040RH18W40	□	40	18	40	160	40	120	10	2	5
WRX2040RH36W40	●	40	36	40	130	45	85	16	4	4

Spare Parts (WRX 2000)

Screw	Wrench
	
BFTX 0306 IP	TRDR 08 IP

Identification Details

WRX 20 25 R H 27 W 25

Insert Size | Cutting Direction | Cutting Edge Length | Arbor Diameter

Tool øD | Inner coolant | Arbor Type

E - Straight Shank
W - Weldon Shank
F - Shell Type


Inserts (Same as for Wavemill WEX 2000 Type)

Application	Coated Carbide						Carbide		DLC	
	P	P	P	K	K	M	M	K	N	
High Speed / Light cut	P			K		M		K	N	
General Purpose		P		K		M			N	
Roughing		P	P		K		M			
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Radius RE
AXMT 123504 PEER-G	●	●	●	●	●			-	-	0,4
123508 PEER-G	●	●	●	●	●			-	-	0,8
123512 PEER-G	●	●	●	●	●			-	-	1,2
AXMT 123504 PEER-H	●	●	●	●	●			-	-	0,4
123508 PEER-H	●	●	●	●	●			-	-	0,8
123512 PEER-H	●	●	○	●	●			-	-	1,2
AXMT 123504 PEER-E						●	●	-	-	0,4
123508 PEER-E			▲			●	●	-	-	0,8
123512 PEER-E						●	●	-	-	1,2
AXMT 123508 PEER-EH			▲			●	●	-	-	0,8
AXET 123502 PEFR-S	-	-	-	-	-	-	-	●	●	0,2
123504 PEFR-S	-	-	-	-	-	-	-	●	●	0,4
123508 PEFR-S	-	-	-	-	-	-	-	●	●	0,8

- Unable to produce
- G - General type
- H - Strong cutting edge
- E - For stainless steel / exotic alloy
- EH - Strong edge for stainless steel / exotic alloy
- S - For aluminium alloy


Application Examples

Example

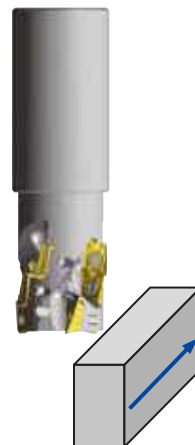

Work Material	Construction Machine Parts (USt.42-2)		
	Body	Sumitomo	Competitor
Tool	Body	WRX2000 Weldon shank	Ø 38,1
	Insert	AXMT	18 mm
	Insert grade	ACP200	PVD Type
	Tool dia. (mm)	38,1	38,1
	Total teeth	24	16
Cutting Data	Effective teeth	4	4
	Cutting speed (m/min)	180	137
	Feed (mm/t)	0,09	0,1
	Axial depth of cut (mm)	38,1	38,1
	Radial width of cut (mm)	3,2	3,2
Result	Coolant	Wet	Wet
	Tool life / Cutting edge	60	40
Benefits	1,5 times longer tool life 30 % increased productivity		

WRX 3000 Series with AXMT 17 mm inserts

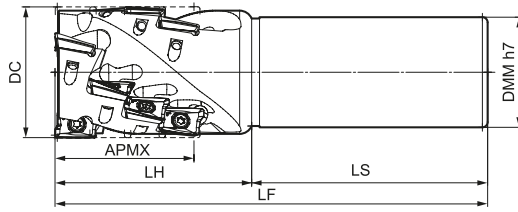

Body (Cylindrical Shank Type)





Cat. No.	Stock	Dimensions (mm)						No. of teeth	No. of rows	Effective teeth
		DC	APMX	DMM	LF	LH	LS			
WRX3032RH40E32	●	32	40	32	150	65	85	6	3	2
WRX3040RH27E40	□	40	27	40	180	60	120	6	2	3
WRX3040RH40E40	●	40	40	40	150	65	85	9	3	3
WRX3050RH27E40	□	50	27	40	180	60	120	8	2	4
WRX3050RH53E40	●	50	53	40	165	75	90	12	4	3

Body (Weldon Shank Type)




Cat. No.	Stock	Dimensions (mm)						No. of teeth	No. of rows	Effective teeth
		DC	APMX	DMM	LF	LH	LS			
WRX3040RH27W40	□	40	27	40	180	60	120	6	2	3
WRX3040RH40W40	●	40	40	40	150	65	85	9	3	3
WRX3050RH27W40	□	50	27	40	180	60	120	8	2	4
WRX3050RH53W40	●	50	53	40	165	75	90	12	4	3

Spare Parts (WRX 3000)

Screw	Wrench
 3,0 Nm	
BFTX 0409 IP	TRDR 15 IP

Inserts (Same as for Wavemill WEX 3000 Type)



Application	Coated Carbide						Carbide	DLC		
	P	P	K	K	M/S	M/S				
High Speed / Light cut	P		K		M/S		K/N	N		
General Purpose		P	K		M/S	M/S		N		
Roughing		P	P	K		M/S				
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Radius RE
AXMT 170508 PEER-L	●	●	●	○	●					0,8
AXMT 170504 PEER-G	○	●	●	●	●					0,4
170508 PEER-G	○	●	●	●	●					0,8
170512 PEER-G	○	●	●	○	●					1,2
170516 PEER-G	○	●	●	○	●					1,6
170520 PEER-G*	○	●	●	○	●					2,0
170530 PEER-G*	●	●	●	●	●					3,0
AXMT 170508 PEER-H	●	●	●	●	●					0,8
170512 PEER-H	●	●	●	●	●					1,2
AXMT 170504 PEER-E						●	●			0,4
170508 PEER-E			▲			●	●			0,8
170512 PEER-E						●	●			1,2
170516 PEER-E						○	●			1,6
170520 PEER-E*						○	●			2,0
170530 PEER-E*						●	●			3,0
AXMT 170508 PEER-EH			▲			●	●			0,8
AXET 170502 PEFR-S	-	-	-	-	-	-	-	●	●	0,2
170504 PEFR-S	-	-	-	-	-	-	-	●	●	0,4
170508 PEFR-S	-	-	-	-	-	-	-	●	●	0,8

L – Low cutting force
 G – General type
 H – Strong cutting edge
 E – For stainless steel
 EH – Strong edge for stainless steel
 S – For aluminium
 * Cutter body modification is required.
 – Unable to produce

Application Examples

Example 1



Work Material	Automotive Component / Cast Iron		
Tool	Body	Sumitomo WRX3000 Type Integrated Arbor	Competitor Ø 50
	Insert	AXMT	18 mm
	Insert grade	ACK300	PVD Type
	Tool dia. (mm)	50	50
	Total teeth	15	12
	Effective teeth	3	3
Cutting Data	Cutting speed (m/min)	78	78
	Feed (mm/t)	0,13	0,13
	Axial depth of cut (mm)	45	45
	Radial width of cut (mm)	5	5
	Coolant	Dry	Dry
Result	Tool life / Cutting edge	500 min	300 min
Benefits	1,7 times longer tool life		


















Example 2



Work Material	Machine Parts / Stainless Steel		
Tool	Body	Sumitomo WRX3040RH40E40	Competitor Ø 40
	Insert	AXMT	18 mm
	Insert grade	ACP300	PVD Type
	Tool dia. (mm)	40	40
	Total teeth	9	6
	Effective teeth	3	2
Cutting Data	Cutting speed (m/min)	125	125
	Feed (mm/t)	0,2	0,2
	Axial depth of cut (mm)	40	40
	Radial width of cut (mm)	5	5
	Coolant	Wet	Wet
Result	Tool life / Cutting edge	20	5 ~ 10
Benefits	Stable machining, double tool life with no breakage		

Wave Repeater Mill WRX Type

Chipbreaker Selection

Work Material	Steel, Cast Iron			Stainless Steel		Aluminium
	L	G	H	E	EH	S
Chipbreaker Type						
Feature	Low cutting force	General purpose	Strong cutting edge	E type for smooth cutting	Strong cutting edge	Sharp cutting edge
2000 Type Figure	—					
3000 Type Figure						
Application	Light cut, low rigidity milling and less burrs	General to Interrupted milling	Roughing, heavy interrupted and hardened steel milling	Light cutting to general purpose	Heavy interrupted machining	Aluminium alloy and non-ferrous metal

Ramping (Slant Milling)

Tool Diameter	Max. Ramping Angle	
	WRX 2000 Typ	WRX 3000 Typ
20	4°	
25	2°	
32	1°30'	
40	1°	2°
50	0°30'	1°
63		0°30'
80		0°30'
100		Not possible



Recommended Cutting Conditions

Tool: WRX 3050 RH53 F22, DC = 50 mm, $a_p = 50$ mm

ISO	Work Material	Property, Condition	Hardness (HB)	Grades (optimum grade in bold letters)	Chip Breaker	Recommended cutting speed and feed / tooth according to width of cut (a_e/DC) - must be adjusted to actual machine and workpiece conditions.					
						10%		25%		> 50%	
						v_c	f_t	v_c	f_t	v_c	f_t
						min. Optimum max.	min. Optimum max.	min. Optimum max.	min. Optimum max.	min. Optimum max.	min. Optimum max.
P	Steel, carbon steel	< 0,15% C, annealed	125	ACP 100 ACP 200 ACP 300	L - G	170 – 215 – 240	0,21 – 0,28 – 0,35	160 – 195 – 220	0,16 – 0,21 – 0,26	130 – 160 – 180	0,08 – 0,10 – 0,13
		< 0,45% C, annealed	190	ACP 100 ACP 200 ACP 300	L - G	160 – 195 – 220	0,21 – 0,28 – 0,35	140 – 175 – 190	0,16 – 0,21 – 0,26	110 – 140 – 160	0,08 – 0,10 – 0,13
		< 0,45% C, tempered	250	ACP 100 ACP 200 ACP 300	L - G - H	140 – 180 – 200	0,19 – 0,26 – 0,32	130 – 165 – 180	0,14 – 0,19 – 0,24	100 – 130 – 140	0,08 – 0,10 – 0,13
		< 0,75% C, annealed	270	ACP 100 ACP 200 ACP 300	L - G - H	140 – 170 – 190	0,19 – 0,26 – 0,32	120 – 155 – 170	0,14 – 0,19 – 0,24	100 – 130 – 140	0,07 – 0,10 – 0,12
		< 0,75% C, tempered	300	ACP 100 ACP 200 ACP 300	L - G - H	130 – 165 – 180	0,19 – 0,26 – 0,32	120 – 150 – 170	0,14 – 0,19 – 0,24	100 – 120 – 130	0,07 – 0,10 – 0,12
	Low alloyed steel	annealed	180	ACP 100 ACP 200 ACP 300	G - H	130 – 165 – 180	0,18 – 0,24 – 0,30	120 – 150 – 170	0,13 – 0,18 – 0,22	100 – 120 – 130	0,07 – 0,09 – 0,11
		tempered	275	ACP 100 ACP 200 ACP 300	G - H	130 – 160 – 180	0,17 – 0,23 – 0,28	120 – 145 – 160	0,12 – 0,16 – 0,20	100 – 120 – 130	0,07 – 0,09 – 0,11
		tempered	300	ACP 100 ACP 200 ACP 300	G - H	110 – 140 – 160	0,16 – 0,22 – 0,27	100 – 130 – 140	0,11 – 0,15 – 0,19	90 – 110 – 120	0,07 – 0,09 – 0,11
		tempered	350	ACP 100 ACP 200 ACP 300	G - H	100 – 130 – 140	0,16 – 0,21 – 0,26	100 – 120 – 130	0,11 – 0,15 – 0,19	80 – 100 – 110	0,06 – 0,08 – 0,10
	High alloyed and tool steel	annealed	200	ACP 100 ACP 200	G - H	70 – 85 – 90	0,15 – 0,21 – 0,26	60 – 80 – 90	0,11 – 0,14 – 0,18	60 – 70 – 80	0,06 – 0,08 – 0,10
tempered		325	ACP 100 ACP 200	G - H	30 – 35 – 40	0,14 – 0,19 – 0,24	30 – 35 – 40	0,10 – 0,14 – 0,17	20 – 30 – 30	0,06 – 0,08 – 0,10	
M	Stainless steel, ferritic/martensitic	annealed	200	ACP 200 ACP 300	L - G - H	120 – 150 – 170	0,15 – 0,20 – 0,25	110 – 135 – 150	0,11 – 0,14 – 0,18	90 – 110 – 120	0,07 – 0,09 – 0,11
	Stainless, martensitic	tempered	240	ACP 200 ACP 300	L - G - H	100 – 125 – 140	0,16 – 0,22 – 0,27	90 – 115 – 130	0,12 – 0,16 – 0,20	80 – 100 – 110	0,07 – 0,10 – 0,12
	Stainless, austenitic	plunged	180	ACM 200 ACM 300	L - G	80 – 95 – 110	0,15 – 0,20 – 0,25	70 – 85 – 90	0,11 – 0,14 – 0,18	60 – 70 – 80	0,06 – 0,08 – 0,10
K	Gray cast iron	GG	180	ACK 200 ACK 300	G - H	190 – 240 – 270	0,19 – 0,26 – 0,32	180 – 220 – 240	0,14 – 0,19 – 0,24	140 – 170 – 190	0,09 – 0,12 – 0,15
	Nodular cast iron	GGG	250	ACK 200 ACK 300	G - H	140 – 170 – 190	0,16 – 0,21 – 0,26	120 – 155 – 170	0,12 – 0,16 – 0,20	100 – 130 – 140	0,07 – 0,10 – 0,12
S	Exotic alloys (Resistant alloys, Ti + Ni alloys)	Fe based, annealed	200	ACK 200 ACK 300	L - G	40 – 45 – 50	0,12 – 0,16 – 0,21	30 – 40 – 45	0,08 – 0,11 – 0,14	30 – 35 – 40	0,07 – 0,09 – 0,11
		hardened	280	ACK 200 ACK 300	L - G	15 – 20 – 25	0,10 – 0,14 – 0,17	10 – 15 – 20	0,07 – 0,10 – 0,12	10 – 15 – 20	0,05 – 0,07 – 0,09
N	Aluminum alloy	Si < 13%		DL 1000 H1	S	510 – 635 – 710	0,23 – 0,31 – 0,38	460 – 580 – 640	0,17 – 0,22 – 0,28	390 – 485 – 540	0,08 – 0,12 – 0,14
		Si ≥ 13%		DL 1000 H1	S	150 – 190 – 210	0,19 – 0,25 – 0,32	140 – 175 – 190	0,14 – 0,18 – 0,23	130 – 165 – 180	0,08 – 0,10 – 0,13
	Copper alloy			DL 1000 H1	S	320 – 405 – 450	0,15 – 0,21 – 0,26	300 – 370 – 410	0,13 – 0,16 – 0,22	240 – 300 – 330	0,07 – 0,10 – 0,12

- Dry machining is recommended (air cooling) - if lubricant is used, we recommend CVD coated grades (ACP100 / ACK200) or tough PVD grades (ACP300 / ACK300).
 - Insert geometry: L type for low cutting forces, thinly coated components. G type for general application, H type offers high cutting edge stability for rough and heavy cutting conditions.

Wave Ball Mill™ for Roughing WBMR Type




■ Features

Particularly suitable for die mold machining the WBMR replaceable insert ball nose endmill efficiently roughs complex profiles.


Its high feed rate capability is a direct result of a sharp cutting edge which is maintained during the cutting cycle by the special cemented carbide substrate working in parallel with the ultra hard ZX coating.

- Advantages
 - Wave shaped cutting edge
 - Economical M class insert
 - Precise clamping
 - High feed rate capability

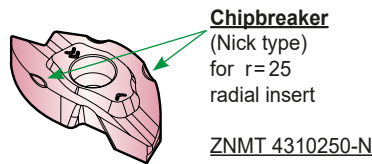


■ Performance


● Cutting Resistance



● Anti-Rotational Mechanism

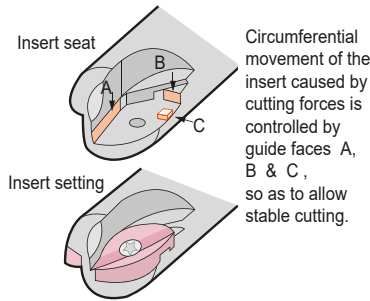

● Insert Life

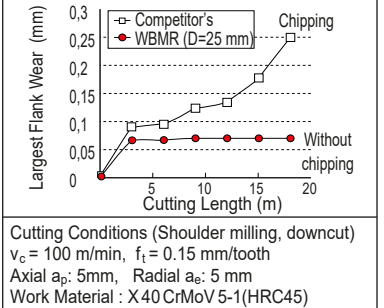

■ Application Example

● Cold Molding Die

Work Material : X155CrMo121

<Results>
 Flank wear after continuous cutting for seven hours was less than other manufacturer's product. Stable cutting was observed.

WBMR 2200S (ø 20 mm)
 Insert Grade : ACZ350

Cutting Conditions :
 $n = 2200$ rpm, $v_f = 500$ mm/min
 Depth of Cut : 0,3-2 mm
 Non-water soluble cutting oil

● Injection Molded Part (Cr-Mo steel + Stellite-overlay)

<Results>
 Wave ball (ø30mm) could cut without chattering while other manufacturer's products could not cut at all due to chattering.

WBMR 2300M (ø 30 mm)
 Insert Grade : ACZ350

Cutting Conditions :
 $n = 500$ rpm, $v_f = 35$ mm/min
 Depth of Cut : 5 mm
 Dry cut

■ Recommended Cutting Conditions (2 teeth)

Material Condition	Carbon steel (Below HRC25)	Alloy steel (Below HRC45)	Stainless, Die steel etc.	Cast iron
	(A)	v_c : 200-250-300 f_t : 0,1-0,2-0,3	v_c : 100-150-200 f_t : 0,1-0,2-0,3	v_c : 50-80-100 f_t : 0,1-0,15-0,2

[v_c =m/min, f_t =mm/tooth] [min.- optimum - max.]

■ Recommended Cutting Conditions (4 teeth)

Material Condition	Carbon steel (Below HRC25)	Alloy steel (Below HRC45)	Stainless, Die steel etc.	Cast iron
	(A)	v_c : 200-250-300 f_t : 0,1-0,2-0,3	v_c : 100-150-200 f_t : 0,1-0,2-0,3	v_c : 50-80-100 f_t : 0,1-0,15-0,2
(B)	v_c : 160-200-240 f_t : 0,1-0,2-0,3	v_c : 80-120-160 f_t : 0,1-0,2-0,3	v_c : 40-60-80 f_t : 0,1-0,15-0,2	v_c : 80-100-120 f_t : 0,2-0,3-0,4


[v_c =m/min, f_t =mm/tooth] [min.- optimum - max.]

Wave Ball Mill™ for Roughing WBMR 2000 Type

Wave Ball Mill™ for Roughing WBMR 2000 L Type


Rake Angle	Radial	-
	Axial	-10°

20-47mm

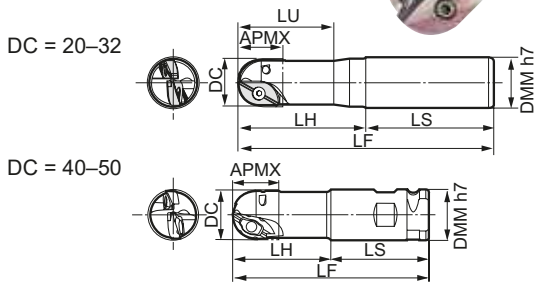

Rake Angle	Radial	-
	Axial	-10°

30-69mm

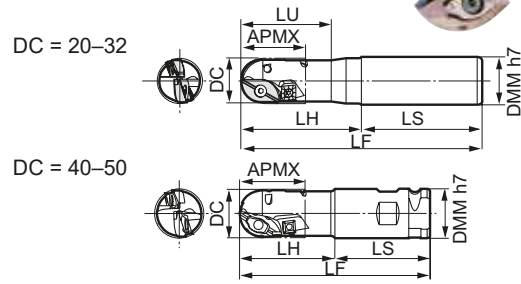

Body (Short and middle length type, 2 teeth)

Cat. No.	Stock	Dimensions (mm)						
		DC	DMM	APMX	LH	LS	LU	LF
WBMR 2200 S	●	20	25	20	60	80	40	140
2200 M	●	20	25	20	60	140	40	200
2200 MW	●	20	25	20	60	140	40	200
WBMR 2250 S	●	25	32	23	70	80	50	150
2250 M	●	25	32	23	73	147	50	220
2250 MW	●	25	32	23	73	147	50	220
WBMR 2320 S	●	32	32	31	80	80	60	160
2320 M	●	32	32	31	85	155	60	240
2320 MW	●	32	32	31	85	155	60	240
WBMR 2400 S	□	40	42	35	100	100	-	200
2400 M	□	40	42	35	180	100	-	280
WBMR 2500 S	□	50	42	47	100	100	-	200
2500 M	□	50	42	47	180	100	-	280

- S: Short type with cylindrical shank
 M: Middle length type with cylindrical shank
 MW: Middle length type with Weldon shank


Body (Extra long type, 4 teeth)

Cat. No.	Stock	Dimensions (mm)						
		DC	DMM	APMX	LH	LS	LU	LF
WBMR 2200 LL	●	20	25	30	80	170	40	250
2200 LLW	●	20	25	30	80	170	40	250
WBMR 2250 LL	●	25	32	38	100	200	50	300
2250 LLW	●	25	32	38	100	200	50	300
WBMR 2320 LL	●	32	32	44	120	230	60	350
2320 LLW	●	32	32	44	120	230	60	350
WBMR 2400 LL	□	40	42	50	250	100	-	350
2400 LLW	□	40	42	50	250	100	-	350
WBMR 2500 LL	□	50	42	69	250	100	-	350
2500 LLW	□	50	42	69	250	100	-	350

- LL: Extra long type with cylindrical shank
 LLW: Extra long type with Weldon shank

Inserts

Application	Coated Carbide			Dimensions (mm)							Fig.	No. of teeth	Applicable Endmill
	ACP200	ACP300	ACK300	L	W1	S	RE						
High Speed / Light cut	●	●	●										
General Purpose	●	●	●										
Roughing	●	●	●										
Cat. No.	ACP200	ACP300	ACK300	L	W1	S	RE	Fig.	No. of teeth	Applicable Endmill			
ZNMT 1804100-C	●	●	●	18,00	9,76	4,76	10,0	1	1	WBMR 2200			
2004100-S	●	●	●	20,00	7,50	4,37	10,0	2	1				
SPMT 070308	○	○	○	7,94	-	3,18	-	3	2	WBMR 2250			
ZNMT 2205125-C	●	●	●	22,50	12,20	5,70	12,5	1	1				
2305125-S	●	●	●	23,00	9,38	5,56	12,5	2	1				
SPMT 09T308	●	●	●	9,53	-	3,97	-	3	2	WBMR 2320			
ZNMT 2907160-C	●	●	●	29,00	15,62	7,15	16,0	1	1				
3006160-S	●	●	●	30,00	12,00	6,70	16,0	2	1				
SPMT 09T308	●	●	●	9,53	-	3,97	-	3	2	WBMR 2400			
ZNMT 3608200	○	○	○	36,00	19,50	6,70	20,0	4	2				
SPMT 09T308	●	●	●	9,53	-	3,97	-	3	2	WBMR 2500			
ZNMT 4310250	○	○	○	43,00	25,70	10,15	25	4	2				
4310250-N	○	○	○	43,00	25,70	10,15	25	5	2				
SPMT 120408	○	○	○	12,7	-	4,76	-	3	2				

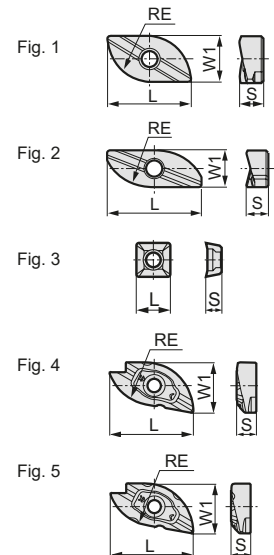

Spare Parts

Screw	Wrench	Wrench	Applicable Endmill
BFTX 0307N	2,0	TRX10	WBMR 2200, WBMR 2200 LL
BFTX 0409N	3,4	-	WBMR 2250, WBMR 2250LL
BFTX 0511N	5,0	-	WBMR 2320, WBMR 2320LL
BFTX 0407N	3,0	-	WBMR 2320LL
BFTX0619N	7,5	-	WBMR 2400, WBMR 2500, WBMR 2400LL, WBMR 2500LL
BFTX 0409N	3,4	-	WBMR 2500LL

Wave Ball Mill for Finishing WBMF Type




■ Features


The outstanding results obtained from this finishing cutter are due to the combination of its large sigmoid blade and precise clamping system making it extremely rigid !


The WBMF achieves an excellent machined finish greatly reducing hand finishing and polishing operations.

- Advantages
- Unique rigid clamping system
 - Large sigmoid blade
 - Smooth cutting action
 - High quality machined surface
 - Ultra hard ZX coated cutting edge

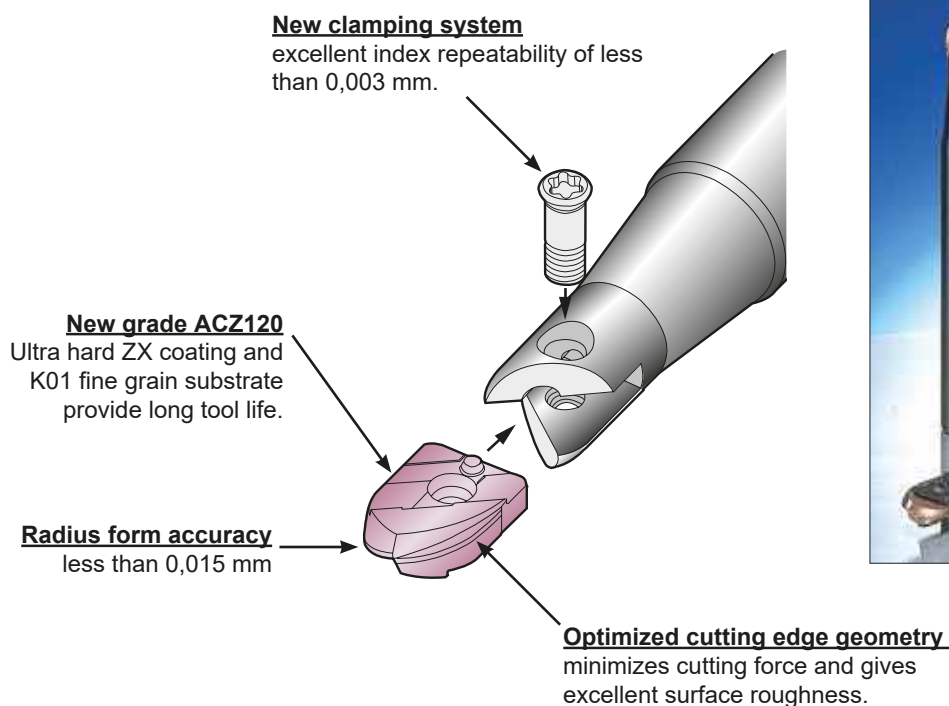

■ Application Example

<p>● Bumper Moulding Die Work Material : C55</p> 	<p><Results> Surface roughness after continuous cutting for twelve hours was better than other manufacturer's product. Less width of flank wear was observed.</p>
<p>WBMF1200M (ø20mm) Insert : ZPGU2471100 Grade : ACZ120</p>	<p>Cutting Conditions $v_c = 88$ m/min $v_f = 700$ mm/min ($f_t = 0,25$ mm/tooth) Width of Cut : 0,5 mm Depth of Cut : 0,5 mm Dry</p>


<p>● Bumper Moulding Die Work Material : C50</p> 	<p><Results> Smooth cutting and good surface finish after continuous cutting for eight hours</p>
<p>WBMF1200M (ø20mm) Insert : ZPGU2471100 Grade : ACZ120</p>	<p>Cutting Conditions $v_c = 190$ m/min $v_f = 1200$ mm/min ($f_t = 0,21$ mm/tooth) Width of Cut : 0,2 mm Depth of Cut : 0,2 mm Dry</p>

● = Euro stock
□ = Delivery on request

 Recommended Tightening Torque (N·m)

Wave Ball Mill for Finishing WBMF 1000 Type

Rake Angle	Radial	-
	Axial	0°

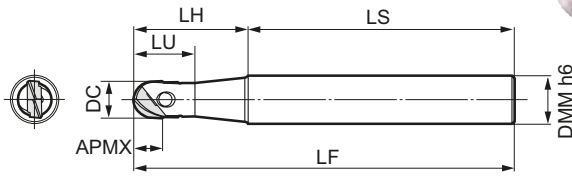

Body

Cat. No.	Stock	Dimensions (mm)							
		DC	DMM	APMX	LH	LS	LU	LF	
WBMF 1100 S	□	10	16	9	30	70	17	100	
1100 M	●	10	16	9	35	95	17	130	
1100 L	□	10	16	9	50	130	17	180	
WBMF 1120 S	□	12	16	10,5	40	70	19,5	110	
1120 M	●	12	16	10,5	40	110	19,5	150	
1120 MM12N	□	12	12	10,5	40	110	19,5	150	
1120 L	□	12	16	10,5	60	140	19,5	200	
WBMF 1160 S	□	16	20	12	50	80	25,5	130	
1160 M	●	16	20	12	50	130	25,5	180	
1160 MM12N	□	16	16	12	50	130	25,5	180	
1160 L	□	16	20	12	70	150	25,5	220	
WBMF 1200 S	□	20	25	15	60	80	32	140	
1200 M	●	20	25	15	60	140	32	200	
1200 MM20N	□	20	20	15	60	140	32	200	
1200 L	□	20	25	15	80	170	32	250	
WBMF 1250 S	□	25	32	18,5	70	80	36	150	
1250 M	●	25	32	18,5	73	147	36	220	
1250 L	□	25	32	18,5	100	200	36	300	
WBMF 1300 S	□	30	32	22,5	80	80	43	160	
1300 M	●	30	32	22,5	85	155	43	240	
1300 L	□	30	32	22,5	120	230	43	350	

S : Short type
M : Middle length type
L : Long type

Inserts

Application	Coated	Dimensions (mm)						Applicable Endmill
High Speed / Light cut	P	DC	L	APMX	S	RE		
General Purpose								
Roughing								
Cat. No.	ACZ120	DC	L	APMX	S	RE	Applicable Endmill	
ZPGU 1551050	●	10	15,6	9	5,1	5,0	WBMF1100	
ZPGU 1856060	●	12	18	10,5	5,6	6,0	WBMF1120	
ZPGU 2061080	●	16	20,5	12	6,1	8,0	WBMF1160	
ZPGU 2471100	●	20	24,5	15	7,1	10,0	WBMF1200	
ZPGU 2876125	●	25	28,5	18,5	7,6	12,5	WBMF1250	
ZPGU 3486150	●	30	34,4	22,5	8,6	15,0	WBMF1300	

Spare Parts

Screw	Wrench	Applicable Endmill
BFTG0408F	TRD15	WBMF1100
BFTG0409F	TRD15	WBMF1120
BFTG0513F	TRD20	WBMF1160
BFTG0617F	TRD25	WBMF1200
BFTG0621F	TRD25	WBMF1250
BFTG0825F	TRD25	WBMF1300


Recommended Cutting Conditions

Material	Material				Condition
	Carbon steel (Below HRC25)	Alloy steel (Below HRC45)	Stainless, Die steel etc.	Cast iron	
Condition	200-250-300	100-150-200	50-80-100	100-120-150	
øD	10-30	10-30	10-30	10-30	
v _c	0,1-0,2-0,3	0,1-0,2-0,3	0,1-0,15-0,2	0,2-0,3-0,4	
f _t	0,1-0,2-0,3	0,1-0,2-0,3	0,1-0,15-0,2	0,2-0,3-0,4	

Wave Radius Mill WRCX 08000/10000 E Type


Multi Purpose Endmills with Polygon Inserts

Shank Type with Small Diameter Inserts



E₋ : Cylindrical straight shank type

- ES : Short type with straight shank
- EM : Middle length type with straight shank
- EL : Long type with straight shank

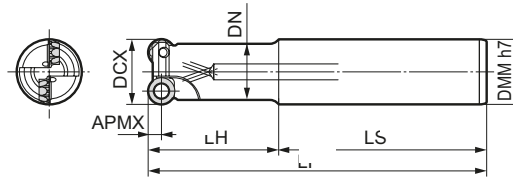

Axial rake angle: -3°
Radial rake angle: 0 - 35°

■ BODY

Cat. No.	Stock	Dimensions (mm)							No. of teeth	Axial Rake	Radial Rake	Helical Boring øB Standard	Plunging α max.	Screwdriver	Torque (N·m)
		DCX	DMM	DN	APMX	LF	LH	LS							
WRCX 08012 ES	●	12	12	9,4	4	110	40	70	1	-3°	-35°	-	0°30'	BFTX 02505 IP	1,5
08012 EM	●	12	12	9,4	4	150	70	80	1	-3°	-10°	24 ⁺⁷ ₋₄	5°30'		
WRCX 08016 ES	●	16	16	14	4	120	50	70	1	-3°	-10°	24 ⁺⁷ ₋₄	5°30'	BFTX 02506 IP	1,5
08016 EM	●	16	16	14	4	150	70	80	1	-3°	-3°	32 ^{±7}	13°		
08016 EL	●	16	16	14	4	250	130	120	2	-3°	0°	42 ^{±7}	8°20'		
WRCX 08020 ES	●	20	20	18	4	130	50	80	2	-3°	0°	40 ^{±8}	13°10'	BFTX 03584 IP	3,0
08020 EM	●	20	20	18	4	180	100	80	2	-3°	0°	54 ^{±8}	8°		
08020 EL	●	20	20	18	4	250	130	120	2	-3°	0°	54 ^{±8}	8°		
WRCX 08025 ES	●	25	25	21	4	130	50	80	3	-3°	0°	40 ^{±8}	13°10'	BFTX 03584 IP	3,0
08025 EM	●	25	25	21	4	180	100	80	3	-3°	0°	54 ^{±8}	8°		
08025 EL	●	25	25	21	4	250	130	120	3	-3°	0°	54 ^{±8}	8°		
WRCX 10025 ES	●	25	25	21	5	130	50	80	2	-3°	0°	40 ^{±8}	13°10'	BFTX 03584 IP	3,0
10025 EM	●	25	25	21	5	180	100	80	2	-3°	0°	54 ^{±8}	8°		
10025 EL	●	25	25	21	5	250	130	120	2	-3°	0°	54 ^{±8}	8°		
WRCX 10032 ES	●	32	32	28	5	130	50	80	3	-3°	0°	40 ^{±8}	13°10'	BFTX 03584 IP	3,0
10032 EM	●	32	32	28	5	200	120	80	3	-3°	0°	54 ^{±8}	8°		
10032 EL	●	32	32	28	5	300	180	120	3	-3°	0°	54 ^{±8}	8°		

■ Spare Parts

■ Inserts

Application	Coated Carbide					Uncoated Carbide	Diamond Coated	Dimensions (mm)			Fig.	Applicable Endmill
	P	M	M	K	K	K	N	IC	RE	S		
High Speed / Light cut	●					●	●	8	3,0	3,18	1	WRCX 08000 E
General Purpose		●	●	●	●			8	3,0	3,18	1	
Roughing					●			10	3,5	3,97	1	WRCX 10000 E
								10	3,5	3,97	1	
								10	5,0	3,97	2	

Fig. 1





Fig. 2



QPMT... : Standard 16 cornered polygon type
QPMT...-H: Stronger cutting edge type

QPET...-S: Polished round insert for non-ferrous material

■ Recommended Cutting Conditions

[v_c = m/min, f_t = mm/tooth] [min. - optimum - max.]

Material Grade	Carbon steel (ex. C40 - C50)	Alloy steel (Below HRC40)	Stainless steel (ex. X10CrNiS18-9)	Cast iron (ex. GG20)	Non-ferrous material
	Grade	ACP100, ACP200	ACP100, ACP200	ACP200, ACP300	ACK200, ACK300
12-32	v _c 80-120-160	60-100-140	60-100-120	60-80-120	200-500-1000
	f _t 0,1-0,3-0,4	0,1-0,2-0,3	0,1-0,15-0,2	0,1-0,2-0,3	0,1-0,2-0,3


- = Euro stock
- = Delivery on request

G19



Recommended Tightening Torque (N·m)

Exchangeable Head Endmills WRCX 08000 M Type

Exchangeable Head Endmills WRCX 10000/12000 M Type




Modular Type




High efficiency multi purpose endmills

High efficiency multi purpose endmills

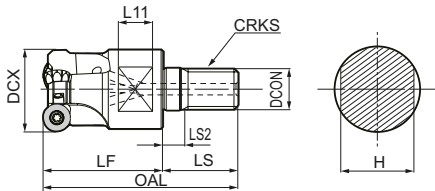

Axial rake angle: 0°
Radial rake angle: -3°

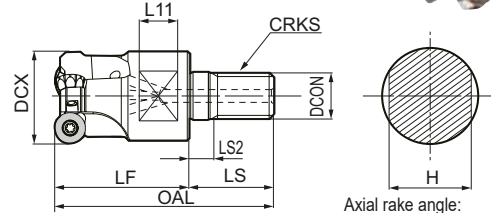

Axial rake angle: 0°
Radial rake angle: -3°

Heads

For insert type : QPMT 0803

Cat. No.	Stock	Dimensions (mm)									No. of teeth
		DCX	DCON	CRKS	OAL	LF	LS2	LS	L11	H	
WRCX 08020M10Z2	●	20	10,5	M10	49	30	5	19	8	15	2
WRCX 08025M12Z3	●	25	12,5	M12	56	35	5	21	10	19	3

Inserts are not included.

Heads

For insert type : QPOT 10T3

Cat. No.	Stock	Dimensions (mm)									No. of teeth
		DCX	DCON	CRKS	OAL	LF	LS2	LS	L11	H	
WRCX 10025M12Z2	●	25	12,5	M12	56	35	5	21	10	19	2
10028M12Z3	●	28	12,5	M12	56	35	5	21	10	19	2
WRCX 10030M16Z3	●	30	17,0	M16	63	40	5	23	10	24	3
10032M16Z3	●	32	17,0	M16	63	40	5	23	10	24	3

Inserts are not included.

Heads

For insert type : QPOT 1204

Cat. No.	Stock	Dimensions (mm)									No. of teeth
		DCX	DCON	CRKS	OAL	LF	LS2	LS	L11	H	
WRCX 12040M16Z4	□	40	17,0	M16	63	40	5	23	10	24	4

Inserts are not included.

Inserts

Application		Coated Carbide					Uncoated carbide	Diamond Coated	Dimensions (mm)			Fig.	Applicable Endmill
		P	M	K	N			IC	RE	S			
High Speed / Light cut		P						8	3,0	3,18	1	WRCX 08000 M	
General Purpose			P	M	K			8	3,0	3,18	1		
Roughing			P	M		K		10	3,5	3,97	1	WRCX 10000 M	
								10	3,5	3,97	1		
								10	5,0	3,97	2	WRCX 12000 M	
								12	4,0	4,76	1		
								12	4,0	4,76	1	WRCX 12000 M	
								12	6,0	4,76	2		

QPMT... : 16 corner insert for general purpose application
QPMT...-H: 16 corner insert with strong cutting edge

QPET...-S: Round insert with sharp cutting edge for aluminium

Identification Details

WRCX	08	020	M10	Z2
Cutter Type	Insert Size	Diameter	Mounting Screw	No. of Teeth



Spare Parts

Screw	Wrench	Applicable Endmill
BFTX 02506 IP	TRDR 08 IP	




Spare Parts


Screw	Wrench	Applicable Endmill
BFTX 03584 IP	TRDR 15 IP	
BFTX 0409 IP	TRDR 15 IP	WRCX 12040M

Wave Radius Mill RSX(F)08000/10000/12000ES

Milling of steel, stainless steel, cast iron and exotic alloys

Shank Type

Rake Angle	Radial	-5° - -8°			
	Axial	10°	(08000ES)	(10000ES)	(12000ES)

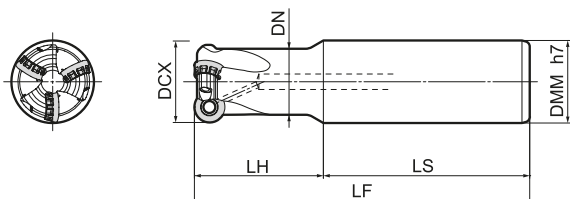

Body (RSX...ES, Standard)


Cat. No.	Stock	Dimensions (mm)						No. of teeth	Weight (kg)
		DCX	DMM	DN	LH	LS	LF		
RSX 08020 ES	●	20	20	16,9	30	70	100	2	0,3
08025 ES	●	25	25	21,9	40	80	120	3	0,4
RSX 10025 ES	●	25	25	20,3	50	80	130	2	0,4
10032 ES	●	32	32	27,1	50	80	130	3	0,7
RSX 12032 ES	●	32	32	25,6	50	80	130	2	0,7

Body (RSXF...ES, Fine Pitch)

Cat. No.	Stock	Dimensions (mm)						No. of teeth	Weight (kg)
		DCX	DMM	DN	LH	LS	LF		
RSXF08020 ES	●	20	20	16,9	30	70	100	3	0,3
08025 ES	●	25	25	21,9	40	80	120	4	0,4
RSXF 10025 ES	●	25	25	20,3	50	80	130	3	0,4
10032 ES	●	32	32	27,1	50	80	130	4	0,7
RSX 12032 ES	●	32	32	25,6	50	80	130	3	0,7



Inserts

Application	Grade					Dimens.		Applicable Cutters
	ACP200	ACK300	ACM100	ACM200	ACM300	IC	S	
High Speed/Light Cut			M S	M S				RSX(F) 08000ES
General Purpose	P M	M S	M S	M S				
Roughing	P M	K			M S			
Cat. No.	ACP200	ACK300	ACM100	ACM200	ACM300	IC	S	
RDET 0803M0EN G	●	●	●	●	●	8	3,18	RSX(F) 08000ES
0803M0EN H	○	●	●	●	●	8	3,18	
RDET 10T3M0EN G	●	●	●	●	●	10	3,97	RSX(F) 10000ES
10T3M0EN H	●	●	●	●	●	10	3,97	
RDET 1204M0EN G	●	●	●	●	●	12	4,76	RSX(F) 12000ES
1204M0EN H	●	●	●	●	●	12	4,76	



M0: IC is metric

Spare Parts

Applicable Cutters	Wrench	Screw	
			(N·m)
RSX(F) 08000ES	TRDR08IP	BFTX02506IP	1,5
RSX(F) 10000ES	TRDR15IP	BFTX03584IP	3,0
RSX(F) 12000ES		BFTX0409IP	3,0

Identification Details

RSX	F	10	025	ES
Cutter Series	Fine Pitch Type	Insert Size	Cutter Diameter	Endmill Type

Recommended Cutting Conditions

Min.-Optimum-Max.

ISO	Work Material		Hardness (HB)	Cutting Speed v_c (m/min)	Feed Rate f_t (mm/t)	Grade	
P	Carbon Steel		180-280	100-160-200	0,20-0,40-0,60	ACP200	
	Alloy Steel		180-280	100-140-180	0,20-0,30-0,40	ACP200	
M	Stainless Steel	Cr Based	Ferritic	200	150-180-200	0,15-0,25-0,35	ACM300
		Cr-Ni Based	Martensitic	200-330	80-120-180	0,15-0,25-0,35	ACM300
			Austenitic	200	150-180-200	0,15-0,25-0,35	ACM300
			Austenitic, ferritic	230-270	80-120-180	0,15-0,25-0,35	ACM200
			Precipitation hardening	330	60-100-160	0,15-0,25-0,35	ACM200
K	Cast Iron		250	80-120-160	0,10-0,30-0,40	ACK300	
S	Heat resistant alloy		Ni based material	250-350	20-30-40	0,10-0,20-0,30	ACM100 ACM200
	Titanium	Pure Titanium	(Rm400)	60-80-100	0,10-0,20-0,30		
		$\alpha + \beta$ alloy system	(Rm1050)	40-50-60	0,10-0,20-0,30		




● = Euro stock
○ = Japan stock


 G20/G21

 Recommended Tightening Torque (N·m)

Exchangeable Head Endmills RSX(F)08000/10000/12000 M

Modular Type

Rake Angle	Radial	-5° - -8°			
	Axial	10°	(08000ES)	(10000ES)	(12000ES)

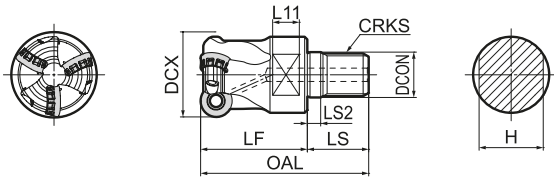

Body (RSX...M, Standard)


Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)
		DCX	DCON	CRKS	OAL	LF	LS2	LS	L11	H		
RSX 08020M10Z2	●	20	10,5	M10	49	30	5	19	8	15	2	0,1
08025M12Z3	●	25	12,5	M12	56	35	5	21	10	19	3	0,1
08032M16Z4	●	32	17,0	M16	63	40	5	23	10	24	4	0,2
RSX 10025M12Z2	●	25	12,5	M12	56	35	5	21	10	19	2	0,1
10032M16Z3	●	32	17,0	M16	63	40	5	23	10	24	3	0,2
RSX 12032M16Z2	●	32	17,0	M16	63	40	5	23	10	24	2	0,2
12040M16Z3	●	40	17,0	M16	63	40	5	23	10	24	3	0,3

Body (RSXF...M, Fine Pitch)

Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Weight (kg)
		DCX	DCON	CRKS	OAL	LF	LS2	LS	L11	H		
RSXF 08020M10Z3	●	20	10,5	M10	49	30	5	19	8	15	3	0,1
08025M12Z4	●	25	12,5	M12	56	35	5	21	10	19	4	0,1
08032M16Z5	●	32	17,0	M16	63	40	5	23	10	24	5	0,2
RSXF 10025M12Z3	●	25	12,5	M12	56	35	5	21	10	19	3	0,1
10032M16Z4	●	32	17,0	M16	63	40	5	23	10	24	4	0,2
RSXF 12032M16Z3	●	32	17,0	M16	63	40	5	23	10	24	3	0,2
12040M16Z4	●	40	17,0	M16	63	40	5	23	10	24	4	0,3

Inserts

Application	Grade					Dimens.		Applicable Cutters
	ACP200	ACK300	ACM100	ACM200	ACM300	IC	S	
High Speed/Light Cut			M S	M S				RSX(F) 08000ES
General Purpose	P M		M S	M S	M S			
Roughing	P M	K			M S			
Cat. No.	ACP200	ACK300	ACM100	ACM200	ACM300	IC	S	
RDET 0803M0EN G	●	●	●	●	●	8	3,18	RSX(F) 10000ES
0803M0EN H	○	●	●	●	●	8	3,18	
RDET 10T3M0EN G	●	●	●	●	●	10	3,97	RSX(F) 12000ES
10T3M0EN H	●	●	●	●	●	10	3,97	
RDET 1204M0EN G	●	●	●	●	●	12	4,76	RSX(F) 12000ES
1204M0EN H	●	●	●	●	●	12	4,76	





Cutting Edge Cross Section



M0: IC is metric

Spare Parts

Applicable Cutters	Wrench	Screw	
			
RSX(F) 08000M	TRDR08IP	BFTX02506IP	1,5
RSX(F) 10000M	TRDR15IP	BFTX03584IP	3,0
RSX(F) 12000M		BFTX0409IP	3,0

Identification Details

RSX	F	10	025	M12	Z3
Cutter Series	Fine Pitch Type	Insert Size	Cutter Diameter	Mounting Screw Size	No. of Teeth

Recommended Cutting Conditions

Min.-Optimum-Max.

ISO	Work Material		Hardness (HB)	Cutting Speed v _c (m/min)	Feed Rate f _t (mm/t)	Grade	
P	Carbon Steel		180-280	100-160-200	0,20-0,40-0,60	ACP200	
	Alloy Steel		180-280	100-140-180	0,20-0,30-0,40	ACP200	
M	Stain-less Steel	Cr Based	Ferritic	200	150-180-200	0,15-0,25-0,35	ACM300
			Martensitic	200-330	80-120-180	0,15-0,25-0,35	ACM300
	Cr-Ni Based	Austenitic	200	150-180-200	0,15-0,25-0,35	ACM300	
		Austenitic, ferritic	230-270	80-120-180	0,15-0,25-0,35	ACM200	
		Precipitation hardening	330	60-100-160	0,15-0,25-0,35	ACM200	
K	Cast Iron		250	80-120-160	0,10-0,30-0,40	ACK300	
S	Heat resistant alloy		Ni based material	250-350	20-30-40	0,10-0,20-0,30	ACM100 ACM200
	Titanium		Pure Titanium	(Rm 400)	60-80-100	0,10-0,20-0,30	
			α + β alloy system	(Rm 1050)	40-50-60	0,10-0,20-0,30	

"Wave Mill" Series WFXC Type



General Features

The WaveMill WFXC type is a chamfering tool that uses inserts for the WFX series. This allows the WFXC type to support many types of work materials using a variety of grades.

Grade Selection

ISO	Grade	Finishing to Light Cutting	Medium Cut	Rough to Heavy Cutting
P	Coated Carbide	ACP100	ACP200	ACP300
		ACM200	ACM300	
M	Coated Carbide			

ISO	Grade	Finishing to Light Cutting	Medium Cut	Rough to Heavy Cutting
K	Coated Carbide	ACK200	ACK300	
N	Coated Carbide	DL1000		
			H1	
	Carbide			

Application Notes


Since chamfering uses the straight cutting edge portion of the insert, the range that can be chamfered will change depending on the corner radius (RE) of the insert that is attached to the body.

Work diameter: Use in a range greater or equal to DC1 and less than or equal to DC2.

Depth: The workpiece can be chamfered from „a“, which is the distance from the tip of the tool to the straight cutting edge at the depth indicated by „b“.

Body	Insert		Min. Work Diameter	Max. Work Diameter	Min. Depth	Max. Depth	Max. Diameter
	Cat. No.	RE	DC1	DC2	a	b	DCX
WFXC 08008E	SOMT 080304	0,4	7,5	15,8	0,1	4,1	17,8
	SOMT 080308	0,8	8,0	15,8	0,2	3,9	17,5
	SOMT 080312	1,2	8,5	15,8	0,4	3,6	17,2
WFXC 08016E	SOMT 080304	0,4	15,5	23,8	0,1	4,1	25,8
	SOMT 080308	0,8	16,0	23,8	0,2	3,9	25,5
	SOMT 080312	1,2	16,5	23,8	0,3	3,6	25,2
WFXC 12025E	SOMT 120404	0,4	24,6	38,3	0,1	6,8	41,3
	SOMT 120408	0,8	25,0	38,3	0,2	6,6	41,0
	SOMT 120412	1,2	25,6	38,3	0,4	6,3	40,7
	SOMT 120416	1,6	26,1	38,3	0,5	6,1	40,4
WFXC 12032E	SOMT 120404	0,4	31,6	45,3	0,1	6,8	48,3
	SOMT 120408	0,8	32,0	45,3	0,2	6,6	48,0
	SOMT 120412	1,2	32,6	45,3	0,4	6,3	47,7
	SOMT 120416	1,6	33,1	45,3	0,5	6,1	47,4

Dimensions (mm)

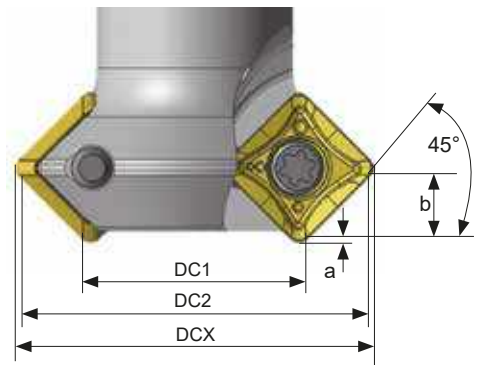


Recommended Tightening Torque (N·m)

"Wave Mill" Series

WFXC 08000/12000 E



Rake Angle	Radial	0°
	Axial	0°

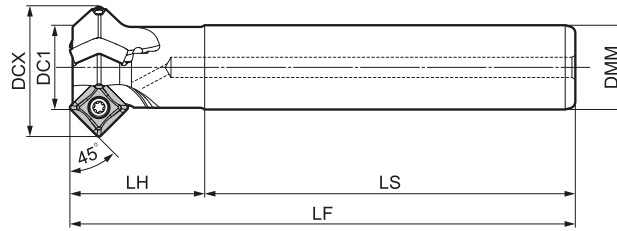

Body WFXC 08000E (Standard Type)

Cat. No.	Stock	Dimensions (mm)						No. of Teeth	Weight (kg)
		DC1	DCX	LF	LH	LS	DMM		
WFXC 08008E	○	8	17,5	120	30	90	10	1	0,1
08016E	○	16	25,5	120	30	90	16	2	0,2

Body WFXC 12000E (Standard Type)


Cat. No.	Stock	Dimensions (mm)						No. of Teeth	Weight (kg)
		DC1	DCX	LF	LH	LS	DMM		
WFXC 12025E	○	25	41,0	150	40	110	25	3	0,6
12032E	○	32	48,0	150	40	110	32	3	1,0

Identification Details

WFX	C	08	016	E
Cutter Series	Chamfering	Insert Size	Cutter Diameter	Endmill Type

Inserts

Application	Coated Carbide							Carbide	DLC	Radius (mm)	Fig.	Applicable Cutters
	P	PM	PM	K	K	MS	MS	KN	N			
High Speed / Light cut	P							MS	KN			
General Purpose		PM	PM	K				MS				N
Roughing		PM	PM		K			MS				N
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	RE		
SOMT 080304 PZER L	○	○	○	○	●	○	○	○	○	0,4	1	WFXC08000E
SOMT 080308 PZER L	○	○	○	○	○	○	○	○	○	0,8	1	
SOMT 080304 PZER G	○	●	●	●	○	○	○	○	○	0,4	1	
SOMT 080308 PZER G	○	●	●	●	○	○	○	○	○	0,8	1	
SOMT 080312 PZER G	○	●	○	○	○	○	○	○	○	1,2	1	
SOMT 080308 PZER H	○	●	●	○	●	○	○	○	○	0,8	1	
SOMT 080312 PZER H	○	○	●	○	○	○	○	○	○	1,2	1	
SOET 080304 PZER G	○	○	○	○	○	○	○	○	○	0,4	1	
SOET 080308 PZER G	○	○	○	○	○	○	○	○	○	0,8	1	
SOET 080312 PZER G	○	○	○	○	○	○	○	○	○	1,2	1	
SOET 080302 PZFR S	-	-	-	-	-	-	-	●	●	0,2	1	WFXC12000E
SOET 080304 PZFR S	-	-	-	-	-	-	-	●	●	0,4	1	
SOET 080308 PZFR S	-	-	-	-	-	-	-	●	●	0,8	1	
SOMT 120408 PDER L	●	●	●	○	○	○	○	○	○	0,8	2	
SOMT 120404 PDER G	○	○	●	○	●	○	○	○	○	0,4	2	
SOMT 120408 PDER G	○	○	●	○	○	○	○	○	○	0,8	2	
SOMT 120412 PDER G	○	○	○	○	○	○	○	○	○	1,2	2	
SOMT 120416 PDER G	○	○	○	○	○	○	○	○	○	1,6	2	
SOMT 120408 PDER H	○	●	○	●	●	○	○	○	○	0,8	2	
SOET 120408 PDFR S	-	-	-	-	-	-	-	●	●	0,8	2	

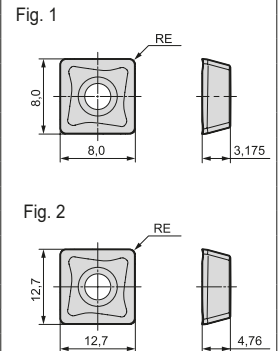

Spare Parts

Applicable Cutter	Screw	Wrench
	WFXC08000E	BFTX0306IP 2,0
WFXC12000E	BFTX03512IP 3,0	TRDR15IP

Recommended Cutting Conditions


ISO	Work Material	Hardness (HB)	Cutting Speed	Feed Rate
P	General Steel	180-280	150-200-250	0,05-0,10-0,15
	Soft Steel	≤180	180-265-350	0,10-0,15-0,20
	Die Steel	200-220	100-150-200	0,05-0,10-0,15
M	Stainless Steel	-	150-200-250	0,05-0,10-0,15
K	Cast Iron	250	100-175-250	0,05-0,10-0,15

Min. - Optimum - Max.

"Wave Mill" Series

WFXC 08000/12000 M

Modular Type

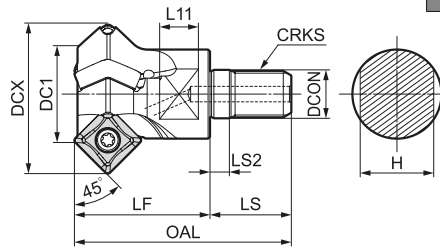

Rake Angle	Radial	0°	
	Axial	0°	

Head (WFXC 08000M)

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)
		DC1	DCX	DCON	CRKS	OAL	LF	LS2	LS	L11	H		
WFXC08016M08Z2	○	16	25,5	8,5	M8	42	25	5	17	8	13	2	0,1

Identification Details

WFX	C	08	016	M08	Z2
Cutter Series	Chamfering	Insert Size	Cutter Diameter	Screw Size	No. of Teeth

Head (WFXC 12000M)

Cat. No.	Stock	Dimensions (mm)										No. of Teeth	Weight (kg)
		DC1	DCX	DCON	CRKS	OAL	LF	LS2	LS	L11	H		
WFXC 12025M12Z3	○	25	41,0	12,5	M12	56	32	5	21	10	19	3	0,1
12032M16Z3	○	32	48,0	17,0	M16	63	40	5	23	10	24	3	0,2



Inserts

Application		Coated Carbide							Carbide	DLC	Radius (mm)	Fig.
		P	M	K	MS	DL1000	RE	H1	DL1000			
High Speed / Light cut		P										
General Purpose			P	M	K	MS						
Roughing			P	M		K	MS					
Cat. No.		ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	RE	Fig.
SOMT 080304 PZER L	○	○	○	○	○	●	○	○	-	-	0,4	1
SOMT 080308 PZER L	○	○	○	○	○	○	○	○	-	-	0,8	1
SOMT 080304 PZER G	○	○	●	●	●	○	○	○	-	-	0,4	1
SOMT 080308 PZER G	○	○	●	●	●	○	○	○	-	-	0,8	1
SOMT 080312 PZER G	○	○	●	○	○	○	○	○	-	-	1,2	1
SOMT 080308 PZER H	○	○	●	○	○	○	○	○	-	-	0,8	1
SOMT 080312 PZER H	○	○	●	○	○	○	○	○	-	-	1,2	1
SOET 080304 PZER G	○	○	○	○	○	○	○	○	-	-	0,4	1
SOET 080308 PZER G	○	○	○	○	○	○	○	○	-	-	0,8	1
SOET 080312 PZER G	○	○	○	○	○	○	○	○	-	-	1,2	1
SOET 080302 PZFR S	-	-	-	-	-	-	-	-	●	●	0,2	1
SOET 080304 PZFR S	-	-	-	-	-	-	-	-	●	●	0,4	1
SOET 080308 PZFR S	-	-	-	-	-	-	-	-	●	●	0,8	1
SOMT 120408 PDER L	●	●	●	○	○	○	○	○	-	-	0,8	2
SOMT 120404 PDER G	○	○	○	○	○	○	○	○	-	-	0,4	2
SOMT 120408 PDER G	○	○	○	○	○	○	○	○	-	-	0,8	2
SOMT 120412 PDER G	○	○	○	○	○	○	○	○	-	-	1,2	2
SOMT 120416 PDER G	○	○	○	○	○	○	○	○	-	-	1,6	2
SOMT 120408 PDER H	○	○	○	○	○	○	○	○	-	-	0,8	2
SOET 120408 PDER S	-	-	-	-	-	-	-	-	●	●	0,8	2

Fig. 1





Fig. 2



Spare Parts

Applicable Cutter	Screw		Wrench
WFXC08000M	BFTX0306IP	2,0	TRDR08IP
WFXC12000M	BFTX03512IP	3,0	TRDR15IP

Recommended Cutting Conditions

ISO	Work Material	Hardness (HB)	Cutting Speed	Feed Rate
P	General Steel	180-280	150-200-250	0,05-0,10-0,15
	Soft Steel	≤180	180-265-350	0,10-0,15-0,20
	Die Steel	200-220	100-150-200	0,05-0,10-0,15
M	Stainless Steel	-	150-200-250	0,05-0,10-0,15
K	Cast Iron	250HB	100-175-250	0,05-0,10-0,15

Min. - Optimum - Max.



■ Features

Drastically Reduced Runout Adjustment Time
Simple screw-fastening structure enables fine adjustments to be made easily.

Blade Through Coolant

Secures a supply of coolant to the cutting edge and breaks chips thoroughly.

Lightweight Aluminum Alloy Body

Utilizing aluminum alloy to achieve a total weight of less than 1,3 kg for a Ø 125 mm cutter with 22 teeth.

■ Product Range

Type	Cat. No.	Body Material	Diameter Range (mm) / No of Teeth							
			Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125	Ø160
Shell	ANXA 16000RS	Aluminum Alloy					10, 14	12, 18	14, 22	20, 28
	ANXA 16000R (Inch)	Aluminum Alloy					10, 14	12, 18	14, 22	20, 28
	ANXS 16000RS	Steel		6	6, 9	8, 12	10, 14	12, 18	14, 22	
	ANXS 16000R (Inch)	Steel				8, 12	10, 14	12, 18	14, 22	
Shank	ANXS 16000E	G60 Steel	4	6						

Inch | Inch Bore


■ Blade Selection Guide

Work Material	N					
Type	L	G	GX	H	—	W
Cutting Edge Shape						
Features	Low Cutting Force	Standard	Long Edge	High Strength		
Applications	Finishing / Light Cutting	General Purpose	Roughing		Corner Radius	Wiper
Edge Length*	6,0 mm	6,0 mm	9,0 mm	6,0 mm		



*Edge length
GX type = 9,0 mm

■ Edge Selection Guide

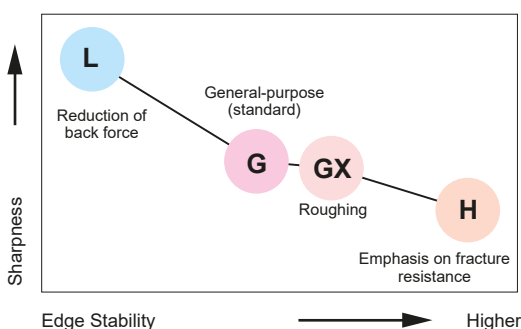

- Reduces Running Costs by Drastically Increasing Blade, Insert Regrinding Allowance (to 1,0 mm)

Assuming 0,2 mm of regrinding each time, an edge can be used up to 6 times. (Peripheral edge cannot be reground.)



If you wish to use reground blades you shall use sets of blades with matching size of the same level in order to keep the balance.

Alnex ANX Series

■ Performances


● High-Speed / High-Efficiency Cutting

Realizes ultra-high efficiency machining with $v_f = 30.000$ mm/min




Comparison: Cutter Diameter \varnothing 100 mm

	Spindle Speed min^{-1}	Number of Teeth	Feed Rate v_f (mm/min)
ANX Series	18.000	18	32.400
Competitor	9.500	12	11.400

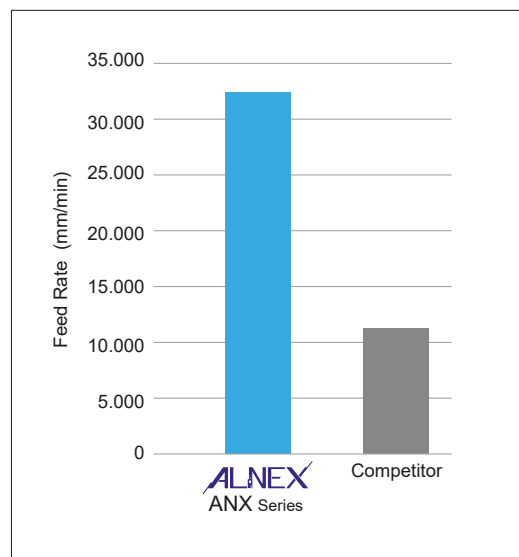


● Drastically Reduces Runout Adjustment Time

- Simple screw-fastening structure
- Enables fine adjustments to be made easily
- High-rigidity body

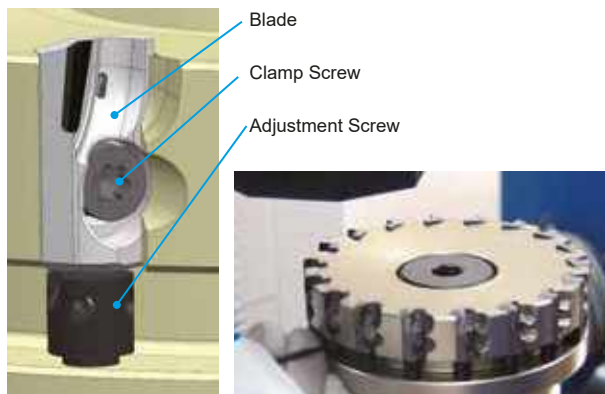

Adjustment Time for Runout Setting $\leq 5 \mu\text{m}$

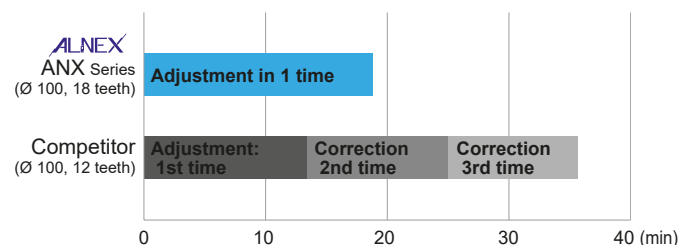

Already completed in 1st time setting, adjustment time reduced.

● Chip Control



Blade-Through Coolant Chip Breaking




Work Material: G-AISI12Cu
Cutting Conditions: $v_c = 2500$ m/min, $f_z = 0,05$ mm/t, $a_p = 0,5$ mm, wet

ANXS 16000 E



Rake Angle	Radial	-2 - 0°	3 mm	90°
	Axial	+5°		

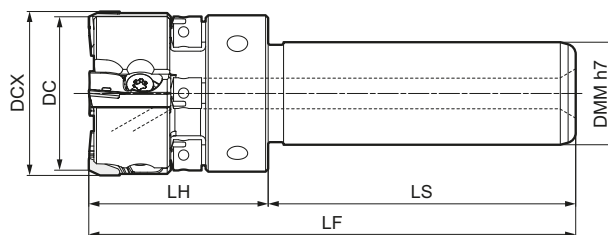

Body - ANXS (Steel)

Dimensions (mm)

Cat. No.	Stock	DC	DCX	DMM	LH	LS	LF	No. of Teeth	Weight (kg)
ANXS 16032E04	○	30	32	20	35	60	95	4	0,3
16040E06	○	38	40	20	40	60	100	6	0,5

Blades are sold separately.
If using a blade for corner radius machining (ANB1604R), DC = DCX.

Identification Details

ANX S 16 032 E 04

Cutter Series: Steel Body, Blade Size: 16, Cutter Diameter: 032, Round Shank: E, Number of Teeth: 04

Spare Parts

Applicable Cutters	Clamp Screw		Adjustment Screw	Wrench	Adjustment Wrench	Assembly Wrench
ANXS 16032E04 16040E06	BXA0310IP	2,0	HFJ	TRXW10IP	ANT	HFVT


Sold separately.

Max. Allowable Spindle Speed

Cat. No.	n max (min ⁻¹)
ANXS 16032E04	10.000
16040E06	10.000

Blades

Application	SUMIDIA				
High Speed / Light Cut					
General Purpose					
Roughing					
Cat. No.	DA1000	Cutting Edge Length	Wiper Edge Shape	Applications	Fig.
ANB 1600R-L	○	6,0	Linear	Low Cutting Force	1
1600R-G	○	6,0	Arc-Shaped	General Purpose	1
1600R-H	○	6,0	Arc-Shaped	Strong Edge	1
1600R-GX	○	9,0	Arc-Shaped	Long Edge	2
1604R	○	6,0	Linear	Corner Radius	3
1600R-W	○	—	Arc-Shaped	Wiper	4

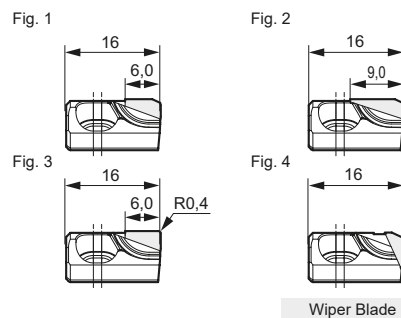

Recommended Cutting Conditions

Si content ≤ 12,6 %

Min. - Optimum - Max.

ISO	Work Material	Hardness	Cutting Speed v _c (m/min)	Feed Rate f _z (mm/t)	Grade
	Aluminium Alloy	—	2.000–2.500–3.000	0,05–0,13–0,20	DA1000

Si content ≥ 12,6 %

Min. - Optimum - Max.


ISO	Work Material	Hardness	Cutting Speed v _c (m/min)	Feed Rate f _z (mm/t)	Grade
	Aluminium Alloy	—	400–600–800	0,05–0,13–0,20	DA1000

The above recommended cutting conditions are meant as a guide. Actual conditions will depend on the individual machine rigidity, work clamp rigidity, depth of cut and other factors.

■ ALNEX Series Usage Manual


● Adjustment of the Blades, Runout Alignment

- ① Before inserting the blade, make sure that the seat and screws are free of debris by cleaning those areas.
- ② Insert the blade into its seat.
- ③ While holding the blade against the seat, install the clamping bolt using the provided wrench, pre-tightening the bolt (recommended pre-torque is 1 N·m).
- ④ Using the provided wrench for the height adjustment screw, set the height to your predetermined value.
- ⑤ Fully tighten the clamp bolt (recommended torque is 2 N·m).
- ⑥ Use 1 blade as a datum point and adjust all blade heights to match.
- ⑦ After tightening, verify that there is no gap between the seat and blade.

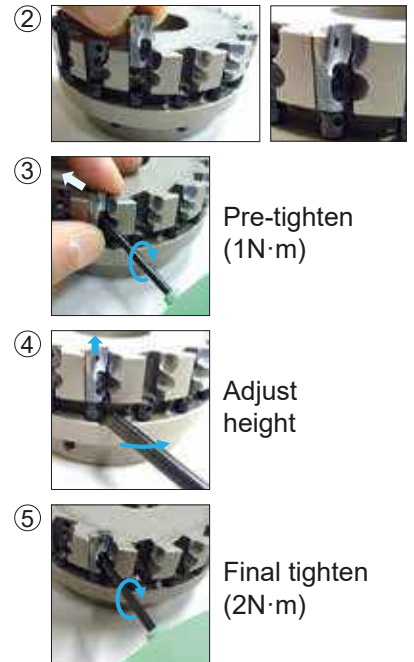


● Balance Adjustments

The cutter comes pre-balanced to a G 6,3 specification. Under normal circumstances, it is not necessary to adjust the balance of the cutter.

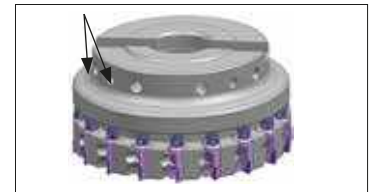

● Clamp Bolts for Arbor

Work Material	Dim.			Max. Torque	Applicable Cutters
	M	L	D		
BXH0825-D13	8	25	13	15	ANXS16040RS_ _
BXH1030-D16	10	30	16	25	ANXS16040RS_ _ , ANXS16063RS_ _
BXH1235-D18	12	35	18	40	ANXS16063R_ _
BXH1235-D33	12	35	33	50	ANXS16080R(S)_ _ , ANXA16080/100/125R(S)_ _
BXH1635-D40	16	35	40	100	ANXS16100R(S)_ _
BXH2036-D50	20	36	50	200	ANXS16125R(S)_ _ , ANXA16160R(S)_ _



● Other Precautions

- Please use only Sumitomo genuine parts.
- Please regularly replace clamp bolts.
- If you wish to reduce the # of effective blades in use, to maintain balance and protect the body, please use dummy blades (set height well below effective blades).
- Please do not operate after releasing the interlock or opening the cover.
- Please avoid use and consult with Sumitomo if you mistakenly crash the body.
- As the blades are very sharp, it is very easy to get hurt when touching the blades with your hands directly, so please wear gloves when taking the blade out of the case to set into the cutter or when setting the cutter into machine tool.

Coated & Solid Endmills

J1-J44

J



Coated Endmills

Selection Guide	According to Work Materials.....	J 2-3
	New Global Standard Endmills.....	J 4-6
GSX MILL Series	GSX 20000	J 7-11
	GSX 30000	J12-13
Slotted Type	GSXSLT 30000.....	J14
	GSX 40000	J15-19
Anti-Vibration Type	GSXVL 40000.....	J20-21
SSEH MILL Series for Exotic Alloys	SSEHVL 4000W-R / SSEH 4000W-R	J22-24
GS MILL Series, Roughing Type	GSRE 4000SF	J25
Hard Type	GSH 4000/6000/8000SF	J26
AURORA COAT MILL Series	ASM 2000/4000DL / DL-R	J27-28
SSUP MILL Series	SSUP 4000ZX/ZX-R.....	J30-31
Hard Type	LHHM 4000/6000/8000ZX	J29
	EHHM 4000/6000/8000ZX	J29
GSX Mills Ball Type	GSXB 20000	J32
AURORA COAT Ball Type	SNB 2000DL.....	J33

Uncoated Endmills

For Aluminium Cutting	ASM 2000.....	J34
SSEH MILL Series for Exotic Alloys	SSEHVL 4000-R / SSEH 4000-R.....	J35
Standard Type	SSM 2000/4000.....	J36-37
Long Type	LSM 2000/4000.....	J38
Extra LongType	ELSM 2000/4000	J39
SUMIBORON "Helical Master" for Hardened Steel	BNES 1000.....	J40
SUMIBORON "Mould Finish Master" for Hardened Steel	BNBP 2R...4/6	J41
SUMIDIA "Mould Finish Master" Binderless	NPDRS / NPDB(S)	J42-43

Solid Carbide
Endmills

Solid Carbide Endmills Selection Guide

● According to Work Materials

Square Type

General Steel (Common Use)

Coated Sharp General

Global Endmills Standard
GSX Type
 ø 1–25 mm
 • 2 Flutes
 • 3 Flutes
 • 4 Flutes
 ⇨ J7–19

Anti-Vibration Radius Corner Endmills
GSXVL Type
 ø 2–25 mm
 • 4 Flutes
 ⇨ J20–21

Legend

Grade Edge Type Usage

General Steel (Special Use)

Plunge Cut Multi-Purpose
 Coated Sharp General
GSX MILL GSXSLT Type
 ø 1–16 mm
 • 3 Flutes
 ⇨ J14

High Efficiency
 Coated Strong High Efficiency
UPMILL SSUP-ZX Type
 ø 2–20 mm
 • 4 Flutes
 ⇨ J30–31

High Efficiency
 Coated Strong High Efficiency
ROUGHING ENDMILL GSRE-SF Type
 ø 6–20 mm
 • 4 Flutes
 ⇨ J25

Hardened Steel

High performance Type
 Coated Strong High Efficiency
GS-MILL-HARD GSH-SF Type
 ø 1–20 mm
 • 4 Flutes
 • 6 Flutes
 • 8 Flutes
 ⇨ J26

High Rigidity Type
 Coated Strong High Efficiency
HARD ENDMILL LHHM...ZX EHHM...ZX
 ø 3–32 mm
 • 4 Flutes
 • 6 Flutes
 • 8 Flutes
 ⇨ J29

SumiBoron Endmill
 CBN
"Helical Master" BNES Type
 ø 6–16 mm
 • 1 Flute
 ⇨ J40, M50

Exotic Metals

For Heat Resistant Steel
 Coated Sharp General
Radius Endmills Standard SSEH Type
 ø 4.5–25 mm
 • 4 Flutes
 ⇨ J22, J24, J35

Anti-Vibration Radius Endmills
SSEHVL Type
 ø 4.5–25 mm
 • 4 Flutes
 ⇨ J22–23, J35

Non-ferrous Metal


SumiDia Endmill
 PCD
SUMIDIA brazed DFE Type
 ø 4–13 mm
 • 1 Flute
 • 2 Flutes
 • 4 Flutes
 ⇨ Stock in Japan

DLC-Coated Endmill
 Coated Sharp General
AURORA COATED ASM-DL Type
 ø 2–16 mm
 • 2 Flutes
 • 4 Flutes
 ⇨ J27–28



● According to Work Materials













Ballnose Type

General Steel (Common Use)


Coated	General
GSX MILL BALL GSXB Type R 0,2–12,5 mm •2 Flutes 	
⇒ J32	

General Steel (Short Series)

Coated	Short	General	Coated	Short	General
NEOBALL SHORT FLUTE S-SNB-ZX Type R 1,5–15 mm •2 Flutes 			ZX-COATED SHORT FLUTE S-SSB-ZX Type R 1,5–4 mm •2 Flutes 		
⇒ Stock in Japan			⇒ Stock in Japan		

Hardened Steel	High Rigidity Type	Hardened Steel																											
	<table border="1"> <tr> <td>Coated</td> <td>Strong</td> <td>High Efficiency</td> </tr> <tr> <td colspan="3"> HARDBALL SHB-ZX Type R 0,5–10 mm •2 Flutes  </td> </tr> <tr> <td colspan="3" style="text-align: right;">⇒ Stock in Japan</td> </tr> </table>	Coated	Strong	High Efficiency	HARDBALL SHB-ZX Type R 0,5–10 mm •2 Flutes 			⇒ Stock in Japan			<table border="1"> <tr> <td>CBN</td> <td style="text-align: center;">MOULD FINISH MASTER</td> <td>PCD</td> </tr> <tr> <td colspan="3"> SUMIBORON brazed BNBP Type R 0,2–1,0 mm •2 Flutes  </td> </tr> <tr> <td colspan="3" style="text-align: right;">⇒ J41, M51</td> </tr> </table>	CBN	MOULD FINISH MASTER	PCD	SUMIBORON brazed BNBP Type R 0,2–1,0 mm •2 Flutes 			⇒ J41, M51			<table border="1"> <tr> <td colspan="2"> SUMIDIA binderless NPDRS Type R 0,2–2,0 mm •1 Flute Radius Endmill  </td> <td> NPDB(S) Type R 0,1–1,0 mm •1 Flute Ballnose Endmill  </td> </tr> <tr> <td colspan="2" style="text-align: right;">NPDRS</td> <td style="text-align: right;">NPDB(S)</td> </tr> <tr> <td colspan="3" style="text-align: right;">⇒ J42–43, M52–53</td> </tr> </table>	SUMIDIA binderless NPDRS Type R 0,2–2,0 mm •1 Flute Radius Endmill 		NPDB(S) Type R 0,1–1,0 mm •1 Flute Ballnose Endmill 	NPDRS		NPDB(S)	⇒ J42–43, M52–53	
Coated	Strong	High Efficiency																											
HARDBALL SHB-ZX Type R 0,5–10 mm •2 Flutes 																													
⇒ Stock in Japan																													
CBN	MOULD FINISH MASTER	PCD																											
SUMIBORON brazed BNBP Type R 0,2–1,0 mm •2 Flutes 																													
⇒ J41, M51																													
SUMIDIA binderless NPDRS Type R 0,2–2,0 mm •1 Flute Radius Endmill 		NPDB(S) Type R 0,1–1,0 mm •1 Flute Ballnose Endmill 																											
NPDRS		NPDB(S)																											
⇒ J42–43, M52–53																													

Non-ferrous Metal

Coated	General
DLC-Coated Endmill AURORA COATED SNB-DL Type R 1–8 mm •2 Flutes 	
⇒ J34	


GSX MILL Series




■ Characteristics and Applications

- Wide variation of three flute types and four flute lengths enable use in a wide variety of applications.
- Fine carbide substrate provides high transverse rupture strength and excellent thermal shock resistance improving reliability in wet cutting applications.
- GSX Coating provides improved reliability and longer tool life.
- Large rake angle and unique flute design improve sharpness and chip evacuation.
- Cutting teeth with gash land improves corner flute strength.
- Sharper edge S type and fracture resistant C type added to the 2D size series.


● Wear Resistance

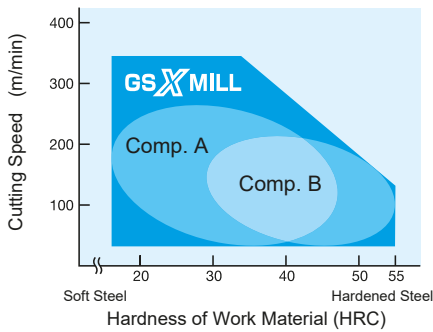

● Thermal Resistance


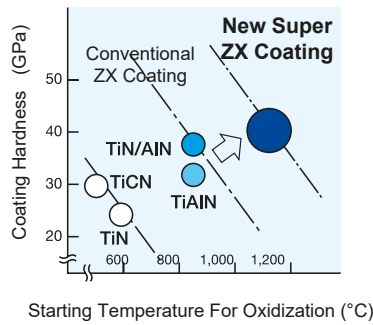


● Improved Chip Evacuation

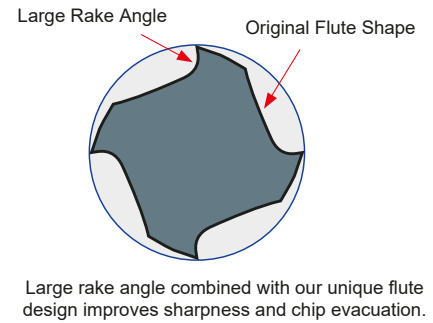


■ 2 cutting edge designs expand machining applications

Sharper edge S type and fracture resistant C type added to the 2D size series.

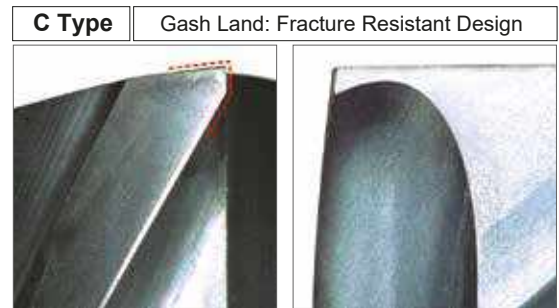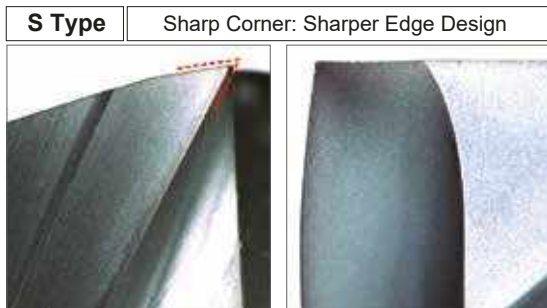

Note: In gash land drilling, some material remains as shown on the right. If you need sharp corners, use the S Type.



Ex.: Corner on a \varnothing 10 mm hole

■ Application Range

P					H			M	S	K	N			
General Structure	Rolled Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Hardened Steel			Stainless Steel	Ti Alloy	Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
					Tempered Die Steel	45 ~ 55 HRC	55 ~ 60 HRC							
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

○ : Best
○ : Good

Blank : Not recommended
*1: GSXSLT30000C is recommended for 50 HRC or less

■ Recommended Milling Examples

Application	Surface Milling		Grooving		Groove Finishing	
	Rough	Finishing	Rough	Finishing	Rough	Finishing
Form						
S Type		○		○		○
C Type	○	○	○	○	○	○

S Type is best for removing inside corners.

*2: Use with small depth of cut.

NEW "Global Standard" Endmills GSX MILL Series



Large rake angle and unique flute design improve sharpness and excellent chip evacuation.


Product Range

Application	No. of Teeth	Flute Length				
		1,5 D	2 D		3 D	4 D
		C Type	S Type	C Type	C Type	C Type
General Purpose	2 Flutes	GSX20000C-1.5D ⇨ J 7	GSX20000S-2D ⇨ J 8	GSX20000C-2D ⇨ J 9	GSX20000C-3D ⇨ J 10	GSX20000C-4D ⇨ J 11
	3 Flutes	GSX30000C-1.5D ⇨ J 12		GSX30000C-2D ⇨ J 13		
	4 Flutes	GSX40000C-1.5D ⇨ J 15	GSX40000S-2D ⇨ J 16	GSX40000C-2D ⇨ J 17	GSX40000C-3D ⇨ J 18	GSX40000C-4D ⇨ J 19
Compound Endmilling	3 Flutes	GSXSLT30000C-1.5D ⇨ J 14				

Multi-Purpose "GSX-SLT" Slot Type

- Optimized flute design of slotted 3 flute (1.5D) short type reduces cutting resistance.

- Allows drilling and slot milling and other continuous (compound) applications.
- Perfect for use with thin sheets and small machining centres



Application Examples

Carbon Steel Grooving with GSX20000C

GSX 20000C	Competitor	Gash land for stronger cutting edge.
		Tool dimension $\phi 6$ (2 Flutes) Work material C50 Cutting speed $v_c = 87$ m/min $n = 4615$ rpm Feed rate $f_t = 0,06$ mm/teeth $v_f = 553$ mm/min Depth of cut $a_p = 3$ mm Wide of cut $a_e = 6$ mm Cooland Dry Vertical machining centre (BT50)
		Breakage

Cast Iron Grooving with GSX20000C

GSX 20000C	Competitor	GSX coating for improved wear resistance.
		Tool dimension $\phi 10$ (2 Flutes) Work material GGG60 Cutting speed $v_c = 66$ m/min $n = 2100$ rpm Feed rate $f_t = 0,072$ mm/teeth $v_f = 302$ mm/min Depth of cut $a_p = 5$ mm, 5 passes Wide of cut $a_e = 10$ mm Cooland Dry Vertical machining centre (BT40)
		High Wear

Stainless Steel Machining with GSX20000C

GSX 20000C	Competitor	Improved reliability even under wet machining.
		Tool dimension $\phi 10$ (2 Flutes) Work material X5 CrNi 1812 Cutting speed $v_c = 50$ m/min $n = 1591$ rpm Feed rate $f_t = 0,04$ mm/teeth $v_f = 27$ mm/min Depth of cut $a_p = 10$ mm Wide of cut $a_e = 0,5$ mm Cooland Wet Vertical machining centre (BT50)
		Coating peel off

Surface Milling C50 with GSX20000S

GSX 20000S	Competitor	S type delivers optimum cutting performance.
		Tool dimension $\phi 6$ (2 Flutes) Work material C50 Cutting speed $v_c = 87$ m/min $n = 4615$ rpm Feed rate $f_t = 0,06$ mm/teeth $v_f = 553$ mm/min Depth of cut $a_p = 10$ mm Wide of cut $a_e = 0,3$ mm Cooland Dry Vertical machining centre (BT50)
		Chipping

GSX MILL Series



⇒ J 20, J 21


GSX MILL Anti-vibration Type (Square/Radius)

Characteristics and Applications

- Optimized irregular pitch and lead affords:
 - Drastically improved chattering and fracture resistance !
 - Less cutting force Allows high-speed, high-feed cutting.
- Rounded lands greatly improve machined surface quality (from $\phi 4$ and up).
- New fine-grained carbide substrate and special coating for better rigidity and thermal and wear resistance.

Product Range


GSX MILL Anti-vibration Square Type

Series	No. of Teeth	Serie	DC (mm)
GSXVL4000-2.5D	4 Flutes		$\phi 2 - \phi 20$ ⇒ J 20


GSX MILL Anti-vibration Corner Radius Type

Series	No. of Teeth	Serie	DC (mm)
GSXVL4000-R-2.5D	4 Flutes		$\phi 3 - \phi 20$ ⇒ J 21

Cutting Range






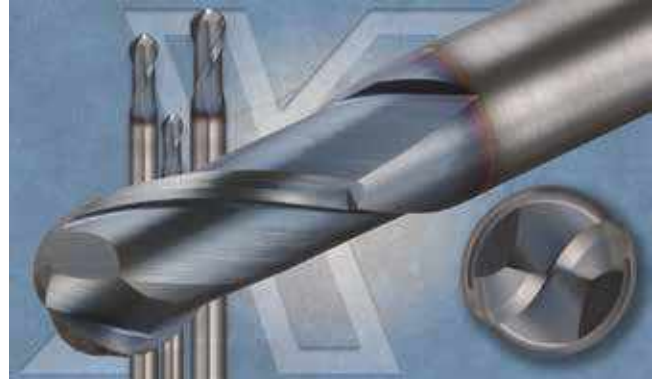
Cutting Resistance



Application Range

Surface Finish Quality

GSX Anti-vibration	Competitor's Anti-vibration	Conventional Design
		
No Chattering Clean Surface	Minute Chattering Poor Surface	Heavy Chattering Poor Surface
Work material: C50 Grooving: $\phi 10$ Tool dimension: $\phi 10$	Cutting Conditions: $n = 4.800 \text{ rpm}$ $v_f = 800 \text{ mm/min}$ $a_p = 10 \text{ mm}$ Equipment: BT50	



⇒ J 34

GSX MILL Ball

Characteristics and Applications


- New coating combined with a fine-grained carbide substrate affords better thermal and wear resistance.
- Large helix angle on cutting edge reduces cutting resistance.
- Unique pocket design and expanded pocket area promotes better chip evacuation.

→ Expands the range of machineable material from soft to hardened steels, and offers reliability and longer tool life.

Product Range


Series	No. of Teeth	Serie	DC (mm)
GSX-B 20000	2 Flutes		$R=\phi 0,2 - \phi 15$ (DC=0,2 - 30) ⇒ J 36

Application Range

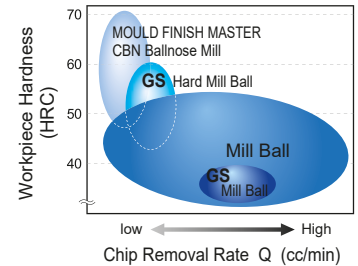


Application Examples

Flank Wear

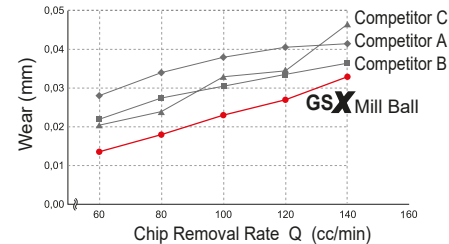

GSX Ball (Cutting Length 140 m)



Able to continue

Conventional Tool (Cutting Length 80 m)




Unable to continue

Work Material : X40CrVMo5-1 (50HRC)
Tool Dimensions : R3 (2 Flutes)
Cutting Conditions : $v_c = 179 \text{ m/min}$ ($n = 9.500 \text{ rpm}$)
 $v_f = 2.250 \text{ mm/min}$ ($f_t = 0,12 \text{ mm/t}$)
 $a_p = 0,2 \sim 1,0 \text{ mm}$, $a_e = 0,3 \text{ mm}$, Wet
Equipment Vertical Machining Centre BT40

Chipping in centre
Heavy wear on flank face



Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered D2e Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	○	○	○	○	○	○	○

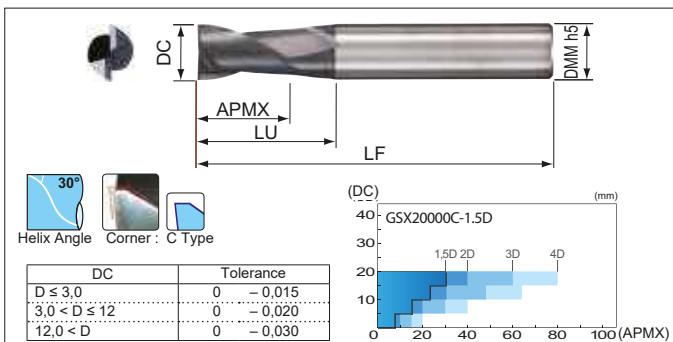

Grade: ACF20

Endmill Identification (GSX MILL Series)

GSX 2 0100 C - 1.5D

Series Code No. of Teeth Diameter Cutting Edge Cutting Edge Length


S: Sharp Edge
C: Gash Land Drilling

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSX 20100C-1.5D	●	1,0	1,5	2,5	40	4
GSX 20150C-1.5D	●	1,5	2,3	3,3	40	4
GSX 20200C-1.5D	●	2,0	3,0	4,0	40	4
GSX 20250C-1.5D	●	2,5	3,8	4,8	40	4
GSX 20300C-1.5D	●	3,0	4,5	6,0	45	6
GSX 20350C-1.5D	●	3,5	5,3	6,8	45	6
GSX 20400C-1.5D	●	4,0	6,0	7,5	45	6
GSX 20450C-1.5D	●	4,5	6,8	8,3	50	6
GSX 20500C-1.5D	●	5,0	7,5	9,5	50	6
GSX 20550C-1.5D	●	5,5	8,3	10,3	50	6
GSX 20600C-1.5D	●	6,0	9,0	-	50	6
GSX 20700C-1.5D	●	7,0	11,0	13,0	60	8
GSX 20800C-1.5D	●	8,0	12,0	-	60	8
GSX 20900C-1.5D	●	9,0	14,0	16,0	70	10
GSX 21000C-1.5D	●	10,0	15,0	-	70	10
GSX 21200C-1.5D	●	12,0	18,0	-	75	12
GSX 21400C-1.5D		14,0	21,0	24,5	90	16
GSX 21500C-1.5D		15,0	23,0	26,5	90	16
GSX 21600C-1.5D		16,0	24,0	-	90	16
GSX 22000C-1.5D		20,0	30,0	-	100	20

Recommended Cutting Conditions

1. For stable machining performance use rigid, high-precision machines and holders.
2. Use air blowing when dry machining.
3. Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
4. If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
1,0	19.600	250	19.600	250	19.600	250	18.300	180	12.700	100	9.000	60	11.000	70	9.000	50
2,0	11.200	340	11.200	340	11.200	340	10.500	240	7.300	130	5.300	80	6.400	90	5.300	70
4,0	6.400	460	6.400	460	6.400	460	6.000	320	4.200	180	3.000	110	3.600	120	3.000	90
6,0	4.600	560	4.600	560	4.600	560	4.300	400	3.000	210	2.200	130	2.700	140	2.200	100
8,0	3.400	560	3.400	560	3.400	560	3.200	400	2.200	210	1.600	130	2.000	140	1.600	100
10,0	2.800	560	2.800	560	2.800	560	2.600	400	1.800	210	1.300	130	1.600	140	1.300	100
12,0	2.300	560	2.300	560	2.300	560	2.200	400	1.500	210	1.100	130	1.300	140	1.100	100
16,0	1.700	450	1.700	450	1.700	450	1.600	320	1.100	180	800	100	1.000	110	800	85
20,0	1.350	380	1.350	380	1.350	380	1.300	280	900	160	650	90	800	100	650	75
Shoulder cutting	ap	1,5 DC										1,0 DC				
	ae	0,05 DC										0,02 DC				


Grooving

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
1,0	19.600	200	19.600	250	19.600	250	18.300	180	12.700	100	9.000	60	11.000	50	4.500	20
2,0	11.200	270	11.200	340	11.200	340	10.500	240	7.300	130	5.300	80	6.400	65	2.650	25
4,0	6.400	370	6.400	460	6.400	460	6.000	320	4.200	180	3.000	110	3.600	80	1.500	35
6,0	4.600	450	4.600	560	4.600	560	4.300	400	3.000	210	2.200	130	2.700	100	1.100	40
8,0	3.400	450	3.400	560	3.400	560	3.200	400	2.200	210	1.600	130	2.000	100	800	40
10,0	2.800	450	2.800	560	2.800	560	2.600	400	1.800	210	1.300	130	1.600	100	650	40
12,0	2.300	450	2.300	560	2.300	560	2.200	400	1.500	210	1.100	130	1.300	100	500	40
16,0	1.700	360	1.700	450	1.700	450	1.600	320	1.100	180	800	100	1.000	80	400	35
20,0	1.350	300	1.350	380	1.350	380	1.300	280	900	160	650	90	800	70	320	30
Grooving	ap	0,2 DC		0,5 DC				0,2 DC		0,05 DC		0,2 DC				

GSX 20000S-2D Type



Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	45-55 HRC	55-60 HRC	60-65 HRC	○	○	○	○

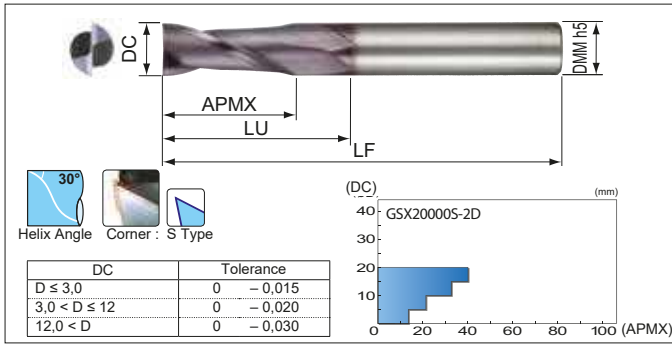

Grade: ACF20

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSX 20030S-2D	○	0,3	0,6	1,0	40	4
GSX 20040S-2D	○	0,4	0,8	1,2	40	4
GSX 20050S-2D	●	0,5	1,3	1,7	40	4
GSX 20080S-2D	○	0,8	1,6	2,1	40	4
GSX 20100S-2D	●	1,0	2,5	3,5	40	4
GSX 20150S-2D	●	1,5	3,8	4,8	40	4
GSX 20200S-2D	●	2,0	5,0	6,0	40	4
GSX 20250S-2D	●	2,5	6,3	7,3	40	4
GSX 20300S-2D	●	3,0	7,5	9,0	45	6
GSX 20350S-2D	●	3,5	8,8	10,3	45	6
GSX 20400S-2D	●	4,0	11,0	14,0	45	6
GSX 20450S-2D	●	4,5	11,3	12,8	50	6
GSX 20500S-2D	●	5,0	13,0	19,6	50	6
GSX 20550S-2D	●	5,5	13,0	19,6	50	6
GSX 20600S-2D	●	6,0	13,0	-	50	6
GSX 20700S-2D	●	7,0	16,0	21,1	60	8
GSX 20800S-2D	●	8,0	19,0	-	60	8
GSX 20900S-2D	●	9,0	19,0	24,1	70	10
GSX 21000S-2D	●	10,0	22,0	-	70	10
GSX 21200S-2D	●	12,0	26,0	-	75	12
GSX 21600S-2D	●	16,0	32,0	-	90	16
GSX 22000S-2D	●	20,0	40,0	-	100	20

Endmill Identification (GSX MILL Series)


GSX 2 0050 S - 2D

Series Code No. of Teeth Diameter Cutting Edge Cutting Length

S: Sharp Edge
C: Gash Land Drilling

Recommended Cutting Conditions

1. For stable machining performance use rigid, high-precision machines and holders.
2. Use air blowing when dry machining.
3. Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
4. If chattering is a problem, reduce the spindle speed and feed rate indicated in the table below by the same ratio, or reduce the depth of cut.
5. This series is not recommended for grooving.
6. If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling


Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm) 1,0	16.600	180	16.600	180	16.600	180	15.500	130	10.500	70	7.500	45	9.400	50	7.500	35
2,0	9.500	250	9.500	250	9.500	250	9.000	200	6.200	100	4.500	60	5.400	70	4.500	50
4,0	5.400	330	5.400	330	5.400	330	5.000	250	3.400	120	2.500	75	3.000	90	2.500	65
6,0	4.000	400	4.000	400	4.000	400	3.700	300	2.550	150	1.900	100	2.300	110	1.900	80
8,0	3.000	400	3.000	400	3.000	400	2.800	300	1.900	150	1.400	100	1.700	110	1.400	80
10,0	2.400	400	2.400	400	2.400	400	2.200	300	1.500	150	1.100	100	1.300	110	1.100	80
12,0	2.000	400	2.000	400	2.000	400	1.850	300	1.300	150	950	100	1.100	110	950	80
16,0	1.500	330	1.500	330	1.500	330	1.400	250	950	120	700	75	850	85	700	60
20,0	1.200	280	1.200	280	1.200	280	1.100	220	750	110	550	65	650	75	550	55
Shoulder cutting	ap		ae		1,5 DC				1,0 DC							
					0,05 DC				0,02 DC							

Groove Finishing

Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm) 1,0	16.600	180	16.600	180	16.600	180	15.500	130	10.500	70	7.500	45	9.400	50	7.500	35
2,0	9.500	250	9.500	250	9.500	250	9.000	200	6.200	100	4.500	60	5.400	70	4.500	50
4,0	5.400	330	5.400	330	5.400	330	5.000	250	3.400	120	2.500	75	3.000	90	2.500	65
6,0	4.000	400	4.000	400	4.000	400	3.700	300	2.550	150	1.900	100	2.300	110	1.900	80
8,0	3.000	400	3.000	400	3.000	400	2.800	300	1.900	150	1.400	100	1.700	110	1.400	80
10,0	2.400	400	2.400	400	2.400	400	2.200	300	1.500	150	1.100	100	1.300	110	1.100	80
12,0	2.000	400	2.000	400	2.000	400	1.850	300	1.300	150	950	100	1.100	110	950	80
16,0	1.500	330	1.500	330	1.500	330	1.400	250	950	120	700	75	850	85	700	60
20,0	1.200	280	1.200	280	1.200	280	1.100	220	750	110	550	65	650	75	550	55
Groove finishing	ap		ae		1,5 DC				-0,02 DC							



Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	○	○	○	○	○	○	○

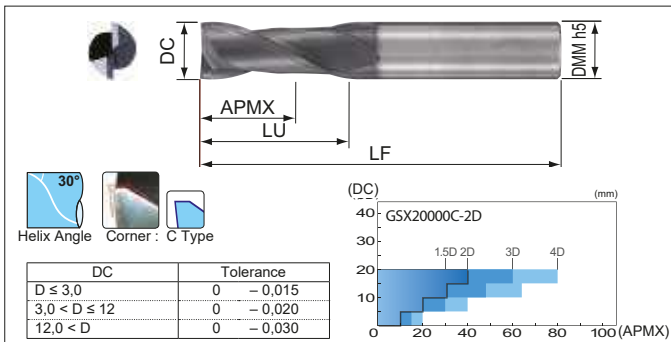

Grade: ACF20

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSX 20050C-2D	●	0,5	1,0	1,4	40	4
GSX 20100C-2D	●	1,0	2,0	3,0	40	4
GSX 20150C-2D	●	1,5	3,0	4,0	40	4
GSX 20200C-2D	●	2,0	4,0	5,0	40	4
GSX 20250C-2D	●	2,5	5,0	6,0	40	4
GSX 20300C-2D	●	3,0	6,0	7,5	45	6
GSX 20350C-2D	●	3,5	7,0	8,5	45	6
GSX 20400C-2D	●	4,0	8,0	9,5	45	6
GSX 20450C-2D	●	4,5	9,0	10,5	50	6
GSX 20500C-2D	●	5,0	10,0	12,0	50	6
GSX 20550C-2D	●	5,5	11,0	13,0	50	6
GSX 20600C-2D	●	6,0	12,0	—	50	6
GSX 20700C-2D	●	7,0	14,0	16,0	60	8
GSX 20800C-2D	●	8,0	16,0	—	60	8
GSX 20900C-2D	●	9,0	18,0	20,0	70	10
GSX 21000C-2D	●	10,0	20,0	—	70	10
GSX 21200C-2D	●	12,0	24,0	—	75	12
GSX 21400C-2D		14,0	28,0	31,5	90	16
GSX 21500C-2D		15,0	30,0	33,5	90	16
GSX 21600C-2D	●	16,0	32,0	—	90	16
GSX 22000C-2D	●	20,0	40,0	—	100	20

Endmill Identification (GSX MILL Series)


GSX 2 0050 C - 2D

Series Code No. of Teeth Diameter Cutting Edge Cutting Edge Length

S: Sharp Edge
C: Gash Land Drilling

Recommended Cutting Conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- If chattering is a problem, reduce the spindle speed and feed rate indicated in the table below by the same ratio, or reduce the depth of cut.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
1,0	19.600	250	19.600	250	19.600	250	18.300	180	12.700	100	9.000	60	11.000	70	9.000	50
2,0	11.200	340	11.200	340	11.200	340	10.500	240	7.300	130	5.300	80	6.400	90	5.300	70
4,0	6.400	460	6.400	460	6.400	460	6.000	320	4.200	180	3.000	110	3.600	120	3.000	90
6,0	4.600	560	4.600	560	4.600	560	4.300	400	3.000	210	2.200	130	2.700	140	2.200	100
8,0	3.400	560	3.400	560	3.400	560	3.200	400	2.200	210	1.600	130	2.000	140	1.600	100
10,0	2.800	560	2.800	560	2.800	560	2.600	400	1.800	210	1.300	130	1.600	140	1.300	100
12,0	2.300	560	2.300	560	2.300	560	2.200	400	1.500	210	1.100	130	1.300	140	1.100	100
16,0	1.700	450	1.700	450	1.700	450	1.600	320	1.100	180	800	100	1.000	110	800	85
20,0	1.350	380	1.350	380	1.350	380	1.300	280	900	160	650	90	800	100	650	75
Shoulder cutting	ap		1,5 DC										1,0 DC			
	ae		0,05 DC										0,02 DC			


Grooving

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
1,0	19.600	200	19.600	250	19.600	250	18.300	180	12.700	100	9.000	60	11.000	50	4.500	20
2,0	11.200	270	11.200	340	11.200	340	10.500	240	7.300	130	5.300	80	6.400	65	2.650	25
4,0	6.400	370	6.400	460	6.400	460	6.000	320	4.200	180	3.000	110	3.600	80	1.500	35
6,0	4.600	450	4.600	560	4.600	560	4.300	400	3.000	210	2.200	130	2.700	100	1.100	40
8,0	3.400	450	3.400	560	3.400	560	3.200	400	2.200	210	1.600	130	2.000	100	800	40
10,0	2.800	450	2.800	560	2.800	560	2.600	400	1.800	210	1.300	130	1.600	100	650	40
12,0	2.300	450	2.300	560	2.300	560	2.200	400	1.500	210	1.100	130	1.300	100	500	40
16,0	1.700	360	1.700	450	1.700	450	1.600	320	1.100	180	800	100	1.000	80	400	35
20,0	1.350	300	1.350	380	1.350	380	1.300	280	900	160	650	90	800	70	320	30
Grooving	ap		0,2 DC		0,5 DC				0,2 DC		0,05 DC		0,2 DC			

GSX 20000C-3D Type



Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	○	○	○	○	○	○	○

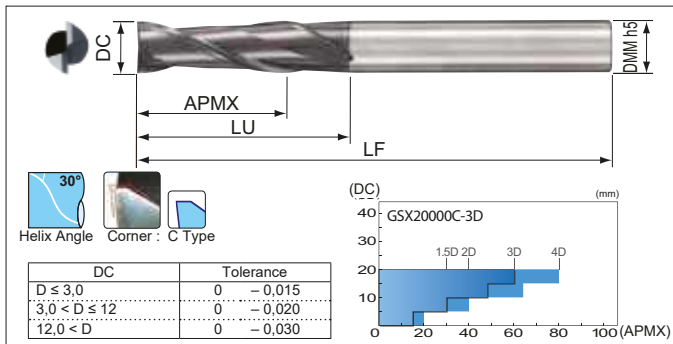

Grade: ACF20

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSX 20100C-3D	●	1,0	3,0	4,0	40	4
GSX 20150C-3D	●	1,5	4,5	5,5	40	4
GSX 20200C-3D	●	2,0	6,0	7,0	40	4
GSX 20250C-3D	●	2,5	7,5	8,5	40	4
GSX 20300C-3D	●	3,0	9,0	10,5	50	6
GSX 20400C-3D	●	4,0	12,0	13,5	50	6
GSX 20500C-3D	●	5,0	15,0	17,0	50	6
GSX 20600C-3D	●	6,0	18,0	—	50	6
GSX 20800C-3D	●	8,0	24,0	—	70	8
GSX 21000C-3D	●	10,0	30,0	—	90	10
GSX 21200C-3D	●	12,0	36,0	—	90	12
GSX 21600C-3D	●	16,0	48,0	—	110	16
GSX 22000C-3D	●	20,0	60,0	—	120	20

Endmill Identification (GSX MILL Series)


GSX 2 0100 C - 3D

Series Code: 2, No. of Teeth: 0100, Diameter: C, Cutting Edge: -, Cutting Edge Length: 3D

S: Sharp Edge
C: Gash Land Drilling

Recommended Cutting Conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- In rare cases, chattering may occur in early milling stages, dissipating after 2m of cutting.
- If chattering is a problem, reduce the spindle speed and feed rate indicated in the table below by the same ratio, or reduce the depth of cut.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling


Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy		
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	
DC (mm)																	
1,0	16.600	190	16.600	190	16.600	190	15.500	140	10.500	70	7.500	45	9.400	50	7.500	35	
2,0	9.500	250	9.500	250	9.500	250	9.000	200	6.200	120	4.500	60	5.200	70	4.500	50	
4,0	5.200	330	5.200	330	5.200	330	4.800	200	3.400	150	2.250	75	2.600	90	2.250	65	
6,0	3.500	360	3.500	360	3.500	360	3.200	250	2.550	170	1.500	90	1.700	100	1.500	80	
8,0	2.600	320	2.600	320	2.600	320	2.400	240	1.900	170	1.100	90	1.300	105	1.100	80	
10,0	2.100	300	2.100	300	2.100	300	1.900	230	1.500	170	900	90	1.000	100	900	80	
12,0	1.750	280	1.750	280	1.750	280	1.600	230	1.250	170	750	90	850	100	750	80	
16,0	1.300	240	1.300	240	1.300	240	1.200	200	950	150	550	75	650	85	550	65	
20,0	1.050	220	1.050	220	1.050	220	950	180	750	140	450	70	500	75	450	60	
Shoulder cutting	ap	2,5 DC						2,0 DC						0,02 DC			
	ae	$\phi 3: 0,05 DC$, $\le \phi 3: 0,1 DC</math>$															

Grooving

Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm)																
1,0	16.600	70	16.600	80	16.600	80	15.500	50	10.500	50	7.500	35	9.400	30	3.750	10
2,0	9.500	80	9.500	100	9.500	100	9.000	90	6.200	60	4.500	45	5.200	40	2.250	15
4,0	5.200	120	5.200	150	5.200	150	4.800	120	3.400	80	2.200	50	2.600	50	1.250	20
6,0	3.500	140	3.500	170	3.500	170	3.200	130	2.550	100	1.500	50	1.700	60	950	25
8,0	2.600	140	2.600	160	2.600	160	2.400	130	1.900	100	1.100	50	1.300	60	700	25
10,0	2.100	130	2.100	150	2.100	150	1.900	120	1.500	90	900	50	1.000	60	550	25
12,0	1.750	130	1.750	150	1.750	150	1.600	120	1.250	90	750	50	850	60	450	25
16,0	1.300	110	1.300	130	1.300	130	1.200	110	950	80	550	45	650	50	350	20
20,0	1.050	100	1.050	120	1.050	120	950	100	750	70	450	40	500	40	280	15
Grooving	ap	0,1 DC		0,2 DC				0,05 DC				0,1 D				
	ae															

● = Euro stock

Coated Carbide Grades	GSX Coating	Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel			Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
		○	○	○	○	○	45-55 HRC	55-60 HRC	60-65 HRC	○	○	○			

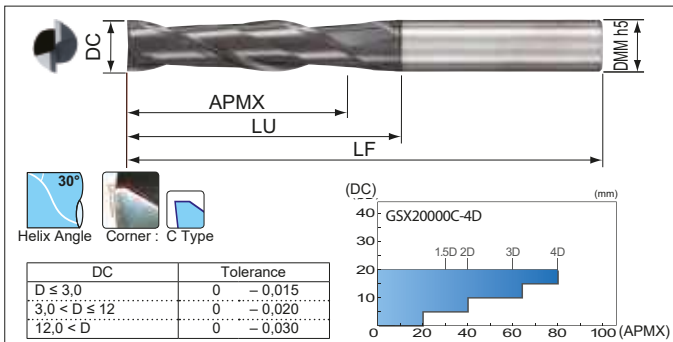

Grade: ACF20

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSX 20100C-4D	●	1,0	4,0	5,0	40	4
GSX 20150C-4D	●	1,5	6,0	7,0	40	4
GSX 20200C-4D	●	2,0	8,0	9,0	40	4
GSX 20250C-4D	●	2,5	10,0	11,0	50	4
GSX 20300C-4D	●	3,0	12,0	13,5	50	6
GSX 20400C-4D	●	4,0	16,0	17,5	50	6
GSX 20500C-4D	●	5,0	20,0	22,0	60	6
GSX 20600C-4D	●	6,0	24,0	-	60	6
GSX 20800C-4D	●	8,0	32,0	-	80	8
GSX 21000C-4D	●	10,0	40,0	-	90	10
GSX 21200C-4D	●	12,0	48,0	-	100	12
GSX 21600C-4D		16,0	64,0	-	120	16
GSX 22000C-4D		20,0	80,0	-	140	20

Endmill Identification (GSX MILL Series)


GSX 2 0100 C - 4D

Series Code No. of Teeth Diameter Cutting Edge Cutting Edge Length

S: Sharp Edge
C: Gash Land Drilling

Recommended Cutting Conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- In rear cases, chattering may occur in early milling stages, dissipating after 2 m of cutting.
- If chattering is a problem, reduce the spindle speed and feed rate indicated in the table below by the same ratio, or reduce the depth of cut.
- This series is not recommended for grooving.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.




Shoulder Milling

Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
1,0	9.000	130	9.000	130	9.000	130	7.000	95	6.500	50	4.500	30	5.400	40	4.500	25
2,0	4.500	180	4.500	180	4.500	180	3.500	120	3.200	70	2.300	40	2.700	50	2.300	35
4,0	2.250	240	2.250	240	2.250	240	1.750	160	1.600	95	1.200	60	1.350	65	1.200	40
6,0	1.500	300	1.500	300	1.500	300	1.150	170	1.050	110	800	70	900	70	800	50
8,0	1.100	260	1.100	260	1.100	260	850	170	800	110	600	70	660	70	600	50
10,0	900	250	900	250	900	250	700	160	650	110	460	70	540	70	460	50
12,0	750	240	750	240	750	240	580	160	520	110	400	70	450	70	400	50
16,0	550	200	550	200	550	200	440	140	400	95	300	55	330	60	300	45
20,0	450	180	450	180	450	180	350	120	320	85	240	45	270	50	240	40
Shoulder cutting	ap	3,5 DC										3,0 DC				
	ae	0,08 DC					0,04 DC									

GSX 30000C-1.5D Type



Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	○	○	○	○	○	○	○

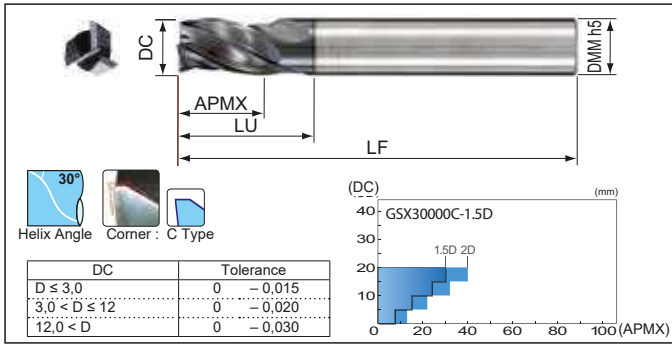

Grade: ACF20

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSX 30100C-1.5D	●	1,0	1,5	2,5	40	4
GSX 30150C-1.5D	●	1,5	2,3	3,3	40	4
GSX 30200C-1.5D	●	2,0	3,0	4,0	40	4
GSX 30250C-1.5D	●	2,5	3,8	4,8	40	4
GSX 30300C-1.5D	●	3,0	4,5	6,0	45	6
GSX 30400C-1.5D	●	4,0	6,0	7,5	45	6
GSX 30500C-1.5D	●	5,0	7,5	9,5	50	6
GSX 30600C-1.5D	●	6,0	9,0	-	50	6
GSX 30700C-1.5D	●	7,0	11,0	13,0	60	8
GSX 30800C-1.5D	●	8,0	12,0	-	60	8
GSX 30900C-1.5D	●	9,0	14,0	16,0	70	10
GSX 31000C-1.5D	●	10,0	15,0	-	70	10
GSX 31200C-1.5D	●	12,0	18,0	-	75	12
GSX 31600C-1.5D	●	16,0	24,0	-	90	16
GSX 32000C-1.5D	●	20,0	30,0	-	100	20

Endmill Identification (GSX MILL Series)


GSX 3 0100 C - 1.5D

Series Code No. of Teeth Diameter Cutting Edge Cutting Edge Length

S: Sharp Edge
C: Gash Land Drilling

Recommended Cutting Conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling

Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy		
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	
1,0	19.600	300	19.600	300	19.600	300	18.300	210	12.700	130	9.000	80	11.000	90	9.000	65	
2,0	11.200	410	11.200	410	11.200	410	10.500	280	7.300	170	5.300	100	6.400	120	5.300	90	
4,0	6.400	550	6.400	550	6.400	550	6.000	370	4.200	230	3.000	140	3.600	150	3.000	120	
6,0	4.600	670	4.600	670	4.600	670	4.300	460	3.000	270	2.200	170	2.700	180	2.200	130	
8,0	3.400	670	3.400	670	3.400	670	3.200	460	2.200	270	1.600	170	2.000	180	1.600	130	
10,0	2.800	670	2.800	670	2.800	670	2.600	460	1.800	270	1.300	170	1.600	180	1.300	130	
12,0	2.300	670	2.300	670	2.300	670	2.200	460	1.500	270	1.100	170	1.300	180	1.100	130	
16,0	1.700	550	1.700	550	1.700	550	1.600	370	1.100	230	800	140	1.000	150	800	100	
20,0	1.350	490	1.350	490	1.350	490	1.300	330	900	210	650	120	800	130	650	90	
Shoulder cutting	ap	1,5 DC						1,0 DC						ap		ae	
	ae	0,05 DC						0,02 DC									

Grooving

Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
1,0	19.600	240	19.600	300	19.600	300	18.300	210	12.700	130	9.000	80	11.000	65	4.500	25
2,0	11.200	320	11.200	410	11.200	410	10.500	280	7.300	170	5.300	100	6.400	85	2.650	35
4,0	6.400	450	6.400	550	6.400	550	6.000	370	4.200	230	3.000	140	3.600	100	1.500	50
6,0	4.600	540	4.600	670	4.600	670	4.300	460	3.000	270	2.200	170	2.650	130	1.150	55
8,0	3.400	540	3.400	670	3.400	670	3.200	460	2.200	270	1.600	170	2.000	130	800	55
10,0	2.800	540	2.800	670	2.800	670	2.600	460	1.800	270	1.300	170	1.600	130	650	55
12,0	2.300	540	2.300	670	2.300	670	2.200	460	1.500	270	1.100	170	1.300	130	500	55
16,0	1.700	440	1.700	550	1.700	550	1.600	370	1.100	230	800	140	1.000	110	400	45
20,0	1.350	390	1.350	490	1.350	490	1.300	330	900	210	650	120	800	90	320	40
Grooving	ap	0,2 DC		0,5 DC				0,05 DC				0,2 DC				
	ae															

● = Euro stock

Coated Carbide **GSX** Grades Coating

Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	○	○	○	○	○	○	○

DC	Tolerance
D ≤ 3,0	0 - 0,015
3,0 < D ≤ 12	0 - 0,020
12,0 < D	0 - 0,030

Grade: ACF20

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSX 30100C-2D	●	1,0	2,5	3,5	40	4
GSX 30150C-2D	●	1,5	3,8	4,8	40	4
GSX 30200C-2D	●	2,0	5,0	6,0	40	4
GSX 30250C-2D	●	2,5	6,3	7,3	40	4
GSX 30300C-2D	●	3,0	7,5	9,0	45	6
GSX 30400C-2D	●	4,0	11,0	12,5	45	6
GSX 30500C-2D	●	5,0	13,0	15,0	50	6
GSX 30600C-2D	●	6,0	13,0	-	50	6
GSX 30700C-2D	●	7,0	16,0	18,0	60	8
GSX 30800C-2D	●	8,0	19,0	-	60	8
GSX 30900C-2D	●	9,0	19,0	21,0	70	10
GSX 31000C-2D	●	10,0	22,0	-	70	10
GSX 31200C-2D	●	12,0	26,0	-	75	12
GSX 31600C-2D		16,0	32,0	-	90	16
GSX 32000C-2D		20,0	40,0	-	100	20

Endmill Identification (GSX MILL Series)


GSX 3 0100 C - 2D

Series Code No. of Teeth Diameter Cutting Edge Cutting Edge Length

S: Sharp Edge
C: Gash Land Drilling

Recommended Cutting Conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
1,0	19.600	300	19.600	300	19.600	300	18.300	210	12.700	130	9.000	80	11.000	90	9.000	65
2,0	11.200	410	11.200	410	11.200	410	10.500	280	7.300	170	5.300	100	6.400	120	5.300	90
4,0	6.400	550	6.400	550	6.400	550	6.000	370	4.200	230	3.000	140	3.600	150	3.000	120
6,0	4.600	670	4.600	670	4.600	670	4.300	460	3.000	270	2.200	170	2.700	180	2.200	130
8,0	3.400	670	3.400	670	3.400	670	3.200	460	2.200	270	1.600	170	2.000	180	1.600	130
10,0	2.800	670	2.800	670	2.800	670	2.600	460	1.800	270	1.300	170	1.600	180	1.300	130
12,0	2.300	670	2.300	670	2.300	670	2.200	460	1.500	270	1.100	170	1.300	180	1.100	130
16,0	1.700	550	1.700	550	1.700	550	1.600	370	1.100	230	800	140	1.000	150	800	100
20,0	1.350	490	1.350	490	1.350	490	1.300	330	900	210	650	120	800	130	650	90
Shoulder cutting	ap		1,5 DC		0,05 DC						1,0 DC		0,02 DC			

Grooving

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
1,0	19.600	240	19.600	300	19.600	300	18.300	210	12.700	130	9.000	80	11.000	65	4.500	25
2,0	11.200	320	11.200	410	11.200	410	10.500	280	7.300	170	5.300	100	6.400	85	2.650	35
4,0	6.400	450	6.400	550	6.400	550	6.000	370	4.200	230	3.000	140	3.600	100	1.500	50
6,0	4.600	540	4.600	670	4.600	670	4.300	460	3.000	270	2.200	170	2.650	130	1.150	55
8,0	3.400	540	3.400	670	3.400	670	3.200	460	2.200	270	1.600	170	2.000	130	800	55
10,0	2.800	540	2.800	670	2.800	670	2.600	460	1.800	270	1.300	170	1.600	130	650	55
12,0	2.300	540	2.300	670	2.300	670	2.200	460	1.500	270	1.100	170	1.300	130	500	55
16,0	1.700	440	1.700	550	1.700	550	1.600	370	1.100	230	800	140	1.000	110	400	45
20,0	1.350	390	1.350	490	1.350	490	1.300	330	900	210	650	120	800	90	320	40
Grooving	ap		0,2 DC		0,5 DC				0,2 DC		0,05 DC		0,2 DC			

GSX MILL Slot Endmills

GSXSLT 30000C-1.5D Type

3 Slotted Short Endmills (3 Flutes)

For Compound Endmilling

Coated Carbide
Grades

GSX
Coating

Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	○	○	○	○	○	○	○

Helix Angle: 40°
Corner: C Type

DC	Tolerance
D ≤ 3.0	0 - 0.015
3.0 < D ≤ 12	0 - 0.020
12.0 < D	0 - 0.030


Grade: ACF20

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSXSLT 30100C-1.5D	●	1,0	1,5	2,5	40	4
GSXSLT 30150C-1.5D	●	1,5	2,3	3,3	40	4
GSXSLT 30200C-1.5D	○	2,0	3,0	4,0	40	4
GSXSLT 30250C-1.5D	○	2,5	3,8	4,8	40	4
GSXSLT 30300C-1.5D	○	3,0	4,5	6,0	45	6
GSXSLT 30400C-1.5D	●	4,0	6,0	7,5	45	6
GSXSLT 30500C-1.5D	●	5,0	7,5	9,5	50	6
GSXSLT 30600C-1.5D	●	6,0	9,0	-	50	6
GSXSLT 30700C-1.5D	●	7,0	11,0	13,0	60	8
GSXSLT 30800C-1.5D	●	8,0	12,0	-	60	8
GSXSLT 30900C-1.5D	●	9,0	14,0	16,0	70	10
GSXSLT 31000C-1.5D	●	10,0	15,0	-	70	10
GSXSLT 31200C-1.5D	●	12,0	18,0	-	75	12
GSXSLT 31600C-1.5D	●	16,0	24,0	-	90	16

Recommended Cutting Conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- Use step machining of 0.1Dc when drilling stainless steel, heat resistant alloy, and titanium alloy.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling

Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	DC (mm)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)
1,0	19.600	300	19.600	300	19.600	300	18.300	210	12.700	130	9.000	80	11.000	90	9.000	65
2,0	11.200	410	11.200	410	11.200	410	10.500	280	7.300	170	5.300	100	6.400	120	5.300	90
4,0	6.400	550	6.400	550	6.400	550	6.000	370	4.200	230	3.000	140	3.600	150	3.000	120
6,0	4.600	670	4.600	670	4.600	670	4.300	460	3.000	270	2.200	170	2.700	180	2.200	130
8,0	3.400	670	3.400	670	3.400	670	3.200	460	2.200	270	1.600	170	2.000	180	1.600	130
10,0	2.800	670	2.800	670	2.800	670	2.600	460	1.800	270	1.300	170	1.600	180	1.300	130
12,0	2.300	670	2.300	670	2.300	670	2.200	460	1.500	270	1.100	170	1.300	180	1.100	130
16,0	1.700	550	1.700	550	1.700	550	1.600	370	1.100	230	800	140	1.000	150	800	100
Shoulder cutting	1.5 DC								1.0 DC							
	0.05 DC								0.02 DC							

Grooving

Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	DC (mm)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)
1,0	19.600	240	19.600	300	19.600	300	18.300	210	12.700	130	9.000	80	11.000	65	4.500	25
2,0	11.200	320	11.200	410	11.200	410	10.500	280	7.300	170	5.300	100	6.400	85	2.650	35
4,0	6.400	450	6.400	550	6.400	550	6.000	370	4.200	230	3.000	140	3.600	100	1.500	50
6,0	4.600	540	4.600	670	4.600	670	4.300	460	3.000	270	2.200	170	2.650	130	1.150	55
8,0	3.400	540	3.400	670	3.400	670	3.200	460	2.200	270	1.600	170	2.000	130	800	55
10,0	2.800	540	2.800	670	2.800	670	2.600	460	1.800	270	1.300	170	1.600	130	650	55
12,0	2.300	540	2.300	670	2.300	670	2.200	460	1.500	270	1.100	170	1.300	130	500	55
16,0	1.700	440	1.700	550	1.700	550	1.600	370	1.100	230	800	140	1.000	110	400	45
Grooving	0,2 DC		0,5 DC				0,2 DC		0,05 DC		0,2 DC					


Drilling

Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	DC (mm)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)
1,0	19.600	70	19.600	90	19.600	90	18.300	60	12.700	40	9.000	25	11.000	20	4.500	10
2,0	11.200	90	11.200	120	11.200	120	10.500	80	7.300	50	5.300	30	6.400	25	2.650	15
4,0	6.400	130	6.400	160	6.400	160	6.000	110	4.200	70	3.000	40	3.600	30	1.500	20
6,0	4.600	160	4.600	200	4.600	200	4.300	130	3.000	80	2.200	50	2.650	40	1.150	20
8,0	3.400	160	3.400	200	3.400	200	3.200	130	2.200	80	1.600	50	2.000	40	800	20
10,0	2.800	160	2.800	200	2.800	200	2.600	130	1.800	80	1.300	50	1.600	40	650	20
12,0	2.300	160	2.300	200	2.300	200	2.200	130	1.500	80	1.100	50	1.300	40	500	20
16,0	1.700	130	1.700	160	1.700	160	1.600	110	1.100	70	800	40	1.000	35	400	15

GSX 4000S-2D Type



Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel 45-55 HRC	55-60 HRC	60-65 HRC	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	○	○	○	○	○	○	○	○	○

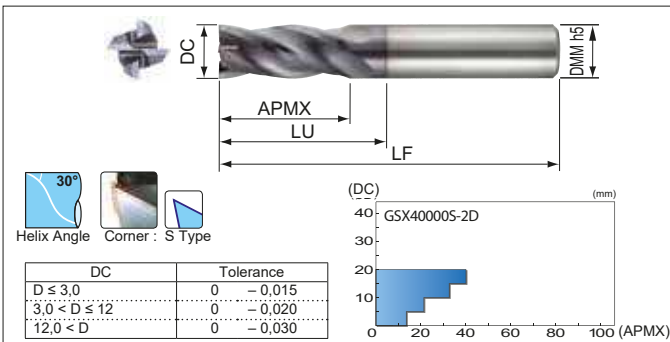

Grade: ACF20

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSX 40100S-2D	●	1,0	2,5	3,5	40	4
GSX 40150S-2D	●	1,5	3,8	4,8	40	4
GSX 40200S-2D	●	2,0	5,0	6,0	40	4
GSX 40250S-2D	●	2,5	6,3	7,3	40	4
GSX 40300S-2D	●	3,0	7,5	9,0	45	6
GSX 40350S-2D	●	3,5	8,8	10,0	45	6
GSX 40400S-2D	●	4,0	11,0	14,0	45	6
GSX 40450S-2D	●	4,5	11,3	12,8	50	6
GSX 40500S-2D	●	5,0	13,0	19,6	50	6
GSX 40550S-2D	●	5,5	13,0	19,6	50	6
GSX 40600S-2D	●	6,0	13,0	-	50	6
GSX 40700S-2D	●	7,0	16,0	21,1	60	8
GSX 40800S-2D	●	8,0	19,0	-	60	8
GSX 40900S-2D	●	9,0	19,0	24,1	70	10
GSX 41000S-2D	●	10,0	22,0	-	70	10
GSX 41200S-2D	●	12,0	26,0	-	75	12
GSX 41600S-2D	●	16,0	32,0	-	90	16
GSX 42000S-2D	●	20,0	40,0	-	100	20

Endmill Identification (GSX MILL Series)


GSX 4 1000 S - 2D

Series Code No. of Teeth Diameter Cutting Edge Cutting Edge Length

S: Sharp Edge
C: Gash Land Drilling

Recommended Cutting Conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- If chattering is a problem, reduce the spindle speed and feed rate indicated in the table below by the same ratio, or reduce the depth of cut.
- This series is not recommended for grooving.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling

Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy			
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)		
DC (mm)																		
1,0	22.000	360	22.000	360	22.000	360	19.000	220	13.000	140	9.500	90	11.300	90	9.500	65		
2,0	11.500	440	11.500	440	11.500	440	11.000	290	7.500	180	5.400	110	6.500	120	5.400	85		
4,0	6.000	560	6.000	560	6.000	560	6.000	370	4.000	230	2.900	150	3.400	160	2.900	100		
6,0	4.200	600	4.200	600	4.200	600	4.000	400	2.700	240	2.000	160	2.400	170	2.000	120		
8,0	3.000	600	3.000	600	3.000	600	2.800	400	2.000	240	1.450	160	1.800	170	1.450	120		
10,0	2.500	600	2.500	600	2.500	600	2.350	400	1.600	240	1.200	160	1.450	170	1.200	120		
12,0	2.100	600	2.100	600	2.100	600	2.000	400	1.350	240	1.000	160	1.200	170	1.000	120		
16,0	1.500	500	1.500	500	1.500	500	1.450	320	1.000	210	750	130	900	140	750	90		
20,0	1.200	460	1.200	460	1.200	460	1.150	290	800	200	600	110	700	120	600	75		
Shoulder cutting	ap		ae		0,03 DC										2,0 DC		0,01 DC	


Groove Finishing

Work Material Cond.	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm)																
1,0	22.000	360	22.000	360	22.000	360	19.000	220	13.000	140	9.500	90	11.300	90	9.500	65
2,0	11.500	440	11.500	440	11.500	440	11.000	290	7.500	180	5.400	110	6.500	120	5.400	85
4,0	6.000	560	6.000	560	6.000	560	6.000	370	4.000	230	2.900	150	3.400	160	2.900	100
6,0	4.200	600	4.200	600	4.200	600	4.000	400	2.700	240	2.000	160	2.400	170	2.000	120
8,0	3.000	600	3.000	600	3.000	600	2.800	400	2.000	240	1.450	160	1.800	170	1.450	120
10,0	2.500	600	2.500	600	2.500	600	2.350	400	1.600	240	1.200	160	1.450	170	1.200	120
12,0	2.100	600	2.100	600	2.100	600	2.000	400	1.350	240	1.000	160	1.200	170	1.000	120
16,0	1.500	500	1.500	500	1.500	500	1.450	320	1.000	210	750	130	900	140	750	90
20,0	1.200	460	1.200	460	1.200	460	1.150	290	800	200	600	110	700	120	600	75
Groove finishing	ap		ae		1,5 DC										-0,02 DC	

● = Euro stock




Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered D2E Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite

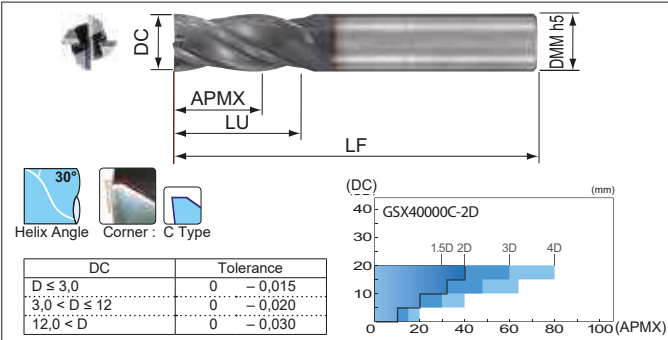

Recommended Cutting Conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- If chattering is a problem, reduce the spindle speed and feed rate indicated in the table below by the same ratio, or reduce the depth of cut.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Endmills (mm)

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSX 40100C-2D	●	1,0	2,0	3,0	40	4
GSX 40150C-2D	●	1,5	3,0	4,0	40	4
GSX 40200C-2D	●	2,0	4,0	5,0	40	4
GSX 40250C-2D	●	2,5	5,0	6,0	40	4
GSX 40300C-2D	●	3,0	6,0	7,5	45	6
GSX 40350C-2D	●	3,5	7,0	8,5	45	6
GSX 40400C-2D	●	4,0	8,0	9,5	45	6
GSX 40450C-2D	●	4,5	9,0	10,5	50	6
GSX 40500C-2D	●	5,0	10,0	12,0	50	6
GSX 40550C-2D	●	5,5	11,0	13,0	50	6
GSX 40600C-2D	●	6,0	12,0	-	50	6
GSX 40700C-2D	●	7,0	14,0	16,0	60	8
GSX 40800C-2D	●	8,0	16,0	-	60	8
GSX 40900C-2D	●	9,0	18,0	20,0	70	10
GSX 41000C-2D	●	10,0	20,0	-	70	10
GSX 41200C-2D	●	12,0	24,0	-	75	12
GSX 41400C-2D	●	14,0	28,0	31,5	90	16
GSX 41500C-2D	●	15,0	30,0	33,5	90	16
GSX 41600C-2D	●	16,0	32,0	-	90	16
GSX 42000C-2D	●	20,0	40,0	-	100	20

Shoulder Milling

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm)	1,5 DC															
Shoulder cutting	0,05 DC															
ae	0,02 DC															

Shoulder Milling (High Speed Machining Centre)

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm)	1,5 DC															
Shoulder cutting	0,05 DC															
ae	0,02 DC															

Grooving

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm)	1,5 DC															
Grooving	0,2 DC															
ap	0,5 DC															

Coated Endmills

GSX 40000C-3D Type

Coated Carbide

Grades

Coating

Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	○	○	○	○	○	○	○

DC	Tolerance
D ≤ 3,0	0 -0,015
3,0 < D ≤ 12	0 -0,020
12,0 < D	0 -0,030

Grade: ACF20

Endmills

Cat. No.	Stock	(mm)				
		DC	APMX	LU	LF	DMM
GSX 40100C-3D	●	1,0	3,0	4,0	40	4
GSX 40150C-3D	●	1,5	4,5	5,5	40	4
GSX 40200C-3D	●	2,0	6,0	7,0	40	4
GSX 40250C-3D	●	2,5	7,5	8,5	40	4
GSX 40300C-3D	●	3,0	9,0	10,5	50	6
GSX 40400C-3D	●	4,0	12,0	13,5	50	6
GSX 40500C-3D	●	5,0	15,0	17,0	50	6
GSX 40600C-3D	●	6,0	18,0	-	50	6
GSX 40800C-3D	●	8,0	24,0	-	70	8
GSX 41000C-3D	●	10,0	30,0	-	90	10
GSX 41200C-3D	●	12,0	36,0	-	90	12
GSX 41600C-3D	●	16,0	48,0	-	110	16
GSX 42000C-3D	●	20,0	60,0	-	120	20

Endmill Identification (GSX MILL Series)


GSX 4 0100 C - 2D / 3D

Series Code No. of Teeth Diameter Cutting Edge Cutting Edge Length

S: Sharp Edge
C: Gash Land Drilling

Recommended Cutting Conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- In rear cases, chattering may occur in early milling stages, dissipating after 2 m of cutting.
- If chattering is a problem, reduce the spindle speed and feed rate indicated in the table below by the same ratio, or reduce the depth of cut.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Cond.	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)
1,0	21.000	360	21.000	360	21.000	360	19.000	220	13.000	140	9.000	90	10.500	90	9.000	65
2,0	10.500	360	10.500	360	10.500	360	9.600	290	7.500	180	4.500	110	5.200	120	4.500	85
4,0	5.200	500	5.200	500	5.200	500	4.800	370	4.000	280	2.250	150	2.600	160	2.250	100
6,0	3.500	560	3.500	560	3.500	560	3.200	400	2.700	300	1.500	160	1.700	170	1.500	120
8,0	2.600	520	2.600	520	2.600	520	2.400	400	2.000	300	1.100	160	1.300	170	1.100	120
10,0	2.100	500	2.100	500	2.100	500	1.900	400	1.600	300	900	160	1.000	160	900	120
12,0	1.750	500	1.750	500	1.750	500	1.600	400	1.350	300	750	150	850	160	750	120
16,0	1.300	420	1.300	420	1.300	420	1.200	330	1.000	260	550	120	650	140	550	100
20,0	1.050	380	1.050	380	1.050	380	950	290	800	230	450	110	500	120	450	90
Shoulder cutting	2,5 DC										2,0 DC					
	$< \phi 3: 0,05 DC$, $\le \phi 3 < \phi 8: 0,1 DC$, $\le \phi 8: 0,15 DC$										0,02 DC					

Grooving

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Cond.	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)
1,0	16.600	140	16.600	140	16.600	140	15.500	100	10.500	100	7.500	70	9.400	60	3.750	20
2,0	9.500	160	9.500	160	9.500	160	9.000	180	6.200	120	4.500	90	5.200	80	2.250	30
4,0	5.200	160	5.200	180	5.200	180	4.800	160	3.400	110	2.200	65	2.600	70	1.250	25
6,0	3.500	160	3.500	200	3.500	200	3.200	160	2.550	120	1.500	65	1.700	70	950	25
8,0	2.600	160	2.600	200	2.600	200	2.400	160	1.900	120	1.100	65	1.300	70	700	25
10,0	2.100	160	2.100	200	2.100	200	1.900	160	1.500	120	900	65	1.000	70	550	25
12,0	1.750	160	1.750	200	1.750	200	1.600	160	1.250	120	750	65	850	70	450	25
16,0	1.300	160	1.300	200	1.300	200	1.200	160	950	120	550	65	650	70	350	25
20,0	1.050	160	1.050	200	1.050	200	950	160	750	120	450	65	500	70	280	25
Grooving	0,1 DC		0,2 DC				0,05 DC				0,1 DC					

● = Euro stock

Coated Carbide **GSX** Grades Coating

Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered D2E Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	45-55 HRC	55-60 HRC	60-65 HRC	○	○	○	○

DC	Tolerance
D ≤ 3,0	0 -0,015
3,0 < D ≤ 12	0 -0,020
12,0 < D	0 -0,030

Grade: ACF20

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSX 40100C-4D	●	1,0	4,0	5,0	40	4
GSX 40150C-4D	●	1,5	6,0	7,0	40	4
GSX 40200C-4D	●	2,0	8,0	9,0	40	4
GSX 40250C-4D	●	2,5	10,0	11,0	50	4
GSX 40300C-4D	●	3,0	12,0	13,5	50	6
GSX 40400C-4D	●	4,0	16,0	17,5	50	6
GSX 40500C-4D	●	5,0	20,0	22,0	60	6
GSX 40600C-4D	●	6,0	24,0	-	60	6
GSX 40800C-4D	●	8,0	32,0	-	80	8
GSX 41000C-4D	●	10,0	40,0	-	90	10
GSX 41200C-4D	●	12,0	48,0	-	100	12
GSX 41600C-4D	●	16,0	64,0	-	120	16
GSX 42000C-4D	●	20,0	80,0	-	140	20

Endmill Identification (GSX MILL Series)


GSX 4 0100 C - 4D

Series Code No. of Teeth Diameter Cutting Edge Cutting Edge Length

S: Sharp Edge
C: Gash Land Drilling

Recommended Cutting Conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- In rear cases, chattering may occur in early milling stages, dissipating after 2m of cutting.
- If chattering is a problem, reduce the spindle speed and feed rate indicated in the table below by the same ratio, or reduce the depth of cut.
- This series is not recommended for grooving.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
1,0	9.000	140	9.000	140	9.000	140	7.000	80	6.500	60	4.500	40	5.400	40	4.500	40
2,0	4.500	140	4.500	140	4.500	140	3.500	100	3.200	80	2.300	55	2.700	55	2.300	40
4,0	2.250	200	2.250	200	2.250	200	1.750	120	1.600	100	1.200	60	1.350	50	1.200	35
6,0	1.500	250	1.500	250	1.500	250	1.150	160	1.050	140	800	65	900	45	800	35
8,0	1.100	220	1.100	220	1.100	220	850	160	800	130	600	65	660	45	600	35
10,0	900	210	900	210	900	210	700	140	650	120	460	65	540	45	460	35
12,0	750	200	750	200	750	200	580	140	520	110	400	65	450	45	400	35
16,0	550	170	550	170	550	170	440	120	400	95	300	55	330	45	300	35
20,0	450	150	450	150	450	150	350	100	320	80	240	50	270	45	240	35
Shoulder cutting	ap	3,5 DC										3,0 DC				
	ae	<math>\phi 3: 0,04 DC, 3 \le \phi D < 8: 0,08 DC, 8 \le \phi D: 0,1 DC</math>										0,02 DC				


Anti-Vibration Typ GSX MILL

GSXVL 4000-2.5D Type

SAFE-LOCK™ Applicable Endmills (4 Flutes)



Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	○	○	○	○	○	○	○

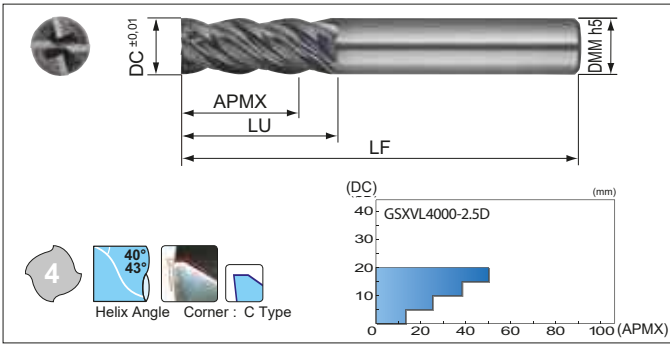


Grade: ACF20

Endmills

Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSXVL 4020-2.5D	●	2,0	5	6,5	50	4
GSXVL 4030-2.5D	●	3,0	8	9,5	50	6
GSXVL 4040-2.5D	●	4,0	10	11,5	50	6
GSXVL 4050-2.5D	●	5,0	13	14,5	60	6
GSXVL 4060-2.5D	●	6,0	15	-	60	6
GSXVL 4070-2.5D	○	7,0	18	20,0	70	8
GSXVL 4080-2.5D	●	8,0	20	-	80	8
GSXVL 4090-2.5D	●	9,0	23	25,0	90	10
GSXVL 4100-2.5D	●	10,0	25	-	90	10
GSXVL 4110-2.5D	○	11,0	28	30,5	90	12
GSXVL 4120-2.5D	●	12,0	30	-	90	12
GSXVL 4140-2.5D	●	14,0	35	37,5	110	16
GSXVL 4150-2.5D	○	15,0	38	41,0	110	16
GSXVL 4160-2.5D	●	16,0	40	-	115	16
GSXVL 4180-2.5D	●	18,0	45	48,0	120	20
GSXVL 4200-2.5D	●	20,0	50	-	125	20
GSXVL 4250-2.5D	○	25,0	63	-	140	25

SAFE-LOCK™ Applicable Endmills

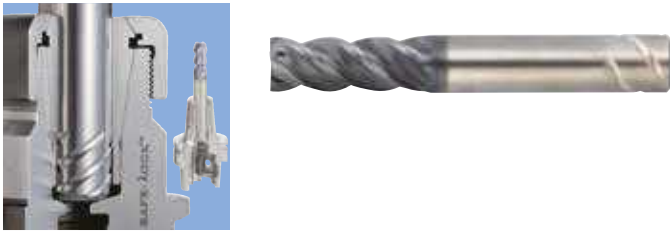

Endmills


Cat. No.	Stock	DC	APMX	LU	LF	DMM
GSXVL 4120S-2.5D	○	12,0	30	-	90	12
GSXVL 4140S-2.5D	○	14,0	35	37,5	110	16
GSXVL 4150S-2.5D	○	15,0	38	41,0	110	16
GSXVL 4160S-2.5D	○	16,0	40	-	115	16
GSXVL 4180S-2.5D	○	18,0	45	48,0	120	20
GSXVL 4200S-2.5D	□	20,0	50	-	125	20
GSXVL 4250S-2.5D	□	25,0	63	-	140	25

Recommended Cutting Conditions

1. For stable machining performance use rigid, high-precision machines and holders.
2. Use air blowing when dry machining.
3. Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
4. If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.

Shoulder Milling

Work Material Cond.	Carbon Steel, Cast Iron (150 to 250HB)		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (40 to 50HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy (20 to 45HRC)	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm)										
2,0	13.000	1.000	10.000	800	8.000	700	10.000	580	5.000	200
4,0	9.600	1.200	8.000	1.000	6.000	800	5.500	650	3.000	230
6,0	6.800	1.500	5.600	1.200	4.200	900	3.800	680	2.100	240
8,0	5.200	1.600	4.400	1.300	3.200	950	2.800	650	1.600	250
10,0	4.200	1.500	3.500	1.200	2.600	800	2.300	600	1.300	210
12,0	3.500	1.400	3.000	1.200	2.200	700	1.900	550	1.100	180
14,0	3.000	1.200	2.600	1.100	1.800	600	1.600	500	900	150
16,0	2.700	1.100	2.200	1.000	1.600	600	1.400	480	760	130
18,0	2.400	1.000	2.000	900	1.400	570	1.300	450	680	120
20,0	2.200	900	1.700	800	1.200	550	1.100	400	600	100
25,0	1.700	680	1.400	630	1.000	450	890	310	480	82
Shoulder cutting	a_p		1,5 DC		0,05 DC		0,1 DC		0,05 DC	
	a_e		0,1 DC		0,05 DC		0,1 DC		0,05 DC	



Shoulder Milling

Work Material Cond.	Carbon Steel, Cast Iron (150 to 250HB)		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (40 to 50HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy (20 to 45HRC)	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm)										
2,0	13.000	750	10.000	550	8.400	500	6.500	300	4.000	140
4,0	8.200	800	6.000	600	5.200	500	4.000	330	2.000	130
6,0	6.100	1.100	4.000	600	3.500	580	2.700	350	1.350	150
8,0	4.600	1.000	3.000	580	2.600	570	2.000	330	1.000	140
10,0	3.600	1.000	2.400	550	2.100	510	1.600	200	800	130
12,0	3.100	920	2.000	500	1.700	450	1.300	280	660	110
14,0	2.600	750	1.700	450	1.500	400	1.100	250	570	100
16,0	2.300	670	1.500	420	1.300	350	1.000	230	500	90
18,0	2.000	620	1.300	380	1.100	330	900	200	430	80
20,0	1.900	600	1.200	360	1.000	320	800	180	380	70
25,0	1.500	470	1.000	300	790	250	640	140	300	55
Grooving	a_p		1,0 DC		0,2 DC		0,3 DC		0,2 DC	

● = Euro stock
○ = Japan stock

□ = Delivery on request

SSEH Series



J 24, J 39


SSEH Radius

Characteristics and Applications

- Steep helix (45° helix) improves sharpness.
- Combination of unique flute design and semi-mirrored surface improves chip evacuation and adhesion resistance.
- Ultra-smooth coating with improved hardness and heat resistance combined with tough carbide substrate improves tool life when working with heat resistant alloys.
- Unique, smooth radius shape mitigates cutting impact and improves fracture resistance.
- Both coated and uncoated types are available in stock to meet various conditions.

Application Examples


● Inconel 718 (Side Milling)

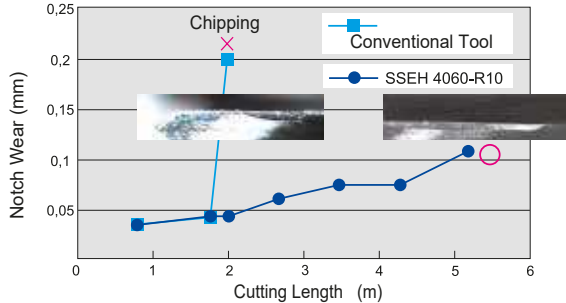

Tool Diameter: $\varnothing 6 \times R1$
 Cutting Conditions: $v_c = 20 \text{ m/min}$, $f_t = 0,025 \text{ mm/t}$,
 $a_p = 5 \text{ mm}$, $a_e = 0,5 \text{ mm}$, wet

● Inconel 713 (Side Milling)


SSEH 4100W-R10	Competitor's Product
Tool Diameter : $\varnothing 10 \times R1$ Cutting Conditions : $v_c = 32 \text{ m/min}$, $f_t = 0,018 \text{ mm/t}$ $a_p = 20 \text{ mm}$, $a_e = 0,8 \text{ m}$, Dry	



In Sumitomo Electric Hardmetal tests, the special coating with excellent adhesion resistance provided less cutting edge adhesion than the competitor's product and enabled fracturefree machining. The competitor's product suffered from edge adhesion leading to breakage.

Unique, smooth radius design

- = Euro stock
- = Delivery on request

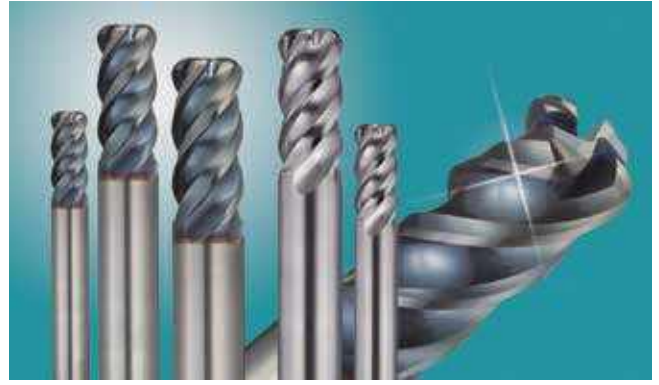


J 23, J 39

SSEH Radius Anti-vibration Type

Characteristics and Applications

- New anti-vibration type added to the SSEH type endmill for exotic alloys.
- Builds on the same features of existing endmills by adding an irregular lead for exceptionally good anti-vibration performance.
- Compatible with wide range of milling for exotic alloys including SUS, Inconel, and titanium.
- Reduces chattering for high-speed, high-feed cutting.
- Both coated and uncoated types are available in stock to meet various conditions.

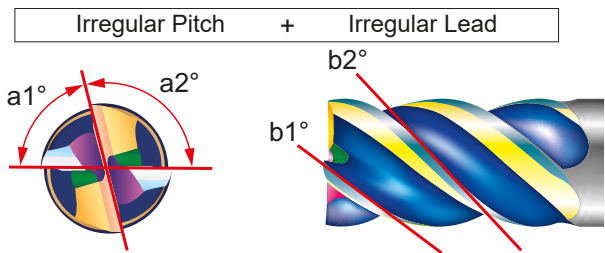

Application Examples


● Surface Roughness Comparison

SSEH Anti-vibration Type



Good Surface Quality

Ra 0,37 μm Rz 1,86 μm




Conventional Tool



Surface shows chattering

Ra 1,52 μm Rz 6,45 μm



Work Material:

X5CrNi1810 (Surface Milling)

Tool Diameter:

$\varnothing 12 \text{ mm}$


Cutting Conditions:

$n = 1.300 \text{ rpm}$, $v_f = 300 \text{ mm/min}$

$a_p = 18 \text{ mm}$, $a_e = 1,2 \text{ mm}$

Equipment: BT50

Coated Carbide Grades	GS HARD Coating	Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel			Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
		○	○	○	○	○	○	45-55 HRC	55-60 HRC	60-65 HRC	◎	◎			

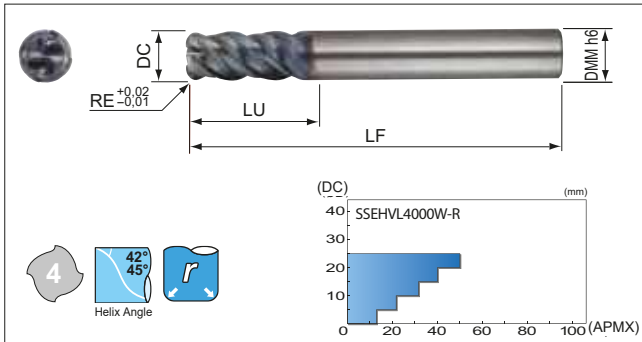

Grade: ACW52

SAFE-LOCK™

Applicable Endmills



■ Endmills

Cat. No.	Stock	DC	RE	LU	LF	DMM
SSEHVL 4045W-R05	●	4,5	0,5	12	50	6
SSEHVL 4045W-R10	●	4,5	1,0	12	50	6
SSEHVL 4050W-R05	●	5,0	0,5	13	60	6
SSEHVL 4050W-R10	●	5,0	1,0	13	60	6
SSEHVL 4060W-R10	●	6,0	1,0	13	60	6
SSEHVL 4080W-R10	●	8,0	1,0	19	80	8
SSEHVL 4100W-R10	●	10,0	1,0	22	90	10
SSEHVL 4100W-R30	●	10,0	3,0	22	90	10
SSEHVL 4120W-R10	●	12,0	1,0	26	90	12
SSEHVL 4120W-R30	●	12,0	3,0	26	90	12
SSEHVL 4160W-R10	●	16,0	1,0	32	115	16
SSEHVL 4160W-R30	●	16,0	3,0	32	115	16
SSEHVL 4200W-R10	□	20,0	1,0	40	125	20
SSEHVL 4200W-R30	□	20,0	3,0	40	125	20
SSEHVL 4250W-R10	□	25,0	1,0	50	140	25
SSEHVL 4250W-R30	□	25,0	3,0	50	140	25

■ Endmills


Cat. No.	Stock	DC	RE	LU	LF	DMM
SSEHVL 4120WS-R10	□	12,0	1,0	26	90	12
SSEHVL 4120WS-R30	□	12,0	3,0	26	90	12
SSEHVL 4160WS-R10	□	16,0	1,0	32	115	16
SSEHVL 4160WS-R30	□	16,0	3,0	32	115	16
SSEHVL 4200WS-R10	□	20,0	1,0	40	125	20
SSEHVL 4200WS-R30	□	20,0	3,0	40	125	20
SSEHVL 4250WS-R10	□	25,0	1,0	50	140	25
SSEHVL 4250WS-R30	□	25,0	3,0	50	140	25

■ Diameter and Corner Radius Selection Range

DC	RE0,5	RE1,0	RE3,0
4,5	●	●	
5	●	●	
6		●	
8		●	
10		●	●
12		●	●
16		●	●
20		□	□
25		□	□

■ Recommended Cutting Conditions

- For stable machining, a more rigid machine is recommended.
- Wet machining is recommended for stainless steel and heat resistant alloy applications.
- If cutting noise and vibration are present, please change the cutting conditions accordingly.



● Shoulder Milling

Work Material Cond.	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm) 4,5	3.500	350	3.500	280	2.100	170
5,0	3.200	380	3.200	320	1.900	190
6,0	2.700	430	2.700	320	1.600	190
8,0	2.000	400	2.000	280	1.200	170
10,0	1.600	380	1.600	260	1.000	160
12,0	1.300	360	1.300	230	800	140
16,0	1.000	320	1.000	200	600	120
20,0	800	260	800	160	480	100
25,0	640	200	640	130	380	80
Shoulder cutting	ap	1,5 DC				
	ae	0,1 DC	0,05 DC		0,05 DC	

● Grooving

Work Material Cond.	Stainless Steel		Titanium Alloy		Heat Resistant Steel		
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	
DC (mm) 4,5	4.200	200	3.900	270	1.400	100	
5,0	3.800	240	3.500	300	1.300	120	
6,0	3.200	260	2.900	300	1.100	140	
8,0	2.400	240	2.200	270	800	120	
10,0	1.900	220	1.700	250	650	110	
12,0	1.600	200	1.400	230	550	100	
16,0	1.200	130	1.100	200	400	80	
20,0	950	95	890	90	320	60	
25,0	760	75	700	70	250	50	
Grooving	ap	0,3 DC		0,2 DC		0,15 DC	

Radius Endmill for Exotic Alloys


SSEH 4000W-R Type

4

4 Flutes Endmills with Radius Corner and

HAIMER's SAFE-LOCK™ Applicable Endmills

Coated Carbide	GS HARD	Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	45-55 HRC	55-60 HRC	60-65 HRC	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
Grades	Coating	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

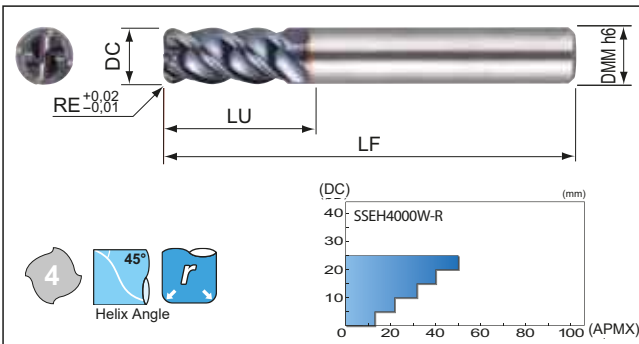

Grade: ACW52

SAFE-LOCK™

Applicable Endmills



Endmills

(mm)

Cat. No.	Stock	DC	APMX	LU	LF	DMM
SSEH 4045W-R05	●	4,5	0,5	12	50	6
SSEH 4050W-R05	●	5,0	0,5	13	60	6
SSEH 4060W-R10	●	6,0	1,0	13	60	6
SSEH 4080W-R10	●	8,0	1,0	19	80	8
SSEH 4100W-R10	●	10,0	1,0	22	90	10
SSEH 4100W-R30	●	10,0	3,0	22	90	10
SSEH 4120W-R10	●	12,0	1,0	26	90	12
SSEH 4120W-R30	●	12,0	3,0	26	90	12
SSEH 4160W-R10	●	16,0	1,0	32	115	16
SSEH 4160W-R30	●	16,0	3,0	32	115	16
SSEH 4200W-R10	○	20,0	1,0	40	125	20
SSEH 4200W-R30	○	20,0	3,0	40	125	20
SSEH 4250W-R10	○	25,0	1,0	50	140	25
SSEH 4250W-R30	○	25,0	3,0	50	140	25

Endmills

(mm)


Cat. No.	Stock	DC	APMX	LU	LF	DMM
SSEH 4120WS-R10	○	12,0	1,0	26	90	12
SSEH 4120WS-R30	○	12,0	3,0	26	90	12
SSEH 4160WS-R10	○	16,0	1,0	32	115	16
SSEH 4160WS-R30	○	16,0	3,0	32	115	16
SSEH 4200WS-R10	○	20,0	1,0	40	125	20
SSEH 4200WS-R30	○	20,0	3,0	40	125	20
SSEH 4250WS-R10	○	25,0	1,0	50	140	25
SSEH 4250WS-R30	○	25,0	3,0	50	140	25

Diameter and Corner Radius Selection Range

DC	RE0,5	RE1,0	RE3,0
4,5	●		
5	●		
6		●	
8		●	
10		●	●
12		●	●
16		●	●
20		○	○
25		○	○

Recommended Cutting Conditions

- For stable machining, a more rigid machine is recommended.
- Wet machining is recommended for stainless steel and heat resistant alloy applications.
- If cutting noise and vibration are present, please change the cutting conditions accordingly.




Shoulder Milling

Work Material	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm)						
4,5	3.500	350	3.500	280	2.100	170
5,0	3.200	380	3.200	320	1.900	190
6,0	2.700	430	2.700	320	1.600	190
8,0	2.000	400	2.000	280	1.200	170
10,0	1.600	380	1.600	260	1.000	160
12,0	1.300	360	1.300	230	800	140
16,0	1.000	320	1.000	200	600	120
20,0	800	260	800	160	480	100
25,0	640	200	640	130	380	80
Shoulder cutting	ap		1,5 DC			
	ae	0,1 DC	0,05 DC		0,05 DC	

Grooving

Work Material	Stainless Steel		Titanium Alloy		Heat Resistant Steel	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm)						
4,5	4,200	200	3,900	270	1,400	100
5,0	3,800	240	3,500	300	1,300	120
6,0	3,200	260	2,900	300	1,100	140
8,0	2,400	240	2,200	270	800	120
10,0	1,900	220	1,700	250	650	110
12,0	1,600	200	1,400	230	550	100
16,0	1,200	130	1,100	200	400	80
20,0	950	95	890	90	320	60
25,0	760	75	700	70	250	50
Grooving	ap	0,3 DC	0,2 DC		0,15 DC	

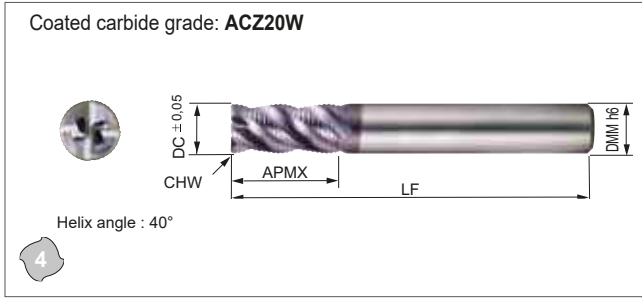


Endmills (mm)

Cat. No.	Stock	DC	APMX	LF	CHW	DMM
GSRE 4060 SF	●	6,0	13	50	0,3	6
4070 SF	●	7,0	16	60	0,3	8
4080 SF	●	8,0	19	60	0,4	8
4090 SF	●	9,0	19	70	0,4	10
4100 SF	●	10,0	22	70	0,5	10
GSRE 4110 SF	●	11,0	22	75	0,5	12
4120 SF	●	12,0	26	75	0,6	12
4140 SF	●	14,0	26	90	0,6	16
4160 SF	●	16,0	32	90	0,8	16
4180 SF	●	18,0	32	100	0,8	20
GSRE 4200 SF	●	20,0	38	100	1,0	20

Recommended :

- (1) Cutting performance is improved when using a high rigidity machine.
- (2) Speeds and feeds should be reduced when there is any excessive vibration or strange noise during the operation.




Recommended Cutting Conditions

Shoulder cutting

Material Cutting data Tool Dia. (mm)	Carbon steel (HB150–250)		Cast iron		Alloy steel, Prehardened steel (HRC25–35)		Hardened steel (HRC40–50)		Stainless steel		Heat resistant alloys Titanium alloy		
	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	
1	4.800	1.200	5.800	1.500	3.200	380	2.600	400	4.300	250	1.600	90	
2	4.100	1.200	5.000	1.500	2.700	380	2.200	400	4.500	250	1.350	90	
3	3.600	1.200	4.500	1.500	2.400	380	2.000	400	4.000	250	1.250	90	
4	3.200	1.200	4.000	1.500	2.100	380	1.800	400	3.500	250	1.050	90	
5	2.800	1.200	2.500	1.500	1.900	380	1.600	400	3.200	250	1.000	100	
6	2.600	1.200	3.000	1.400	1.700	380	1.500	400	2.900	250	900	100	
8	2.400	1.200	2.900	1.400	1.600	400	1.300	400	2.600	250	800	100	
10	2.200	1.100	2.600	1.300	1.300	380	1.100	350	2.200	200	700	100	
12	1.800	900	2.200	1.100	1.200	380	1.000	350	2.000	180	600	100	
16	1.400	700	1.800	900	1.000	380	900	350	1.800	150	550	100	
20	1.400	700	1.700	800	850	380	800	350	1.600	150	500	100	
Shoulder cutting	ap	1,5 DC						1,5 DC					
	ae	0,5 DC						0,3 DC					

Slotting


Material Cutting data Tool Dia. (mm)	Carbon steel (HB150–250)		Cast iron		Alloy steel, Prehardened steel (HRC25–35)		Hardened steel (HRC40–50)		Stainless steel		Heat resistant alloys Titanium alloy		
	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	
1	3.600	900	4.300	1.100	2.400	300	1.700	260	4.200	250	1.100	60	
2	3.000	900	3.700	1.100	2.000	280	1.500	260	3.600	250	900	60	
3	2.700	900	3.400	1.100	1.800	280	1.350	260	3.200	250	800	60	
4	2.400	900	3.000	1.100	1.600	280	1.200	260	2.800	250	700	60	
5	2.100	900	2.600	1.100	1.400	280	1.100	270	2.500	250	650	65	
6	2.000	900	2.300	1.100	1.300	280	1.000	270	2.300	250	600	70	
8	1.800	900	2.200	1.100	1.200	300	900	270	2.100	250	550	70	
10	1.600	800	2.000	1.100	1.000	290	750	240	1.800	180	450	65	
12	1.350	650	1.650	850	900	280	700	240	1.600	160	400	65	
16	1.200	550	1.500	750	800	280	600	230	1.400	140	350	60	
20	1.050	500	1.350	700	700	280	550	210	1.250	125	300	60	
Slotting	ap	1,0 DC						0,5 DC					



GS MILL Series

GSH 4000/6000/8000 SF Type

TiAlN Coated Fast Helix Endmills

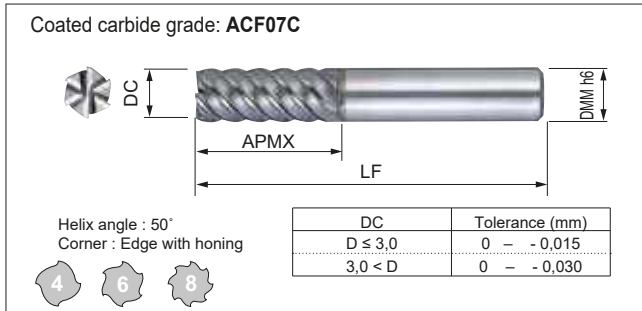

Endmills (mm)

Cat. No.	Stock	DC	APMX	LF	DMM
GSH 4010 SF	●	1,0	3	50	6
4015 SF	●	1,5	4	50	6
4020 SF	●	2,0	6	50	6
GSH 6030 SF	●	3,0	8	50	6
6040 SF	●	4,0	11	50	6
6050 SF	●	5,0	12	50	6
6060 SF	●	6,0	13	50	6
6080 SF	●	8,0	19	60	8
6100 SF	●	10,0	22	70	10
6120 SF	●	12,0	26	75	12
GSH 8160 SF	●	16,0	32	90	16
8200 SF	●	20,0	38	100	20

Recommended :

- (1) Cutting performance is improved when using a high rigidity machine.
- (2) Speeds and feeds should be reduced when there is any excessive vibration or strange noise during the operation.


Recommended Cutting Conditions

Conventional Milling Operations

Material Cutting data	Alloy steel, Prehardened steel (-HRC35)		Heat treated alloy steel, hardened steel (HRC35-45)		Hardened steel (HRC45-55)		Hardened steel (HRC55-60)		Hardened steel (HRC60-65)		Hardened steel (HRC65-)		
	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	
1	20.000	540	20.000	390	15.600	260	12.300	160	11.100	140	7.800	95	
2	19.000	1.100	17.200	770	13.400	530	10.500	320	9.500	270	6.700	190	
3	15.000	2.150	13.400	1.540	10.400	1.050	8.200	650	7.400	540	5.200	380	
4	11.200	2.400	10.000	1.740	7.800	1.180	6.100	730	5.600	600	3.900	420	
5	9.000	2.700	8.000	1.930	6.200	1.300	4.900	810	4.400	670	3.100	470	
6	7.500	2.700	6.700	1.930	5.200	1.300	4.100	810	3.700	670	2.600	470	
8	5.600	2.700	5.000	1.930	3.900	1.300	3.050	810	2.800	670	1.950	470	
10	4.500	2.700	4.000	1.930	3.100	1.300	2.450	810	2.200	670	1.550	470	
12	3.750	2.700	3.350	1.930	2.600	1.300	2.050	810	1.850	670	1.300	470	
16	2.800	2.500	2.500	1.800	1.950	1.220	1.530	760	1.400	630	980	440	
20	2.250	2.100	2.000	1.540	1.550	1.050	1.230	650	1.100	540	780	380	
Shoulder cutting	a_p	1-1,5 DC		1-1,5 DC		1-1,5 DC		1-1,5 DC		1-1,5 DC		1-1,5 DC	
	a_e	0,1 DC		0,05 DC		0,05 DC		0,05 DC		0,05 DC		0,02 DC	
Slotting	a_p	0,1 DC		0,05 DC		0,05 DC		0,05 DC		-0,05 DC (Max 0,5)		-0,05 DC (Max 0,5)	

HSC Machining Centre Operations

Material Cutting data	Alloy steel, Prehardened steel (-HRC35)		Heat treated alloy steel, hardened steel (HRC35-45)		Hardened steel (HRC45-55)		Hardened steel (HRC55-60)		Hardened steel (HRC60-65)				
	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)			
1	48.000	1.250	48.000	1.250	48.000	1.250	48.000	930	38.000	700			
2	48.000	2.850	48.000	2.850	48.000	2.850	36.000	1.600	24.000	1.000			
3	32.000	4.900	32.000	4.900	32.000	4.900	24.000	2.740	16.000	1.700			
4	24.000	5.200	24.000	5.200	24.000	5.200	18.000	2.900	12.000	1.800			
5	19.200	5.800	19.200	5.800	19.200	5.800	14.300	3.200	9.600	2.000			
6	16.000	5.800	16.000	5.800	16.000	5.800	12.000	3.200	8.000	2.000			
8	12.000	5.800	12.000	5.800	12.000	5.800	9.000	3.200	6.000	2.000			
10	9.600	5.800	9.600	5.800	9.600	5.800	7.200	3.200	4.800	2.000			
12	8.000	5.800	8.000	5.800	8.000	5.800	6.000	3.200	4.000	2.000			
16	6.000	5.400	6.000	5.400	6.000	5.400	4.500	3.000	3.000	1.900			
20	4.800	4.600	4.800	4.600	4.800	4.600	3.600	2.580	2.400	1.600			
Shoulder cutting	a_p	1-1,5 DC		1-1,5 DC		1-1,5 DC		1-1,5 DC		1-1,5 DC		1-1,5 DC	
	a_e	0,1 DC		0,05 DC		0,05 DC		0,02 DC		0,12 DC		0,12 DC	



● = Euro stock

DLC (Diamond Like Carbon) Coating AURORA COAT Series



■ Features




Sumitomo Electric's "AURORA" COAT is a high hardness, low coefficient layer of "Diamond Like Carbon" (DLC).

Other than producing excellent surface finish for machining of Aluminium and non-ferrous metals, DLC coat can be used for dry cutting and is environmental friendly.

■ Characteristics / Application



- Very smooth AURORA COAT results in low adhesion as well as good surface finish
- With lower cutting forces and high rigidity, this series is suitable for low rigidity machine
- Available in 2 and 4 flutes square type as well as ballnose type endmills

■ Product Range


Series	No. of teeth	Shape	Diameter
ASM2000DL	2	Square 	ø 2 – ø 16
ASM4000DL	4	Square 	ø 2 – ø 16
SNB2000DL	2	Ballnose 	ø 2 – ø 16 (R1 – R8)

■ Efficiency

● Performance Comparison


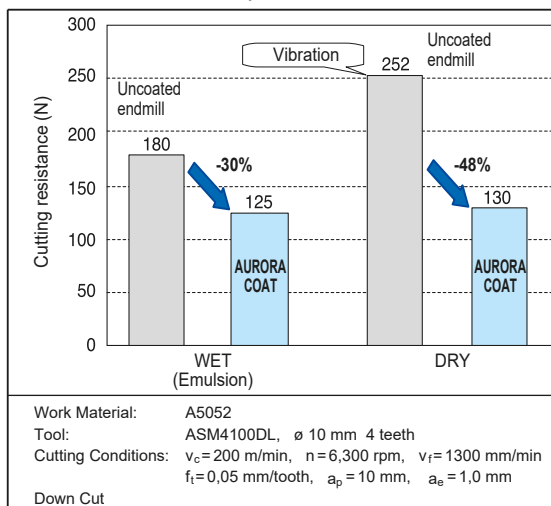


● Surface Finish Comparison

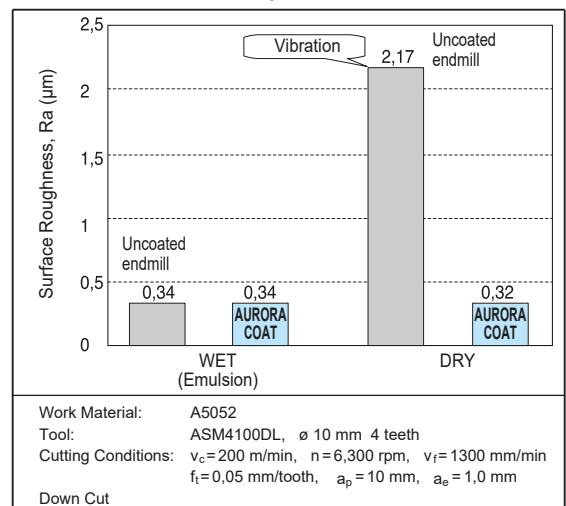

AURORA Coated Spiral Endmills ASM 2000/4000 DL Type

AURORA Coated Spiral Endmills ASM 2000/4000 DL-R Type

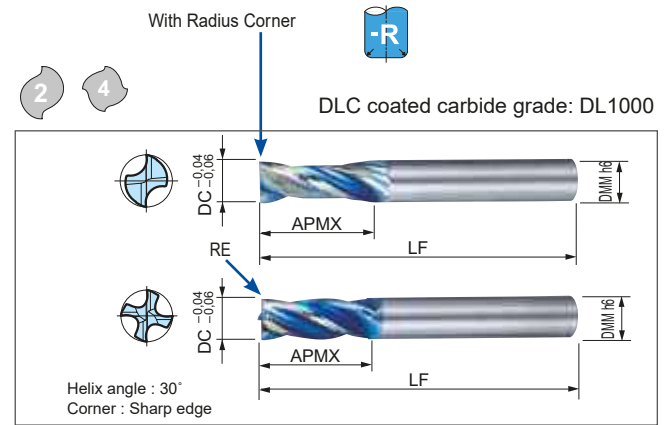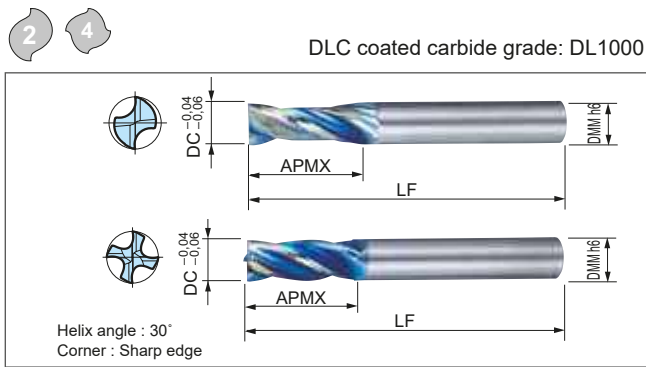

Endmills (mm)

Cat. No.	Stock	DC	APMX	LF	DMM
ASM 2020 DL	●	2,0	6	40	4
2030 DL	●	3,0	10	45	6
2040 DL	●	4,0	12	45	6
2050 DL	●	5,0	15	50	6
ASM 2060 DL	●	6,0	15	50	6
2080 DL	●	8,0	18	60	8
2100 DL	●	10,0	22	71	10
ASM 2120 DL	●	12,0	25	75	12
2160 DL	●	16,0	32	90	16

ASM 4020 DL	●	2,0	6	40	4
4030 DL	●	3,0	10	45	6
4040 DL	●	4,0	12	45	6
4050 DL	●	5,0	15	50	6
ASM 4060 DL	●	6,0	15	50	6
4080 DL	●	8,0	18	60	8
4100 DL	●	10,0	22	71	10
ASM 4120 DL	●	12,0	25	75	12
4160 DL	●	16,0	32	90	16

Endmills (mm)


Cat. No.	Stock	DC	RE	APMX	LF	DMM
ASM 2080 DL-R10	□	8,0	1,0	18	60	8
2080 DL-R20	□	8,0	2,0	18	60	8
ASM 2100 DL-R10	□	10,0	1,0	22	71	10
2100 DL-R20	□	10,0	2,0	22	71	10
ASM 2120 DL-R20	□	12,0	2,0	25	75	12
2120 DL-R30	□	12,0	3,0	25	75	12
ASM 2160 DL-R30	□	16,0	3,0	32	90	16

ASM 4080 DL-R10	□	8,0	1,0	18	60	8
4080 DL-R20	□	8,0	2,0	18	60	8
ASM 4100 DL-R10	□	10,0	1,0	22	71	10
4100 DL-R20	□	10,0	2,0	22	71	10
ASM 4120 DL-R20	□	12,0	2,0	25	75	12
4120 DL-R30	□	12,0	3,0	25	75	12
ASM 4160 DL-R30	□	16,0	3,0	32	90	16

Recommended Cutting Conditions

Recommended :

- (1) Cutting performance is improved when using a high rigidity machine.
- (2) Speeds and feeds should be reduced when there is any excessive vibration or strange noise during the operation.
- (3) In case of chatter first check the cutting conditions.



Work Material		Aluminium Alloy							
		Wet (Emulsion)				Dry			
		Side Milling (4 teeth)		Groove Milling (4 teeth)		Side Milling (4 teeth)		Groove Milling (4 teeth)	
DC (mm)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	
2,0	40.000	1.400	28.000	280	40.000	980	28.000	200	
3,0	32.000	2.000	22.000	400	32.000	1.400	22.000	280	
4,0	26.000	2.600	18.000	520	26.000	1.800	18.000	360	
5,0	20.000	2.600	14.000	520	20.000	1.800	14.000	360	
6,0	17.000	2.700	12.000	540	17.000	1.900	12.000	370	
8,0	13.000	2.700	9.000	540	13.000	1.900	9.000	370	
10,0	11.000	2.800	7.200	560	11.000	2.000	7.200	390	
12,0	8.500	2.800	6.000	560	8.500	2.000	6.000	390	
16,0	6.400	2.800	4.500	560	6.400	2.000	4.500	390	
Depth and wide of cut	a _p	1,5 DC		1,0 DC		1,5 DC		0,5 DC	
	a _e	0,2 DC		(DC)		0,2 DC		(DC)	

● = Euro stock

□ = Delivery on request

ZX Coated Long Fast Helix Endmills


LHHM 4000/6000/8000 ZX Type

ZX Coated Extra Long Fast Helix Endmills

EHHM 4000/6000/8000 ZX Type


4 6 8

Coated carbide grade: ACZ10M

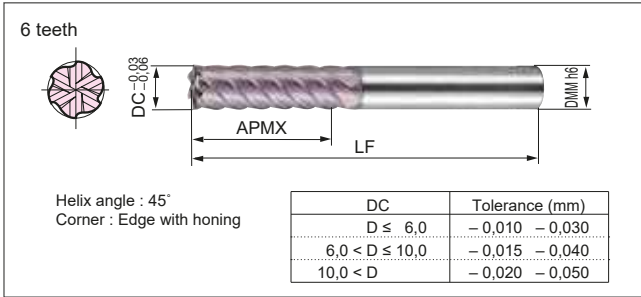

4 6 8

Coated carbide grade: ACZ10M

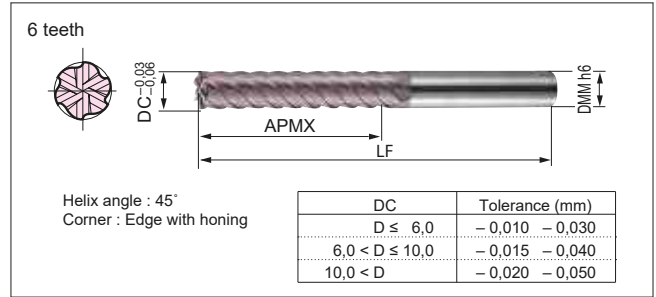

Endmills (mm)

Cat. No.	Stock	DC	APMX	LF	DMM
LHHM 4030 ZX	☐	3,0	12	55	6
4040 ZX	☐	4,0	15	60	6
4050 ZX	☐	5,0	18	60	6

LHHM 6060 ZX	☐	6,0	18	60	6
6080 ZX	☐	8,0	25	75	8
6100 ZX	☐	10,0	30	80	10
6120 ZX	☐	12,0	30	100	12



LHHM 8160 ZX	☐	16,0	50	105	16
8200 ZX	☐	20,0	55	120	20
8250 ZX	☐	25,0	65	140	25
8300 ZX	☐	30,0	75	160	32

Endmills (mm)

Cat. No.	Stock	DC	APMX	LF	DMM
EHHM 4030 ZX	☐	3,0	20	60	6
4040 ZX	☐	4,0	25	65	6
4050 ZX	☐	5,0	30	70	6

EHHM 6060 ZX	☐	6,0	30	70	6
6080 ZX	☐	8,0	40	90	8
6100 ZX	☐	10,0	50	100	10
6120 ZX	☐	12,0	50	120	12

EHHM 8160 ZX	☐	16,0	70	140	16
8200 ZX	☐	20,0	85	165	20
8250 ZX	☐	25,0	100	185	25
8300 ZX	☐	30,0	110	205	32
8320 ZX	☐	32,0	110	205	32

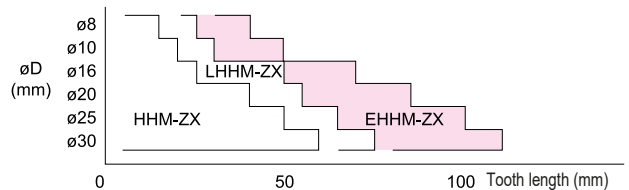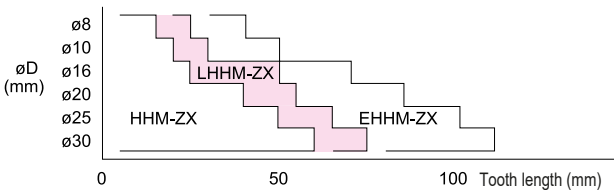

Recommended conditions (Shoulder processing) $a_p = 1,5 \times \phi D$
 $a_e = 0,025(\text{HRC}56-65) \sim 0,2(\text{below HRC}25) \times \phi D$

DC	Material	Carbon steel, Alloy steel		Hardened steel	Cast iron
		(BelowHRC25)	(BelowHRC45)	(BelowHRC65)	
3,0-5,0	v_c	200-250-300	100-150-200	80-100-120	60-75-90
	f_t	0,030-0,060	0,022-0,037	0,007-0,015	0,030-0,060
6,0-12,0	v_c	200-250-300	100-150-200	80-100-120	40-50-60
	f_t	0,061-0,090	0,037-0,067	0,015-0,028	0,060-0,165
16,0-32,0	v_c	200-250-300	100-150-200	80-100-120	40-50-60
	f_t	0,090-0,098	0,067-0,075	0,028-0,038	0,187-0,262

$v_c = \text{m/min}$ $f_t = \text{mm/tooth}$

Recommended conditions (Shoulder processing) $a_p = 1,5 \times \phi D$
 $a_e = 0,025(\text{HRC}56-65) \sim 0,2(\text{below HRC}25) \times \phi D$

DC	Material	Carbon steel, Alloy steel		Hardened steel	Cast iron
		(BelowHRC25)	(BelowHRC45)	(BelowHRC65)	
3,0-5,0	v_c	200-250-300	100-150-200	80-100-120	100-120-150
	f_t	0,020-0,040	0,015-0,025	0,005-0,010	0,020-0,040
6,0-12,0	v_c	200-250-300	100-150-200	80-100-120	100-120-150
	f_t	0,041-0,060	0,025-0,045	0,010-0,019	0,040-0,110
16,0-32,0	v_c	200-250-300	100-150-200	80-100-120	100-120-150
	f_t	0,060-0,065	0,045-0,050	0,019-0,025	0,125-0,175

$v_c = \text{m/min}$ $f_t = \text{mm/tooth}$

High Efficient Endmills SSUP MILL Series



■ Features

ZX coated general use endmill for high efficient slotting and side cutting of steels, stainless steels, high temperature alloys and cast irons.

Unique flute design and strong cutting edge ensure excellent chip control even when rough machining slots.

Feed rate up to 2000 mm/min with and without coolant

■ Advantages





- Unique flute design for excellent chip removal
- Extra strong cutting edge
- 40° high helix angle for high feed rates
- New ZX coating for excellent wear resistance
- Smooth cutting
- Excellent rigid wide cutting land



SSUP 4000ZX-R Series
Diameter and Corner Radius Range


DC \ RE	RE0,2	RE0,3	RE0,5	RE1,0	RE1,5	RE2,0	RE3,0
3	●		●				
4	●			●			
5	●		●	●			
6		●	●	●	●		
8		●	●	●	●		
10		●	●	●	●	●	
12			●	●	●	●	●
16				●	●	●	●
20				●	●	●	●

■ Performance

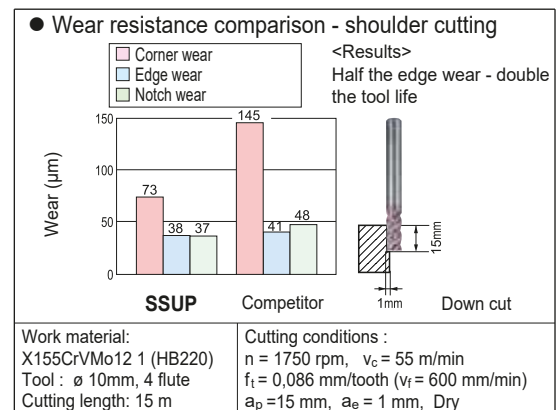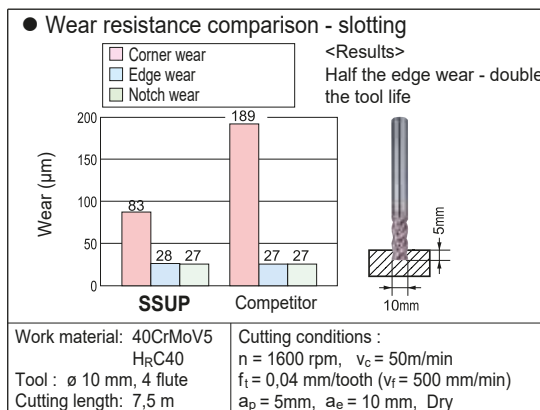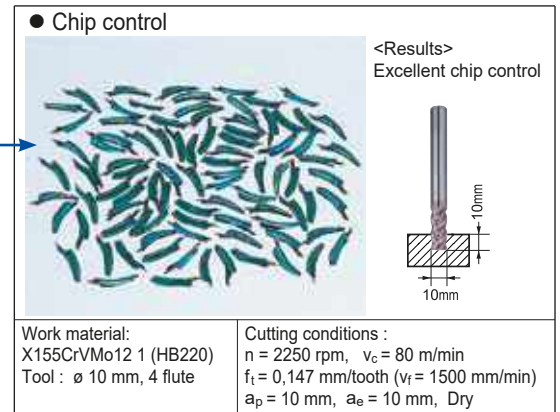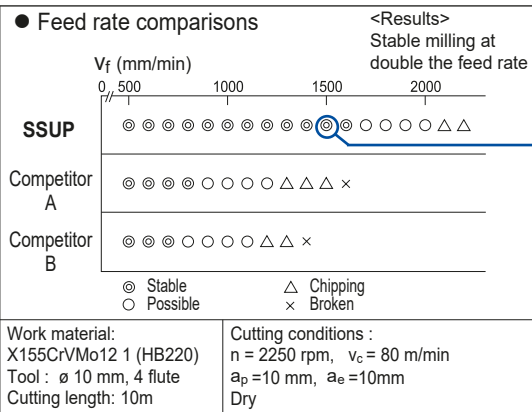


● = Euro stock
□ = Delivery on request

ZX Coated SSUP MILL SSUP 4000ZX Type

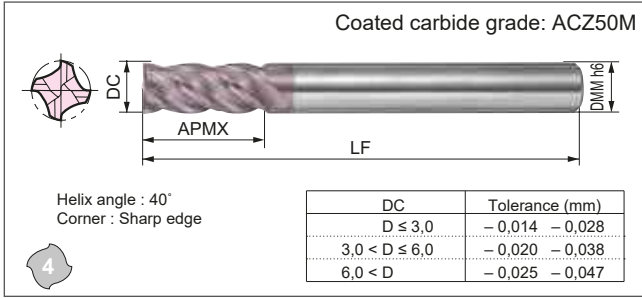

ZX Coated SSUP MILL SSUP 4000ZX-R Type

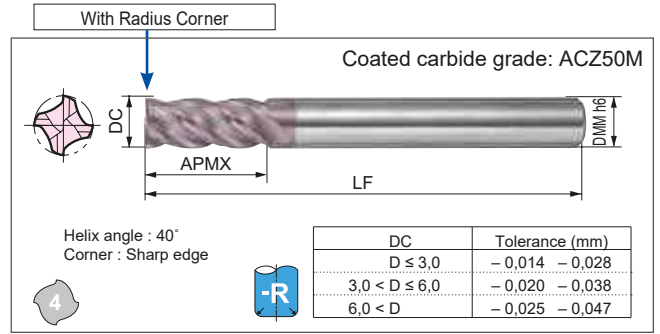

Endmills (mm)


Cat. No.	Stock	DC	APMX	LF	DMM
SSUP 4020 ZX	●	2,0	6	50	4
4030 ZX	●	3,0	8	50	6
4040 ZX	●	4,0	11	50	6
4050 ZX	●	5,0	13	60	6
SSUP 4060 ZX	●	6,0	13	60	6
4070 ZX	●	7,0	16	70	8
4080 ZX	●	8,0	19	80	8
4090 ZX	●	9,0	19	90	10
4100 ZX	●	10,0	22	90	10
SSUP 4110 ZX	●	11,0	22	90	12
4120 ZX	●	12,0	26	90	12
4140 ZX	●	14,0	26	110	16
4150 ZX	□	15,0	26	110	16
SSUP 4160 ZX	●	16,0	32	115	16
4180 ZX	□	18,0	32	120	20
4200 ZX	●	20,0	38	125	20

Endmills (mm)

Cat. No.	Stock	DC	RE	APMX	LF	DMM
SSUP 4030 ZX-R02	●	3,0	0,2	8	50	6
4030 ZX-R05	□	3,0	0,5	8	50	6
SSUP 4040 ZX-R02	●	4,0	0,2	11	50	6
4040 ZX-R05	●	4,0	0,5	11	50	6
4040 ZX-R10	□	4,0	1,0	11	50	6
SSUP 4050 ZX-R02	●	5,0	0,2	13	60	6
4050 ZX-R05	●	5,0	0,5	13	60	6
4050 ZX-R10	□	5,0	1,0	13	60	6
SSUP 4060 ZX-R03	●	6,0	0,3	13	60	6
4060 ZX-R05	●	6,0	0,5	13	60	6
4060 ZX-R10	●	6,0	1,0	13	60	6
4060 ZX-R15	□	6,0	1,5	13	60	6
SSUP 4080 ZX-R03	●	8,0	0,3	13	80	8
4080 ZX-R05	●	8,0	0,5	13	80	8
4080 ZX-R10	●	8,0	1,0	19	80	8
4080 ZX-R15	□	8,0	1,5	19	80	8
4080 ZX-R20	□	8,0	2,0	19	80	8
SSUP 4100 ZX-R03	●	10,0	0,3	22	90	10
4100 ZX-R05	●	10,0	0,5	22	90	10
4100 ZX-R10	●	10,0	1,0	22	90	10
4100 ZX-R15	□	10,0	1,5	22	90	10
4100 ZX-R20	□	10,0	2,0	22	90	10
SSUP 4120 ZX-R05	●	12,0	0,5	26	90	12
4120 ZX-R10	●	12,0	1,0	26	90	12
4120 ZX-R15	●	12,0	1,5	26	90	12
4120 ZX-R20	□	12,0	2,0	26	90	12
4120 ZX-R30	□	12,0	3,0	26	90	12
SSUP 4160 ZX-R10	●	16,0	1,0	32	115	16
4160 ZX-R15	●	16,0	1,5	32	115	16
4160 ZX-R20	□	16,0	2,0	32	115	16
4160 ZX-R30	□	16,0	3,0	32	115	16
SSUP 4200 ZX-R10	●	20,0	1,0	38	125	20
4200 ZX-R15	□	20,0	1,5	38	125	20
4200 ZX-R20	□	20,0	2,0	38	125	20
4200 ZX-R30	□	20,0	3,0	38	125	20

Recommended Cutting Conditions

Material	Carbon steel, Cast iron (Hb150-250)		Alloy steel, Prehardened steel (HRC25-35)		Hardened steel (HRC40-50)		Stainless steel		Heat resistant alloys Titanium alloy (HRC20-45)	
	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)
2	9000	720	6000	430	4000	320	5500	320	2600	120
4	6600	800	4500	450	3000	380	4000	320	2000	120
6	4800	960	3000	480	2500	380	3000	480	1200	120
8	3600	1000	2200	610	2000	400	2000	520	1000	140
10	2800	1000	1800	610	1500	400	1700	550	800	160
12	2400	950	1500	550	1200	380	1500	500	700	140
14	2200	880	1300	490	1000	360	1200	430	600	130
16	1800	650	1100	420	800	300	1000	360	500	120
18	1600	580	1000	360	750	270	900	340	450	110
20	1400	500	900	330	700	250	820	300	400	100
Shoulder cutting	a_p	1,5 DC								
	a_e	0,1 DC		0,05 DC		0,1 DC		0,05 DC		
Slotting	a_p	1,0 DC		0,2 DC		0,3 DC		0,2 DC		

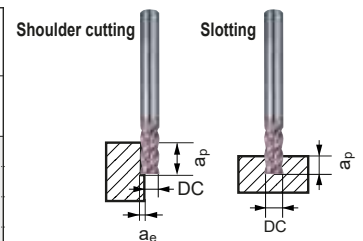


- (1) Cutting performance is improved when using a high rigidity machine.
- (2) Speeds and feeds should be reduced when slotting some stainless steels.
- (3) In case of chatter first check the cutting conditions.

GSX MILL Ball Endmills GSXB 20000 Type



Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	45-55 HRC	55-60 HRC	60-65 HRC	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

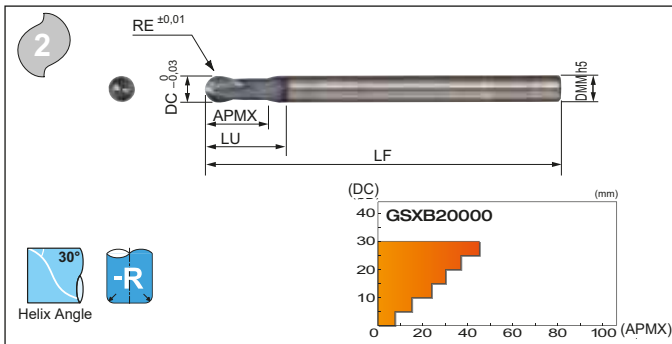

Coated carbide grade: **ACB20**

Endmill Identification (GSXB Type)

GSXB 2 0200


Series Code: **GSXB 2 0200**
No. of Teeth: 2
Radius of Ballnose: 0.20

Endmills

Cat. No.	Stock	RE	DC	APMX	LU	LF	DMM
GSXB 20020	●	0,20	0,4	0,6	0,8	50	4
GSXB 20030	●	0,30	0,6	0,9	1,2	50	4
GSXB 20050	●	0,50	1,0	1,5	2,0	50	4
GSXB 20075	●	0,75	1,5	2,5	3,0	50	4
GSXB 20100	●	1,00	2,0	3,0	4,0	60	6
GSXB 20125	●	1,25	2,5	4,0	5,0	60	6
GSXB 20150	●	1,50	3,0	4,5	6,0	60	6
GSXB 20200	●	2,00	4,0	6,0	8,0	70	6
GSXB 20250	●	2,50	5,0	7,5	10,0	80	6
GSXB 20300	●	3,00	6,0	9,0	-	80	6
GSXB 20350	●	3,50	7,0	11,0	20,0	90	8
GSXB 20400	●	4,00	8,0	12,0	-	90	8
GSXB 20500	●	5,00	10,0	15,0	-	100	10
GSXB 20600	●	6,00	12,0	18,0	-	110	12
GSXB 20700	●	7,00	14,0	21,0	38,0	110	16
GSXB 20800	●	8,00	16,0	24,0	-	140	16
GSXB 20900	●	9,00	18,0	27,0	50,0	140	20
GSXB 21000	●	10,00	20,0	30,0	-	160	20
GSXB 21250	●	12,50	25,0	38,0	-	180	25
GSXB 21500	●	15,00	30,0	45,0	80,0	180	32



New "Global Standard" Mills
Ball nose type with 2 teeth



Recommended Cutting Conditions

- (1) If cutting noise and vibration are present, please change the cutting conditions accordingly.
- (2) If the machine is not designed to achieve the recommended spindle speed, please use the max. spindle speed available.

Radius Milling


Work Material	Carbon Steel, Alloy Steel (Below 25HRC)		Carbon Steel, Alloy Steel (Below 50HRC)		Cast Iron Special Cast Iron		Stainless Steel Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
RE (mm) 0,20	50.000	2.100	35.000	1.150	50.000	2.100	50.000	1.750
0,30	50.000	2.500	35.000	1.350	50.000	2.500	50.000	2.100
0,50	50.000	3.000	35.000	1.600	50.000	3.000	50.000	2.500
0,75	35.000	3.000	24.000	1.650	35.000	3.200	34.000	2.500
1,00	27.500	3.000	19.000	1.700	35.000	3.900	26.000	2.500
1,25	22.500	3.000	15.500	1.700	28.000	3.900	21.000	2.500
1,50	19.000	3.000	13.000	1.700	24.000	3.900	17.500	2.500
2,00	17.000	3.800	12.000	2.100	20.000	4.100	15.000	2.700
2,50	15.500	4.300	11.000	2.200	18.000	4.600	12.000	2.500
3,00	14.000	4.700	10.500	2.500	16.500	5.300	10.500	2.500
3,50	12.500	4.200	9.000	2.100	14.000	4.500	9.000	2.200
4,00	11.000	3.500	7.900	1.900	12.500	4.000	7.800	1.900
5,00	9.000	2.800	6.300	1.500	10.500	3.300	6.300	1.500
6,00	7.500	2.400	5.200	1.250	8.700	2.800	5.200	1.250
7,00	6.400	2.100	4.500	1.100	7.400	2.400	4.500	1.100
8,00	5.600	1.800	3.900	950	6.500	2.100	3.900	950
9,00	5.000	1.600	3.500	850	5.800	1.900	3.500	850
10,00	4.500	1.450	3.100	750	5.200	1.700	3.150	750
12,50	3.600	1.150	2.500	600	4.200	1.350	2.500	600
15,00	3.000	960	2.100	500	3.500	1.150	2.100	500
Depth and wide of cut	ap	0,02 DC	0,02 DC	0,02 DC	0,02 DC	0,02 DC	0,02 DC	0,02 DC
	ae	0,05 DC	0,05 DC	0,05 DC	0,05 DC	0,05 DC	0,05 DC	0,05 DC

● = Euro stock

DLC (Diamond Like Carbon) Coating

2

DLC coated carbide grade: DL1200

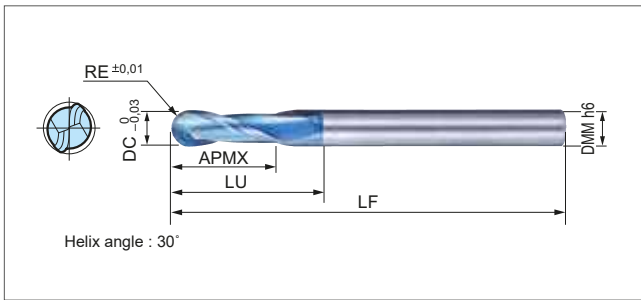


Endmills (mm)

Cat. No.	Stock	RE	DC	APMX	LU	LF	DMM
SNB 2020 DL	●	1,0	2,0	3	5	60	6
2030 DL	●	1,5	3,0	4,5	8	80	6
SNB 2040 DL	●	2,0	4,0	6	12	80	6
2050 DL	●	2,5	5,0	7,5	14	90	6
SNB 2060 DL	●	3,0	6,0	9	-	100	6
2080 DL	●	4,0	8,0	12	-	100	8
2100 DL	●	5,0	10,0	15	-	120	10
SNB 2120 DL	●	6,0	12,0	18	-	120	12
2160 DL	●	8,0	16,0	24	-	160	16

Characteristics / Application

- Very smooth AURORA COAT results in low adhesion as well as good surface finish
- With lower cutting forces and high rigidity, this series is suitable for low rigidity machine



Recommended Cutting Conditions

Work Material	Aluminum Alloy			
	Wet (Emulsion)		Dry	
	Speed (rpm)	Feed (mm/min)	Speed (rpm)	Feed (mm/min)
RE (mm)				
1,0	48.000	1.500	48.000	1.000
1,5	48.000	2.100	48.000	1.500
2,0	31.000	2.800	31.000	2.000
2,5	24.000	2.800	24.000	2.000
3,0	20.000	2.800	20.000	2.000
4,0	15.000	2.800	15.000	2.000
5,0	13.000	3.000	13.000	2.100
6,0	10.000	3.000	10.000	2.100
8,0	7.700	3.000	7.700	2.100
Depth and wide of cut	a_p	1,5 DC	1,0 DC	
	a_e	0,2 DC	(DC)	


● = Euro stock

Spiral Endmills for Non-Ferrous Cutting

ASM 2000 Type

2

Carbide grade: H1 (Micrograin)

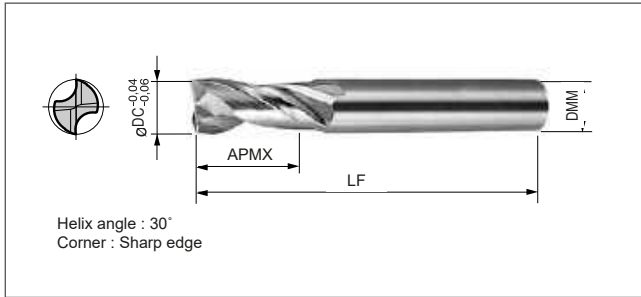

Endmills (mm)

Cat. No.	Stock	DC	APMX	LF	DMM
ASM 2020	<input type="checkbox"/>	2,0	6	40	4
2030	<input type="checkbox"/>	3,0	10	45	6
2040	<input type="checkbox"/>	4,0	12	45	6
2050	<input type="checkbox"/>	5,0	15	50	6
ASM 2060	<input type="checkbox"/>	6,0	15	50	6
2080	<input type="checkbox"/>	8,0	18	60	8
2100	<input type="checkbox"/>	10,0	22	71	10
ASM 2120	<input type="checkbox"/>	12,0	25	75	12
2160	<input type="checkbox"/>	16,0	32	90	16


Uncoated Endmills

Recommended Conditions

(Shoulder processing) $a_p = 1,5 \times DC$
 $a_e = 0,1 \times DC$

DC	Material	
	Al-alloy	Cast iron
1 – 2,5	v_c	100-200-300 / 100-120-150
	f_t	0,004–0,017 / 0,008–0,020
3 – 5	v_c	100-200-300 / 100-120-150
	f_t	0,018–0,036 / 0,027–0,060
6 – 12	v_c	100-200-300 / 100-120-150
	f_t	0,038–0,070 / 0,065–0,157
14 – 16	v_c	100-200-300 / 100-120-150
	f_t	0,075–0,125 / 0,160–0,250


$v_c = \text{m/min}$ $f_t = \text{mm/tooth}$



Anti-Vibration Type Radius Endmills for Exotic Alloys

SSEHVL 4000-R Type

Uncoated Carbide	4	Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel			Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
							45-55 HRC	55-60 HRC	60-65 HRC						

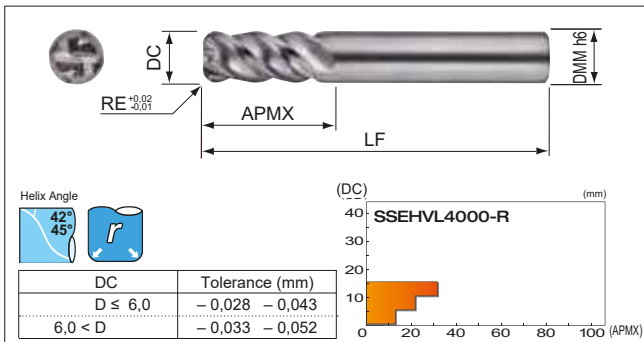


Carbide grade: EH520

Radius Endmills for Exotic Alloys

SSEH 4000-R Type

Uncoated Carbide	4	Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel			Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
							45-55 HRC	55-60 HRC	60-65 HRC						

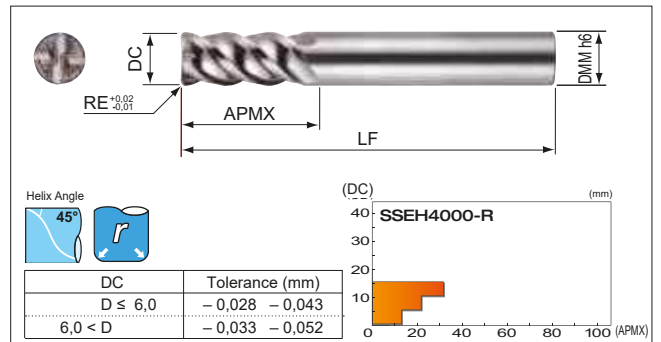

Carbide grade: EH520

Endmills

(mm)

Cat. No.	Stock	DC	APMX	LU	LF	DMM
SSEHVL 4045-R05	●	4,5	0,5	12	50	6
SSEHVL 4045-R10	●	4,5	1,0	12	50	6
SSEHVL 4050-R05	●	5,0	0,5	13	60	6
SSEHVL 4050-R10	●	5,0	1,0	13	60	6
SSEHVL 4060-R10	●	6,0	1,0	13	60	6
SSEHVL 4080-R10	●	8,0	1,0	19	80	8
SSEHVL 4100-R10	●	10,0	1,0	22	90	10
SSEHVL 4100-R30	●	10,0	3,0	22	90	10
SSEHVL 4120-R10	●	12,0	1,0	26	90	12
SSEHVL 4120-R30	●	12,0	3,0	26	90	12
SSEHVL 4160-R10	●	16,0	1,0	32	115	16
SSEHVL 4160-R30	●	16,0	3,0	32	115	16


Endmills

(mm)

Cat. No.	Stock	DC	APMX	LU	LF	DMM
SSEH 4045-R05	●	4,5	0,5	12	50	6
SSEH 4045-R10	●	4,5	1,0	12	50	6
SSEH 4050-R05	●	5,0	0,5	13	60	6
SSEH 4050-R10	●	5,0	1,0	13	60	6
SSEH 4060-R10	●	6,0	1,0	13	60	6
SSEH 4080-R10	●	8,0	1,0	19	80	8
SSEH 4100-R10	●	10,0	1,0	22	90	10
SSEH 4100-R30	●	10,0	3,0	22	90	10
SSEH 4120-R10	●	12,0	1,0	26	90	12
SSEH 4120-R30	●	12,0	3,0	26	90	12
SSEH 4160-R10	●	16,0	1,0	32	115	16
SSEH 4160-R30	●	16,0	3,0	32	115	16

Characteristics / Application

1. For stable machining, a more rigid machine is recommended.
2. Wet machining is recommended for stainless steel and heat resistant alloy applications.
3. If cutting noise and vibration are present, please change the cutting conditions accordingly.



Shoulder Milling

Work Material Cond.	Stainless Steel		Titanium Alloy		Heat Resistive Steel	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm) 4,5	2.300	120	4.600	370	1.600	130
5,0	2.000	130	4.100	410	1.500	150
6,0	1.700	130	3.400	400	1.200	140
8,0	1.300	130	2.600	360	900	130
10,0	1.000	130	2.100	340	700	110
12,0	800	110	1.700	300	600	100
16,0	600	90	1.300	260	500	100
Shoulder cutting	ap ae	1,5 DC		0,05 DC		0,05 DC

Shoulder Milling

Work Material Cond.	Stainless Steel		Titanium Alloy		Heat Resistive Steel	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm) 4,5	1.800	90	3.500	280	1.400	110
5,0	1.600	100	3.200	320	1.300	130
6,0	1.300	100	2.700	320	1.100	130
8,0	1.000	100	2.000	280	800	110
10,0	800	100	1.600	260	600	100
12,0	700	100	1.300	230	500	90
16,0	500	80	1.000	200	400	80
Shoulder cutting	ap ae	1,5 DC		0,05 DC		0,05 DC

Grooving

Work Material Cond.	Stainless Steel		Titanium Alloy		Heat Resistive Steel	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm) 4,5	1.800	50	3.200	250	1.300	110
5,0	1.600	50	2.900	290	1.200	120
6,0	1.400	50	2.400	290	1.000	120
8,0	1.000	50	1.800	250	700	90
10,0	800	50	1.400	230	600	100
12,0	600	50	1.200	210	500	90
16,0	500	40	900	180	400	80
Grooving	ap	0,3 DC		0,2 DC		0,15 DC

Grooving

Work Material Cond.	Stainless Steel		Titanium Alloy		Heat Resistive Steel	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
DC (mm) 4,5	1.400	40	2.500	200	1.100	90
5,0	1.300	40	2.200	220	1.000	100
6,0	1.100	40	1.900	230	800	100
8,0	800	40	1.400	200	600	80
10,0	600	40	1.100	180	500	80
12,0	500	40	900	160	400	70
16,0	400	30	700	140	300	60
Grooving	ap	0,3 DC		0,2 DC		0,15 DC


Uncoated Endmills

Solid Carbide Spiral Endmills SSM 2000 Type ($\phi 0,2-\phi 4,3$)

Solid Carbide Spiral Endmills SSM 2000 Type ($\phi 4,4-\phi 8,5$)


2

Carbide grade: A1 (Micrograin)

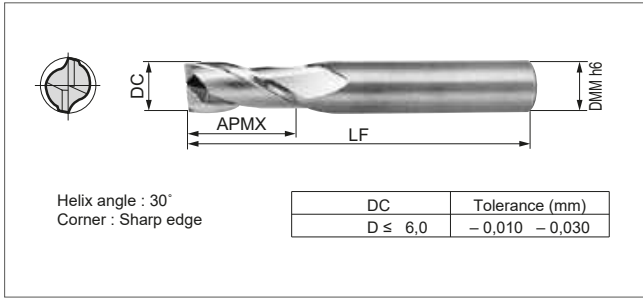

2

Carbide grade: A1 (Micrograin)

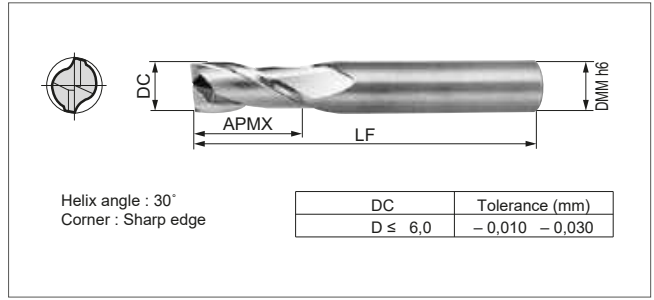

■ Endmills (mm)

Cat. No.	Stock	DC	APMX	LF	DMM
SSM 2002	□	0,2	0,5	40	3
2003	●	0,3	1,0	40	3
2004	●	0,4	1,0	40	3
2005	○	0,5	1,5	40	3
SSM 2006	●	0,6	1,5	40	3
2007	○	0,7	1,5	40	3
2008	●	0,8	2,0	40	3
2009	□	0,9	2,0	40	3
2010	●	1,0	3,0	40	4
SSM 2011	□	1,1	3,0	40	4
2012	□	1,2	3,0	40	4
2013	□	1,3	3,0	40	4
2014	□	1,4	3,0	40	4
2015	●	1,5	5,0	40	4
SSM 2016	□	1,6	5,0	40	4
2017	□	1,7	5,0	40	4
2018	□	1,8	5,0	40	4
2019	□	1,9	5,0	40	4
2020	●	2,0	6,0	40	4
SSM 2021	□	2,1	6,0	40	4
2022	□	2,2	6,0	40	4
2023	□	2,3	6,0	40	4
2024	□	2,4	6,0	40	4
2025	●	2,5	8,0	40	4
SSM 2026	□	2,6	8,0	40	4
2027	□	2,7	8,0	40	4
2028	□	2,8	8,0	40	4
2029	□	2,9	8,0	40	4
2030	●	3,0	8,0	45	6
SSM 2031	□	3,1	8,0	45	6
2032	●	3,2	8,0	45	6
2033	□	3,3	8,0	45	6
2034	□	3,4	8,0	45	6
2035	●	3,5	8,0	45	6
SSM 2036	□	3,6	10,0	45	6
2037	□	3,7	10,0	45	6
2038	□	3,8	10,0	45	6
2039	□	3,9	10,0	45	6
2040	●	4,0	10,0	45	6
SSM 2041	□	4,1	10,0	45	6
2042	□	4,2	10,0	45	6
2043	□	4,3	10,0	45	6

■ Endmills (mm)

Cat. No.	Stock	DC	APMX	LF	DMM
SSM 2044	□	4,4	10	45	6
2045	□	4,5	10	45	6
SSM 2046	□	4,6	12	50	6
2047	□	4,7	12	50	6
2048	□	4,8	12	50	6
2049	□	4,9	12	50	6
2050	●	5,0	12	50	6
SSM 2051	□	5,1	12	50	6
2052	□	5,2	12	50	6
2053	□	5,3	12	50	6
2054	□	5,4	12	50	6
2055	□	5,5	12	50	6
SSM 2056	□	5,6	12	50	6
2057	□	5,7	12	50	6
2058	□	5,8	12	50	6
2059	□	5,9	12	50	6
2060	●	6,0	12	50	6
SSM 2061	□	6,1	12	50	6
2062	○	6,2	12	50	6
2063	□	6,3	12	50	6
2064	□	6,4	12	50	6
2065	□	6,5	12	50	8
SSM 2066	□	6,6	15	55	8
2067	□	6,7	15	55	8
2068	□	6,8	15	55	8
2069	□	6,9	15	55	8
2070	●	7,0	15	55	8
SSM 2071	□	7,1	15	55	8
2072	□	7,2	15	55	8
2073	□	7,3	15	55	8
2074	□	7,4	15	55	8
2075	○	7,5	15	55	8
SSM 2076	□	7,6	15	55	8
2077	□	7,7	15	55	8
2078	□	7,8	15	55	8
2079	□	7,9	15	55	8
2080	●	8,0	15	55	8
SSM 2081	□	8,1	15	55	8
2082	○	8,2	15	55	8
2083	□	8,3	15	55	8
2084	□	8,4	15	55	8
2085	○	8,5	15	55	10

Uncoated Endmills

Recommended Conditions (Slotting) DC < $\phi 3$; $a_p = 0,5 \times DC$
DC $\geq \phi 3$; $a_p = 1,0 \times DC$

DC	Material	Carbon steel, Alloy steel			Cast iron
		(BelowHRC30)	(BelowHRC40)	(BelowHRC45)	
0,2-0,9	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	-0,002	-0,002	-0,001	0,002-0,004
1,0-2,9	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,003-0,010	0,003-0,010	0,002-0,005	0,005-0,017
3,0-4,9	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,012-0,024	0,012-0,024	0,006-0,011	0,018-0,040

$v_c = \text{m/min}$ $f_t = \text{mm/tooth}$

Recommended Conditions (Slotting) DC $\geq \phi 3$; $a_p = 1,0 \times DC$


DC	Material	Carbon steel, Alloy steel			Cast iron
		(BelowHRC30)	(BelowHRC40)	(BelowHRC45)	
5-5,9	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,012-0,024	0,012-0,024	0,006-0,011	0,018-0,040
6-8,9	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,025-0,050	0,025-0,050	0,013-0,025	0,045-0,105

$v_c = \text{m/min}$ $f_t = \text{mm/tooth}$

Solid Carbide Spiral Endmills SSM 2000 Type ($\phi 8,6-\phi 30$)

2

Carbide grade: A1 (Micrograin)

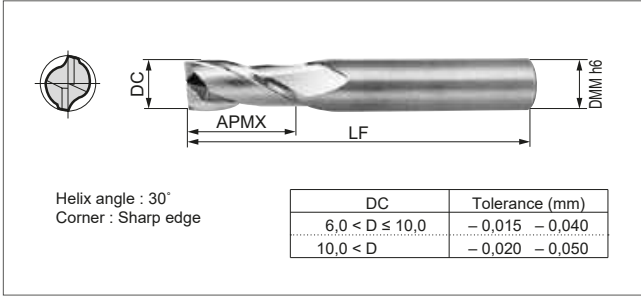

Endmills (mm)

Cat. No.	Stock	DC	APMX	LF	DMM
SSM 2086	○	8,6	15	55	10
2087		8,7	15	55	10
2088	□	8,8	15	55	10
2089		8,9	15	55	10
2090	□	9,0	15	55	10
SSM 2091		9,1	15	55	10
2092		9,2	15	55	10
2093		9,3	15	55	10
2094		9,4	15	55	10
2095		9,5	15	55	10
SSM 2096		9,6	18	65	10
2097		9,7	18	65	10
2098		9,8	18	65	10
2099		9,9	18	65	10
2100	●	10,0	18	65	10
SSM 2105		10,5	18	70	12
2110	□	11,0	18	70	12
2115	□	11,5	18	70	12
2120	●	12,0	18	70	12
2125		12,5	20	80	16
SSM 2130	□	13,0	20	80	16
2135		13,5		80	16
2140	○	14,0	20	80	16
2145		14,5	25	80	16
2150	□	15,0	25	80	16
SSM 2155		15,5	35	90	16
2160	○	16,0	35	90	16
2165		16,5	35	90	20
2170	○	17,0	35	90	20
2175	□	17,5	40	105	20
SSM 2180	□	18,0	40	105	20
2185		18,5	40	105	20
2190		19,0	40	105	20
2195		19,5	40	105	20
2200	○	20,0	40	105	20
SSM 2210	□	21,0	40	105	25
2220	□	22,0	40		25
2230	□		45	115	25
2240		24,0	45	115	25
2250	□		50		25
SSM 2300			55	130	32

Recommended Conditions (Slotting) $DC \geq \phi 3$; $a_p = 1,0 \times DC$


DC	Material	Carbon steel, Alloy steel			Cast iron
		(BelowHRC30)	(BelowHRC40)	(BelowHRC45)	
9-12,5	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,025-0,050	0,025-0,050	0,013-0,025	0,045-0,105
13-19,5	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,055-0,085	0,055-0,085	0,030-0,050	0,110-0,170
20-30	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,095-0,120	0,095-0,120	0,055-0,070	0,185-0,260

$v_c = m/min$ $f_t = mm/tooth$

Solid Carbide Spiral Endmills SSM 4000 Type ($\phi 1,5-\phi 25$)

4

Carbide grade: A1 (Micrograin)

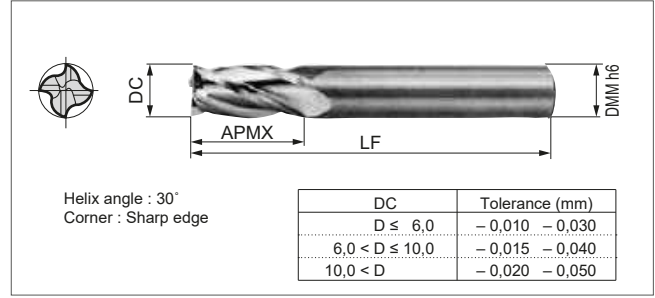

Endmills (mm)

Cat. No.	Stock	DC	APMX	LF	DMM
SSM 4015	○	1,5	5	40	4
4020	●	2,0	6	40	4
4025	□	2,5	8	40	4
4030	●	3,0	8	45	6
4035	□	3,5	8	45	6
SSM 4040	●	4,0	10	45	6
4045	□	4,5	10	45	6
4050	●	5,0	12	50	6
4055	□	5,5	12	50	6
4060	●	6,0	12	50	6
SSM 4065	□	6,5	12	50	8
4070	□	7,0	15	55	8
4075	○	7,5	15	55	8
4080	●	8,0	15	55	8
4085	□	8,5	15	55	10
SSM 4090	○	9,0	15	55	10
4095	○	9,5	15	55	10
4100	●	10,0	18	65	10
4105		10,5	18	65	12
4110	□	11,0	18	70	12
SSM 4120	●	12,0	18	70	12
4130		13,0	20	80	16
4140	○	14,0	20	80	16
4150	□	15,0	25	80	16
4160	●	16,0	35	90	16
SSM 4170	□	17,0	35	90	20
4180	□	18,0	40	105	20
4190		19,0	40	105	20
4200	●	20,0	40	105	20
4210		21,0	40	105	25
SSM 4220		22,0	40	105	25
4230		23,0	45	115	25
4240		24,0	45	115	25
4250	□	25,0	50	120	25

Recommended Conditions (Shoulder processing) $a_p = 1,5 \times DC$ $a_e = 0,1 \times DC$

DC	Material	Carbon steel, Alloy steel			Cast iron
		(BelowHRC30)	(BelowHRC40)	(BelowHRC45)	
1 ~ 2,9	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,004-0,017	0,004-0,017	0,002-0,008	0,008-0,020
3 ~ 5,9	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,018-0,036	0,018-0,036	0,009-0,018	0,027-0,060
6 ~ 12,9	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,038-0,070	0,038-0,070	0,019-0,035	0,065-0,157
13 ~ 19,9	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,075-0,125	0,075-0,125	0,040-0,075	0,160-0,250
20 ~	v_c	40-50-60	30-40-50	20-30-40	40-50-60
	f_t	0,135-0,170	0,135-0,170	0,085-0,110	0,257-0,390


$v_c = m/min$ $f_t = mm/tooth$

Uncoated Endmills

Long Spiral Endmills LSM 2000 Type


2

Carbide grade: A1 (Micrograin)

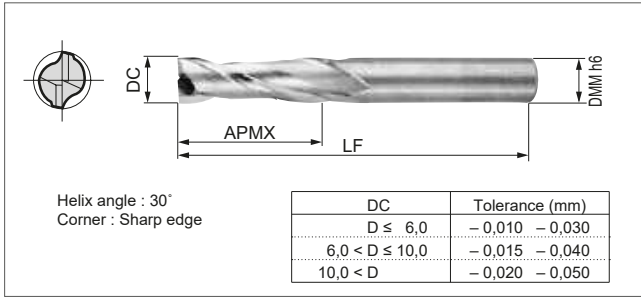

4

Carbide grade: A1 (Micrograin)

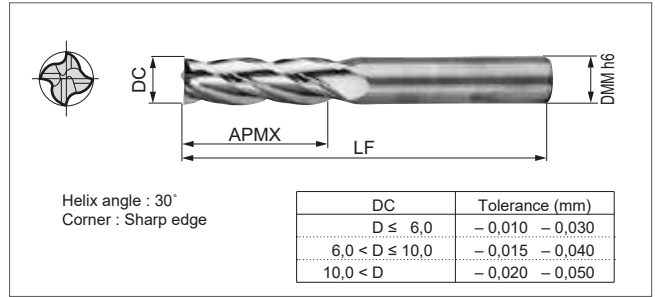

Endmills

Cat. No.	Stock	DC	APMX	LF	DMM
LSM 2030	▲	3,0	12	50	6
2035	▲	3,5	12	50	6
2040	▲	4,0	15	50	6
2045	▲	4,5	15	50	6
2050	▲	5,0	18	55	6
LSM 2055	▲	5,5	18	55	6
2060	▲	6,0	18	55	6
2065	▲	6,5	18	55	8
2070	▲	7,0	25	65	8
2075	▲	7,5	25	65	8
LSM 2080	▲	8,0	25	65	8
2085	▲	8,5	25	65	10
2090	▲	9,0	25	65	10
2095	▲	9,5	25	65	10
2100	▲	10,0	30	75	10
LSM 2105	▲	10,5	30	80	12
2110	▲	11,0	30	80	12
2120	▲	12,0	30	80	12
2130	▲	13,0	35	95	16
2140	▲	14,0	40	95	16
LSM 2150	▲	15,0	40	95	16
2160	▲	16,0	50	105	16
2170	▲	17,0	50	105	20
2180	▲	18,0	50	115	20
2190	▲	19,0	55	120	20
LSM 2200	▲	20,0	55	120	20
2210	▲	21,0	60	125	25
2220	▲	22,0	60	135	25
2230	▲	23,0	60	135	25
2240	▲	24,0	65	140	25

Endmills

(mm)

Cat. No.	Stock	DC	APMX	LF	DMM
LSM 4030	▲	3,0	12	50	6
4035	▲	3,5	12	50	6
4040	▲	4,0	15	50	6
4045	▲	4,5	15	50	6
4050	▲	5,0	18	55	6
LSM 4055	▲	5,5	18	55	6
4060	▲	6,0	18	55	6
4065	▲	6,5	18	55	8
4070	▲	7,0	25	65	8
4075	▲	7,5	25	65	8
LSM 4080	▲	8,0	25	65	8
4085	▲	8,5	25	65	10
4090	▲	9,0	25	65	10
4095	▲	9,5	25	65	10
4100	▲	10,0	30	75	10
LSM 4105	▲	10,5	30	80	12
4110	▲	11,0	30	80	12
4120	▲	12,0	30	80	12
4130	▲	13,0	35	95	16
4140	▲	14,0	40	95	16
LSM 4150	▲	15,0	40	95	16
4160	▲	16,0	50	105	16
4170	▲	17,0	50	105	20
4180	▲	18,0	50	115	20
4190	▲	19,0	55	120	20
LSM 4200	▲	20,0	55	120	20
4210	▲	21,0	60	125	25
4220	▲	22,0	60	135	25
4230	▲	23,0	60	135	25
4240	▲	24,0	65	140	25
4250	▲	25,0	65	140	25

Uncoated Endmills

Recommended Conditions

(Slotting) DC ≥ ø3; a_p = 1,0 × DC

DC	Material	Carbon steel, Alloy steel			Cast iron
		(BelowHRC30)	(BelowHRC40)	(BelowHRC45)	
3-5,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,009-0,018	0,009-0,018	0,005-0,008	0,014-0,030
6-12,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,019-0,038	0,019-0,038	0,009-0,019	0,034-0,079
13-19,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,041-0,064	0,041-0,064	0,023-0,038	0,083-0,128
20-	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,071-0,090	0,071-0,090	0,041-0,052	0,139-0,195

v_c = m/min f_t = mm/tooth

Recommended Conditions

(Shoulder processing) a_p = 1,5 × DC
a_e = 0,1 × DC


DC	Material	Carbon steel, Alloy steel			Cast iron
		(BelowHRC30)	(BelowHRC40)	(BelowHRC45)	
3-5,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,014-0,027	0,014-0,027	0,007-0,014	0,020-0,045
6-12,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,028-0,053	0,028-0,053	0,014-0,026	0,048-0,118
13-19,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,056-0,094	0,056-0,094	0,030-0,056	0,120-0,188
20-	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,101-0,127	0,101-0,127	0,064-0,082	0,193-0,292

v_c = m/min f_t = mm/tooth

Extra Long Spiral Endmills ELSM 2000 Type

2

Carbide grade: A1 (Micrograin)

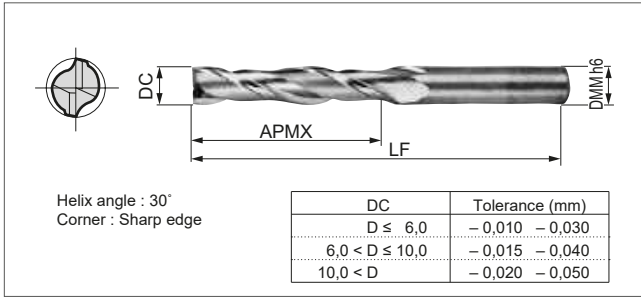

Endmills


(mm)

Cat. No.	Stock	DC	APMX	LF	DMM
ELSM 2030	▲	3,0	20	55	6
2040	▲	4,0	25	60	6
2050	▲	5,0	30	65	6
2060	▲	6,0	30	65	6
2070	▲	7,0	40	85	8
ELSM 2080	▲	8,0	40	85	8
2090	▲	9,0	40	85	10
2100	▲	10,0	50	100	10
2110	▲	11,0	50	100	12
2120	▲	12,0	50	100	12
ELSM 2130		13,0	70	140	16
2140	▲	14,0	70	140	16
2150		15,0	70	140	16
2160	▲	16,0	70	140	16
2180	▲	18,0	80	160	20
ELSM 2200	▲	20,0	85	165	20
2220		22,0	95	180	25
2250		25,0	100	185	25

Extra Long Spiral Endmills ELSM 4000 Type

4

Carbide grade: A1 (Micrograin)

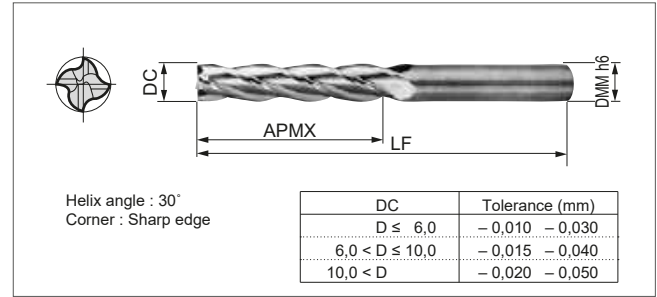

Endmills

Cat. No.	Stock	DC	APMX	LF	DMM
ELSM 4030	▲	3,0	20	55	6
4040	▲	4,0	25	60	6
4050	▲	5,0	30	65	6
4060	▲	6,0	30	65	6
4070	▲	7,0	40	85	8
ELSM 4080	▲	8,0	40	85	8
4090	▲	9,0	40	85	10
4100	▲	10,0	50	100	10
4110		11,0	50	100	12
4120	▲	12,0	50	100	12
ELSM 4130		13,0	70	140	16
4140	▲	14,0	70	140	16
4150		15,0	70	140	16
4160	▲	16,0	70	140	16
4170		17,0	80	160	20
ELSM 4180	▲	18,0	80	160	20
4190		19,0	85	165	20
4200	▲	20,0	85	165	20
4210		21,0	95	180	25
4220		22,0	95	180	25
ELSM 4230		23,0	95	180	25
4240		24,0	100	180	25
4250	▲	25,0	100	180	25

Recommended Conditions

(Slotting) DC ≥ ø3; a_p = 1,0 × DC

DC	Material	Carbon steel, Alloy steel			Cast iron
		(BelowHRC30)	(BelowHRC40)	(BelowHRC45)	
3-5,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,006-0,012	0,006-0,012	0,003-0,006	0,009-0,020
6-12,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,013-0,025	0,013-0,025	0,006-0,013	0,023-0,053
13-19,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,028-0,043	0,028-0,043	0,015-0,025	0,055-0,085
20-	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,048-0,060	0,048-0,060	0,027-0,035	0,092-0,130

v_c = m/min f_t = mm/tooth

Recommended Conditions


(Shoulder processing) a_p = 1,5 × DC
a_e = 0,05 × DC

DC	Material	Carbon steel, Alloy steel			Cast iron
		(BelowHRC30)	(BelowHRC40)	(BelowHRC45)	
3-5,9	v _c	40-60	30-40-50	20-30-40	40-50-60
	f _t	0,009-0,018	0,009-0,018	0,005-0,009	0,014-0,030
6-12,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,019-0,035	0,019-0,035	0,010-0,018	0,033-0,079
13-19,9	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,038-0,063	0,038-0,063	0,020-0,038	0,080-0,125
20-	v _c	40-50-60	30-40-50	20-30-40	40-50-60
	f _t	0,067-0,085	0,067-0,085	0,042-0,055	0,128-0,195

v_c = m/min f_t = mm/tooth


SUMIBORON "Helical Master" BNES Type

Spiral CBN Endmill for Hardened Steel

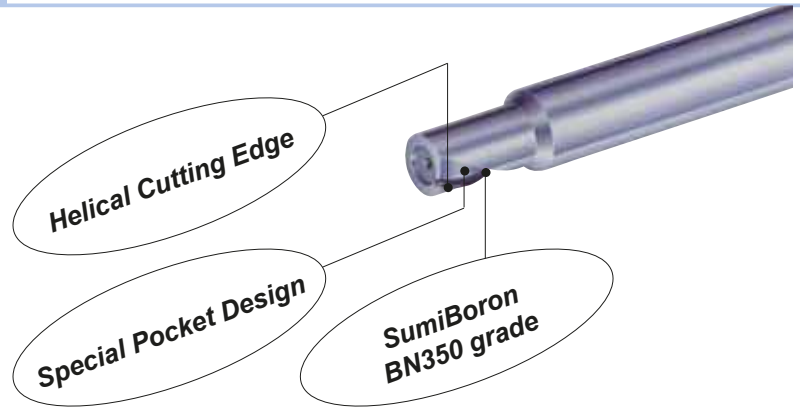

Endmills BNES Type with 1 Spiral Flute

Cat. No.	Stock	Dimensions (mm)				
	BN350	DC	DMM	APMX	LU	LF
BNES 1060	○	6,0	10	7,0	11	60
1080	○	8,0	10	10,0	14	70
1100	○	10,0	12	12,0	17	75
1120	○	12,0	12	14,0	20	80
1140	○	14,0	16	16,0	21,5	80

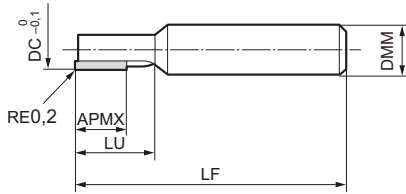

Helix angle : 15°
right-hand cut, right-hand helix

Recommended Cutting Conditions


Cutting speed: v_c (m/min), Spindle revolutions: n (rpm), Feed per tooth: f_t (mm/tooth), Feed speed: v_f (mm/min)

Tooling example	DC	Hardened steel (HRC 50–57)			Hardened steel (HRC 58–65)		
		$v_c = 100\text{--}170$ m/min			$v_c = 80\text{--}150$ m/min		
<p>Depth of cut : $a_p \leq D$</p>	6–8	$a_e \leq 0,1$ mm	$n = 4000\text{--}9000$	V_f (mm/min) = 240–540	$a_e \leq 0,08$ mm	$n = 3200\text{--}8000$	V_f (mm/min) = 150–370
	10–12	$a_e \leq 0,15$ mm	$n = 2700\text{--}5400$	V_f (mm/min) = 180–360	$a_e \leq 0,12$ mm	$n = 2100\text{--}4800$	V_f (mm/min) = 120–270
	14–16	$a_e \leq 0,2$ mm	$n = 2000\text{--}3800$	V_f (mm/min) = 140–260	$a_e \leq 0,15$ mm	$n = 1600\text{--}3400$	V_f (mm/min) = 110–230

Recommendation: Dry cutting (Air coolant)
Down-cut milling
Minimise the overhang
Use a rigid machine

Performance

Long Tool Life and High Efficiency

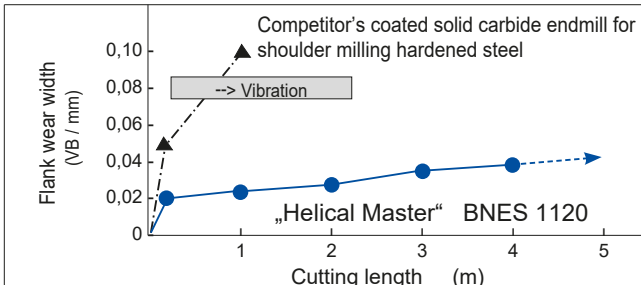

Work material: X155CrVMo12-1
Hardness: HRC 60

Cutting data:
 $v_c = 100$ m/min (**Helical Master**)
 $v_c = 40$ m/min (Competitor's coated solid carbide endmill)
 $v_f = 186$ mm/min

Down-cut milling
Dry cutting


Excellent Surface Roughness

"Helical Master" BNES 1080 $\phi 8,0$

Conventional straight flute CBN endmill, $\phi 8,0$

Work material: 15Cr3
Hardness: HRC 55–58
Cutting data: $v_c = 130$ m/min, $v_f = 310$ mm/min


Down-cut milling
Dry cutting

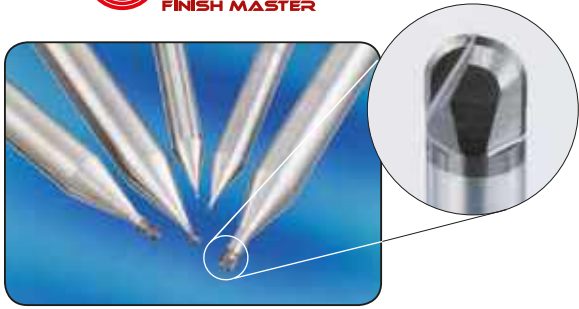

Characteristics / Application



- High precision machining of hardened steels < HRC70 with long tool life
- Super tough grade SUMIBORON BN350 prevents chipping of the cutting edge
- RE accuracy : $\pm 0,005$ mm

Endmills

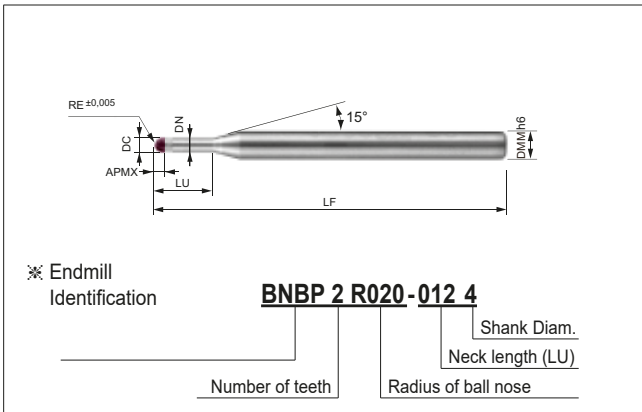

Cat. No.	Stock		Dimensions (mm)						
	BN350	RE	DC	LF	DN	DMM	APMX	LU	
BNBP 2 R020-012 4	●	0,2	0,4	50	0,37	4	0,3	1,2	
2 R030-015 4	●	0,3	0,6	50	0,57	4	0,4	1,5	
2 R050-025 4	●	0,5	1,0	50	0,97	4	0,6	2,5	
2 R075-040 4	●	0,75	1,5	50	1,47	4	0,9	4,0	
2 R100-055 4	●	1,0	2,0	50	1,97	4	1,4	5,5	
BNBP 2 R020-012 6	●	0,2	0,4	50	0,37	6	0,3	1,2	
2 R030-015 6	●	0,3	0,6	50	0,57	6	0,4	1,5	
2 R050-025 6	●	0,5	1,0	50	0,97	6	0,6	2,5	
2 R075-040 6	●	0,75	1,5	50	1,47	6	0,9	4,0	
2 R100-055 6	●	1,0	2,0	50	1,97	6	1,4	5,5	

Performance

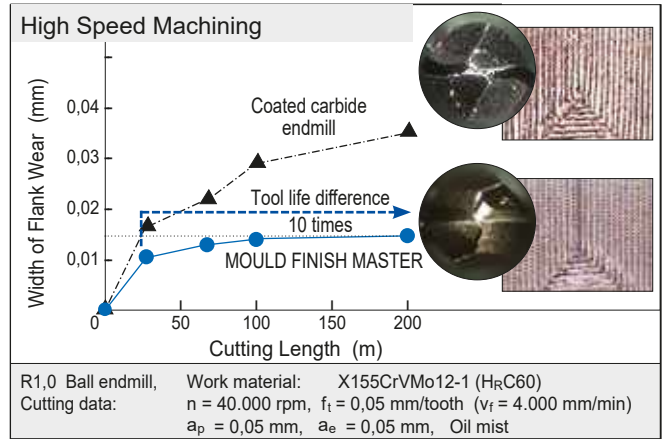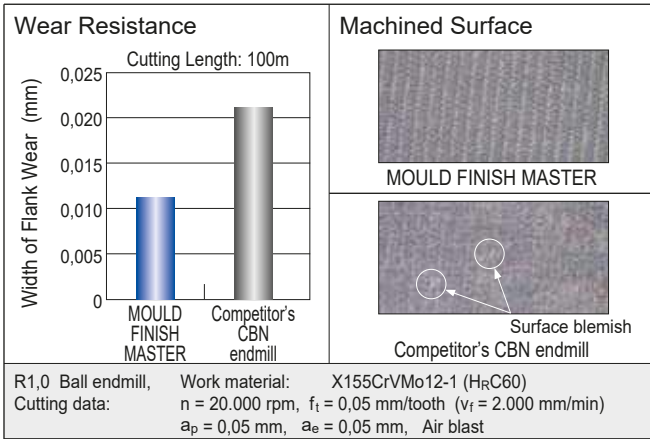

Excellent surface finish compared with competitor's CBN and coated carbide endmills

Recommended Cutting Conditions

Spindle revolutions: n (rpm), Feed rate per tooth: f_t (mm/tooth), Depth of cut: a_p (mm), Width of cut: a_e (mm)

Material Cutting data	Pre-hardened steel, Die steel (-HRC52)				Die steel (-HRC62)				High speed tool steel (-HRC70)			
	n (rpm)	f _t (mm/tooth)	a _p (mm)	a _e (mm)	n (rpm)	f _t (mm/tooth)	a _p (mm)	a _e (mm)	n (rpm)	f _t (mm/tooth)	a _p (mm)	a _e (mm)
Radius (mm) 0,2	20.000-50.000	0,02	0,03	0,03	20.000-50.000	0,02	0,01	0,02	20.000-50.000	0,015	0,01	0,02
0,3	20.000-50.000	0,02	0,03	0,03	20.000-50.000	0,02	0,01	0,02	20.000-50.000	0,015	0,01	0,02
0,5	20.000-50.000	0,03	0,05	0,05	20.000-50.000	0,03	0,03	0,04	20.000-50.000	0,02	0,02	0,03
0,75	20.000-50.000	0,04	0,08	0,1	20.000-50.000	0,04	0,05	0,05	20.000-50.000	0,03	0,02	0,05
1,0	20.000-50.000	0,05	0,1	0,1	17.000-50.000	0,05	0,05	0,05	17.000-50.000	0,03	0,03	0,05


Important Notes

- (1) For stable machining, a more rigid machine is recommended.
- (2) Air blast or oil mist coolant is recommended.
- (3) Shorten overhang as much as possible.



SUMIDIA "MOULD Finish Master" NPDRS Type

SUMIDIA Binderless Radius Endmill NPDRS Type

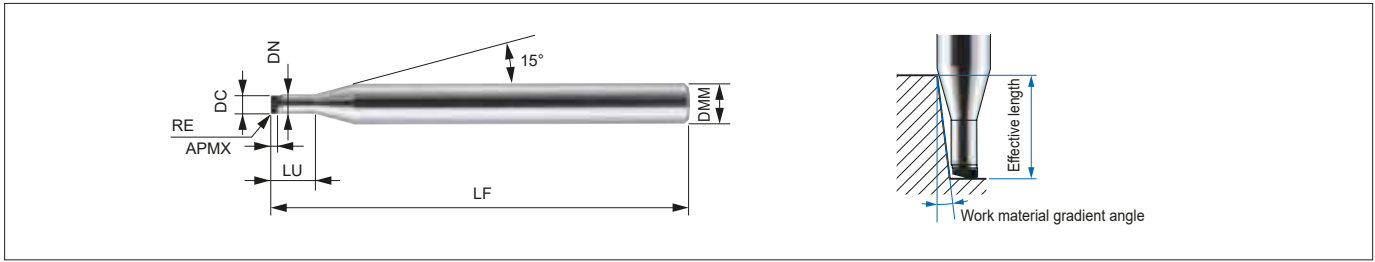

NPDRS Type Body (for Standard Finishing)

Cat. No.	Stock	Dimensions (mm)							Real effective length with respect to work material gradient angle				
	NPD10	DC	RE	APMX	LU	LF	DN	DMM	0,5°	1°	1,5°	2°	3°
NPDRS 1020 R002-006	○	0,2	0,02	0,10	0,6	40	0,175	4	0,61	0,62	0,63	0,64	0,66
1020 R005-006	○	0,2	0,05	0,10	0,6	40	0,175	4	0,61	0,62	0,63	0,64	0,66
1030 R002-010	○	0,3	0,02	0,15	1,0	40	0,27	4	1,01	1,03	1,04	1,06	1,09
1030 R005-010	○	0,3	0,05	0,15	1,0	40	0,27	4	1,01	1,03	1,04	1,06	1,09
1050 R005-015	○	0,5	0,05	0,25	1,5	40	0,47	4	1,61	1,66	1,72	1,78	1,92
NPDRS 1050 R010-015	○	0,5	0,10	0,25	1,5	40	0,47	4	1,61	1,66	1,71	1,77	1,91
1100 R005-030	○	1,0	0,05	0,55	3,0	40	0,95	4	3,40	3,52	3,65	3,78	4,08
1100 R010-030	○	1,0	0,10	0,55	3,0	40	0,95	4	3,40	3,52	3,64	3,77	4,07
1100 R020-030	○	1,0	0,20	0,55	3,0	40	0,95	4	3,40	3,51	3,63	3,76	4,05
1200 R005-040	○	2,0	0,05	0,55	4,0	40	1,95	4	4,44	4,59	4,75	4,93	5,33
NPDRS 1200 R010-040	○	2,0	0,10	0,55	4,0	40	1,95	4	4,43	4,59	4,75	4,92	5,31
1200 R020-040	○	2,0	0,20	0,55	4,0	40	1,95	4	4,43	4,58	4,74	4,91	5,29

Identification Details

NPDR	S	1	020	R002	- 006
Series Code	For standard finishing	No. of flutes	Cutting diameter	Corner radius	Length below neck

Cutting Diameter and Nose Radius Combinations

DC	RE 0,02	RE 0,05	RE 0,1	RE 0,2
0,2	○	○		
0,3	○	○		
0,5		○	○	
1,0		○	○	○
2,0		○	○	○

Recommended Cutting Conditions

- Use a machine with high rigidity for stable cutting.
- Non-water soluble coolant recommended. Supply as a mist or external coolant. Take fire prevention precautions to avoid fire hazards caused by sparks igniting during machining or tool breakage.
- Shorten overhang as much as possible.
- Adjust cutting conditions as necessary as machine rigidity and other conditions may vary.
- Depth of cut shown in the table of conditions are maximum depths. Adjust the actual depth of cut to the desired machined surface finish.


Work Material		Carbide			
DC (mm)	LU (mm)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	a _p (mm)	Pr (mm)
0,2	0,10	40.000	100	0,001	0,001
0,3	0,15	40.000	150	0,002	0,001
0,5	0,25	40.000	200	0,003	0,001
1,0	0,55	40.000	400	0,005	0,003
2,0	0,55	40.000	600	0,010	0,005



○ = Japan stock

SUMIDIA "MOULD Finish Master" NPDB(S) Type

SUMIDIA Binderless Ballnose Endmill NPDBS Type / NPDB Type

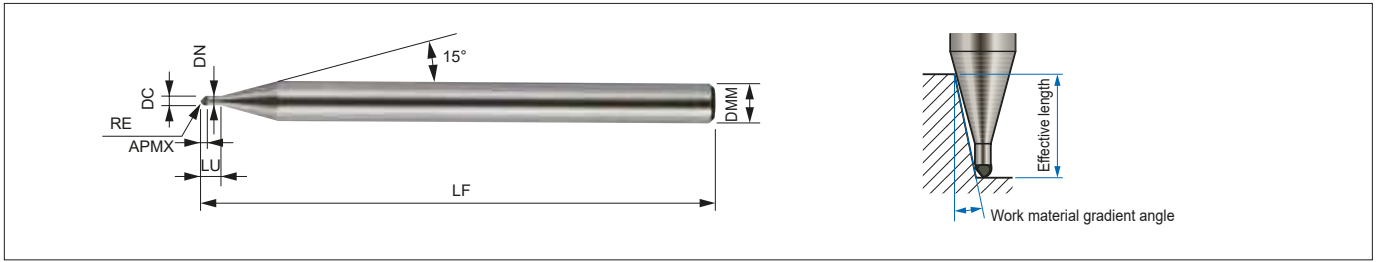

NPDBS Type Body (for Standard Finishing)

Cat. No.	Stock NPD10	Dimensions (mm)							Real effective length with respect to work material gradient angle				
		RE	DC	APMX	LU	LF	DN	DMM	0,5°	1°	1,5°	2°	3°
NPDBS 1010-004	○	0,1	0,2	0,1	0,4	40	0,18	4	0,44	0,45	0,46	0,47	0,49
1020-008	○	0,2	0,4	0,2	0,8	40	0,38	4	0,83	0,84	0,85	0,86	0,89
1030-010	○	0,3	0,6	0,3	1,0	40	0,58	4	1,05	1,08	1,10	1,13	1,20
1050-020	○	0,5	1,0	0,5	2,0	40	0,95	4	2,08	2,13	2,19	2,24	2,38
1100-030	○	1,0	2,0	1,0	3,0	40	1,95	4	3,13	3,20	3,27	3,35	3,53

NPDB Type Body (for Precision Finishing)

Cat. No.	Stock NPD10	Dimensions (mm)							Real effective length with respect to work material gradient angle				
		RE	DC	APMX	LU	LF	DN	DMM	0,5°	1°	1,5°	2°	3°
NPDB 1010-004	○	0,1	0,2	0,1	0,4	40	0,18	4	0,44	0,45	0,46	0,47	0,49
1020-008	○	0,2	0,4	0,2	0,8	40	0,38	4	0,83	0,84	0,85	0,86	0,89
1030-010	○	0,3	0,6	0,3	1,0	40	0,58	4	1,05	1,08	1,10	1,13	1,20
1050-020	○	0,5	1,0	0,5	2,0	40	0,95	4	2,08	2,13	2,19	2,24	2,38
1100-030	○	1,0	2,0	1,0	3,0	40	1,95	4	3,13	3,20	3,27	3,35	3,53

Identification Details

NPDB **(S)** **1** **030** - **010**
 Series Code For standard finishing No. of flutes Ballnose radius Length below neck

Recommended Cutting Conditions

- Use a machine with high rigidity for stable cutting.
- Non-water soluble coolant recommended. Supply as a mist or external coolant. Take fire prevention precautions to avoid fire hazards caused by sparks igniting during machining or tool breakage.
- Shorten overhang as much as possible.
- Adjust cutting conditions as necessary as machine rigidity and other conditions may vary.
- Depth of cut shown in the table of conditions are maximum depths. Adjust the actual depth of cut to the desired machined surface finish.


● Flat Surface Finishing

Work Material		Carbide			
RE (mm)	LU (mm)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	a _p (mm)	ρ _f (mm)
0,1	0,4	40.000	100	0,001	0,001
0,2	0,8	40.000	150	0,001	0,001
0,3	1,0	40.000	200	0,001	0,001
0,5	2,0	40.000	400	0,001	0,003
1,0	3,0	40.000	600	0,001	0,005

● Copy Finishing

Work Material		Carbide			
RE (mm)	LU (mm)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	a _p (mm)	ρ _f (mm)
0,1	0,4	40.000	100	0,001	0,001
0,2	0,8	40.000	150	0,002	0,001
0,3	1,0	40.000	200	0,003	0,001
0,5	2,0	40.000	400	0,005	0,003
1,0	3,0	40.000	600	0,010	0,005



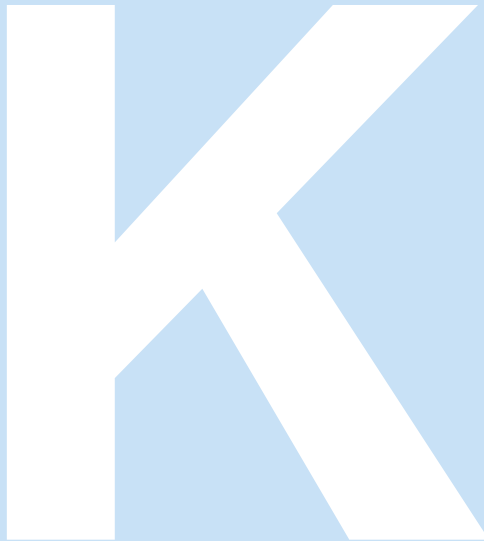

Multi-Drills

K1-K72



Selection Guide	MULTI-DRILLS	K 2-5
Solid Type Drills	SDP ... U3/5/7 -HAK	K 6-11
	SDM ... U3/5 -HAK	K12-17
	MDW ... GS 2/4	K18-21
	MDS ... S/M K-HAK	K22-23
Flat MultiDrill	MDF	K24-31
Deep Hole Drills	MDW... XHG S / PHT	K32-33
for Steels	MDW ... XHG S	K34
for Aluminium	MDW ... XHT A	K35
Pilot Hole Drills	MDW ... PHT	K34-35
AURORA COAT Drills	MDW ... NHGS	K36-37
MINI-Drills	MLDH ... L/P	K38-39
	MDUS / MDSS	K40
SUMIDIA Coated Drills	MDS ... SDC	K41
Brazed Type Drills	KDS	K43
Series	KDS ... MAK	K44-45
	KDS ... LAK	K46-47
	KDS ... DAK	K48-49
	KDS ... FA	K50
Replaceable Head Type Drills	SMD	K51
Drill Holder	SMDH ... (D)	K52/57/59
Drill Head for Steels	SMDT ... D MTL	K53
for Stainless Steels	SMDT ... D MEL	K54-55
for Spot Facing	SMDT ... MFS	K56-57
Large Holes	SMDT ... MTL	K58-59
Insert Type Drills	WDX (2D, 3D, 4D, 5D)	K60-69
Eccentric Sleeve	WAS	K66
Plunge Drills	PDL (2D, 3D)	K70-72
Multi-Function Mills	PCT (3D, 5D)	K71-72

Multi-Drill Series



■ General Features

MultiDrill series is Sumitomo's original brand of high performance drills that have a special cutting edge design coupled with an advance carbide substrate.

The series has a comprehensive selection of diameters and drill lengths to cover a wide range of work materials and requirements, providing high efficiency, high precision and cost effectiveness.

■ Solid Carbide Type Multi-Drills Selection

	SDP ...	SDM ...	MDW ...	MDS ...	MDF ...	MDW ... 000			MLDH	MDUS / MDSS	MDS ...	
Type	...U3/5/7 -HAK (DIN)	...U3/5 -HAK (DIN)	GS 2/4	S/M/K-HAK (DIN)	...S2D, L2D ...H3D, H5D	... PHT	...XHGS ...XHTA	...NHGS	... P / L	-	... SDC	
Page	⇒ K 6-11	⇒ K 12-17	⇒ K18-21	⇒ K22-23	⇒ K24-31	⇒ K32-35		⇒ K36-37	⇒ K38-39	⇒ K40	⇒ K41	
Application	PK	PM	P	PMK	P	PMKN		N	PMK	PMKH	N	
Form	m7 drill DIN type		h8 drill cylindric	m7 drill DIN type	h8 drill cylindric		Extra long DIN type		Super Multi-Drill	Long Micro Drill	Mini Multi-Drill	Diamond Coated
Length (The ratio to øD)	3D/5D/7D	3D / 5D	2 / 4D	3D / 5D	S2D/ L2D	H3D/ H5D	3D	10D-30D	3D/5D/10D	5/12/20/30 D	10D	3D
Coolant holes	Yes		No	Yes	No	Yes	Yes		Yes	Yes	No	No
Coating	AlCrTiN		DEX (TiAlCr/TiSi)	TiAlN	PVD		TiAlN	-	DLC	TiAlN	TiAlN / ZX	SUMIDIA
Diameter range	3,0-16,0		2,0- 16,0	4,0-12,0	0,3- 20,0	3,0- 16,0	4,0- 8,0	3,0-12,0	3,0-16,0	0,8-2,0	0,03-1,0	2,0-10,0

Multi-Drill Series

Advantages

- Unique curved flute design with proven enhanced chip formation and removal, resulting in better hole accuracy.
- High speed and high efficient drilling is made possible with the combination of a special substrate with an advanced PVD coating. (10x tool life of HSS drills, 5x the efficiency)
- Wide selection range (Diameter: 0,03–65 mm, Drilling depths L/D: 2–30)
- Other diameters and length can be asked and offered



Brazed Carbide Type and Insert Type Multi-Drills Selection

	KDS ...000 ⇨ K43				SMD ... ⇨ K51, K56, K58			WDX ...00	PDL ...00	PCT ...00
Type	MAK	LAK	DAK	FA	 SMDT ... (D) MTL ⇨ K53, K59	WAS ...-... ⇨ K70				
Page	⇨ K44–45	⇨ K45–46	⇨ K48–49	⇨ K50	 SMDT ... D MEL ⇨ K54–55	⇨ K60–69		⇨ K70–72	⇨ K71–72	
					 SMDT ... MFS ⇨ K57					
					 SMDH ... M-3/5/8 ⇨ K52, K56					
					 SMDH ... M / L / D ⇨ K59					
										
Application	P M K S			K N	P M K			P M K N		
Form	h7 drill			h8 drill	SMDT type carbide head			Indexable insert drill	Straight flute insert drill	Insert mill
Length (The ratio to øD)	3D	5D	7D	10D	1.5D / 3D / 5D / 8D / 12D			2D / 3D / 4D / 5D	2D / 3D	3D / 5D
Coolant holes	Yes			Yes	Yes			Yes		
Coating	TiAlN			–	TiAlN			WDXT type insert		
Diameter range	9,5–40,5			8,0–30,5	12,0–42,5			3,0–65,0	16,0–40,0	

Multi-Drill Series Selection Guide

● According to Drill Types / Applications

Application		General		Special	
Solid Type	"Super Multi-Drill" MDS / MDW Type	m7 DIN Type "Super Multi-Drill" SDP...U HAK Type AlCrTiN coated general purpose drill with coolant holes Ø 3,0–16 mm L/D: 3, 5, 7 ⇒ K6–11	"Super Multi-Drill" MDW...GS Type DEX (TiAlCr/TiSi) coated general purpose drill without coolant holes Ø 2,0–16 mm L/D: –2, –4 ⇒ K18–21	—	
		m7 DIN Type "Super Multi-Drill" MDS...K-HAK Type TiAlN coated general purpose drill with coolant holes Ø 2,0–12 mm L/D: –2, –4 ⇒ K22–23	—		"Super Multi-Drill" MDS...D Type Hardened Steel Exotic Metals Ø 1,0–16,1 mm L/D: –3 (Stock in Japan)
Brazed Type	"Super Multi-Drill" KDS Type	"Super Multi-Drill" KDS...MAK Type General Purpose Drill Ø 12–26 mm L/D: –3 ⇒ K44–45	Long Type "Super Multi-Drill" KDS...LAK Type Deep Hole Drilling Ø 12–26 mm L/D: –5 ⇒ K46–47	—	
		—		Long Type "Super Multi-Drill" KDS...DAK Type Good Chip Removal Ø 9–22 mm L/D: –7 ⇒ K48–49	Extra Long Typ "Super Multi-Drill" KDS...FA Type For Cast Irons and Aluminium Alloys Ø 9–22 mm L/D: –7 ⇒ K50 Delivery on request




■ Recommended Cutting Conditions by Work Materials







Drill		Steel	Stainless Steel	Cast Iron	Non-ferrous Metals
Solid Type	SDP...U HAK MDW...GS	50 120 0,21 0,35	15 70 0,11 0,2	50 110 0,21 0,35	—
	KDS...AK (MAK/LAK/DAK)	50 90 0,15 0,35	35 50 0,15 0,25	60 100 0,21 0,35	—
Brazed Type	KDS...FA	—	—	30 70 0,21 0,5	60 150 0,21 0,5

Cutting speed v_c (m/min)
 Feed f (mm/rev)







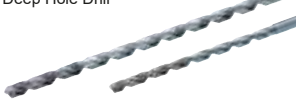

















Multi-Drill Series Selection Guide



● According to Drill Types / Applications

Application	General ↔		Special
Indexable Drills	Insert Type Drills WDX Type High Efficiency and Deep Holes  Ø 13,0–65,0 mm L/D: 2, 3, 4, 5 ⇨ K60–69	Replaceable Head Type Drills SMD Type  Ø 12,0–42,5 mm L/D: 3, 5, 8 ⇨ K51–59	"Multi-Function" Types PDL & PCT Plunge Drills and Plunge Mills  Ø 16,0–40,0 mm L/D: 2, 3, 5 ⇨ K70–72

Application	Deep Hole	Very Small Hole	Precision Hole
Special Purpose Drills	"Super Long Multi-Drill" MDW...XHGS/XHTA Type New General Purpose Deep Hole Drill  Ø 4,0–12,0 mm L/D: 10/15/20/25/30 ⇨ K32–35	"Long Micro Drill" MLDH... P/L Type "P" type for pilot hole  Ø 0,8–2,0 mm L/D: 5/12/20/30 ⇨ K38–39	AURORA-Coat Drill MDW...NHGS Type For Aluminium Alloy  Ø 3,0–16,0 mm L/D: 3 / 5 / 10 ⇨ K36–37
	—	"Mini-MultiDrill" MDSS Type  Ø 0,20–1,00 mm L/D: 10 ⇨ K40	"SUMI-DIA" coated Drill MDS...SDC Type For Aluminium & CFRP*  CFRP* (Carbon Fibre Reinforced Plastic) Ø 2–10 mm L/D: –3 ⇨ K41
	—	"Micro Drill" MDUS Type For Printed Circuit Boards High precision holes  Ø 0,05–0,19 mm L/D: –8 ⇨ K40	—

■ Recommended Cutting Conditions by Work Materials

Drill \ Work	Steel	Stainless Steel	Cast Iron	Non-ferrous Metals
	SMD (Ø 20) 50  120 0,12  0,35	50  90 0,1  0,25	50  100 0,2  0,45	100  180 0,2  0,4
WDX (Ø 18) 100  220 0,15  0,25	80  180 0,06  0,18	120  200 0,1  0,32	100  200 0,1  0,25	
MDW...XHT (Ø 5) 80  120 0,15  0,25	30  60 0,08  0,15	50  90 0,15  0,3	80  160 0,12  0,35	

 Cutting speed v_c (m/min)
 Feed f (mm/rev)

SumiDrill Power Series SDP Type (DIN)

AlCrTiN Coated Solid Carbide Drills to DIN 6537

General Features

New designed double margin

Excellent hole accuracy

Shank

DIN 6535 HAK

Sumi-Power Coating

Excellent wear resistance and anti-adhesion


Elliptical flute design

Improved chip formation and chip evacuation

Curved cutting edge, optimized edge preparation

Low cutting force

Coating Structure



Improved anti-adhesion
AlCrTiN lubricant layer
coating with high Al content
improves friction condition.

High wear resistance
Tough and hard
AlCrTiN super multilayer

Substrate

Stock Size

Ø 3,0 – Ø 12,0
Increment 0,1 mm




Ø 12,1 – Ø 16,0
Standard diameter





Advantages

- The specific and optimum solution for a wide range of application conditions
- Top performance parameters, maximum feed and stable long tool life
- Double margin design for high-precision holes
- Good balance of high wear resistance and toughness
- Curved cutting edge - ideal for removing chips
- Reliable and high productivity performance

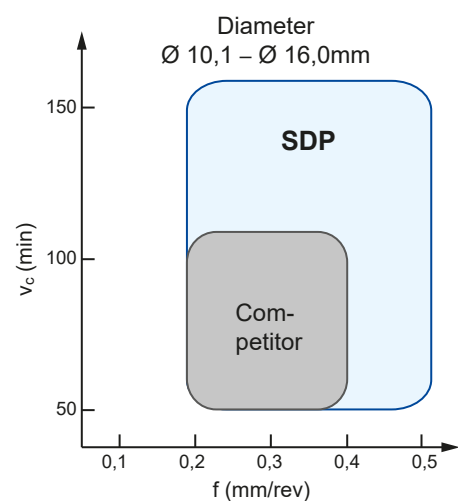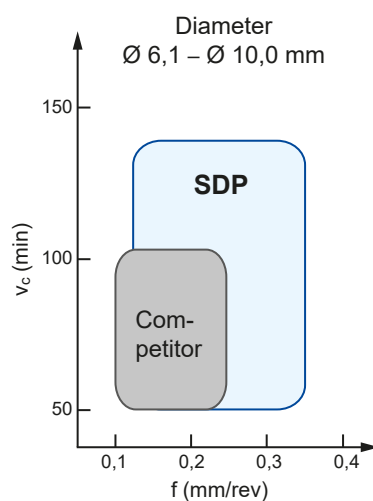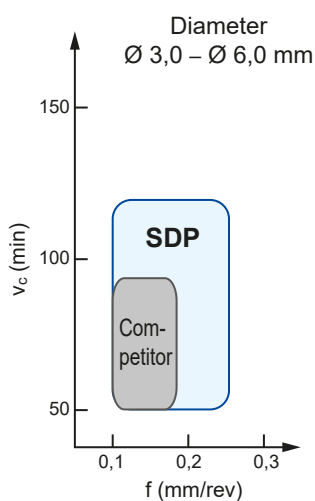Application Range




Maximum Feed Rate Result

Feed Rate (mm/rev)	0,30	0,40	0,50	0,55	0,60	0,65	0,70	0,75	0,80
SDP Type	OK	OK	OK	OK	OK		OK	OK	OK
Competitor	OK	 Breakage!							

Internal test conditions

Drill: Ø 4, L/D = 5
Work Material: Carbon Steel (C50)
Cutting Data: $v_c = 80$ m/rev, $a_p = 18$ mm

Comparison of Tool Life

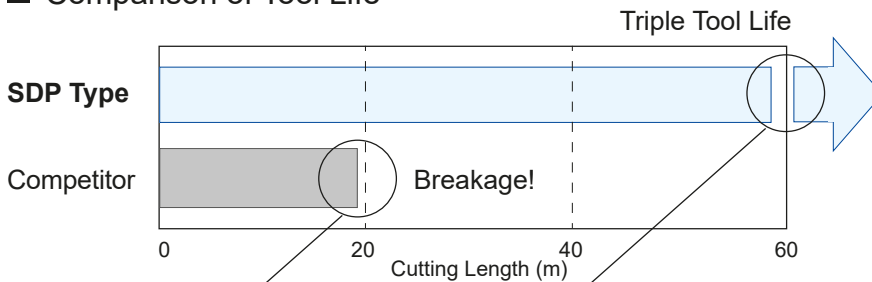


Drill: Ø 8, L/D = 5
Work Material: Carbon Steel (C50)
Cutting Data: $v_c = 80$ m/min, $f = 0,15$ mm/rev, $a_p = 38$ mm, Through hole, Internal coolant







SDP Type

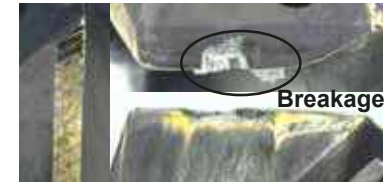

Competitor



Excellent Hole Accuracy


	Hole Accuracy	Chip Shape
SDP Type	 <p>Stable hole size</p> <p>0,030 0,020 0,010 0,000</p> <p>0 500 1000 1500</p> <p>Number of holes</p> <p>0,011</p> <p>Entrance Bottom</p>	<p>Compact cutting chips</p> 
Competitor	 <p>Unstable</p> <p>0,030 0,020 0,010 0,000</p> <p>0 500 1000 1500</p> <p>Number of holes</p> <p>0,016</p> <p>Entrance Bottom</p> <p>Breakage!</p>	<p>Longer cutting chips</p> 

Drill: Ø 8, L/D = 5
Workpiece: Carbon Steel (C50)
Cutting Data: $v_c = 80$ m/min, $f = 0,25$ mm/rev, $a_p = 24$ mm, Blind-hole, Internal coolant

SumiDrill Power Series SDP (DIN) Type

AlCrTiN Coated Solid Carbide Drills to DIN 6537

■ Solid Carbide Drill with Internal Coolant Supply, Ø 3,0–7,5 mm, 3D / 5D / 7D

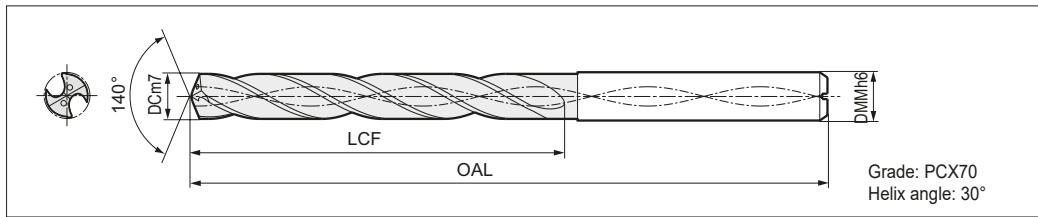


DC (mm)	DMM (mm)	Cat. No. (L/D) 3, 5, 7	3D Type			5D Type			7D Type		
			Stock	Dimensions (mm)		Stock	Dimensions (mm)		Stock	Dimensions (mm)	
			3	OAL	LCF	5	OAL	LCF	7	OAL	LCF
3,0	6	SDP 0300 U □ HAK	●	62	17	●	66	24	●	70	29
3,1		SDP 0310 U □ HAK	●			●					
3,2		SDP 0320 U □ HAK	●			●					
3,25		SDP 0325 U □ HAK	●			●					
3,3		SDP 0330 U □ HAK	●			●					
3,4		SDP 0340 U □ HAK	●			●					
3,5		SDP 0350 U □ HAK	●			●					
3,6		SDP 0360 U □ HAK	●			●					
3,7		SDP 0370 U □ HAK	●			●					
3,8		SDP 0380 U □ HAK	●			21			74		
3,9		SDP 0390 U □ HAK	●	●							
4,0		SDP 0400 U □ HAK	●	●							
4,1		SDP 0410 U □ HAK	●	●							
4,2		SDP 0420 U □ HAK	●	●							
4,3		SDP 0430 U □ HAK	●	●							
4,4		SDP 0440 U □ HAK	●	●							
4,5		SDP 0450 U □ HAK	●	●							
4,6		SDP 0460 U □ HAK	●	●							
4,65		SDP 0465 U □ HAK	●	●							
4,7		SDP 0470 U □ HAK	●	●							
4,8		SDP 0480 U □ HAK	●	66	25	82	41	●	85	44	
4,9		SDP 0490 U □ HAK	●					●			
5,0		SDP 0500 U □ HAK	●					●			
5,1		SDP 0510 U □ HAK	●					●			
5,2		SDP 0520 U □ HAK	●					●			
5,3		SDP 0530 U □ HAK	●					●			
5,4		SDP 0540 U □ HAK	●					●			
5,5		SDP 0550 U □ HAK	●					●			
5,55		SDP 0555 U □ HAK	●					●			
5,6		SDP 0560 U □ HAK	●					●			
5,7	SDP 0570 U □ HAK	●	●								
5,8	SDP 0580 U □ HAK	●	●								
5,9	SDP 0590 U □ HAK	●	●								
6,0	SDP 0600 U □ HAK	●	●								
6,1	8	SDP 0610 U □ HAK	●	79	31	91	50	●	106	65	
6,2		SDP 0620 U □ HAK	●					●			
6,3		SDP 0630 U □ HAK	●					●			
6,4		SDP 0640 U □ HAK	●					●			
6,5		SDP 0650 U □ HAK	●					●			
6,6		SDP 0660 U □ HAK	●					●			
6,7		SDP 0670 U □ HAK	●					●			
6,8		SDP 0680 U □ HAK	●					●			
6,9		SDP 0690 U □ HAK	●					●			
7,0		SDP 0700 U □ HAK	●					●			
7,1		SDP 0710 U □ HAK	●	37	●	●	●	●	116	75	
7,2		SDP 0720 U □ HAK	●								●
7,3		SDP 0730 U □ HAK	●								●
7,4		SDP 0740 U □ HAK	●								●
7,5		SDP 0750 U □ HAK	●								●

※ Remarks:

□ Non-Stock Items will be required minimum order quantity for 30 pcs.

● = Euro stock
□ = Delivery on request

■ Solid Carbide Drill with Internal Coolant Supply, Ø 7,6–12,5 mm, 3D / 5D / 7D

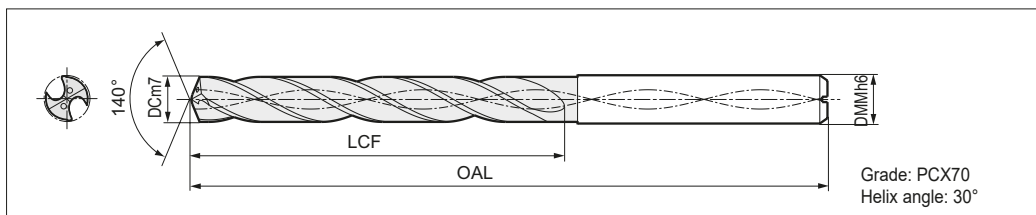

DC (mm)	DMM (mm)	Cat. No. (L/D) 3, 5, 7	3D Type			5D Type			7D Type		
			Stock	Dimensions (mm)		Stock	Dimensions (mm)		Stock	Dimensions (mm)	
			3	OAL	LCF	5	OAL	LCF	7	OAL	LCF
7,6	8	SDP 0760 U □ HAK	●			●			●		
7,7		SDP 0770 U □ HAK	●			●			●		
7,8		SDP 0780 U □ HAK	●	79	37	●	91	50	●	116	75
7,9		SDP 0790 U □ HAK	●			●			●		
8,0		SDP 0800 U □ HAK	●			●			●		
8,1	10	SDP 0810 U □ HAK	●			●			●		
8,2		SDP 0820 U □ HAK	●			●			●		
8,3		SDP 0830 U □ HAK	●			●			□		
8,4		SDP 0840 U □ HAK	●			●			●		
8,5		SDP 0850 U □ HAK	●			●			●	131	85
8,6		SDP 0860 U □ HAK	●			●			●		
8,7		SDP 0870 U □ HAK	●			●			●		
8,8		SDP 0880 U □ HAK	●			●			●		
8,9		SDP 0890 U □ HAK	●			●			□		
9,0		SDP 0900 U □ HAK	●			●			●		
9,1		SDP 0910 U □ HAK	●	89	43	●	103	57	●		
9,2		SDP 0920 U □ HAK	●			●			●		
9,25		SDP 0925 U □ HAK	●			●			□		
9,3		SDP 0930 U □ HAK	●			●			●		
9,4		SDP 0940 U □ HAK	●			●			●		
9,5	SDP 0950 U □ HAK	●			●			●	139	93	
9,6	SDP 0960 U □ HAK	●			●			□			
9,7	SDP 0970 U □ HAK	●			●			●			
9,8	SDP 0980 U □ HAK	●			●			●			
9,9	SDP 0990 U □ HAK	●			●			●			
10,0	SDP 1000 U □ HAK	●			●			●			
10,1	12	SDP 1010 U □ HAK	●			●			□		
10,2		SDP 1020 U □ HAK	●			●			●		
10,3		SDP 1030 U □ HAK	●			●			□		
10,4		SDP 1040 U □ HAK	●			●			□		
10,5		SDP 1050 U □ HAK	●			●			●	155	104
10,6		SDP 1060 U □ HAK	●			●			□		
10,7		SDP 1070 U □ HAK	●			●			●		
10,8		SDP 1080 U □ HAK	●			●			●		
10,9		SDP 1090 U □ HAK	●			●			□		
11,0		SDP 1100 U □ HAK	●	102	51	●	118	67	●		
11,1		SDP 1110 U □ HAK	●			●			□		
11,2		SDP 1120 U □ HAK	●			●			●		
11,3		SDP 1130 U □ HAK	●			●			□		
11,4		SDP 1140 U □ HAK	●			●			□		
11,5		SDP 1150 U □ HAK	●			●			●	163	112
11,6	SDP 1160 U □ HAK	●			●			□			
11,7	SDP 1170 U □ HAK	●			●			□			
11,8	SDP 1180 U □ HAK	●			●			●			
11,9	SDP 1190 U □ HAK	●			●			□			
12,0	SDP 1200 U □ HAK	●			●			●			
12,1	14	SDP 1210 U □ HAK	□			□			□		
12,2		SDP 1220 U □ HAK	●			●			●		
12,3		SDP 1230 U □ HAK	□	107	56	□	124	73	□	182	131
12,4		SDP 1240 U □ HAK	□			□			□		
12,5		SDP 1250 U □ HAK	●			●			●		


※ Remarks:

□ Non-Stock Items will be required minimum order quantity for 30 pcs.

SumiDrill Power Series SDP (DIN) Type

AlCrTiN Coated Solid Carbide Drills to DIN 6537

■ Solid Carbide Drill with Internal Coolant Supply, Ø 12,6–16,0 mm, 3D / 5D / 7D

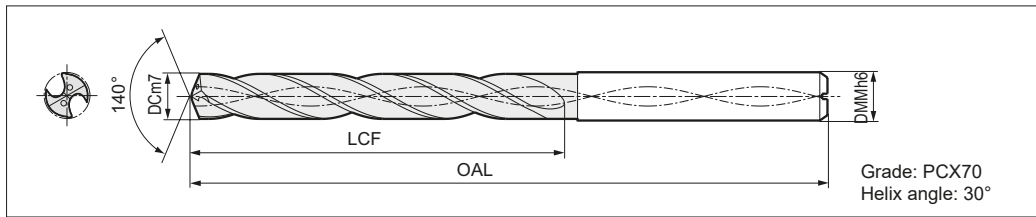

DC (mm)	DMM (mm)	Cat. No. (L/D) 3, 5, 7	3D Type			5D Type			7D Type		
			Stock	Dimensions (mm)		Stock	Dimensions (mm)		Stock	Dimensions (mm)	
			3	OAL	LCF	5	OAL	LCF	7	OAL	LCF
12,6	14	SDP 1260 U □ HAK	□	107	56	□	124	73	□	182	131
12,7		SDP 1270 U □ HAK	□			□			□		
12,8		SDP 1280 U □ HAK	□			□			□		
12,9		SDP 1290 U □ HAK	□			□			□		
13,0		SDP 1300 U □ HAK	●			●			●		
13,1		SDP 1310 U □ HAK	□			□			□		
13,2		SDP 1320 U □ HAK	□			□			□		
13,3		SDP 1330 U □ HAK	□			□			□		
13,4		SDP 1340 U □ HAK	□			□			□		
13,5		SDP 1350 U □ HAK	●			●			●		
13,6		SDP 1360 U □ HAK	□			□			□		
13,7		SDP 1370 U □ HAK	●			●			●		
13,8		SDP 1380 U □ HAK	□			□			□		
13,9		SDP 1390 U □ HAK	□			□			□		
14,0	SDP 1400 U □ HAK	●	●	●							
14,1	16	SDP 1410 U □ HAK	□	115	60	□	133	78	□	204	149
14,2		SDP 1420 U □ HAK	●			●			●		
14,3		SDP 1430 U □ HAK	□			□			□		
14,4		SDP 1440 U □ HAK	□			□			□		
14,5		SDP 1450 U □ HAK	●			●			●		
14,6		SDP 1460 U □ HAK	□			□			□		
14,7		SDP 1470 U □ HAK	●			●			●		
14,8		SDP 1480 U □ HAK	□			□			□		
14,9		SDP 1490 U □ HAK	□			□			□		
15,0		SDP 1500 U □ HAK	●			●			●		
15,1		SDP 1510 U □ HAK	□			□			□		
15,2		SDP 1520 U □ HAK	●			●			●		
15,3		SDP 1530 U □ HAK	□			□			□		
15,4		SDP 1540 U □ HAK	□			□			□		
15,5		SDP 1550 U □ HAK	●			●			●		
15,6		SDP 1560 U □ HAK	□			□			□		
15,7	SDP 1570 U □ HAK	●	●	●							
15,8	SDP 1580 U □ HAK	□	□	□							
15,9	SDP 1590 U □ HAK	□	□	□							
16,0	SDP 1600 U □ HAK	●	●	●							

※ Remarks:

□ Non-Stock Items will be required minimum order quantity for 30 pcs.

● = Euro stock
□ = Delivery on request

Recommended Cutting Conditions


Material Group						SDP ____ U_HAK PCX70					
ISO 513	Work Material	Type/ Structure	R _m N/mm ²	Hardness HB30	Fitness	Ø 3,0–6,0 mm		Ø 6,1–10,0 mm		Ø 10,1–16,0 mm	
						v _c =m/min	Feed rate (mm/rev)	v _c =m/min	Feed rate (mm/rev)	v _c =m/min	Feed rate (mm/rev)
P	Carbon steel Cast steel	free cutting steel	420	125	◎	50–80–120	0,15–0,20–0,31	70–110–140	0,20–0,25–0,42	80–120–160	0,25–0,30–0,53
		construction steel	650	190	◎	50–80–120	0,15–0,20–0,31	70–110–140	0,20–0,25–0,42	80–120–160	0,25–0,30–0,53
		case-hardened steel	850	250	◎	50–80–120	0,15–0,20–0,31	70–110–140	0,20–0,25–0,42	80–120–160	0,25–0,30–0,53
		heat-treatable steel	750	270	◎	50–80–120	0,15–0,20–0,31	70–110–140	0,20–0,25–0,42	80–120–160	0,25–0,30–0,50
		spring steel	1000	300	◎	10–20–30	0,05–0,06–0,11	15–22–30	0,08–0,09–0,14	20–28–35	0,08–0,09–0,16
	Low alloy steel Cast steel	case-hardened steel	600	180	◎	50–70–90	0,10–0,14–0,24	60–80–110	0,15–0,20–0,32	70–100–120	0,20–0,25–0,40
		heat-treatable steel	930	275	◎	45–65–85	0,10–0,14–0,24	60–80–110	0,15–0,22–0,34	65–95–120	0,20–0,25–0,37
		bearing steel	1000	300	○	40–60–80	0,10–0,15–0,26	60–80–110	0,15–0,20–0,32	60–90–120	0,20–0,25–0,37
		nitriding steel cold work steel	1200	350	◎	35–55–75	0,10–0,15–0,26	55–75–110	0,15–0,22–0,32	55–80–110	0,20–0,27–0,38
	High alloy steel	tool steel	680	200	○	30–40–50	0,10–0,15–0,25	30–40–50	0,12–0,20–0,28	30–40–50	0,12–0,20–0,32
hot work steel		1100	325	○	20–30–40	0,10–0,12–0,23	20–30–40	0,12–0,15–0,27	20–30–40	0,14–0,18–0,32	
M	Stainless steel Cast steel	martensitic/ferritic	680	200	○	40–55–70	0,08–0,10–0,21	40–60–75	0,10–0,12–0,25	50–70–80	0,10–0,12–0,25
		martensitic	820	240	◎	30–45–60	0,08–0,10–0,20	40–60–70	0,10–0,12–0,24	50–60–80	0,10–0,12–0,24
		austenitic	600	180	◎	30–45–60	0,08–0,10–0,20	40–60–70	0,10–0,12–0,24	50–60–80	0,10–0,12–0,24
		Duplex	740	230	◎	30–45–60	0,06–0,08–0,18	40–60–70	0,08–0,10–0,23	50–60–80	0,10–0,10–0,23
K	Cast iron GG	ferritic/pearlitic		180	◎	50–70–90	0,15–0,20–0,36	60–80–100	0,20–0,25–0,40	70–100–120	0,25–0,30–0,42
		pearlitic		260	◎	40–60–80	0,15–0,20–0,36	50–70–90	0,20–0,25–0,40	60–80–100	0,25–0,30–0,42
	Cast iron GGG	ferritic		160	◎	50–70–90	0,15–0,18–0,31	60–80–100	0,20–0,25–0,40	70–100–120	0,25–0,30–0,42
		pearlitic		250	◎	40–60–80	0,15–0,18–0,31	50–70–90	0,20–0,25–0,40	70–80–100	0,25–0,30–0,42
S	Heat resisting alloys	Fe-based			○	10–20–30	0,08–0,09–0,13	15–22–32	0,08–0,10–0,15	20–28–35	0,10–0,12–0,19
		Ni / Co-based			○	10–20–30	0,08–0,09–0,13	15–22–32	0,08–0,10–0,15	20–28–35	0,10–0,12–0,19
	Titanium Titanium alloys	pure Titanium	430								
		Ti-Basis			○	10–20–30	0,05–0,06–0,12	15–22–32	0,08–0,09–0,17	20–28–35	0,08–0,09–0,17
N	Aluminium Al-wrought alloys	pure aluminium									
		wrought alloys									
	Aluminium Cast alloys	Si ≤ 12%									
		Si ≥ 12%			◎	70–90–100	0,15–0,20–0,25	80–100–120	0,20–0,25–0,30	100–120–140	0,25–0,30–0,35
		Al - Mg alloys									
Zinc die-cast	Zn alloys										
Copper alloys	Copper										
	Brass			○	80–100–120	0,15–0,20–0,25	110–130–180	0,20–0,25–0,30	160–180–200	0,25–0,30–0,35	
	Bronze										
H	Hardened steel	45 HRC			○	10–20–30	0,08–0,09–0,10	15–22–32	0,08–0,10–0,12	20–28–35	0,12–0,15–0,20
		55 HRC									
		60 HRC									
		> 60 HRC									

◎ Preferred choice

○ Suitable


◎ Possible

SDP-Identification

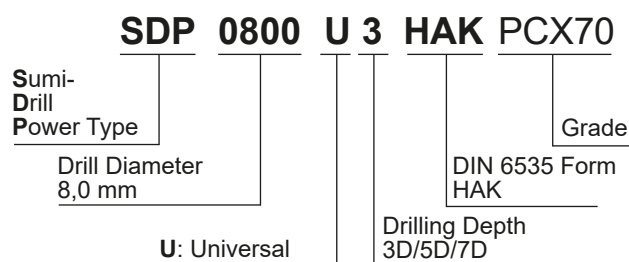


SumiDrill Power Series SDM Type

General Features

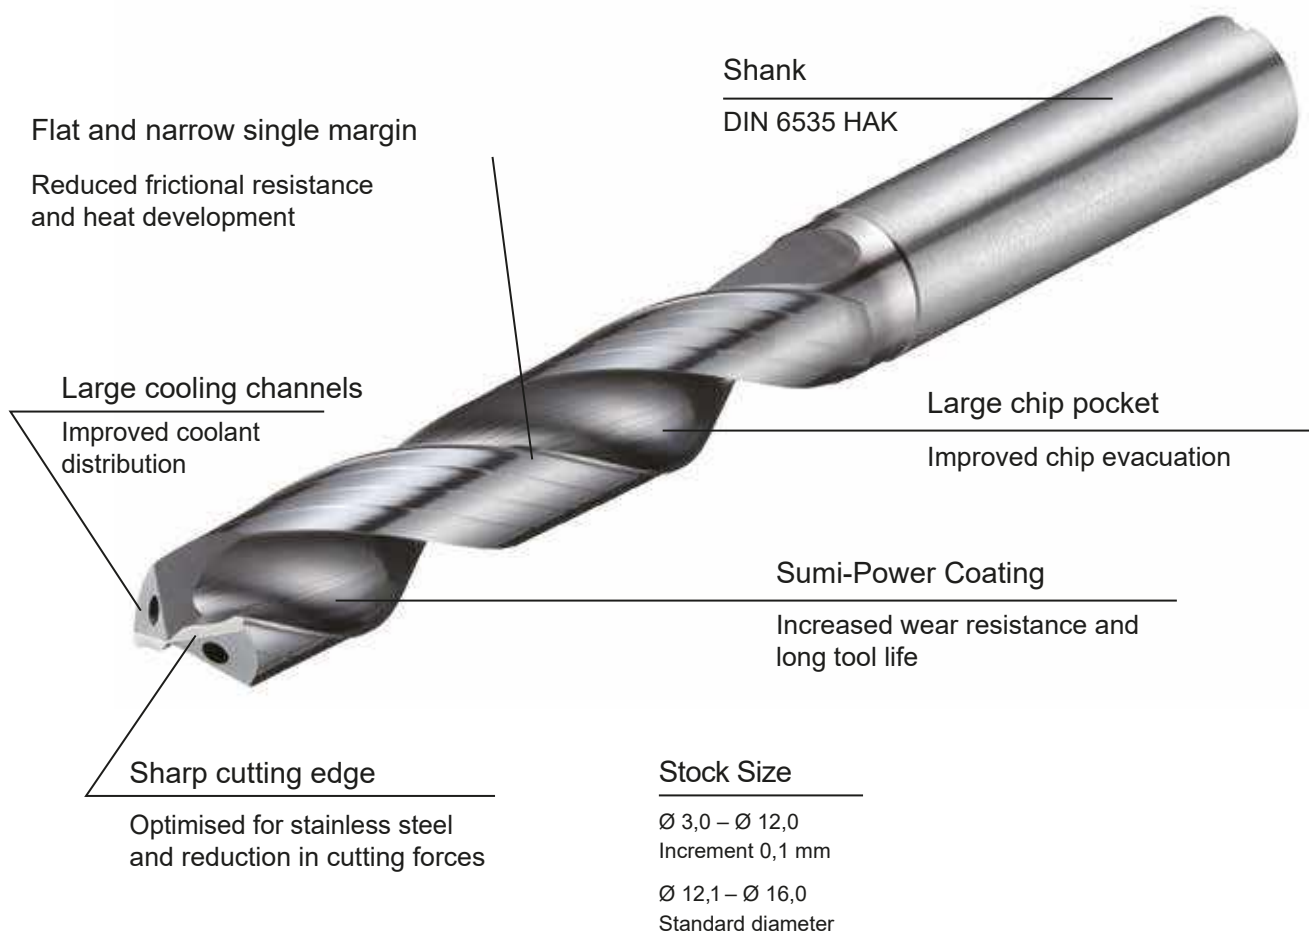

Advantages

- High process reliability in stainless steel and low carbon steel
- Can be used on low-performance machines! (→avoids overload!)
- High surface quality in the bore
- Sharp cutting edge
- High adhesion resistance by Sumi-Power Coating

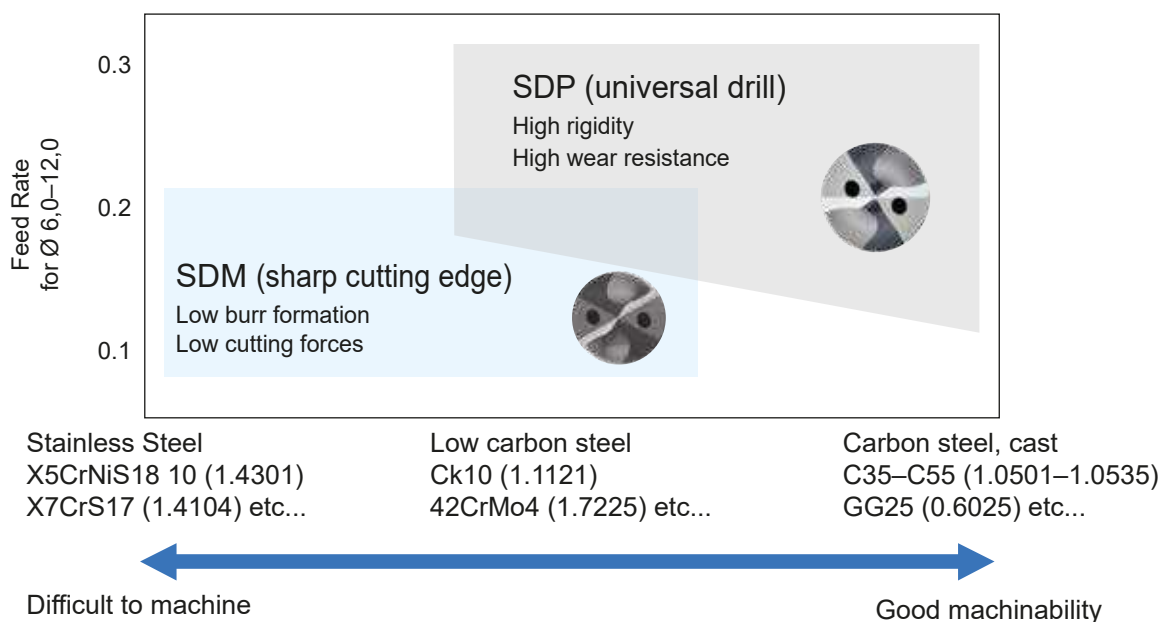

SumiDrill Power Series SDM Type

■ Chip Control


Drill:	Ø 8 mm, L/D = 5
Work Material:	X5CrNiS18 10 (1.4301)
Cutting Data:	$v_c=60\text{m/min}$, $f=0,10\text{mm/rev}$, $a_p=19\text{mm}$ Internal coolant (2,0MPa)

SDM



Short chips,
good chip evacuation

Competitor A

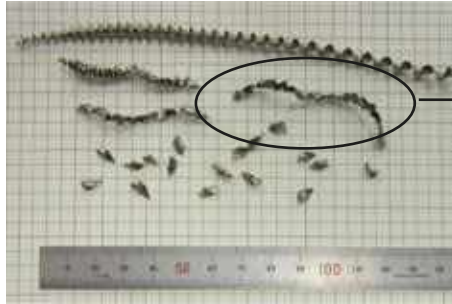


Partial long chips,
risk of tool breakage
by poor chip evacuation




■ Optimal Cutting Forces

Drill:	Ø 8 mm, L/D = 5
Work Material:	X5CrNiS18 10 (1.4301)
Cutting Data:	$v_c=60\text{m/min}$, $f=0,20\text{mm/rev}$, $a_p=40\text{mm}$ Internal coolant (2,0MPa)

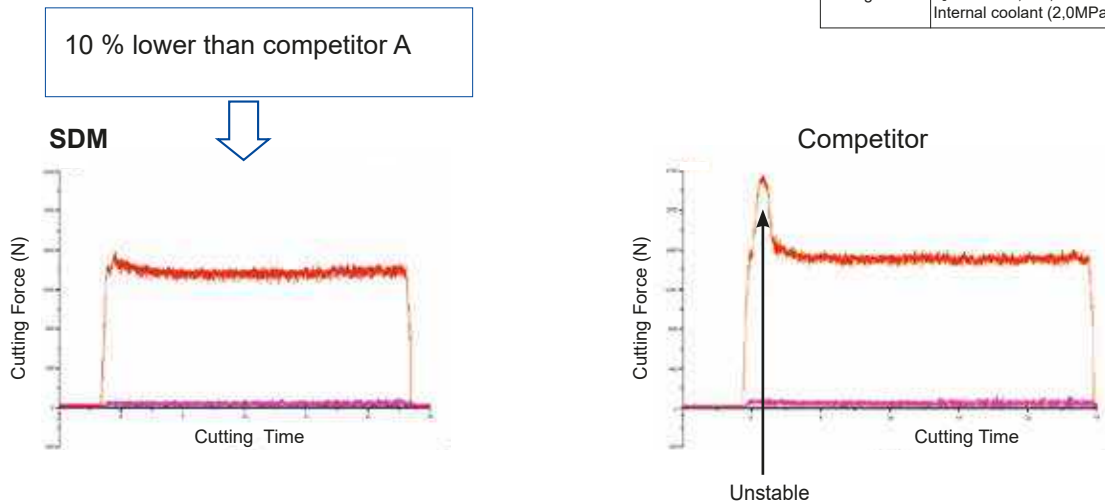

■ Low Burr Formation

Drill:	Ø 8 mm, L/D = 5
Work Material:	X5CrNiS18 10 (1.4301)
Cutting Data:	$v_c=60\text{m/min}$, $f=0,20\text{mm/rev}$, $a_p=40\text{mm}$ Internal coolant (2,0MPa)

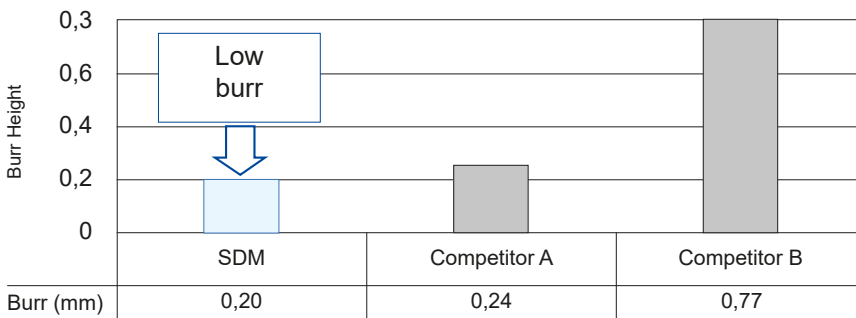

SumiDrill Power Series

SDM Type

Recommended Cutting Conditions

Material Group					SDM____U_HAK PCX70						
ISO 513	Work Material	Type/ Structure	R _m N/mm ²	Hardness HB30	Fitness	Ø 3,0–6,0 mm		Ø 6,1–10,0 mm		Ø 10,1–16,0 mm	
						v _c =m/min	Feed rate (mm/rev)	v _c =m/min	Feed rate (mm/rev)	v _c =m/min	Feed rate (mm/rev)
P	Carbon steel Cast steel	free cutting steel	420	125	○	80–100–120	0,08–0,11–0,14	80–100–120	0,10–0,15–0,20	80–100–120	0,20–0,25–0,30
		construction steel	650	190	○	80–100–120	0,08–0,11–0,14	80–100–120	0,10–0,15–0,20	80–100–120	0,20–0,25–0,30
		case-hardened steel	850	250	○	80–100–120	0,08–0,11–0,14	80–100–120	0,10–0,15–0,20	80–100–120	0,20–0,25–0,30
		heat-treatable steel	750	270	○	40–60–100	0,08–0,10–0,12	40–60–100	0,10–0,12–0,16	40–60–100	0,15–0,17–0,20
		spring steel	1000	300							
	Low alloy steel Cast steel	case-hardened steel	600	180	○	80–100–120	0,08–0,11–0,14	80–100–120	0,10–0,15–0,20	80–100–120	0,20–0,25–0,30
		heat-treatable steel	930	275	○	40–60–100	0,08–0,10–0,12	40–60–100	0,10–0,12–0,16	40–60–100	0,15–0,17–0,20
		bearing steel	1000	300							
		nitriding steel	1200	350							
	High alloy steel / Cast steel	tool steel	680	200	○	40–60–100	0,08–0,10–0,12	40–60–100	0,10–0,12–0,16	40–60–100	0,15–0,17–0,20
hot work steel		1100	325								
M	Stainless steel Cast steel	martensitic/ferritic	680	200	●	40–60–100	0,08–0,10–0,12	40–60–100	0,10–0,14–0,18	40–60–100	0,15–0,20–0,25
		martensitic/ferritic		>200	●	30–50–80	0,08–0,10–0,12	30–50–80	0,10–0,14–0,18	30–50–80	0,15–0,20–0,25
		martensitic	820	240	●	30–50–80	0,08–0,10–0,12	30–50–80	0,10–0,14–0,18	30–50–80	0,15–0,20–0,25
		austenitic	600	180	●	40–60–100	0,08–0,10–0,12	40–60–100	0,10–0,14–0,18	40–60–100	0,15–0,20–0,25
		austenitic		>200	●	30–50–80	0,08–0,10–0,12	30–50–80	0,10–0,14–0,18	30–50–80	0,15–0,20–0,25
		Duplex	740	230	●	30–45–70	0,08–0,10–0,12	30–45–70	0,10–0,14–0,18	30–45–70	0,15–0,20–0,25
		Precipitation hardened		≤450	●	30–45–70	0,08–0,10–0,12	30–45–70	0,10–0,14–0,18	30–45–70	0,15–0,20–0,25
K	Cast iron GG	ferritic/pearlitic		180							
		pearlitic		260							
	Cast iron GGG	ferritic		160							
		pearlitic		250							
S	Heat resisting alloys	Fe-based			○	20–30–40	0,06–0,08–0,10	20–30–40	0,08–0,10–0,12	20–30–40	0,10–0,12–0,15
		Ni / Co-based			○	20–30–40	0,06–0,08–0,10	20–30–40	0,08–0,10–0,12	20–30–40	0,10–0,12–0,15
	Titanium Titanium alloys	pure Titanium	430								
		Ti-Basis			○	20–30–40	0,06–0,08–0,10	20–30–40	0,08–0,10–0,12	20–30–40	0,10–0,12–0,15
N	Aluminium	pure aluminium									
		wrought alloys									
	Aluminium Cast alloys	Si ≤ 12%									
		Si ≥ 12%									
		Al - Mg alloys									
	Zinc die-cast	Zn alloys									
	Copper alloys	Copper									
Brass											
Bronze											
H	Hardened steel	45 HRC									
		55 HRC									
		60 HRC									
		> 60 HRC									

● Preferred choice ○ Possible

SDM-Identification


SDM 0800 U 3 HAK PCX70



● = Euro stock
□ = Delivery on request

SumiDrill Power Series SDM Type


■ Solid Carbide Drill with Internal Coolant Supply, Ø 3,0–7,5 mm, 3D / 5D

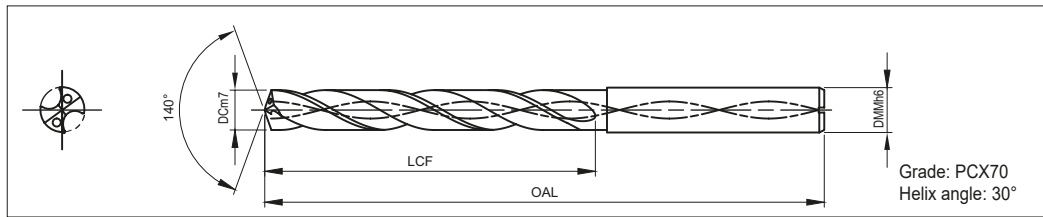

DC (mm)	DMM (mm)	Cat. No. (L/D) 3/5	3D Type			5D Type						
			Stock	Dimensions (mm)		Stock	Dimensions (mm)					
				OAL	LCF		OAL	LCF				
3,0	6	SDM 0300 U □ HAK	●	62	17	●	66	24				
3,1		SDM 0310 U □ HAK	●			●						
3,2		SDM 0320 U □ HAK	●			●						
3,25		SDM 0325 U □ HAK	□			□						
3,3		SDM 0330 U □ HAK	●			●						
3,4		SDM 0340 U □ HAK	●			●						
3,5		SDM 0350 U □ HAK	●			●						
3,6		SDM 0360 U □ HAK	●			●						
3,7		SDM 0370 U □ HAK	●			●						
3,8		SDM 0380 U □ HAK	●			66			21	●	74	33
3,9		SDM 0390 U □ HAK	●							●		
4,0		SDM 0400 U □ HAK	●							●		
4,1		SDM 0410 U □ HAK	●	●								
4,2		SDM 0420 U □ HAK	●	●								
4,3		SDM 0430 U □ HAK	●	●								
4,4		SDM 0440 U □ HAK	●	●								
4,5		SDM 0450 U □ HAK	●	●								
4,6		SDM 0460 U □ HAK	●	●								
4,65		SDM 0465 U □ HAK	□	□								
4,7		SDM 0470 U □ HAK	●	●								
4,8		SDM 0480 U □ HAK	●	66	25		●	82		41		
4,9		SDM 0490 U □ HAK	●			●						
5,0		SDM 0500 U □ HAK	●			●						
5,1		SDM 0510 U □ HAK	●			●						
5,2		SDM 0520 U □ HAK	●			●						
5,3		SDM 0530 U □ HAK	●			●						
5,4		SDM 0540 U □ HAK	●			●						
5,5		SDM 0550 U □ HAK	●			●						
5,55		SDM 0555 U □ HAK	□			□						
5,6		SDM 0560 U □ HAK	●			●						
5,7		SDM 0570 U □ HAK	●			●						
5,8		SDM 0580 U □ HAK	●			●						
5,9		SDM 0590 U □ HAK	●	79	31	●	91	50				
6,0	SDM 0600 U □ HAK	●	●									
6,1	SDM 0610 U □ HAK	●	●									
6,2	SDM 0620 U □ HAK	●	●									
6,3	SDM 0630 U □ HAK	●	●									
6,4	SDM 0640 U □ HAK	●	●									
6,5	SDM 0650 U □ HAK	●	●									
6,6	SDM 0660 U □ HAK	●	●									
6,7	SDM 0670 U □ HAK	●	●									
6,8	SDM 0680 U □ HAK	●	●									
6,9	SDM 0690 U □ HAK	●	●									
7,0	SDM 0700 U □ HAK	●	37			●						
7,1	SDM 0710 U □ HAK	●		●								
7,2	SDM 0720 U □ HAK	●		●								
7,3	SDM 0730 U □ HAK	●		●								
7,4	SDM 0740 U □ HAK	●		●								
7,5	SDM 0750 U □ HAK	●	●									

SumiDrill Power Series SDM Type

■ Solid Carbide Drill with Internal Coolant Supply, Ø 7,6–12,0 mm, 3D / 5D

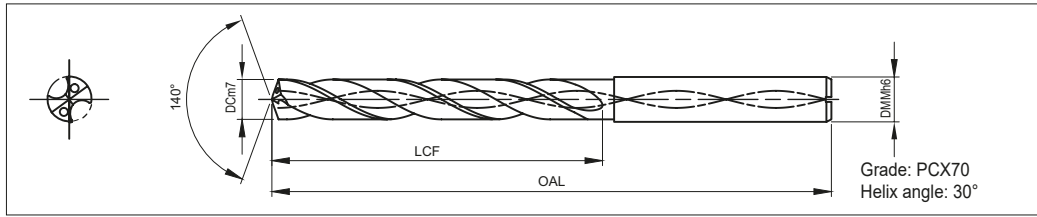


DC (mm)	DMM (mm)	Cat. No. (L/D) 3/5	3D Type			5D Type		
			Stock	Dimensions (mm)		Stock	Dimensions (mm)	
				3	OAL		LCF	5
7,6	8	SDM 0760 U □ HAK	●	79	37	91	50	
7,7		SDM 0770 U □ HAK	●					
7,8		SDM 0780 U □ HAK	●					
7,9		SDM 0790 U □ HAK	●					
8,0		SDM 0800 U □ HAK	●					
8,1	10	SDM 0810 U □ HAK	●	89	43	103	57	
8,2		SDM 0820 U □ HAK	●					
8,3		SDM 0830 U □ HAK	●					
8,4		SDM 0840 U □ HAK	●					
8,5		SDM 0850 U □ HAK	●					
8,6		SDM 0860 U □ HAK	●					
8,7		SDM 0870 U □ HAK	●					
8,8		SDM 0880 U □ HAK	●					
8,9		SDM 0890 U □ HAK	●					
9,0		SDM 0900 U □ HAK	●					
9,1		SDM 0910 U □ HAK	●					
9,2		SDM 0920 U □ HAK	●					
9,25		SDM 0925 U □ HAK	□					
9,3		SDM 0930 U □ HAK	●					
9,4		SDM 0940 U □ HAK	●					
9,5	SDM 0950 U □ HAK	●						
9,6	SDM 0960 U □ HAK	●						
9,7	SDM 0970 U □ HAK	●						
9,8	SDM 0980 U □ HAK	●						
9,9	SDM 0990 U □ HAK	●						
10,0	SDM 1000 U □ HAK	●						
10,1	12	SDM 1010 U □ HAK	●	102	51	118	67	
10,2		SDM 1020 U □ HAK	●					
10,3		SDM 1030 U □ HAK	●					
10,4		SDM 1040 U □ HAK	●					
10,5		SDM 1050 U □ HAK	●					
10,6		SDM 1060 U □ HAK	●					
10,7		SDM 1070 U □ HAK	●					
10,8		SDM 1080 U □ HAK	●					
10,9		SDM 1090 U □ HAK	●					
11,0		SDM 1100 U □ HAK	●					
11,1		SDM 1110 U □ HAK	●					
11,2		SDM 1120 U □ HAK	●					
11,3	SDM 1130 U □ HAK	●						
11,4	SDM 1140 U □ HAK	●						
11,5	SDM 1150 U □ HAK	●						
11,6	SDM 1160 U □ HAK	●						
11,7	SDM 1170 U □ HAK	●						
11,8	SDM 1180 U □ HAK	●						
11,9	SDM 1190 U □ HAK	●						
12,0	SDM 1200 U □ HAK	●						

● = Euro stock
□ = Delivery on request

SumiDrill Power Series SDM Type

■ Solid Carbide Drill with Internal Coolant Supply, Ø 12,0–16,0 mm, 3D / 5D

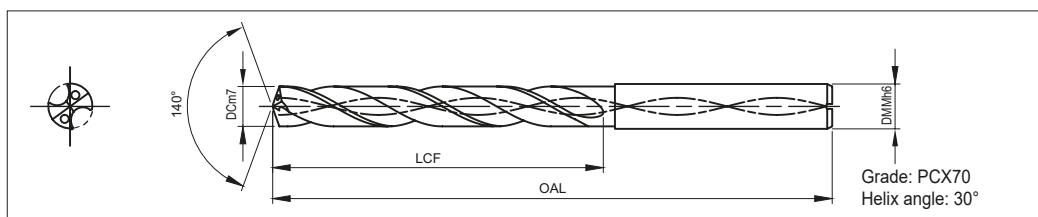

DC (mm)	DMM (mm)	Cat. No. (L/D) 3/5	3D Type		5D Type			
			Stock 3	Dimensions (mm) OAL LCF	Stock 5	Dimensions (mm) OAL LCF		
12,1	14	SDM 1210 U □ HAK	□	107	56	□	124	73
12,2		SDM 1220 U □ HAK	□			□		
12,3		SDM 1230 U □ HAK	□			□		
12,4		SDM 1240 U □ HAK	□			□		
12,5		SDM 1250 U □ HAK	●			●		
12,6		SDM 1260 U □ HAK	□			□		
12,7		SDM 1270 U □ HAK	□			□		
12,8		SDM 1280 U □ HAK	□			□		
12,9		SDM 1290 U □ HAK	□			□		
13,0		SDM 1300 U □ HAK	●			●		
13,1		SDM 1310 U □ HAK	□			□		
13,2		SDM 1320 U □ HAK	□			□		
13,3		SDM 1330 U □ HAK	□			□		
13,4		SDM 1340 U □ HAK	□			□		
13,5	SDM 1350 U □ HAK	●	●					
13,6	SDM 1360 U □ HAK	□	□					
13,7	SDM 1370 U □ HAK	□	□					
13,8	SDM 1380 U □ HAK	□	□					
13,9	SDM 1390 U □ HAK	□	□					
14,0	SDM 1400 U □ HAK	●	●					
14,1	16	SDM 1410 U □ HAK	□	115	60	□	133	78
14,2		SDM 1420 U □ HAK	□			□		
14,3		SDM 1430 U □ HAK	□			□		
14,4		SDM 1440 U □ HAK	□			□		
14,5		SDM 1450 U □ HAK	●			●		
14,6		SDM 1460 U □ HAK	□			□		
14,7		SDM 1470 U □ HAK	□			□		
14,8		SDM 1480 U □ HAK	□			□		
14,9		SDM 1490 U □ HAK	□			□		
15,0		SDM 1500 U □ HAK	●			●		
15,1		SDM 1510 U □ HAK	□			□		
15,2		SDM 1520 U □ HAK	□			□		
15,3		SDM 1530 U □ HAK	□			□		
15,4		SDM 1540 U □ HAK	□			□		
15,5		SDM 1550 U □ HAK	●			●		
15,6		SDM 1560 U □ HAK	□			□		
15,7	SDM 1570 U □ HAK	□	□					
15,8	SDM 1580 U □ HAK	□	□					
15,9	SDM 1590 U □ HAK	□	□					
16,0	SDM 1600 U □ HAK	●	●					

Drill Coating

DEX Coating




General Features

- Sumitomo Electric Hardmetal's next-generation drill coating utilises nano-coating technology to provide more than double the tool life of conventional coatings.
- Silicon and chrome improve usure, heat, and adhesion resistance.
- New super multi-layered structure offers significantly improved chip resistance (coating strength).


Characteristics

Coating Design

World's first combined super multi-layered coating is made from alternate layers of super multilayered substrates.

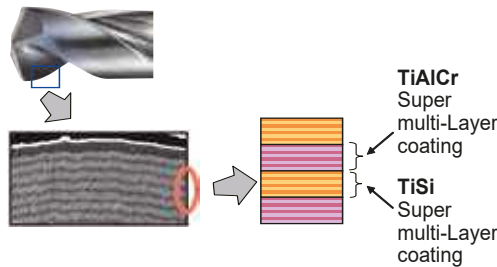

Characteristics of Films

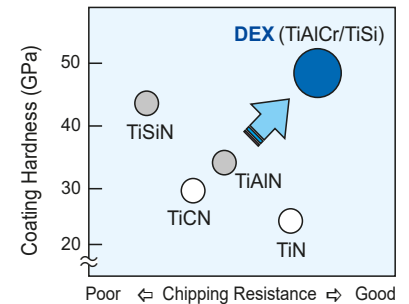

DEX Coat Application Examples

MultiDrill GS Type Drilling Examples

Comparison of Usure Resistance		Comparison of Adhesion Resistance	
<p>Edge Usure Comparison for 70 m Drilling</p> <p>Shoulder and rake face feature improved usure resistance enabling long tool life.</p> <p>DEX Coating MultiDrill GS Type</p> <p>Concurrent A Drill</p>		<p>Edge Usure Comparison for 100 m Drilling</p> <p>Offers significantly improved fracture resistance to counter problems caused by shoulder and flute adhesion in soft steel drilling.</p> <p>DEX Coating MultiDrill GS Type</p> <p>Competitor B Drill</p>	
Tool:	MDW 0800 GS4	Tool:	MDW 0600 GS4
Work Material:	C50 (HB200)	Work Material:	15CrMo5 (HB120)
Cutting Conditions:	$v_c = 70$ m/min, $f = 0,25$ mm/rev, $a_p = 32$ mm External coolant (Water soluble)	Cutting Conditions:	$v_c = 60$ m/min, $f = 0,18$ mm/rev, $a_p = 18$ mm External coolant (Water soluble)

Long MultiDrill XHT Type Drilling Examples

<p>Reduced margin usure during deep hole MQL drilling increases number of regrinds.</p> <p>DEX Coating</p> <p>Conventional Coating</p>	
Tool:	MDW 0497 XHT20 (Ø 4,97 L/D = 29)
Work Material:	42CrMo4 (HB275) Crank Shaft
Cutting Conditions:	$v_c = 70$ m/min, $f = 0,23$ mm/rev, $a_p = 75$ mm MQL

MultiDrill SMD Type Drilling Examples

<p>Offers longer tool life with SEC MultiDrills as well.</p> <p>Number of holes</p> <p>DEX Coating: 1,150</p> <p>Conventional Coating: 800</p> <p>1,4x Life!</p>	
Tool:	SMDH 210 M (Ø 21,0)
Work Material:	36Mn5 (HB350) Construction Mashine Component
Cutting Conditions:	$v_c = 60$ m/min, $f = 0,25$ mm/rev, $a_p = 25$ mm Water soluble Coolant



General Features

Super MultiDrill GS types are solid carbide drills that employ a new flute design and wide chip pocket to achieve excellent chip management and evacuation. DEX coating enables stable and long tool life over a wide range of work materials and applications.


Characteristics and Applications

- Long tool life
New cutting edge design and special DEX coating provide long tool life with a wide variety of work materials.
- Stable chip evacuation
New flute shape significantly improves chip management and evacuation.
- Quiet cutting and stable cutting resistance
Stable drilling with little wobble even in small machine applications.
- Environmentally-friendly
Compatible with the MQL (Minimum Quantity Lubrication) system.


Series

Coolant Supply	Type	Diameter Range (mm)	Hole Depth (L/D)
External (GS Type)	MDW □□□□ GS2	Ø 0,8 – 16,0	-2
	MDW □□□□ GS4		-4

Performance

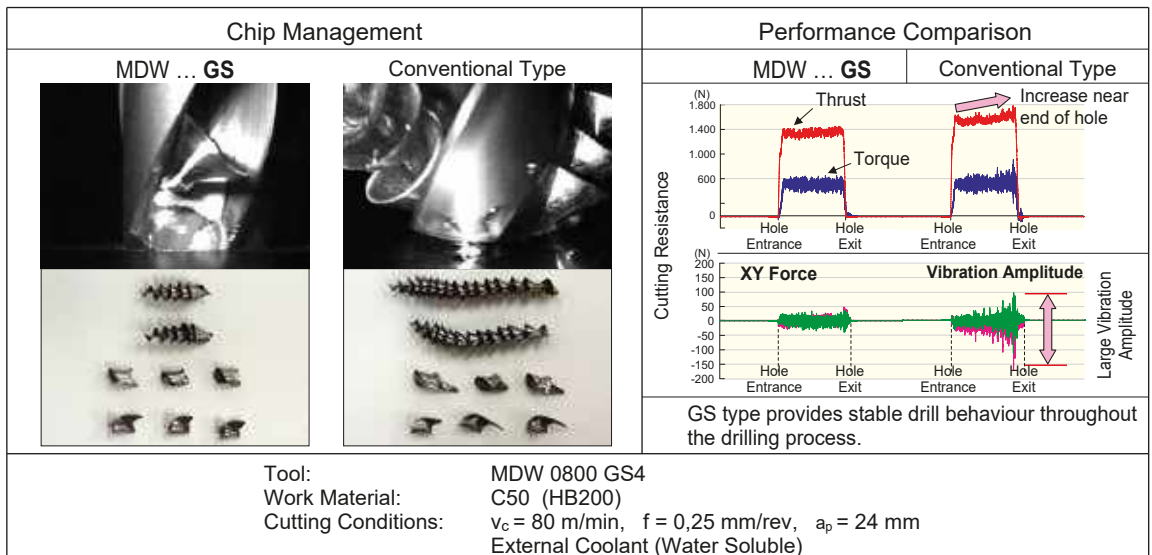

Application Examples

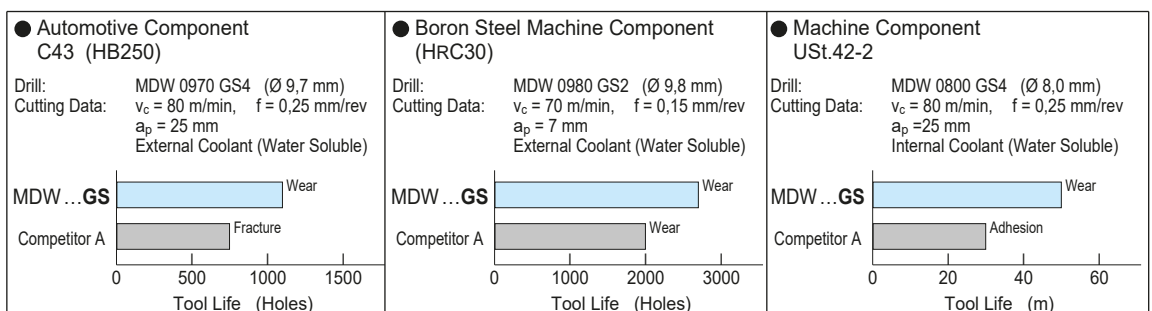


GS Type SUPER MULTI-DRILLS

MDW ... GS Type

Without Coolant Holes (2D/4D)

"Super Multi-Layer" DEX (TiAlCr/TiSi) Coated Solid Carbide Drills

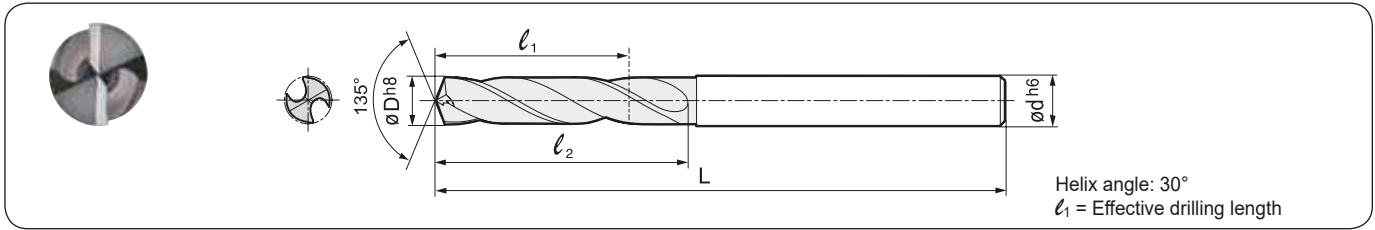

● Diameter Ø 2,0–6,0 mm

Dimensions		Cat. No.	Short Type (2D)				Long Type (4D)			
DC	ød		Stock	Dimensions			Stock	Dimensions		
			2	L	l ₁	l ₂	4	L	l ₁	l ₂
2,0	3,0	MDW 0200 GS□	●	45,4	6,0	8,4	○	49,4	13,0	15,4
2,1	3,0	MDW 0210 GS□	○	45,6	7,3	10,5	○	49,6	14,5	17,5
2,2		MDW 0220 GS□	○							
2,3		MDW 0230 GS□	○							
2,4		MDW 0240 GS□	○							
2,5		MDW 0250 GS□	●							
2,6		MDW 0260 GS□	●							
2,7		MDW 0270 GS□	○							
2,8		MDW 0280 GS□	○							
2,9		MDW 0290 GS□	○							
3,0		MDW 0300 GS□	○							
3,1	4,0	MDW 0310 GS□	○	54,8	15,5	19,7	○	60,8	20,5	24,7
3,2		MDW 0320 GS□	○							
3,3		MDW 0330 GS□	○							
3,4		MDW 0340 GS□	○							
3,5		MDW 0350 GS□	○							
3,6		MDW 0360 GS□	○							
3,7		MDW 0370 GS□	○							
3,8		MDW 0380 GS□	○							
3,9		MDW 0390 GS□	○							
4,0		MDW 0400 GS□	○							
4,1	5,0	MDW 0410 GS□	○	62,0	18,5	23,9	○	77,0	25,5	31,9
4,2		MDW 0420 GS□	○							
4,3		MDW 0430 GS□	○							
4,4		MDW 0440 GS□	○							
4,5		MDW 0450 GS□	○							
4,6		MDW 0460 GS□	○							
4,7		MDW 0470 GS□	○							
4,8		MDW 0480 GS□	○							
4,9		MDW 0490 GS□	○							
5,0		MDW 0500 GS□	○							
5,1	6,0	MDW 0510 GS□	○	66,2	19,5	26,1	○	82,2	33,5	40,1
5,2		MDW 0520 GS□	○							
5,3		MDW 0530 GS□	○							
5,4		MDW 0540 GS□	○							
5,5		MDW 0550 GS□	○							
5,6		MDW 0560 GS□	○							
5,7		MDW 0570 GS□	○							
5,8		MDW 0580 GS□	○							
5,9		MDW 0590 GS□	○							
6,0		MDW 0600 GS□	○							

● Diameter Ø 6,1–10,0 mm

Dimensions		Cat. No.	Short Type (2D)				Long Type (4D)			
DC	ød		Stock	Dimensions			Stock	Dimensions		
			2	L	l ₁	l ₂	4	L	l ₁	l ₂
6,1	7,0	MDW 0610 GS□	○	74,5	24,5	32,3	○	84,3	35,5	43,3
6,2		MDW 0620 GS□	○							
6,3		MDW 0630 GS□	○							
6,4		MDW 0640 GS□	○							
6,5		MDW 0650 GS□	○							
6,6		MDW 0660 GS□	○							
6,7		MDW 0670 GS□	○							
6,8		MDW 0680 GS□	○							
6,9		MDW 0690 GS□	○							
7,0		MDW 0700 GS□	○							
7,1	8,0	MDW 0710 GS□	○	79,7	25,6	34,6	○	91,7	37,6	46,6
7,2		MDW 0720 GS□	○							
7,3		MDW 0730 GS□	○							
7,4		MDW 0740 GS□	○							
7,5		MDW 0750 GS□	○							
7,6		MDW 0760 GS□	○							
7,7		MDW 0770 GS□	○							
7,8		MDW 0780 GS□	○							
7,9		MDW 0790 GS□	○							
8,0		MDW 0800 GS□	○							
8,1	9,0	MDW 0810 GS□	○	83,9	27,4	37,8	○	99,9	34,4	54,8
8,2		MDW 0820 GS□	○							
8,3		MDW 0830 GS□	○							
8,4		MDW 0840 GS□	○							
8,5		MDW 0850 GS□	○							
8,6		MDW 0860 GS□	○							
8,7		MDW 0870 GS□	○							
8,8		MDW 0880 GS□	○							
8,9		MDW 0890 GS□	○							
9,0		MDW 0900 GS□	○							
9,1	10,0	MDW 0910 GS□	○	89,0	28,6	40,0	○	107,0	48,6	60,0
9,2		MDW 0920 GS□	○							
9,3		MDW 0930 GS□	○							
9,4		MDW 0940 GS□	○							
9,5		MDW 0950 GS□	○							
9,6		MDW 0960 GS□	○							
9,7		MDW 0970 GS□	○							
9,8		MDW 0980 GS□	○							
9,9		MDW 0990 GS□	○							
10,0		MDW 1000 GS□	○							

■ Recommended Cutting Conditions for Multi-Drills GS Type

Diameter (mm)		Soft Steels (-200 HB)	General Steels (-300 HB)	Stainless Steels (-200 HB)	Grey Cast Irons	Ductile Cast Irons
-Ø 3	v _c	30–50–70	30–45–60	10–30–40	40–70–90	35–55–75
	f	0,12–0,20	0,10–0,20	0,06–0,12	0,15–0,30	0,12–0,20
-Ø 5	v _c	40–70–100	40–60–80	15–40–55	40–70–90	40–60–80
	f	0,15–0,25	0,15–0,25	0,08–0,15	0,15–0,30	0,15–0,25
-Ø 10	v _c	50–80–130	50–70–110	15–45–60	50–80–120	50–70–100
	f	0,20–0,35	0,20–0,35	0,10–0,20	0,20–0,35	0,20–0,35
-Ø 16	v _c	60–90–140	60–80–120	20–50–60	60–90–120	50–70–100
	f	0,25–0,35	0,25–0,35	0,10–0,20	0,25–0,35	0,25–0,35


(v_c: Cutting Speed (m/min), f: Feed Rate (mm/rev)) (Min – Standard – Max)

● = Euro stock
○ = Japan stock

GS Type SUPER MULTI-DRILLS

MDW ... GS Type

GS Type for General Purpose Drilling of Steels

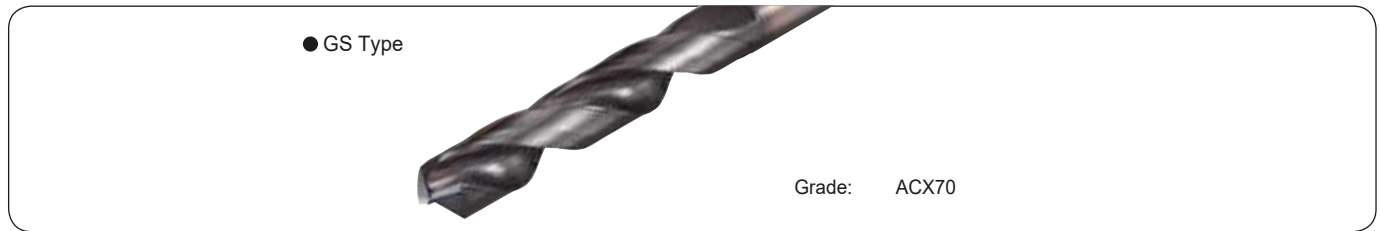

● Diameter Ø 10,1–13,0 mm (mm)

Dimensions		Cat. No.	Short Type (2D)				Long Type (4D)			
DC (mm)	ød		Stock	Dimensions			Stock	Dimensions		
			2	L	ℓ ₁	ℓ ₂	4	L	ℓ ₁	ℓ ₂
10,1	11,0	MDW 1010 GS□ ○	95,3	30,6	43,2	116,2	55,6	68,2	2, 4 ↘	
10,2		MDW 1020 GS□ ○								
10,3		MDW 1030 GS□ ○								
10,4		MDW 1040 GS□ ○								
10,5		MDW 1050 GS□ ○								
10,6		MDW 1060 GS□ ○								
10,7		MDW 1070 GS□ ○								
10,8		MDW 1080 GS□ ○								
10,9		MDW 1090 GS□ ○								
11,0		MDW 1100 GS□ ○								
11,1	12,0	MDW 1110 GS□ ○	102,5	33,6	47,4	123,5	59,6	73,4	2, 4 ↘	
11,2		MDW 1120 GS□ ○								
11,3		MDW 1130 GS□ ○								
11,4		MDW 1140 GS□ ○								
11,5		MDW 1150 GS□ ○								
11,6		MDW 1160 GS□ ○								
11,7		MDW 1170 GS□ ○								
11,8		MDW 1180 GS□ ○								
11,9		MDW 1190 GS□ ○								
12,0		MDW 1200 GS□ ○								
12,1	13,0	MDW 1210 GS□ ○	102,7	34,6	49,6	139,7	63,6	78,6	2, 4 ↘	
12,2		MDW 1220 GS□ ○								
12,3		MDW 1230 GS□ ○								
12,4		MDW 1240 GS□ ○								
12,5		MDW 1250 GS□ ○								
12,6		MDW 1260 GS□ ○								
12,7		MDW 1270 GS□ ○								
12,8		MDW 1280 GS□ ○								
12,9		MDW 1290 GS□ ○								
13,0		MDW 1300 GS□ ○								

● Diameter Ø 13,1–16,0 mm (mm)

Dimensions		Cat. No.	Short Type (2D)				Long Type (4D)			
DC (mm)	ød		Stock	Dimensions			Stock	Dimensions		
			2	L	ℓ ₁	ℓ ₂	4	L	ℓ ₁	ℓ ₂
13,1	14,0	MDW 1310 GS□ ○	107,9	36,6	52,8	149,9	70,2	86,8	2, 4 ↘	
13,2		MDW 1320 GS□ ○								
13,3		MDW 1330 GS□ ○								
13,4		MDW 1340 GS□ ○								
13,5		MDW 1350 GS□ ○								
13,6		MDW 1360 GS□ ○								
13,7		MDW 1370 GS□ ○								
13,8		MDW 1380 GS□ ○								
13,9		MDW 1390 GS□ ○								
14,0		MDW 1400 GS□ ○								
14,1	15,0	MDW 1410 GS□ ○	111,1	37,6	55,0	156,1	74,6	92,0	2, 4 ↘	
14,2		MDW 1420 GS□ ○								
14,3		MDW 1430 GS□ ○								
14,4		MDW 1440 GS□ ○								
14,5		MDW 1450 GS□ ○								
14,6		MDW 1460 GS□ ○								
14,7		MDW 1470 GS□ ○								
14,8		MDW 1480 GS□ ○								
14,9		MDW 1490 GS□ ○								
15,0		MDW 1500 GS□ ○								
15,1	16,0	MDW 1510 GS□ ○	115,5	37,6	56,2	169,3	78,6	97,2	2, 4 ↘	
15,2		MDW 1520 GS□ ○								
15,3		MDW 1530 GS□ ○								
15,4		MDW 1540 GS□ ○								
15,5		MDW 1550 GS□ ○								
15,6		MDW 1560 GS□ ○								
15,7		MDW 1570 GS□ ○								
15,8		MDW 1580 GS□ ○								
15,9		MDW 1590 GS□ ○								
16,0		MDW 1600 GS□ ○								

■ How to Order

Non-Stock Items will be required minimum order quantity for 6 pcs.
Please specify the Cat. No. For example, if the diameter of the drill is 10,2 mm, please indicate as follow.

E.g., **MDW 1020 GS 2/4, ACX70**
(Grade)

SUPER MULTI-DRILLS

Drill diameter **10,2 mm**


Drilling depth (The ratio to ØD): -2 / -4

GS type MULTI-DRILLS

K Type SUPER MULTI-DRILLS (DIN) MDS ... sk-HAK Type

Short Type

TiAlN Coated Solid Carbide Drills to DIN6537 (Ø-Tolerance: m7)

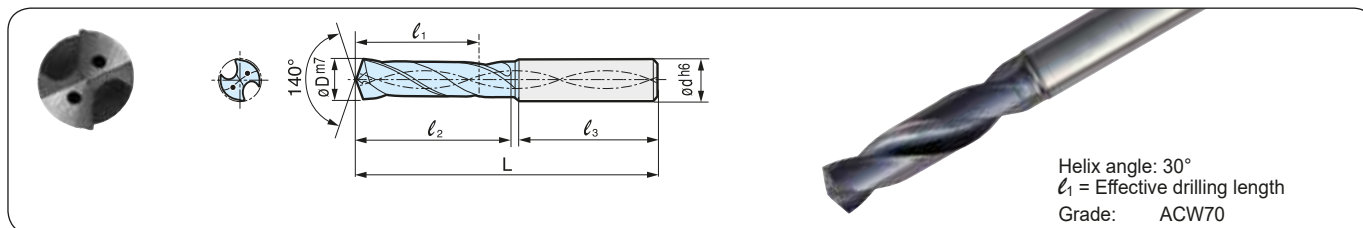

● Diameter Ø 4,0–8,0 mm

Dimensions (mm)			Cat. No.	DIN 6537 K (Short Type)			
ØD (mm)	Shank			Stock	Dimensions (mm)		
	ød	l ₃			SK-HAK	L	l ₁
4,0	6	36	MDS 040 SKHAK	●	66	17	24
4,1			MDS 041 SKHAK	□			
4,2			MDS 042 SKHAK	●			
4,3			MDS 043 SKHAK	□			
4,4			MDS 044 SKHAK	□			
4,5			MDS 045 SKHAK	●			
4,6			MDS 046 SKHAK	□			
4,7			MDS 047 SKHAK	□			
4,8			MDS 048 SKHAK	□			
4,9			MDS 049 SKHAK	□			
5,0	6	36	MDS 050 SKHAK	●	66	20	28
5,1			MDS 051 SKHAK	●			
5,2			MDS 052 SKHAK	□			
5,3			MDS 053 SKHAK	□			
5,4			MDS 054 SKHAK	□			
5,5			MDS 055 SKHAK	●			
5,6			MDS 056 SKHAK	□			
5,7			MDS 057 SKHAK	□			
5,8			MDS 058 SKHAK	□			
5,9			MDS 059 SKHAK	□			
6,0	MDS 060 SKHAK	●					
6,1	8	36	MDS 061 SKHAK	□	79	24	34
6,2			MDS 062 SKHAK	□			
6,3			MDS 063 SKHAK	□			
6,4			MDS 064 SKHAK	□			
6,5			MDS 065 SKHAK	●			
6,6			MDS 066 SKHAK	□			
6,7			MDS 067 SKHAK	□			
6,8			MDS 068 SKHAK	●			
6,9			MDS 069 SKHAK	□			
7,0			MDS 070 SKHAK	●			
7,1	8	36	MDS 071 SKHAK	□	79	29	41
7,2			MDS 072 SKHAK	□			
7,3			MDS 073 SKHAK	□			
7,4			MDS 074 SKHAK	□			
7,5			MDS 075 SKHAK	●			
7,6			MDS 076 SKHAK	□			
7,7			MDS 077 SKHAK	□			
7,8			MDS 078 SKHAK	□			
7,9			MDS 079 SKHAK	□			
8,0			MDS 080 SKHAK	●			

● Diameter Ø 8,1–12,0 mm

Dimensions (mm)			Cat. No.	DIN 6537 K (Short Type)			
ØD (mm)	Shank			Stock	Dimensions (mm)		
	ød	l ₃			SK-HAK	L	l ₁
8,1	10	40	MDS 081 SKHAK	□	89	35	47
8,2			MDS 082 SKHAK	□			
8,3			MDS 083 SKHAK	□			
8,4			MDS 084 SKHAK	□			
8,5			MDS 085 SKHAK	●			
8,6			MDS 086 SKHAK	□			
8,7			MDS 087 SKHAK	□			
8,8			MDS 088 SKHAK	□			
8,9			MDS 089 SKHAK	□			
9,0			MDS 090 SKHAK	●			
9,1	10	40	MDS 091 SKHAK	□	89	35	47
9,2			MDS 092 SKHAK	□			
9,3			MDS 093 SKHAK	□			
9,4			MDS 094 SKHAK	□			
9,5			MDS 095 SKHAK	●			
9,6			MDS 096 SKHAK	□			
9,7			MDS 097 SKHAK	□			
9,8			MDS 098 SKHAK	□			
9,9			MDS 099 SKHAK	□			
10,0			MDS 100 SKHAK	●			
10,1	12	45	MDS 101 SKHAK	□	102	40	55
10,2			MDS 102 SKHAK	□			
10,3			MDS 103 SKHAK	□			
10,4			MDS 104 SKHAK	□			
10,5			MDS 105 SKHAK	●			
10,6			MDS 106 SKHAK	□			
10,7			MDS 107 SKHAK	□			
10,8			MDS 108 SKHAK	□			
10,9			MDS 109 SKHAK	□			
11,0			MDS 110 SKHAK	●			
11,1	12	45	MDS 111 SKHAK	□	102	40	55
11,2			MDS 112 SKHAK	□			
11,3			MDS 113 SKHAK	□			
11,4			MDS 114 SKHAK	□			
11,5			MDS 115 SKHAK	●			
11,6			MDS 116 SKHAK	□			
11,7			MDS 117 SKHAK	□			
11,8			MDS 118 SKHAK	□			
11,9			MDS 119 SKHAK	□			
12,0			MDS 120 SKHAK	●			

■ Recommended Cutting Conditions for K-HAK Type Multi-Drills


Diameter (mm)		Steels (<200 HB)	Steels (200–300 HB)	Alloy Steels (>200 HB)	Hardened Steels (45 HRC)	Stainless Steels (<200 HB)	Ductile Cast Irons	Grey Cast Irons	Titanium Alloys (Ti-6Al-4V)	Inconel (Inconel 718)
		–Ø 5	v _c	50–80–120	50–75–100	40–65–80	20–35–50	30–45–60	40–60–100	80–100–120
	f	0,15–0,25	0,15–0,25	0,10–0,20	0,08–0,10	0,10–0,20	0,15–0,25	0,15–0,30	0,08–0,10	0,05–0,08
–Ø 10	v _c	50–120–140	70–110–140	40–70–80	30–40–60	50–70–90	70–90–120	100–130–140	25–30–40	15–25–30
	f	0,20–0,35	0,20–0,35	0,10–0,25	0,10–0,15	0,10–0,25	0,20–0,35	0,20–0,35	0,08–0,12	0,08–0,10
–Ø 16	v _c	90–140–170	80–120–150	40–80–100	30–45–60	50–80–110	80–100–130	100–150–160	25–35–40	20–30–35
	f	0,25–0,35	0,25–0,35	0,15–0,30	0,12–0,20	0,15–0,30	0,25–0,35	0,25–0,40	0,10–0,15	0,08–0,10
–Ø 20	v _c	100–150–180	80–130–160	50–90–120	30–45–60	50–80–110	80–110–140	100–150–160	25–35–40	20–30–35
	f	0,30–0,40	0,25–0,40	0,15–0,30	0,15–0,25	0,15–0,30	0,25–0,40	0,25–0,40	0,10–0,15	0,08–0,10

(v_c: Cutting Speed (m/min), f: Feed Rate (mm/rev)) (Min – Standard – Max)

K Type SUPER MULTI-DRILLS (DIN) MDS ... MK-HAK Type

Long Type

TiAlN Coated Solid Carbide Drills to DIN6537 (Ø-Tolerance: m7)

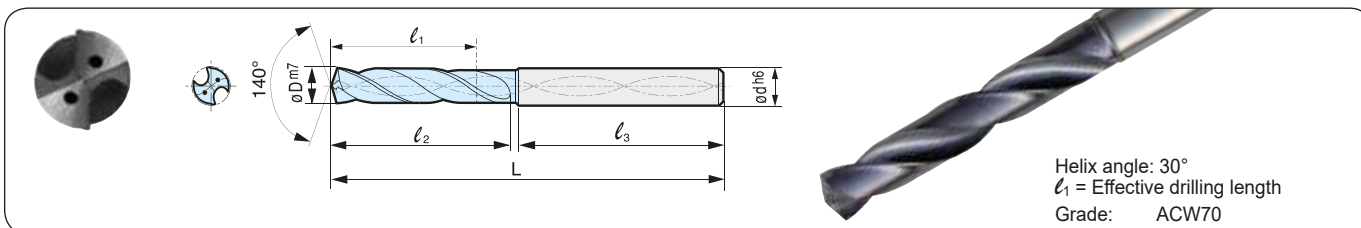

Helix angle: 30°
l₁ = Effective drilling length
Grade: ACW70

● Diameter Ø 4,0–8,0 mm

Dimensions (mm)			Cat. No.	DIN 6537 L (Long Type)			
øD (mm)	Shank			MK-HAK	Dimensions (mm)		
	ød	l ₃			L	l ₁	l ₂
4,0	6	36	MDS 040 MKHAK	●	74	29	36
4,1			MDS 041 MKHAK	□			
4,2			MDS 042 MKHAK	●			
4,3			MDS 043 MKHAK	□			
4,4			MDS 044 MKHAK	□			
4,5			MDS 045 MKHAK	●			
4,6			MDS 046 MKHAK	□			
4,7			MDS 047 MKHAK	□			
4,8			MDS 048 MKHAK	□			
4,9			MDS 049 MKHAK	□			
5,0	MDS 050 MKHAK	●	82	35	44		
5,1	MDS 051 MKHAK	□					
5,2	MDS 052 MKHAK	□					
5,3	MDS 053 MKHAK	□					
5,4	MDS 054 MKHAK	□					
5,5	MDS 055 MKHAK	●					
5,6	MDS 056 MKHAK	□					
5,7	MDS 057 MKHAK	□					
5,8	MDS 058 MKHAK	□					
5,9	MDS 059 MKHAK	□					
6,0	MDS 060 MKHAK	●	91	43	53		
6,1	MDS 061 MKHAK	□					
6,2	MDS 062 MKHAK	□					
6,3	MDS 063 MKHAK	□					
6,4	MDS 064 MKHAK	□					
6,5	MDS 065 MKHAK	●					
6,6	MDS 066 MKHAK	□					
6,7	MDS 067 MKHAK	□					
6,8	MDS 068 MKHAK	●					
6,9	MDS 069 MKHAK	□					
7,0	MDS 070 MKHAK	●	91	43	53		
7,1	MDS 071 MKHAK	□					
7,2	MDS 072 MKHAK	□					
7,3	MDS 073 MKHAK	□					
7,4	MDS 074 MKHAK	□					
7,5	MDS 075 MKHAK	□					
7,6	MDS 076 MKHAK	□					
7,7	MDS 077 MKHAK	□					
7,8	MDS 078 MKHAK	□					
7,9	MDS 079 MKHAK	□					
8,0	MDS 080 MKHAK	●					

● Diameter Ø 8,1–12,0 mm

Dimensions (mm)			Cat. No.	DIN 6537 L (Long Type)			
øD (mm)	Shank			MK-HAK	Dimensions (mm)		
	ød	l ₃			L	l ₁	l ₂
8,1	10	40	MDS 081 MKHAK	□	103	49	61
8,2			MDS 082 MKHAK	□			
8,3			MDS 083 MKHAK	□			
8,4			MDS 084 MKHAK	□			
8,5			MDS 085 MKHAK	●			
8,6			MDS 086 MKHAK	□			
8,7			MDS 087 MKHAK	□			
8,8			MDS 088 MKHAK	□			
8,9			MDS 089 MKHAK	□			
9,0			MDS 090 MKHAK	●			
9,1	MDS 091 MKHAK	□					
9,2	MDS 092 MKHAK	□					
9,3	MDS 093 MKHAK	□					
9,4	MDS 094 MKHAK	□					
9,5	MDS 095 MKHAK	●					
9,6	MDS 096 MKHAK	□					
9,7	MDS 097 MKHAK	□					
9,8	MDS 098 MKHAK	□					
9,9	MDS 099 MKHAK	□					
10,0	MDS 100 MKHAK	●	118	56	71		
10,1	MDS 101 MKHAK	□					
10,2	MDS 102 MKHAK	●					
10,3	MDS 103 MKHAK	□					
10,4	MDS 104 MKHAK	□					
10,5	MDS 105 MKHAK	●					
10,6	MDS 106 MKHAK	□					
10,7	MDS 107 MKHAK	□					
10,8	MDS 108 MKHAK	□					
10,9	MDS 109 MKHAK	□					
11,0	MDS 110 MKHAK	●	118	56	71		
11,1	MDS 111 MKHAK	□					
11,2	MDS 112 MKHAK	□					
11,3	MDS 113 MKHAK	□					
11,4	MDS 114 MKHAK	□					
11,5	MDS 115 MKHAK	●					
11,6	MDS 116 MKHAK	□					
11,7	MDS 117 MKHAK	□					
11,8	MDS 118 MKHAK	□					
11,9	MDS 119 MKHAK	□					
12,0	MDS 120 MKHAK	●					

■ How to Order

Non-Stock Items will be required minimum order quantity for 6 pcs. Please specify the Cat. No. For example, if the diameter of the drill is 10,2 mm, please indicate as follow.

E.g., **MDS 102 MK-HAK**, (Grade) **ACW70**

Multi-Drill
Solid type

Drill diameter
10,2 mm

Cylindrical shank and spiral coolant holes to DIN6535 Form HAK

S : 3–3,5 D
M : –5 D



Flat MultiDrill MDF Type

Coated Carbide Drills for Spot Facing



General Features

The flat MultiDrill MDF type is a solid carbide drill that can be used for various purposes including high-efficiency spot facing and drilling in inclined and curved surfaces.




Advantages

- Can be used in a variety of drilling applications thanks to its point angle of 180°
Applicable to high-efficiency spot facing, drilling in non-horizontal surfaces such as inclined and cylindrical surfaces and interrupted drilling. It also reduces burrs at hole exits.
- Improved machining stability
Achieves high rigidity by employing RS THINNING, which ensures web thickness on the bottom face.
- Excellent chip evacuation performance
Achieves excellent chip evacuation thanks to its wide chip pocket and high-quality rake face shape.
- Excellent cutting edge strength
Achieves excellent cutting edge strength thanks to optimized cutting edge design.
- Expanded lineup of long type
An expanded lineup of long type drills with diameters between $\varnothing 3,0$ and $\varnothing 20,0$ mm that are capable of drilling with an overhang length up to $L/D = 10$.
- Expanded lineup of types with oil hole
Supports internal coolant. For deeper drilling (3D, 5D).

Improves drilling stability by ensuring web thickness.



Reduction of Burrs at Hole Exit



Work Material: 15CrMo5
Drill: MDF0500S2D ($\varnothing 5,0$ mm, 2D)
Cutting Conditions: $v_c = 65$ m/min, $f = 0,12$ mm/rev
 $H = 10$ mm, 150 holes, wet
Equipment: Vertical machining center

Reduces exit burrs by more than half compared to general-purpose drills




Burr height: 0,18 mm
Flat MultiDrill MDF type




Burr height: 0,44 mm
Conventional general type


Applications




High-efficient spot facing




Hole expansion drilling




Drilling in non-horizontal surfaces (such as inclined and cylindrical)




Interrupted drilling




Cross drilling



Pre-tap hole drilling in thin sheets



Deep spot facing




Avoiding interference with work materials

Long Type (L2D)

For flat base drilling in long overhang conditions, hole expansion, burr prevention.
For deep flat base drilling and to avoid interference with workpiece.
Drilling that uses the long shank type requires a guide hole of the same diameter or a centering hole larger than the tool diameter.

- Two types (A) $\varnothing DC < 6 \text{ mm}$ Stepped Shank Products
 (B) $\varnothing DC \geq 6 \text{ mm}$ Relief Shank Products

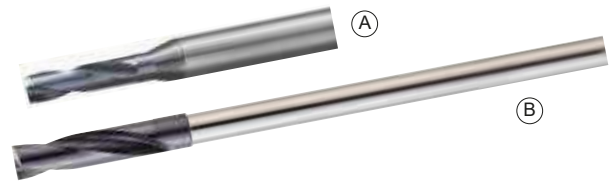


With Oil Hole (H3D Type / H5D Type)


Support for internal coolant allows for deeper flat hole drilling.
Drilling that uses oil hole L/D = 5 requires a guide hole of the same diameter or a centering hole larger than the tool diameter.




Deep Spot Facing

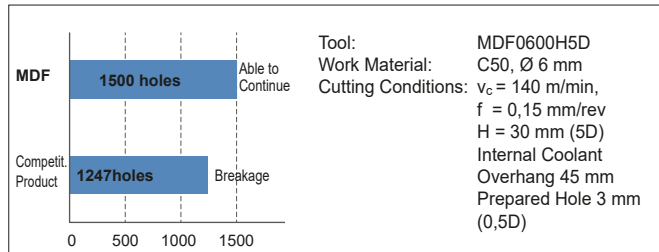


Long Overhang Spot Facing

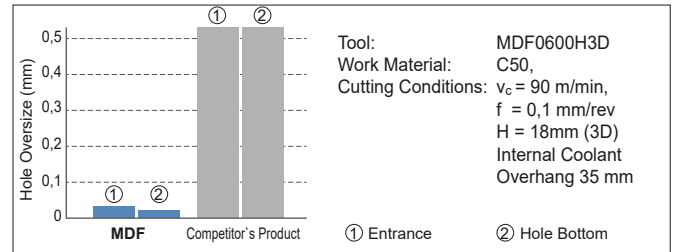

Inclined Surface Drilling

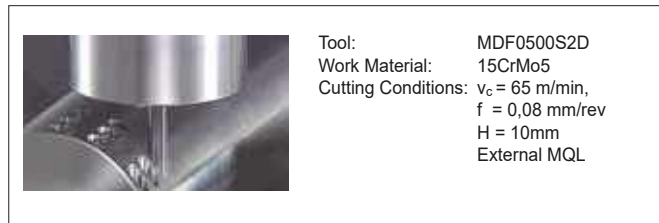

Controlling Burrs and Chips when Withdrawn

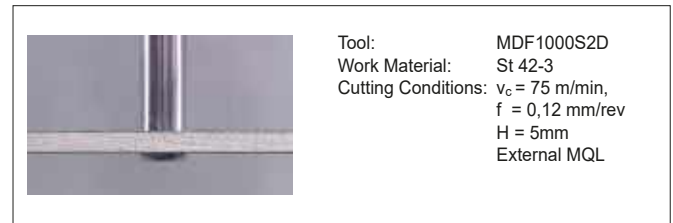

Using Flat Drills, General-Purpose Drills and Endmills

Tool	Flat Drill MDF Type	General Purpose Drill GS/HGS Type	Endmill for Spot Facing GSX MILL Slot
Hole Bottom Shape			
Drilling in horizontal surfaces	⊙ Feed rate approximately half of a general-purpose drill	⊙ Optimal	✗ Within 1D, limited to low feed rate Feed rate one-fifth or lower of a general-purpose drill
Drilling in non-horizontal surfaces	⊙ Optimal (within 2D is recommended)	✗ Unusable	⊙ Within 1D, limited to low feed rate Feed rate half or lower of a flat drill
Traversing	✗ Unusable	✗ Unusable	⊙ Optimal

Series


Application	Series	Diameter Range (mm)	Hole Depth (L/D)
External	MDF □□□□ S2D	$\varnothing 0,3 - 20,0$	$\leq 2,0$
	MDF □□□□ L2D	$\varnothing 0,3 - 20,0$	$\leq 2,0$
Internal	MDF □□□□ H3D	$\varnothing 0,3 - 16,0$	$\leq 3,0$
	MDF □□□□ H5D	$\varnothing 0,3 - 16,0$	$\leq 5,0$

Flat MultiDrill MDF Type

MDF S2D Type

External Coolant Supply (MDF S2D Type)

Carbon Steel	Alloy Steel	Tempered Steel	Hardened Steel	Stainless Steel	Cast Iron	Ductile Cast Iron	Aluminium Alloy
<0.28%	>0.28%	Steel	<45HRC	>45HRC	Steel	Cast Iron	Alloy

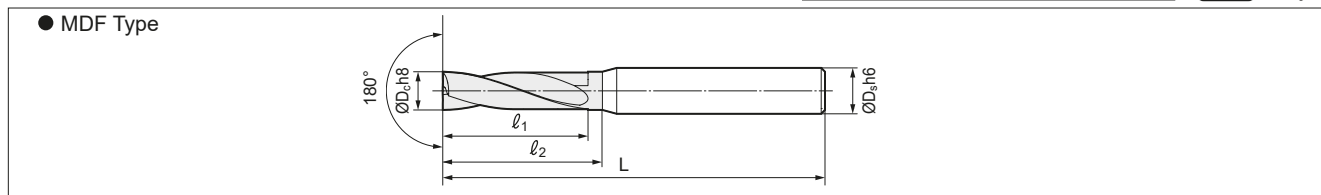

● Diameter Ø 0,3–7,0 mm

Diameter ØD _c (mm)	Shank ØD _s (mm)	Cat. No.	Stock	Dimensions (mm)		
				L	ℓ ₁	ℓ ₂
0,3*	3,0	MDF 0030S2D	○	40	1,0	1,3
0,4*		MDF 0040S2D	○		1,4	1,8
0,5	3,0	MDF 0050S2D	○	40	2,0	2,2
0,6		MDF 0060S2D	○		2,4	2,6
0,7		MDF 0070S2D	○		2,8	3,1
0,8		MDF 0080S2D	○		3,2	3,5
0,9		MDF 0090S2D	○		3,6	4,0
1,0		MDF 0100S2D	●		45	4,0
1,1	MDF 0110S2D	○	4,4	4,8		
1,2	MDF 0120S2D	○	4,8	5,3		
1,3	MDF 0130S2D	○	5,2	5,7		
1,4	MDF 0140S2D	○	5,6	6,2		
1,5	MDF 0150S2D	●	45	6,0		6,6
1,6	MDF 0160S2D	○		6,4	7,0	
1,7	MDF 0170S2D	○		6,8	7,5	
1,8	MDF 0180S2D	○		7,2	7,9	
1,9	MDF 0190S2D	○		7,6	8,4	
2,0	MDF 0200S2D	●		50	8,0	8,8
2,1	MDF 0210S2D	●	8,4		9,2	
2,2	MDF 0220S2D	●	8,8		9,7	
2,3	MDF 0230S2D	●	9,2		10,1	
2,4	MDF 0240S2D	●	9,6		10,6	
2,5	MDF 0250S2D	●	50		10,0	11,0
2,6	MDF 0260S2D	●		10,4	11,4	
2,7	MDF 0270S2D	●		10,8	11,9	
2,8	MDF 0280S2D	●		11,2	12,3	
2,9	MDF 0290S2D	●		11,6	12,8	
3,0	MDF 0300S2D	●		50	12,0	13,2
3,1	MDF 0310S2D	●	12,4		13,6	
3,2	MDF 0320S2D	●	12,8		14,1	
3,3	MDF 0330S2D	●	13,2		14,5	
3,4	MDF 0340S2D	●	13,6		15,0	
3,5	MDF 0350S2D	●	14,0		15,4	
3,6	MDF 0360S2D	●	50	14,4	15,8	
3,7	MDF 0370S2D	●		14,8	16,3	
3,8	MDF 0380S2D	●		15,2	16,7	
3,9	MDF 0390S2D	●		15,6	17,2	
4,0	MDF 0400S2D	●		16,0	17,6	
4,1	MDF 0410S2D	●		60	16,4	18,0
4,2	MDF 0420S2D	●	16,8		18,5	
4,3	MDF 0430S2D	●	17,2		18,9	
4,4	MDF 0440S2D	●	17,6		19,4	
4,5	MDF 0450S2D	●	18,0		19,8	
4,6	MDF 0460S2D	●	60		18,4	20,2
4,7	MDF 0470S2D	●		18,8	20,7	
4,8	MDF 0480S2D	●		19,2	21,1	
4,9	MDF 0490S2D	●		19,6	21,6	
5,0	MDF 0500S2D	●		20,0	22,0	
5,1	MDF 0510S2D	●		60	20,4	22,4
5,2	MDF 0520S2D	●	20,8		22,9	
5,3	MDF 0530S2D	●	21,2		23,3	
5,4	MDF 0540S2D	●	21,6		23,8	
5,5	MDF 0550S2D	●	22,0		24,2	
5,6	MDF 0560S2D	●	60		22,4	24,6
5,7	MDF 0570S2D	●		22,8	25,1	
5,8	MDF 0580S2D	●		23,2	25,5	
5,9	MDF 0590S2D	●		23,6	26,0	
6,0	MDF 0600S2D	●		24,0	26,4	
6,1	MDF 0610S2D	●		70	24,4	26,8
6,2	MDF 0620S2D	●	24,8		27,3	
6,3	MDF 0630S2D	●	25,2		27,7	
6,4	MDF 0640S2D	●	25,6		28,2	
6,5	MDF 0650S2D	●	26,0		28,6	
6,6	MDF 0660S2D	●	70		26,4	29,0
6,7	MDF 0670S2D	●		26,8	29,5	
6,8	MDF 0680S2D	●		27,2	29,9	
6,9	MDF 0690S2D	●		27,6	30,4	
7,0	MDF 0700S2D	●		28,0	30,8	

● Diameter Ø 7,1–20,0 mm

Diameter ØD _c (mm)	Shank ØD _s (mm)	Cat. No.	Stock	Dimensions (mm)		
				L	ℓ ₁	ℓ ₂
7,1	8,0	MDF 0710S2D	●	70	28,4	31,2
7,2		MDF 0720S2D	●		28,8	31,7
7,3		MDF 0730S2D	●		29,2	32,1
7,4		MDF 0740S2D	●		29,6	32,6
7,5		MDF 0750S2D	●		30,0	33,0
7,6		MDF 0760S2D	●		70	30,4
7,7	MDF 0770S2D	●	30,8	33,9		
7,8	MDF 0780S2D	●	31,2	34,3		
7,9	MDF 0790S2D	●	31,6	34,8		
8,0	MDF 0800S2D	●	32,0	35,2		
8,1	MDF 0810S2D	○	80	32,4		35,6
8,2	MDF 0820S2D	○		32,8	36,1	
8,3	MDF 0830S2D	○		33,2	36,5	
8,4	MDF 0840S2D	○		33,6	37,0	
8,5	MDF 0850S2D	●		34,0	37,4	
8,6	MDF 0860S2D	○		80	34,4	37,8
8,7	MDF 0870S2D	○	34,8		38,3	
8,8	MDF 0880S2D	○	35,2		38,7	
8,9	MDF 0890S2D	○	35,6		39,2	
9,0	MDF 0900S2D	●	36,0		39,6	
9,1	MDF 0910S2D	○	80		36,4	40,0
9,2	MDF 0920S2D	○		36,8	40,5	
9,3	MDF 0930S2D	○		37,2	40,9	
9,4	MDF 0940S2D	○		37,6	41,4	
9,5	MDF 0950S2D	●		38,0	41,8	
9,6	MDF 0960S2D	○		80	38,4	42,2
9,7	MDF 0970S2D	●	38,8		42,7	
9,8	MDF 0980S2D	○	39,2		43,1	
9,9	MDF 0990S2D	○	39,6		43,6	
10,0	MDF 1000S2D	●	40,0		44,0	
10,1	MDF 1010S2D	○	90		40,4	44,4
10,2	MDF 1020S2D	○		40,8	44,9	
10,3	MDF 1030S2D	○		41,2	45,3	
10,4	MDF 1040S2D	○		41,6	45,8	
10,5	MDF 1050S2D	●		42,0	46,2	
10,6	MDF 1060S2D	○		90	42,4	46,6
10,7	MDF 1070S2D	○	42,8		47,1	
10,8	MDF 1080S2D	○	43,2		47,5	
10,9	MDF 1090S2D	○	43,6		48,0	
11,0	MDF 1100S2D	●	44,0		48,4	
11,1	MDF 1110S2D	○	90		44,4	48,8
11,2	MDF 1120S2D	○		44,8	49,3	
11,3	MDF 1130S2D	○		45,2	49,7	
11,4	MDF 1140S2D	○		45,6	50,2	
11,5	MDF 1150S2D	●		46,0	50,6	
11,6	MDF 1160S2D	○		90	46,4	51,0
11,7	MDF 1170S2D	○	46,8		51,5	
11,8	MDF 1180S2D	●	47,2		51,9	
11,9	MDF 1190S2D	○	47,6		52,4	
12,0	MDF 1200S2D	●	48,0		52,8	
12,5	MDF 1250S2D	○	100		50,0	54,0
13,0	MDF 1300S2D	○		52,0	56,8	
13,5	MDF 1350S2D	○		54,0	59,6	
14,0	MDF 1400S2D	○	110	56,0	62,4	
14,5	MDF 1450S2D	○	110	58,0	65,2	
15,0	MDF 1500S2D	○		60,0	68,0	
15,5	MDF 1550S2D	○		62,0	70,8	
16,0	MDF 1600S2D	○	115	64,0	73,6	
16,5	MDF 1650S2D	○	125	66,0	72,4	
17,0	MDF 1700S2D	○		68,0	75,2	
17,5	MDF 1750S2D	○		70,0	78,0	
18,0	MDF 1800S2D	○	130	72,0	80,8	
18,5	MDF 1850S2D	○	140	74,0	83,6	
19,0	MDF 1900S2D	○		76,0	86,4	
19,5	MDF 1950S2D	○		78,0	89,2	
20,0	MDF 2000S2D	○		80,0	92,0	


*RS Thinning is used for ØD_c ≥ 0,5mm.

Grade: ACF75

Carbon Steel <0.28%	Alloy Steel >0.28%	Tempered Steel	Hardened Steel <45HRC	Stainless Steel >45HRC	Cast Iron	Ductile Cast Iron	Aluminum Alloy
○	○	○	○	○	○	○	○



External Coolant Supply (L2D Type, Long Type)

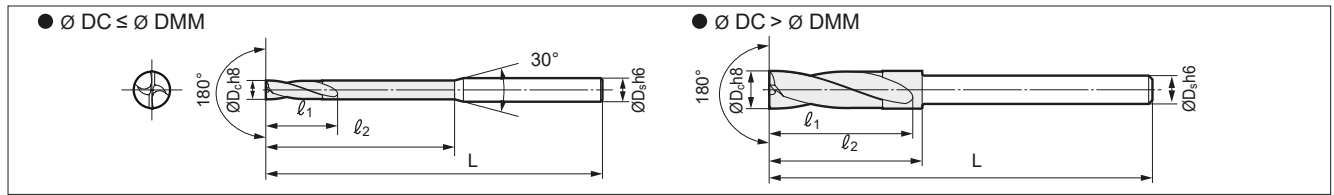

● Diameter \varnothing 3,0–9,5 mm

Diameter $\varnothing D_c$ (mm)	Shank $\varnothing D_s$ (mm)	Cat. No.	Stock	Dimensions (mm)			
				L	l_1	l_2	
3,0	6,0	MDF 0300L2D	○	100	13,5	30,0	
3,1		0310L2D	○		14,0	31,0	
3,2		0320L2D	○		14,4	32,0	
3,3		0330L2D	○		14,9	33,0	
3,4		0340L2D	○		15,3	34,0	
3,5		0350L2D	○		15,8	35,0	
3,6	6,0	MDF 0360L2D	○	100	16,2	36,0	
3,7		0370L2D	○		16,7	37,0	
3,8		0380L2D	○		17,1	38,0	
3,9		0390L2D	○		17,6	39,0	
4,0		0400L2D	○		18,0	40,0	
4,1		6,0	MDF 0410L2D		○	100	18,5
4,2	0420L2D		○	18,9	42,0		
4,3	0430L2D		○	19,4	43,0		
4,4	0440L2D		○	19,8	44,0		
4,5	0450L2D		○	20,3	45,0		
4,6	6,0		MDF 0460L2D	○	100		20,7
4,7		0470L2D	○	21,2		47,0	
4,8		0480L2D	○	21,6		48,0	
4,9		0490L2D	○	22,1		49,0	
5,0		0500L2D	○	22,5		50,0	
5,1		6,0	MDF 0510L2D	○		110	23,0
5,2	0520L2D		○	23,4	52,0		
5,3	0530L2D		○	23,9	53,0		
5,4	0540L2D		○	24,3	54,0		
5,5	0550L2D		○	24,8	55,0		
5,6	6,0		MDF 0560L2D	○	110		25,2
5,7		0570L2D	○	25,7		57,0	
5,8		0580L2D	○	26,1		58,0	
5,9		0590L2D	○	26,6		59,0	
6,0		MDF 0600L2DS5	○	110		27,0	30,0
6,0		MDF 0600L2D	○	110		27,0	60,0
6,1	6,0	MDF 0610L2D	○	120	27,5	30,5	
6,2		0620L2D	○		27,9	30,9	
6,3		0630L2D	○		28,4	31,4	
6,4		0640L2D	○		28,8	31,8	
6,5		0650L2D	○		29,3	32,3	
6,6		6,0	MDF 0660L2D		○	120	29,7
6,7	0670L2D		○	30,2	33,2		
6,8	0680L2D		○	30,6	33,6		
6,9	0690L2D		○	31,1	34,1		
7,0	0700L2D		○	31,5	34,5		
7,1	6,0		MDF 0710L2D	○	130		32,0
7,2		0720L2D	○	32,4		35,4	
7,3		0730L2D	○	32,9		35,9	
7,4		0740L2D	○	33,3		36,3	
7,5		0750L2D	○	33,8		36,8	
7,6		6,0	MDF 0760L2D	○		130	34,2
7,7	0770L2D		○	34,7	37,7		
7,8	0780L2D		○	35,1	38,1		
7,9	0790L2D		○	35,6	38,6		
8,0	MDF 0800L2DS6		○	130	36,0		39,0
8,0	MDF 0800L2D		○	130	36,0		80,0
8,1	8,0	MDF 0810L2D	○	140	36,5	39,5	
8,2		0820L2D	○		36,9	39,9	
8,3		0830L2D	○		37,4	40,4	
8,4		0840L2D	○		37,8	40,8	
8,5		0850L2D	○		38,3	41,3	
8,6		8,0	MDF 0860L2D		○	140	38,7
8,7	0870L2D		○	39,2	42,2		
8,8	0880L2D		○	39,6	42,6		
8,9	0890L2D		○	40,1	43,1		
9,0	0900L2D		○	40,5	43,5		
9,1	8,0		MDF 0910L2D	○	150		41,0
9,2		0920L2D	○	41,4		41,4	
9,3		0930L2D	○	41,9		41,9	
9,4		0940L2D	○	42,3		42,3	
9,5		0950L2D	○	42,8		42,8	

● Diameter \varnothing 9,6–20,0 mm

Diameter $\varnothing D_c$ (mm)	Shank $\varnothing D_s$ (mm)	Cat. No.	Stock	Dimensions (mm)			
				L	l_1	l_2	
9,6	8,0	MDF 0960L2D	○	150	43,2	46,2	
9,7		0970L2D	○		43,7	46,7	
9,8		0980L2D	○		44,1	47,1	
9,9		0990L2D	○		44,6	47,6	
10,0		MDF 1000L2DS8	○		150	45,0	48,0
10,0		MDF 1000L2D	○		150	45,0	100,0
10,1	10,0	MDF 1010L2D	○	160	45,5	48,5	
10,2		1020L2D	○		45,9	48,9	
10,3		1030L2D	○		46,4	49,4	
10,4		1040L2D	○		46,8	49,8	
10,5		1050L2D	○		47,3	50,3	
10,6		10,0	MDF 1060L2D		○	160	47,7
10,7	1070L2D		○	48,2	51,2		
10,8	1080L2D		○	48,6	51,6		
10,9	1090L2D		○	49,1	52,1		
11,0	1100L2D		○	49,5	52,5		
11,1	10,0		MDF 1110L2D	○	170		50,0
11,2		1120L2D	○	50,4		53,4	
11,3		1130L2D	○	50,9		53,9	
11,4		1140L2D	○	51,3		54,3	
11,5		1150L2D	○	51,8		54,8	
11,6		10,0	MDF 1160L2D	○		170	52,2
11,7	1170L2D		○	52,7	55,7		
11,8	1180L2D		○	53,1	56,1		
11,9	1190L2D		○	53,6	56,6		
12,0	MDF 1200L2DS10		○	170	54,0		57,0
12,0	MDF 1200L2D		○	170	54,0		120,0
12,5	12,0	MDF 1250L2D	○	180	56,3	59,3	
13,0		1300L2D	○		58,5	61,5	
13,5		1350L2D	○		190	60,8	63,8
14,0		MDF 1400L2DS12	○		190	63,0	66,0
14,0		MDF 1400L2D	○		190	63,0	140,0
14,5		14,0	MDF 1450L2D		○	200	65,3
15,0	1500L2D		○	67,5	70,5		
15,5	1550L2D		○	210	69,8		72,8
16,0	MDF 1600L2DS14		○	210	72,0		75,0
16,0	MDF 1600L2D		○	210	72,0		160,0
16,5	16,0		MDF 1650L2D	○	220		74,3
17,0		1700L2D	○	76,5		79,5	
17,5		1750L2D	○	230		78,8	81,8
18,0		MDF 1800L2DS16	○	230		81,0	84,0
18,0		MDF 1800L2D	○	230		81,0	180,0
18,5		18,0	MDF 1850L2D	○		240	83,3
19,0	1900L2D		○	85,5	88,5		
19,5	1950L2D		○	250	87,8		90,8
20,0	MDF 2000L2DS18		○	250	90,0		93,0
20,0	MDF 2000L2D		○	250	90,0		200,0

Grade: ACF75

Drilling that uses this tool requires a guide hole of the same diameter or a centering hole larger than the tool diameter.

■ Recommended Cutting Conditions

● MDF S2D Type

1. The recommended hole depth is 2 x DC. The depth shall be the depth from the highest point of the hole when drilling inclined surfaces.
2. The recommended cutting conditions are those for drilling in flat horizontal surfaces.
3. Adjust the feed rate according to the inclination angle when drilling in an inclined surface.
 - 3.1 Set the feed rate at ≤ 70% when the inclination angle is ≤ 30°
 - 3.2 Set the feed rate at ≤ 50% when the inclination angle is > 30°
4. This product is a drilling tool. Do not use it for traversing or helical milling

(v_c: Cutting Speed m/min f: Feed Rate mm/rev)

Drill Diam. ØDC (mm)	Cutting Conditions	Soft Steel / General Steel (-250 HB)	Alloy Steel (-300 HB)	Hardened Steel (-50 HRC)	Stainless Steel (-200 HB)	Gray Cast Iron FC250	Ductile Cast Iron	Aluminium Alloy
-Ø 0,5	v _c	30-40-50	30-35-40	15-20-25	15-20-25	30-40-50	20-30-40	60-80-100
	f	0,004-0,005-0,006	0,004-0,005-0,006	0,001-0,002-0,003	0,003-0,004-0,005	0,004-0,005-0,006	0,001-0,003-0,005	0,003-0,005-0,007
-Ø 1,0	v _c	45-55-65	35-45-55	20-30-40	20-25-30	45-55-65	30-40-50	80-100-120
	f	0,01-0,03-0,05	0,01-0,03-0,05	0,002-0,006-0,01	0,005-0,007-0,01	0,01-0,03-0,05	0,005-0,01-0,015	0,01-0,02-0,03
-Ø 2,0	v _c	50-60-70	40-50-60	20-30-40	20-30-40	50-60-70	45-55-65	90-110-130
	f	0,02-0,04-0,06	0,02-0,04-0,06	0,01-0,018-0,025	0,01-0,015-0,02	0,02-0,04-0,06	0,015-0,03-0,045	0,03-0,05-0,07
-Ø 4,0	v _c	60-75-90	50-65-80	20-30-40	20-30-40	60-75-90	55-65-75	90-110-130
	f	0,06-0,08-0,10	0,05-0,08-0,10	0,01-0,02-0,03	0,01-0,02-0,03	0,06-0,08-0,10	0,04-0,06-0,08	0,06-0,08-0,10
-Ø 6,0	v _c	60-75-90	50-65-80	20-30-40	20-30-50	60-75-90	60-70-80	90-110-130
	f	0,05-0,10-0,15	0,05-0,10-0,15	0,04-0,06-0,08	0,03-0,04-0,05	0,05-0,10-0,15	0,06-0,09-0,12	0,05-0,10-0,15
-Ø 8,0	v _c	60-75-90	50-65-80	20-30-40	20-30-50	60-75-90	60-70-80	90-110-130
	f	0,10-0,15-0,20	0,10-0,15-0,20	0,06-0,08-0,10	0,04-0,06-0,08	0,10-0,15-0,20	0,10-0,12-0,15	0,10-0,15-0,20
-Ø 10,0	v _c	60-75-90	50-65-80	20-30-40	20-30-50	60-75-90	60-70-80	90-110-130
	f	0,12-0,17-0,22	0,12-0,17-0,22	0,08-0,10-0,12	0,06-0,08-0,10	0,12-0,17-0,22	0,12-0,15-0,18	0,12-0,17-0,22
-Ø 12,0	v _c	60-75-90	50-65-80	20-30-40	20-30-50	60-75-90	60-70-80	90-110-130
	f	0,15-0,20-0,25	0,15-0,20-0,25	0,12-0,15-0,18	0,08-0,10-0,12	0,15-0,20-0,25	0,15-0,18-0,20	0,15-0,20-0,25
-Ø 16,0	v _c	60-75-90	50-65-80	20-30-40	20-30-50	60-75-90	60-70-80	90-110-130
	f	0,20-0,25-0,30	0,20-0,25-0,30	0,14-0,17-0,20	0,10-0,15-0,20	0,17-0,22-0,27	0,15-0,20-0,25	0,20-0,25-0,30
-Ø 20,0	v _c	60-75-90	50-65-80	20-30-40	20-30-50	60-75-90	60-70-80	90-110-130
	f	0,25-0,30-0,35	0,25-0,30-0,35	0,16-0,19-0,22	0,15-0,20-0,25	0,25-0,30-0,35	0,20-0,25-0,30	0,25-0,30-0,35

Min. - Optimum - Max.

● MDF L2D Type, Long Type

1. Drilling that uses this tool requires a guide hole of the same diameter.
2. The cutting conditions are the recommended conditions with a guide hole.
3. The recommended hole depth is 5 x DC. The depth is measured from the highest point of the hole on drilling in inclined surfaces.
4. This product is a drilling tool. Do not use it for traversing or helical milling.

(v_c: Cutting Speed m/min f: Feed Rate mm/rev)


Drill Diam. ØDC (mm)	Cutting Conditions	Soft Steel / General Steel (-250 HB)	Alloy Steel (-300 HB)	Hardened Steel (-50 HRC)	Stainless Steel (-200 HB)	Gray Cast Iron FC250	Ductile Cast Iron	Aluminium Alloy
-Ø 4,0	v _c	60-80-100	50-70-90	20-30-40	20-30-40	70-85-100	65-75-85	90-120-150
	f	0,06-0,08-0,10	0,05-0,08-0,10	0,01-0,02-0,03	0,01-0,02-0,03	0,06-0,08-0,10	0,04-0,06-0,08	0,06-0,08-0,10
-Ø 6,0	v _c	60-80-100	50-70-90	20-30-40	20-30-50	70-85-100	65-75-85	90-120-150
	f	0,05-0,10-0,15	0,05-0,10-0,15	0,04-0,06-0,08	0,03-0,04-0,05	0,05-0,10-0,15	0,06-0,09-0,12	0,05-0,10-0,15
-Ø 8,0	v _c	60-80-100	50-70-90	20-30-40	20-30-50	70-85-100	65-75-85	90-120-150
	f	0,10-0,15-0,20	0,10-0,15-0,20	0,06-0,08-0,10	0,04-0,06-0,08	0,10-0,15-0,20	0,10-0,12-0,15	0,10-0,15-0,20
-Ø 10,0	v _c	60-80-100	50-70-90	20-30-40	20-30-50	70-85-100	65-75-85	90-120-150
	f	0,15-0,20-0,25	0,15-0,20-0,25	0,08-0,10-0,12	0,06-0,08-0,10	0,15-0,20-0,25	0,12-0,15-0,18	0,15-0,20-0,25
-Ø 12,0	v _c	60-80-100	50-70-90	20-30-40	20-30-50	70-85-100	65-75-85	90-120-150
	f	0,20-0,25-0,30	0,20-0,25-0,30	0,12-0,15-0,18	0,08-0,10-0,12	0,17-0,22-0,27	0,15-0,20-0,25	0,20-0,25-0,30
-Ø 16,0	v _c	60-80-100	50-70-90	20-30-40	20-30-50	70-85-100	65-75-85	90-120-150
	f	0,20-0,25-0,30	0,20-0,25-0,30	0,14-0,17-0,20	0,10-0,15-0,20	0,20-0,25-0,30	0,20-0,25-0,30	0,25-0,30-0,35
-Ø 20,0	v _c	60-80-100	50-70-90	20-30-40	20-30-50	70-85-100	65-75-85	90-120-150
	f	0,25-0,30-0,35	0,25-0,30-0,35	0,16-0,19-0,22	0,15-0,20-0,25	0,30-0,35-0,40	0,25-0,30-0,35	0,35-0,40-0,45

Min. - Optimum - Max.


Internal Coolant Supply (MDF H3D/H5D Type)

Carbon Steel	Alloy Steel	Tempered Steel	Hardened Steel	Stainless Steel	Cast Iron	Ductile Cast Iron	Aluminum Alloy	PVD	3D	5D
⊙ <0.28%	⊙ >0.28%	⊙ Steel	⊙ <45HRC	⊙ >45HRC	⊙ Steel	⊙ Cast Iron	⊙ Alloy			

● MDF Type 3D Single Margin

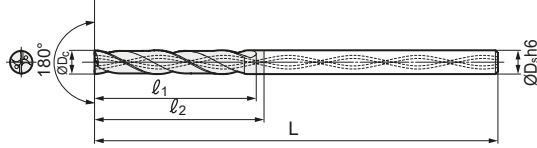

● MDF Type 5D Double Margin

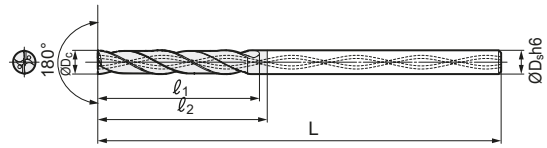

● Diameter Ø 3,0–6,0 mm

Diameter ØDc (mm)	Shank ØDs (mm)	Hole Depth (L/D)	Cat. No.	Stock	Dimensions (mm)		
					L	l ₁	l ₂
3,0	3	3	MDF 0300H3D	●	68	13,5	16,5
		5	0300H5D	●	78	20,1	23,1
3,1	4	3	MDF 0310H3D	○	72	14,0	17,0
		5	0310H5D	○	86	20,8	23,8
3,2	4	3	0320H3D	○	72	14,4	17,4
		5	0320H5D	○	86	21,4	24,4
3,3	4	3	0330H3D	○	72	14,9	17,9
		5	0330H5D	○	86	22,1	25,1
3,4	4	3	0340H3D	○	72	15,3	18,3
		5	0340H5D	○	86	22,8	25,8
3,5	4	3	0350H3D	●	72	15,8	18,8
		5	0350H5D	●	86	23,5	26,5
3,6	4	3	MDF 0360H3D	○	72	16,2	19,2
		5	0360H5D	○	86	24,1	27,1
3,7	4	3	0370H3D	○	72	16,7	19,7
		5	0370H5D	○	86	24,8	27,8
3,8	4	3	0380H3D	○	72	17,1	20,1
		5	0380H5D	○	86	25,5	28,5
3,9	4	3	0390H3D	○	72	17,6	20,6
		5	0390H5D	○	86	26,1	29,1
4,0	4	3	0400H3D	●	72	18,0	21,0
		5	0400H5D	●	86	26,8	29,8
4,1	5	3	MDF 0410H3D	○	80	18,5	21,5
		5	0410H5D	○	98	27,5	30,5
4,2	5	3	0420H3D	○	80	18,9	21,9
		5	0420H5D	○	98	28,1	31,1
4,3	5	3	0430H3D	○	80	19,4	22,4
		5	0430H5D	○	98	28,8	31,8
4,4	5	3	0440H3D	○	80	19,8	22,8
		5	0440H5D	○	98	29,5	32,5
4,5	5	3	0450H3D	●	80	20,3	23,3
		5	0450H5D	●	98	30,2	33,2
4,6	5	3	MDF 0460H3D	○	80	20,7	23,7
		5	0460H5D	○	98	30,8	33,8
4,7	5	3	0470H3D	○	80	21,2	24,2
		5	0470H5D	○	98	31,5	34,5
4,8	5	3	0480H3D	○	80	21,6	24,6
		5	0480H5D	○	98	32,2	35,2
4,9	5	3	0490H3D	○	80	22,1	25,1
		5	0490H5D	○	98	32,8	35,8
5,0	5	3	0500H3D	●	80	22,5	25,5
		5	0500H5D	●	98	33,5	36,5
5,1	6	3	MDF 0510H3D	○	82	23,0	26,0
		5	0510H5D	○	100	34,2	37,2
5,2	6	3	0520H3D	○	82	23,4	26,4
		5	0520H5D	○	100	34,8	37,8
5,3	6	3	0530H3D	○	82	23,9	26,9
		5	0530H5D	○	100	35,5	38,5
5,4	6	3	0540H3D	○	82	24,3	27,3
		5	0540H5D	○	100	36,2	39,2
5,5	6	3	0550H3D	●	82	24,8	27,8
		5	0550H5D	●	100	36,9	39,9
5,6	6	3	MDF 0560H3D	○	82	25,2	28,2
		5	0560H5D	○	100	37,5	40,5
5,7	6	3	0570H3D	○	82	25,7	28,7
		5	0570H5D	○	100	38,2	41,2
5,8	6	3	0580H3D	○	82	26,1	29,1
		5	0580H5D	○	100	38,9	41,9
5,9	6	3	0590H3D	○	82	26,6	29,6
		5	0590H5D	○	100	39,5	42,5
6,0	6	3	0600H3D	●	82	27,0	30,0
		5	0600H5D	●	100	40,2	43,2

● Diameter Ø 6,1–9,0 mm

Diameter ØDc (mm)	Shank ØDs (mm)	Hole Depth (L/D)	Cat. No.	Stock	Dimensions (mm)		
					L	l ₁	l ₂
6,1	7	3	MDF 0610H3D	○	88	27,5	30,5
		5	0610H5D	○	109	40,9	43,9
6,2	7	3	0620H3D	○	88	27,9	30,9
		5	0620H5D	○	109	41,5	44,5
6,3	7	3	0630H3D	○	88	28,4	31,4
		5	0630H5D	○	109	42,2	45,2
6,4	7	3	0640H3D	○	88	28,8	31,8
		5	0640H5D	○	109	42,9	45,9
6,5	7	3	0650H3D	●	88	29,3	32,3
		5	0650H5D	●	109	43,6	46,6
6,6	7	3	MDF 0660H3D	○	88	29,7	32,7
		5	0660H5D	○	109	44,2	47,2
6,7	7	3	0670H3D	○	88	30,2	33,2
		5	0670H5D	○	109	44,9	47,9
6,8	7	3	0680H3D	○	88	30,6	33,6
		5	0680H5D	○	109	45,6	48,6
6,9	7	3	0690H3D	○	88	31,1	34,1
		5	0690H5D	○	109	46,2	49,2
7,0	7	3	0700H3D	●	88	31,5	34,5
		5	0700H5D	●	109	46,9	49,9
7,1	8	3	MDF 0710H3D	○	94	32,0	35,0
		5	0710H5D	○	118	47,6	50,6
7,2	8	3	0720H3D	○	94	32,4	35,4
		5	0720H5D	○	118	48,2	51,2
7,3	8	3	0730H3D	○	94	32,9	35,9
		5	0730H5D	○	118	48,9	51,9
7,4	8	3	0740H3D	○	94	33,3	36,3
		5	0740H5D	○	118	49,6	52,6
7,5	8	3	0750H3D	●	94	33,8	36,8
		5	0750H5D	●	118	50,3	53,3
7,6	8	3	MDF 0760H3D	○	94	34,2	37,2
		5	0760H5D	○	118	50,9	53,9
7,7	8	3	0770H3D	○	94	34,7	37,7
		5	0770H5D	○	118	51,6	54,6
7,8	8	3	0780H3D	○	94	35,1	38,1
		5	0780H5D	○	118	52,3	55,3
7,9	8	3	0790H3D	○	94	35,6	38,6
		5	0790H5D	○	118	52,9	55,9
8,0	8	3	0800H3D	●	94	36,0	39,0
		5	0800H5D	●	118	53,6	56,6
8,1	9	3	MDF 0810H3D	○	100	36,5	39,5
		5	0810H5D	○	127	54,3	57,3
8,2	9	3	0820H3D	○	100	36,9	39,9
		5	0820H5D	○	127	54,9	57,9
8,3	9	3	0830H3D	○	100	37,4	40,4
		5	0830H5D	○	127	55,6	58,6
8,4	9	3	0840H3D	○	100	37,8	40,8
		5	0840H5D	○	127	56,3	59,3
8,5	9	3	0850H3D	●	100	38,3	41,3
		5	0850H5D	●	127	57,0	60,0
8,6	9	3	MDF 0860H3D	○	100	38,7	41,7
		5	0860H5D	○	127	57,6	60,6
8,7	9	3	0870H3D	○	100	39,2	42,2
		5	0870H5D	○	127	58,3	61,3
8,8	9	3	0880H3D	○	100	39,6	42,6
		5	0880H5D	○	127	59,0	62,0
8,9	9	3	0890H3D	○	100	40,1	43,1
		5	0890H5D	○	127	59,6	62,6
9,0	9	3	0900H3D	●	100	40,5	43,5
		5	0900H5D	●	127	60,3	63,3


Grade: ACF75

Flat MultiDrill MDF Type

MDF Type with Oil Hole - H3D / H5D

Internal Coolant Supply (MDF H3D/H5D Type)

Carbon Steel	Alloy Steel	Tempered Steel	Hardened Steel	Stainless Steel	Cast Iron	Ductile Cast Iron	Aluminium Alloy
<0,28%	>0,28%	<45HRC	>45HRC				

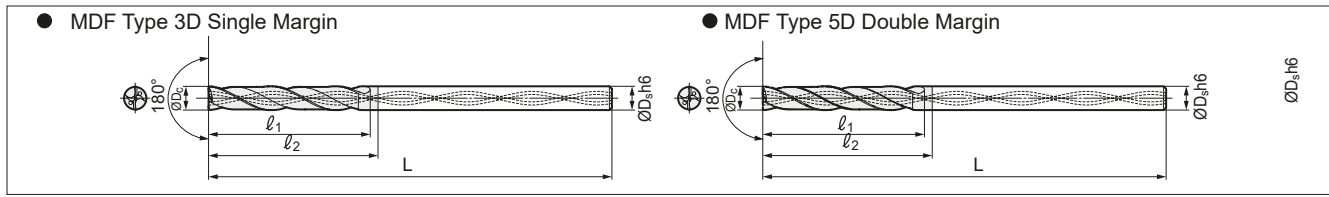

● Diameter Ø 9,1–12,0 mm

Diameter ØDc (mm)	Shank ØDs (mm)	Hole Depth (L/D)	Cat. No.	Stock	Dimensions (mm)		
					L	l ₁	l ₂
9,1	10	3	MDF 0910H3D	○	106	41,0	44,0
		5	0910H5D	○	136	61,0	64,0
9,2	10	3	0920H3D	○	106	41,4	44,4
		5	0920H5D	○	136	61,6	64,6
9,3	10	3	0930H3D	○	106	41,9	44,9
		5	0930H5D	○	136	62,3	65,3
9,4	10	3	0940H3D	○	106	42,3	45,3
		5	0940H5D	○	136	63,0	66,0
9,5	10	3	0950H3D	●	106	42,8	45,8
		5	0950H5D	●	136	63,7	66,7
9,6	10	3	MDF 0960H3D	○	106	43,2	46,2
		5	0960H5D	○	136	64,3	67,3
9,7	10	3	0970H3D	○	106	43,7	46,7
		5	0970H5D	○	136	65,0	68,0
9,8	10	3	0980H3D	○	106	44,1	47,1
		5	0980H5D	○	136	65,7	68,7
9,9	10	3	0990H3D	○	106	44,6	47,6
		5	0990H5D	○	136	66,3	69,3
10,0	10	3	1000H3D	●	106	45,0	48,0
		5	1000H5D	●	136	67,0	70,0
10,1	11	3	MDF 1010H3D	○	116	45,5	48,5
		5	1010H5D	○	149	67,7	70,7
10,2	11	3	1020H3D	○	116	45,9	48,9
		5	1020H5D	○	149	68,3	71,3
10,3	11	3	1030H3D	○	116	46,4	49,4
		5	1030H5D	○	149	69,0	72,0
10,4	11	3	1040H3D	○	116	46,8	49,8
		5	1040H5D	○	149	69,7	72,7
10,5	11	3	1050H3D	●	116	47,3	50,3
		5	1050H5D	●	149	70,4	73,4
10,6	11	3	MDF 1060H3D	○	116	47,7	50,7
		5	1060H5D	○	149	71,0	74,0
10,7	11	3	1070H3D	○	116	48,2	51,2
		5	1070H5D	○	149	71,7	74,7
10,8	11	3	1080H3D	○	116	48,6	51,6
		5	1080H5D	○	149	72,4	75,4
10,9	11	3	1090H3D	○	116	49,1	52,1
		5	1090H5D	○	149	73,0	76,0
11,0	11	3	1100H3D	●	116	49,5	52,5
		5	1100H5D	●	149	73,7	76,7
11,1	12	3	MDF 1110H3D	○	122	50,0	53,0
		5	1110H5D	○	158	74,4	77,4
11,2	12	3	1120H3D	○	122	50,4	53,4
		5	1120H5D	○	158	75,0	78,0
11,3	12	3	1130H3D	○	122	50,9	53,9
		5	1130H5D	○	158	75,7	78,7
11,4	12	3	1140H3D	○	122	51,3	54,3
		5	1140H5D	○	158	76,4	79,4
11,5	12	3	1150H3D	●	122	51,8	54,8
		5	1150H5D	●	158	77,1	80,1
11,6	12	3	MDF 1160H3D	○	122	52,2	55,2
		5	1160H5D	○	158	77,7	80,7
11,7	12	3	1170H3D	○	122	52,7	55,7
		5	1170H5D	○	158	78,4	81,4
11,8	12	3	1180H3D	○	122	53,1	56,1
		5	1180H5D	○	158	79,1	82,1
11,9	12	3	1190H3D	○	122	53,6	56,6
		5	1190H5D	○	158	79,7	82,7
12,0	12	3	1200H3D	●	122	54,0	57,0
		5	1200H5D	●	158	80,4	83,4

● Diameter Ø 12,5–16,0 mm

Diameter ØDc (mm)	Shank ØDs (mm)	Hole Depth (L/D)	Cat. No.	Stock	Dimensions (mm)		
					L	l ₁	l ₂
12,5	13	3	MDF 1250H3D	○	128	56,3	59,3
		5	1250H5D	○	167	83,8	86,8
13,0	13	3	1300H3D	○	128	58,5	61,5
		5	1300H5D	○	167	87,1	90,1
13,5	14	3	MDF 1350H3D	○	134	60,8	63,8
		5	1350H5D	○	176	90,5	93,5
14,0	14	3	1400H3D	○	134	63,0	66,0
		5	1400H5D	○	176	93,8	96,8
14,5	15	3	MDF 1450H3D	○	140	65,3	68,3
		5	1450H5D	○	185	97,2	100,2
15,0	15	3	1500H3D	○	140	67,5	70,5
		5	1500H5D	○	185	100,5	103,5
15,5	16	3	MDF 1550H3D	○	146	69,8	72,8
		5	1550H5D	○	194	103,9	106,9
16,0	16	3	1600H3D	○	146	72,0	75,0
		5	1600H5D	○	194	107,2	110,2

Grade: ACF75

Recommended Cutting Conditions

● MDF H3D Type with Oil Hole

1. The recommended hole depth is 3 x DC. The depth is measured from the highest point of the hole on drilling in inclined surfaces.
2. The recommended cutting conditions are those for drilling on flat horizontal surfaces.
3. Adjust the feed rate according to the inclination angle when drilling in an inclined surface.
 - 3.1 Set the feed rate at ≤ 70 % when the inclination angle is ≤ 30°.
 - 3.2 Set the feed rate at ≤ 50 % when the inclination angle is > 30°.
4. This product is a drilling tool. Do not use it for traversing or helical milling.
5. A guide hole of the same diameter is recommended when drilling stainless steel.

(v_c: Cutting Speed m/min f: Feed Rate mm/rev)

Drill Diam. ØDC(mm)	Cutting Conditions	Soft Steel / General Steel (~250 HB)	Alloy Steel (~300 HB)	Hardened Steel (~50 HRC)	Stainless Steel (~200 HB)	Gray Cast Iron FC250	Ductile Cast Iron	Aluminium Alloy
-Ø 4,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	65-75-85	90-120-150
	f	0,06-0,08-0,10	0,05-0,08-0,10	0,01-0,02-0,03	0,01-0,02-0,03	0,06-0,08-0,10	0,04-0,06-0,08	0,06-0,08-0,10
-Ø 6,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	70-80-90	90-120-150
	f	0,05-0,10-0,15	0,05-0,10-0,15	0,04-0,06-0,08	0,03-0,04-0,05	0,05-0,10-0,15	0,06-0,09-0,12	0,05-0,10-0,15
-Ø 8,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	70-80-90	90-120-150
	f	0,10-0,15-0,20	0,10-0,15-0,20	0,06-0,08-0,10	0,04-0,06-0,08	0,10-0,15-0,20	0,10-0,12-0,15	0,10-0,15-0,20
-Ø 10,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	70-80-90	90-120-150
	f	0,12-0,17-0,22	0,12-0,17-0,22	0,08-0,10-0,12	0,06-0,08-0,10	0,12-0,17-0,22	0,12-0,15-0,18	0,15-0,20-0,25
-Ø 12,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	70-80-90	90-120-150
	f	0,15-0,20-0,25	0,15-0,20-0,25	0,12-0,15-0,18	0,08-0,10-0,12	0,15-0,20-0,25	0,15-0,18-0,20	0,20-0,25-0,30
-Ø 16,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	70-80-90	90-120-150
	f	0,15-0,20-0,25	0,15-0,20-0,25	0,12-0,15-0,18	0,10-0,15-0,20	0,17-0,22-0,27	0,15-0,20-0,25	0,25-0,30-0,40

Min. - Optimum - Max.

● MDF H5D Type with Oil Hole

1. Drilling that uses this tool requires a guide hole of the same diameter.
2. The cutting conditions are the recommended conditions with a guide hole.
3. The recommended hole depth is 5 x DC. The depth is measured from the highest point of the hole on drilling in inclined surfaces.
4. This product is a drilling tool. Do not use it for traversing or helical milling.

(v_c: Cutting Speed m/min f: Feed Rate mm/rev)

Drill Diam. ØDC(mm)	Cutting Conditions	Soft Steel / General Steel (~250 HB)	Alloy Steel (~300 HB)	Hardened Steel (~50 HRC)	Stainless Steel (~200 HB)	Gray Cast Iron FC250	Ductile Cast Iron	Aluminium Alloy
-Ø 4,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	65-75-85	90-120-150
	f	0,06-0,08-0,10	0,05-0,08-0,10	0,01-0,02-0,03	0,01-0,02-0,03	0,06-0,08-0,10	0,04-0,06-0,08	0,06-0,08-0,10
-Ø 6,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	65-75-85	90-120-150
	f	0,05-0,10-0,15	0,05-0,10-0,15	0,04-0,06-0,08	0,03-0,04-0,05	0,05-0,10-0,15	0,06-0,09-0,12	0,05-0,10-0,15
-Ø 8,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	65-75-85	90-120-150
	f	0,10-0,15-0,20	0,10-0,15-0,20	0,06-0,08-0,10	0,04-0,06-0,08	0,10-0,15-0,20	0,10-0,12-0,15	0,10-0,15-0,20
-Ø 10,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	65-75-85	90-120-150
	f	0,15-0,20-0,25	0,15-0,20-0,25	0,08-0,10-0,12	0,06-0,08-0,10	0,15-0,20-0,25	0,12-0,15-0,18	0,15-0,20-0,25
-Ø 12,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	65-75-85	90-120-150
	f	0,20-0,25-0,30	0,20-0,25-0,30	0,12-0,15-0,18	0,08-0,10-0,12	0,17-0,22-0,27	0,15-0,20-0,25	0,20-0,25-0,30
-Ø 16,0	v _c	70-85-100	60-75-90	30-40-50	25-35-45	70-85-100	65-75-85	90-120-150
	f	0,20-0,25-0,30	0,20-0,25-0,30	0,14-0,17-0,20	0,10-0,15-0,20	0,20-0,25-0,30	0,20-0,25-0,30	0,25-0,30-0,35

Min. - Optimum - Max.



■ XGHS Series

Applications	Series	Diameter Range (mm)	Hole Depth (L/D)
Deep Hole Drilling	MDW□□□□XHGS12	Ø 3,0 – 12,0	-12
	MDW□□□□XHGS15	Ø 3,0 – 12,0	-15
	MDW□□□□XHGS20	Ø 3,0 – 12,0	-20
	MDW□□□□XHGS25	Ø 3,0 – 12,0	-25
	MDW□□□□XHGS30	Ø 3,0 – 10,0	-30
Pilot Hole Drilling	MDW□□□□PHT	Ø 3,0 – 12,0	-2

■ General Features

Super MultiDrill XHGS series is a next-generation drill for deep hole drilling, features stable chip control and improved strength to further enhance efficiency of deep hole drilling.

■ Characteristics and Applications


Low Cutting Resistance

The application of a new special thinning shape „RX thinning“ reduces cutting resistance during high efficiency drilling.


RX THINNING



Conventional Drill

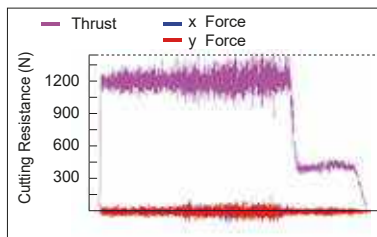

XHGS Series

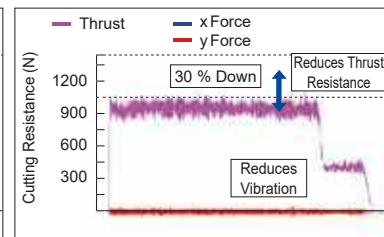

Work Material: C45
 Tools: MDW050XHT20 (conventional), MDW0500XHGS20 (Ø 5,0 mm, 20D)
 Cutting Cond.: $v_c = 80$ m/min, $f = 0,35$ mm/rev, (\Rightarrow at the time of entry penetration $f = 0,08$ mm/rev), $H = 90$ mm
 Coolant: MQL


Chip Control

New groove shape „J flute“ with improved chip control stability when drilling deep holes.

J-flute



Consistent Chips

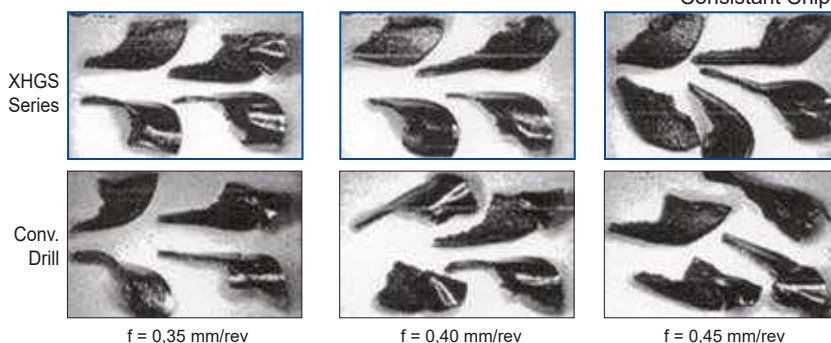

Work Material: C45
 Tools: MDW050XHT20 (conventional), MDW0500XHGS20 (Ø 5,0 mm, 20D)
 Cutting Cond.: $v_c = 80$ m/min, $H = 90$ mm
 Coolant: MQL

High Precision & Stability

The XHGS series provides excellent guide performance due to the unique design when compared to the conventional drill.



Recommended Cutting Conditions

Min. - Optimum - Max.

Drill Diameter DC (mm)	Cutting Conditions	Soft Steel (-200 HB)	General Steel (-250 HB)	Alloy Steel (-300 HB)	Hardened Steel (-40 HRC)	Cast Iron FC FCD
-Ø 3,0	v _c	50-60-80	60-80-100	40-55-70	30-40-50	40-55-70
	f	0,12-0,15-0,20	0,12-0,15-0,20	0,10-0,13-0,16	0,06-0,08-0,12	0,15-0,18-0,23
-Ø 5,0	v _c	50-60-80	60-80-100	50-60-70	30-45-55	50-60-70
	f	0,15-0,20-0,25	0,15-0,23-0,30	0,12-0,15-0,20	0,08-0,10-0,14	0,17-0,25-0,35
-Ø 10,0	v _c	50-70-90	60-80-110	50-65-80	30-50-60	50-65-80
	f	0,20-0,25-0,30	0,20-0,25-0,32	0,15-0,20-0,25	0,10-0,15-0,20	0,25-0,28-0,35
-Ø 12,0	v _c	60-80-100	60-90-120	50-65-80	40-55-70	50-65-80
	f	0,25-0,30-0,35	0,25-0,30-0,35	0,15-0,23-0,27	0,12-0,15-0,23	0,25-0,30-0,35


Note: Use lower speed when using MQL coolant and higher speed when using internal coolant.

V_c: Cutting speed (m/min), f: Feed Rate (mm/rev)

Recommended Drilling Method


1. Drill a pilot hole using the dedicated PHT

Select the same nominal diameter for the dedicated pilot hole drill PHT type as the deep hole drill XHGS type. (The pilot drill diameter is designed +0,02 mm to +0,05 mm larger than the long drill diameter)

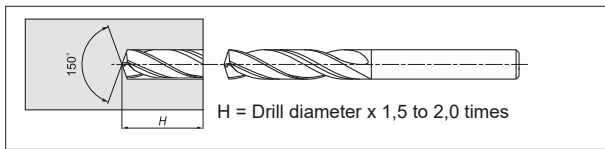

2. Enter the pilot hole at reduced cutting data


Rotation speed: 500 min⁻¹
Feed rate: 1000 to 2000 mm/min

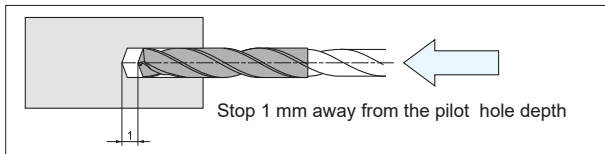

Important:

DO NOT enter pilot hole at higher cutting data, this will cause damage to the drill.


3. Increase rotation speed until the set cutting speed is reached, and start normal drilling operation

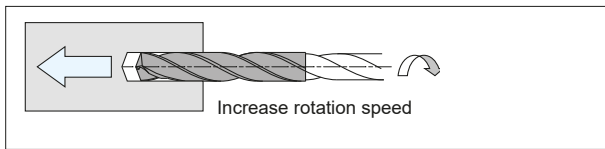

When using a NC machine, only begin drilling operation once full rotation speed is reached.

4. After drilling rotation speed is reduced and the drill is retracted from the work material


Rotation speed: 500 min⁻¹
Feed rate: 1.000 to 2.000 mm/min

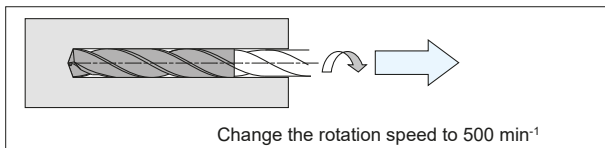

Retracting a drill from the work material at a high rotation speed is dangerous as doing so may result in breakage due to run-out.

5. Other Notes

A flat base should be prepared when the surface for the pilot tool is slanted. Spot face using:



When the deep hole drill exits through an angle surface, decrease the feed rate to f = 0,05 mm/rev just before drilling through.

Coolant

1. Internal coolant supply

Use suitable coolant / emulsion

Pump pressure: Steel: 1,5 to 2,0 MPa (cooling effect increases at higher pressure, affecting chips/wear)
Cast iron & aluminium alloy: 4,0 to 6,0 MPa (priority on cooling)

2. Internal MQL


Airpressure: 0,5 MPa or higher

Discharge volume: It is recommended to set the maximum discharge volume possible on the machine.

*Consult the manufacturer before using with aluminium alloy.

Extra Long SUPER MULTI-DRILLS MDW ... XHGS/PHT Type

Solid Carbide Drills for Deep Hole Drilling

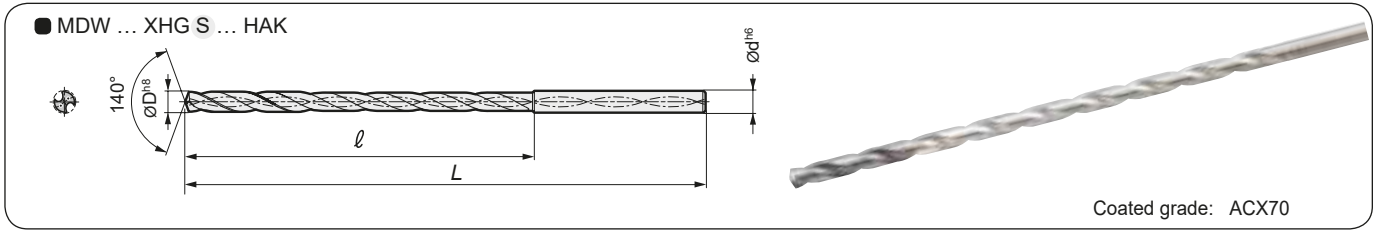

Coated grade: ACX70

P ● MDW...XHGS Type for Deep Hole Drilling, Diameter \varnothing 3,0–12,0 mm (mm)


Dimensions		Cat. No. 12, 15, 20, 25, 30	For 12 x D		For 15 x D		For 20 x D		For 25 x D		For 30 x D						
			Stock	Dimensions		Stock	Dimensions		Stock	Dimensions		Stock	Dimensions				
				L	ℓ		L	ℓ		L	ℓ		L	ℓ	L	ℓ	
3,0	4,0	MDW 0300XHGS □□ HAK	●	85	57	●	94	66	●	109	81	●	124	96	●	139	111
3,5		0350XHGS □□ HAK	●	89	61	●	100	72	●	117	89	●	135	107	●	152	124
4,0		0400XHGS □□ HAK	●	95	67	●	107	79	●	127	99	●	147	119	●	167	139
4,5	5,0	MDW 0450XHGS □□ HAK	●	104	76	●	118	90	●	140	112	●	163	135	●	184	156
5,0		0500XHGS □□ HAK ^{5*}	●	108	80	●	123	95	●	148	120	●	173	145	●	198	170
5,0	6,0	MDW 0500XHGS □□ HAK	●	116	80	●	131	95	●	156	120	●	181	145	●	206	170
5,5		0550XHGS □□ HAK	●	124	88	●	141	105	●	168	132	●	196	160	●	223	187
6,0		0600XHGS □□ HAK	●	130	94	●	148	112	●	178	142	●	208	172	●	238	202
6,5	8,0	MDW 0650XHGS □□ HAK	●	138	102	●	158	122	●	190	154	●	223	187	●	255	219
6,8		0680XHGS □□ HAK	●	144	108	●	164	128	●	198	162	●	236	200	●	266	230
7,0		0700XHGS □□ HAK	●	145	109	●	166	130	●	201	165	●	236	200	●	271	235
7,5		0750XHGS □□ HAK	●	151	115	●	174	138	●	211	175	●	249	213	●	286	250
8,0		0800XHGS □□ HAK	●	157	121	●	181	145	●	221	185	●	261	225	●	301	265
8,5	10,0	MDW 0850XHGS □□ HAK	●	171	131	●	197	157	●	239	199	●	282	242	●	324	284
9,0		0900XHGS □□ HAK	●	177	137	●	204	164	●	249	209	●	294	254	●	339	299
9,5		0950XHGS □□ HAK	●	183	143	●	212	172	●	259	219	●	305	265	●	352	312
10,0		1000XHGS □□ HAK	●	187	147	●	217	177	●	267	227	●	317	277	●	367	327
10,5	12,0	MDW 1050XHGS □□ HAK	●	202	157	●	234	189	●	286	241	●	339	294	-	-	-
11,0		1100XHGS □□ HAK	●	208	163	●	241	196	●	296	251	●	351	306	-	-	-
11,5		1150XHGS □□ HAK	●	213	168	●	248	203	●	305	260	●	363	318	-	-	-
12,0		1200XHGS □□ HAK	●	219	174	●	255	210	●	315	270	●	375	330	-	-	-

(*) Cat. No. description: Drill- \varnothing = 5 mm, shank- \varnothing = 5 mm (E.g. for 20 x D: MDW050XHGS20HAK5)

Non-standard diameters and lengths on request (\varnothing 2,5–16,0 mm possible)



● MDW...PHT Type for Pilot Hole

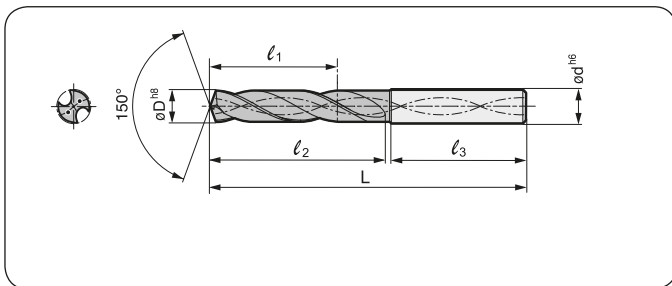

Dimensions		Cat. No.	Stock	For Pilot Hole			
DC (mm)	$\varnothing d$ (mm)			L	ℓ_1	ℓ_2	ℓ_3
3,03	4,0	MDW 0303 PHT	●	52	9	22	28
3,53		0353 PHT	●	52	9	22	28
4,03	5,0	MDW 0403 PHT	●	59	12	29	28
4,53		0453 PHT	●	59	12	29	28
5,03	6,0	MDW 0503 PHT	●	71	15	33	36
5,53		0553 PHT	●	71	15	33	36
6,03	8,0	MDW 0603 PHT	●	76	18	38	36
6,53		0653 PHT	●	76	18	38	36
6,83		0683 PHT	●	76	18	38	36
7,03		0703 PHT	●	82	21	43	36
7,53		0753 PHT	●	82	21	43	36
8,03	10,0	MDW 0803 PHT	●	88	24	46	40
8,53		0853 PHT	●	88	24	46	40
9,03		0903 PHT	●	88	24	46	40
9,53		0953 PHT	●	88	24	46	40
10,03	12,0	MDW 1003 PHT	●	104	30	55	45
10,53		1053 PHT	●	104	30	55	45
11,03		1103 PHT	●	104	30	55	45
11,53		1153 PHT	●	104	30	55	45
12,03	14,0	MDW 1203 PHT	●	117	42	68	45

■ How to Order

Non stock items – minimum order 6 pieces


Always specify the catalogue number and drill diameter as shown

- eg drill diameter 5,0 mm = MDW 050

E.g.,

MDW 050 X H G S 30 HAK ACX70 (Grade)
 Super MULTI-DRILL
 DC = 5,0 mm
 Extra long type
 With spiral coolant holes
 Shank type to DIN6535
 Drilling depth (L/D ratio)
 Cutting edges for steel with double margin
 Special shape (RX thinning) + J flute

● = Euro stock

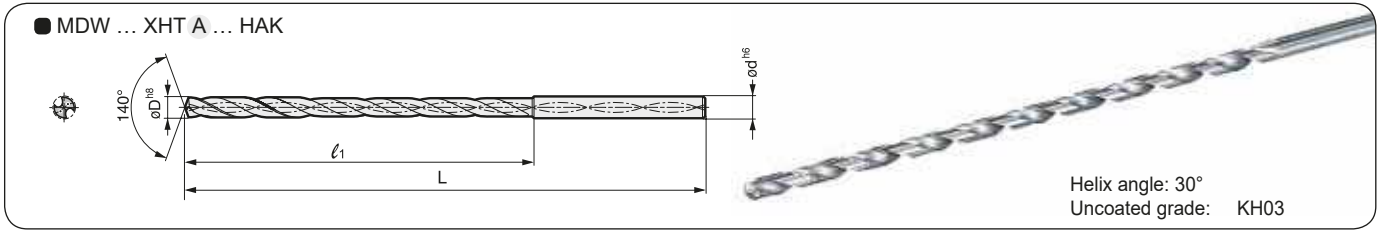

N ● MDW...XHT A Type for Aluminium and Copper Alloys


Dimensions		Cat. No. 20, 30	For 20 x D			For 30 x D		
DC (mm)	$\varnothing d$ (mm)		Stock	Dimensions		Stock	Dimensions	
			20	L	l_1	30	L	l_1
4,0	4,0	MDW 040XHT A□□ HAK	●	127	97	●	167	137
5,0	6,0	MDW 050XHT A□□ HAK	●	156	118	●	206	168
6,0		060XHT A□□ HAK	●	178	138	●	238	198
7,0	8,0	MDW 070XHT A□□ HAK	●	201	162	●	271	232
8,0		080XHT A□□ HAK	●	221	182	●	301	262
9,0	10,0	MDW 090XHT A□□ HAK	●	249	205	●	339	295
10,0		100XHT A□□ HAK	●	267	225	●	367	325

⇒ All Long Drill series include an allowance to accommodate regrinding!
 ⇒ Uncoated carbide grade: KH03

How to Order

Non stock items – minimum order 6 pieces
 Always specify the catalogue number and drill diameter as shown
 - eg drill diameter 5,0 mm = MDW 050

E.g.,

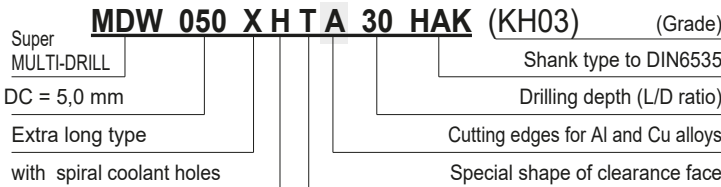


Recommended Cutting Conditions

Vc: Cutting speed (m/min), f: Feed Rate (mm/rev)

Drill \varnothing (mm)	Work material	
	Aluminium Alloy	
- \varnothing 5,0	Vc	80–160
	f	0,08–0,30
- \varnothing 6,0	Vc	80–160
	f	0,12–0,35
- \varnothing 8,0	Vc	80–180
	f	0,15–0,40
- \varnothing 10,0	Vc	80–180
	f	0,20–0,50
- \varnothing 12,0	Vc	80–180
	f	0,20–0,45




● MDW...PHT Type for Pilot Hole

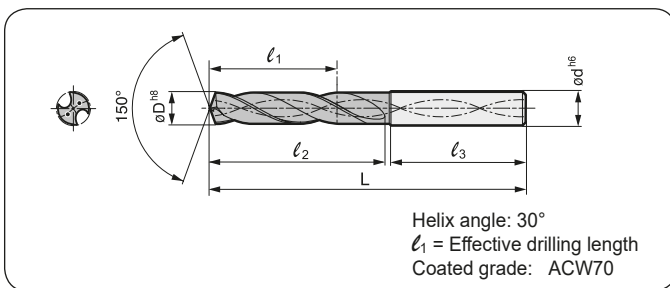

How to Order

Non stock items – minimum order 6 pieces
 Always specify the catalogue number and drill diameter as shown -
 eg. drill diameter 5,03 mm = MDW 0503

E.g.,

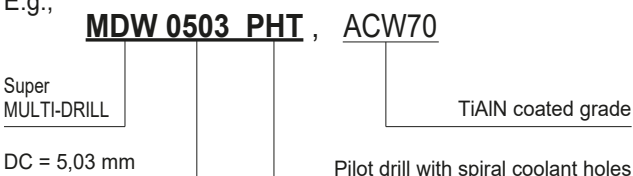


Dimensions		Cat. No.	Stock	For Pilot Hole			
DC (mm)	$\varnothing d$ (mm)			Dimensions (mm)			
				L	l_1	l_2	l_3
3,03	4,0	MDW 0303 PHT	●	52	9	22	28
3,53		0353 PHT	●	52	9	22	28
4,03	5,0	MDW 0403 PHT	●	59	12	29	28
4,53		0453 PHT	●	59	12	29	28
5,03	6,0	MDW 0503 PHT	●	71	15	33	36
5,53		0553 PHT	●	71	15	33	36
6,03	8,0	MDW 0603 PHT	●	76	18	38	36
6,53		0653 PHT	●	76	18	38	36
6,83		0683 PHT	●	76	18	38	36
7,03		0703 PHT	●	82	21	43	36
7,53		0753 PHT	●	82	21	43	36
8,03		10,0	MDW 0803 PHT	●	88	24	46
8,53	0853 PHT		●	88	24	46	40
9,03	0903 PHT		●	88	24	46	40
9,53	0953 PHT		●	88	24	46	40
10,03	12,0		MDW 1003 PHT	●	104	30	55
10,53		1053 PHT	●	104	30	55	45
11,03		1103 PHT	●	104	30	55	45
11,53		1153 PHT	●	104	30	55	45
12,03	14,0	MDW 1203 PHT	●	117	42	68	45

AURORA COAT SERIES MDW ... NHGS Type

DLC (Diamond Like Carbon) Coated Multi-Drills

With Coolant Holes (3D/5D/10D)

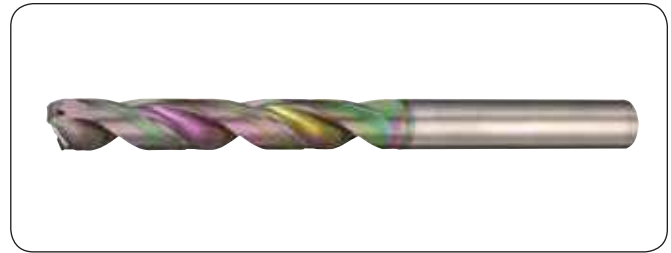

● Diameter Ø 3,0–8,0 mm

(mm)

Dimensions øD	ød	Cat. No. 3, 5, 10	3D Type		5D Type		10D Type									
			Stock	Dimensions	Stock	Dimensions	Stock	Dimensions								
			3	L	ℓ	5	L	ℓ	10	L	ℓ					
3,0	3,0	MDW 0300 NHGS□□	□	68,6	18,1	□	78,6	28,6	□	92,6	42,6					
3,1	4,0	MDW 0310 NHGS□□	□	72,8	□	□	86,8	□	106,8	□	□					
3,2		MDW 0320 NHGS□□	□													
3,3		MDW 0330 NHGS□□	□									20,7	□	32,7	□	49,7
3,4		MDW 0340 NHGS□□	□													
3,5		MDW 0350 NHGS□□	□													
3,6		MDW 0360 NHGS□□	□													
3,65		MDW 0365 NHGS□□	□													
3,66		MDW 0366 NHGS□□	□									23,3	□	36,8	□	56,8
3,7		MDW 0370 NHGS□□	□													
3,8		MDW 0380 NHGS□□	□													
3,9	MDW 0390 NHGS□□	□														
4,0	MDW 0400 NHGS□□	□														
4,1	5,0	MDW 0410 NHGS□□	□	81,0	□	□	99,0	□	125,0	□	□					
4,2		MDW 0420 NHGS□□	□													
4,3		MDW 0430 NHGS□□	□									25,9	□	40,9	□	63,9
4,4		MDW 0440 NHGS□□	□													
4,5		MDW 0450 NHGS□□	□													
4,6		MDW 0460 NHGS□□	□													
4,7		MDW 0470 NHGS□□	□													
4,8		MDW 0480 NHGS□□	□									28,5	□	45,0	□	71,0
4,9		MDW 0490 NHGS□□	□													
5,0		MDW 0500 NHGS□□	□													
5,1	6,0	MDW 0510 NHGS□□	□	83,2	□	□	101,2	□	137,2	□	□					
5,2		MDW 0520 NHGS□□	□													
5,3		MDW 0530 NHGS□□	□									28,6	□	45,1	□	88,1
5,4		MDW 0540 NHGS□□	□													
5,5		MDW 0550 NHGS□□	□													
5,6		MDW 0560 NHGS□□	□													
5,7		MDW 0570 NHGS□□	□													
5,8		MDW 0580 NHGS□□	□									31,2	□	49,2	□	85,2
5,9		MDW 0590 NHGS□□	□													
6,0		MDW 0600 NHGS□□	□													
6,1	7,0	MDW 0610 NHGS□□	□	89,5	□	□	110,5	□	152,5	□	□					
6,2		MDW 0620 NHGS□□	□													
6,3		MDW 0630 NHGS□□	□									33,8	□	53,3	□	92,3
6,4		MDW 0640 NHGS□□	□													
6,5		MDW 0650 NHGS□□	□													
6,6		MDW 0660 NHGS□□	□													
6,7		MDW 0670 NHGS□□	□													
6,8		MDW 0680 NHGS□□	□									36,5	□	57,5	□	99,5
6,9		MDW 0690 NHGS□□	□													
7,0		MDW 0700 NHGS□□	□													
7,1	8,0	MDW 0710 NHGS□□	□	95,7	□	□	119,7	□	167,7	□	□					
7,2		MDW 0720 NHGS□□	□													
7,3		MDW 0730 NHGS□□	□									39,1	□	61,6	□	116,6
7,35		MDW 0735 NHGS□□	□													
7,4		MDW 0740 NHGS□□	□													
7,5		MDW 0750 NHGS□□	□													
7,6		MDW 0760 NHGS□□	□													
7,7		MDW 0770 NHGS□□	□													
7,8		MDW 0780 NHGS□□	□									41,7	□	65,7	□	113,7
7,9		MDW 0790 NHGS□□	□													
8,0	MDW 0800 NHGS□□	□														


■ Characteristics

- High efficiency drilling
AURORA COAT and strong helix design reduces cutting forces and improves edge sharpness.
- Precision drilling
Special cutting edge design improves hole precision and quality.
- Longer tool life
With AURORA COAT coupled with the cutting edge design, long and stable tool life can be achieved.
- Deep hole (L/D = 20) drilling
Drills for deep hole drilling can be custom-made.
Production range: Ø 3,0–16,0 mm
total length: 50 times drill diameter (max. 290 mm)

■ Applicable Work Materials

- Aluminium Die Casting
- Aluminium Alloy
- Aluminium Alloy Casting
- Brass Casting
- Bronze Casting

■ Comparison of Cutting Force (Thrust Force)

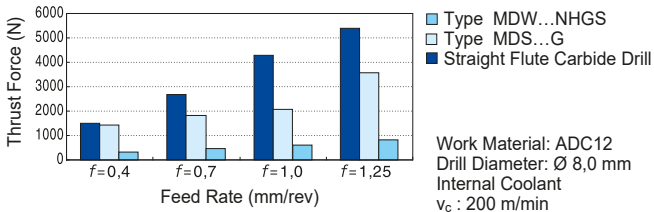


■ Recommended Cutting Conditions

Diameter (mm)		Aluminium Alloy	Aluminium Die Casting	Copper Alloy
-Ø 5	vc	80–160	80–180	80–160
	f	0,08–0,30	0,10–0,30	0,08–0,15
-Ø 10	vc	80–180	80–200	60–180
	f	0,10–0,30	0,10–0,35	0,10–0,20
-Ø 16	vc	80–200	80–200	80–200
	f	0,15–0,40	0,10–0,40	0,10–0,25

(vc : Cutting Speed (m/min), f : Feed rate (mm/rev), Min–Max)

AURORA Coated NHGS Type, Grade: DL1300

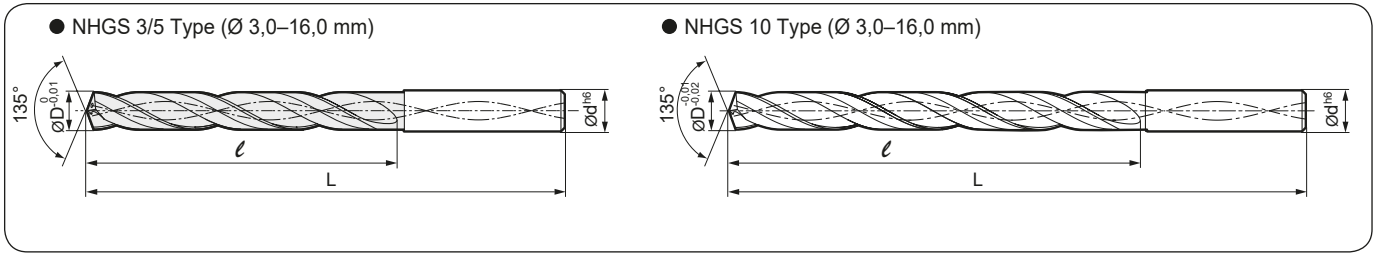

● Diameter Ø 8,1–13,0 mm (mm)

Dimensions		Cat. No.	3D Type		5D Type		10D Type	
øD	ød		Stock	Dimensions	Stock	Dimensions	Stock	Dimensions
		3, 5, 10	3	L	5	L	10	L
8,1	9,0	MDW 0810 NHGS□□			□			
8,2		MDW 0820 NHGS□□			□			
8,3		MDW 0830 NHGS□□		44,3	□	69,8		118,8
8,4		MDW 0840 NHGS□□			□			
8,5		MDW 0850 NHGS□□	□	101,9	□	128,9	□	182,9
8,6		MDW 0860 NHGS□□	□		□			
8,7		MDW 0870 NHGS□□			□			
8,8		MDW 0880 NHGS□□	□	46,9	□	73,9		127,9
8,9		MDW 0890 NHGS□□			□			
9,0		MDW 0900 NHGS□□	□		□		□	
9,1	10,0	MDW 0910 NHGS□□			□			
9,2		MDW 0920 NHGS□□			□			
9,21		MDW 0921 NHGS□□	□	49,5	□	78,0		135,0
9,3		MDW 0930 NHGS□□			□			
9,4		MDW 0940 NHGS□□	□		□			
9,5		MDW 0950 NHGS□□	□	108,0	□	138,0	□	198,0
9,6		MDW 0960 NHGS□□			□			
9,7		MDW 0970 NHGS□□			□			
9,8		MDW 0980 NHGS□□		52,0	□	82,0	□	142,0
9,9		MDW 0990 NHGS□□			□			
10,0	MDW 1000 NHGS□□	□		□		□		
10,1	11,0	MDW 1010 NHGS□□	□					
10,2		MDW 1020 NHGS□□						
10,3		MDW 1030 NHGS□□	□	54,7	□	86,2		149,2
10,4		MDW 1040 NHGS□□			□			
10,5		MDW 1050 NHGS□□	□	168,3	□	151,3	□	217,3
10,6		MDW 1060 NHGS□□	□		□			
10,7		MDW 1070 NHGS□□						
10,8		MDW 1080 NHGS□□		57,3		90,3		156,3
10,9		MDW 1090 NHGS□□						
11,0		MDW 1100 NHGS□□	□		□		□	
11,08	12,0	MDW 1108 NHGS□□	□					
11,1		MDW 1110 NHGS□□	□					
11,2		MDW 1120 NHGS□□	□	59,9	□	94,4		163,4
11,3		MDW 1130 NHGS□□			□			
11,4		MDW 1140 NHGS□□	□	124,5	□	160,5	□	232,5
11,5		MDW 1150 NHGS□□	□		□			
11,6		MDW 1160 NHGS□□						
11,7		MDW 1170 NHGS□□						
11,8		MDW 1180 NHGS□□		62,5		98,5		170,5
11,9		MDW 1190 NHGS□□						
12,0	MDW 1200 NHGS□□	□		□		□		
12,1	13,0	MDW 1210 NHGS□□	□					
12,2		MDW 1220 NHGS□□						
12,3		MDW 1230 NHGS□□	□	65,1	□	102,6		177,6
12,4		MDW 1240 NHGS□□			□			
12,5		MDW 1250 NHGS□□	□	130,7	□	169,7	□	247,7
12,6		MDW 1260 NHGS□□			□			
12,7		MDW 1270 NHGS□□						
12,8		MDW 1280 NHGS□□		67,7		106,7		184,7
12,9		MDW 1290 NHGS□□						
12,96		MDW 1296 NHGS□□	□		□		□	
13,0	MDW 1300 NHGS□□	□		□		□		

● Diameter Ø 13,1–16,0 mm (mm)

Dimensions		Cat. No.	3D Type		5D Type		10D Type	
øD	ød		Stock	Dimensions	Stock	Dimensions	Stock	Dimensions
		3, 5, 10	3	L	5	L	10	L
13,1	14,0	MDW 1310 NHGS□□						
13,2		MDW 1320 NHGS□□						
13,3		MDW 1330 NHGS□□		70,8		110,8		191,8
13,4		MDW 1340 NHGS□□						
13,5		MDW 1350 NHGS□□	□	136,9	□	178,9		262,9
13,6		MDW 1360 NHGS□□			□			
13,7		MDW 1370 NHGS□□						
13,8		MDW 1380 NHGS□□		72,9		114,9		198,9
13,9		MDW 1390 NHGS□□						
14,0		MDW 1400 NHGS□□	□			□		
14,1	15,0	MDW 1410 NHGS□□	□		□			
14,2		MDW 1420 NHGS□□						
14,3		MDW 1430 NHGS□□		75,5		119,0		206
14,4		MDW 1440 NHGS□□						
14,5		MDW 1450 NHGS□□	□	141,1	□	188,1		278,1
14,6		MDW 1460 NHGS□□			□			
14,7		MDW 1470 NHGS□□						
14,8		MDW 1480 NHGS□□						
14,9		MDW 1490 NHGS□□	□	78,1	□	123,1		213,1
14,96		MDW 1496 NHGS□□	□		□			
15,0	MDW 1500 NHGS□□	□			□			
15,1	16,0	MDW 1510 NHGS□□						
15,2		MDW 1520 NHGS□□						
15,3		MDW 1530 NHGS□□		80,7		127,2		220,2
15,4		MDW 1540 NHGS□□						
15,5		MDW 1550 NHGS□□	□	149,3	□	197,3		293,3
15,6		MDW 1560 NHGS□□			□			
15,7		MDW 1570 NHGS□□						
15,8		MDW 1580 NHGS□□		83,3		131,3		227,3
15,9		MDW 1590 NHGS□□						
16,0		MDW 1600 NHGS□□	□			□		

AURORA Coated NHGS Type, Grade: DL1300

■ How to Order

Non-Stock Items will be required minimum order quantity for 6 pcs.

Please specify the Cat. No.

For example, if the diameter of the drill is 10,3 mm and the ratio to øD is 5, please indicate as follow.

E.g.,

MDW 1030 NHGS 5 , DL1300 (Grade)

Super MULTI-DRILL

DC = 10,3 mm

Applicable work materials with spiral coolant holes

Drilling depth (The ratio to øD): -3 / -5 / -10

NHGS type Multi-Drills

Micro Long Drills

MLDH ...L/P Type



■ General Features

Micro Long Drills are oil-hole drills for high efficiency drilling that were developed for drilling deep, small-diameter holes. These next-generation, small-diameter hole drills feature improved strength - often a problem area with small-diameter drills.

■ Characteristics and Applications

- Deep-hole drilling
New groove shape ensures good drill rigidity and chip evacuation.
High efficiency drilling to depths of over 20 x drill diameter at over $v_f = 500$ mm/min (drill diameter 1,3 mm, X12CrS13 equivalent).
Optimal thinning and edge balance for stable chip control.
- Long tool life
Special coating provides long tool life with a wide variety of work materials.
Improved chip evacuation makes it possible to reduce spindle load fluctuation, ensuring stable tool life.

■ Series

Application	Type	Diameter Range (mm)	Hole Depth (L/D)
Guide Hole Drilling	MLDH □□□□ P	Ø 0,8 – 2,0	–2
Deep Hole Drilling	MLDH □□□□ L5	Ø 0,8 – 2,0	–5
	MLDH □□□□ L12	Ø 0,8 – 2,0	–12
	MLDH □□□□ L20	Ø 0,8 – 2,0	–20
	MLDH □□□□ L30	Ø 0,8 – 2,0	–30

■ Recommended Cutting Conditions

● MLDH ... P / L5

(v_c : Cutting Speed (m/min), f : Feed rate (mm/rev), Min - **Optimum** - Max)

Drill-Ø (mm)	Cutting Cond.	Soft Steel (-200 HB)	General Steel (200–250 HB)	Alloy Steel (250–300 HB)	Stainless Steel (-200 HB)	Cast Iron	Aluminium Alloy	Heat-Resistant Steels
-Ø 1,0	v_c	40–50–60	40–50–60	40–50–60	20–30–40	40–50–60	50–60–70	5–10–15
	f	0,01– 0,02 –0,03	0,01– 0,02 –0,03	0,01– 0,02 –0,03	0,01– 0,02 –0,03	0,02– 0,03 –0,04	0,03– 0,04 –0,06	0,005– 0,01 –0,02
-Ø 1,5	v_c	40–50–60	40–50–60	40–50–60	20–30–40	40–50–60	50–60–70	5–10–15
	f	0,04– 0,08 –0,12	0,04– 0,08 –0,12	0,04– 0,08 –0,12	0,02– 0,05 –0,10	0,04– 0,08 –0,12	0,05– 0,10 –0,15	0,01– 0,03 –0,05
-Ø 2,0	v_c	40–50–60	40–50–60	40–50–60	20–30–40	40–50–60	50–60–70	5–10–15
	f	0,06– 0,08 –0,12	0,06– 0,08 –0,12	0,06– 0,08 –0,12	0,04– 0,06 –0,10	0,06– 0,08 –0,12	0,08– 0,12 –0,15	0,01– 0,03 –0,05

● MLDH ... L12 / L20 / L30

(v_c : Cutting Speed (m/min), f : Feed rate (mm/rev), Min - **Optimum** - Max)

Drill-Ø (mm)	Cutting Cond.	Soft Steel (-200 HB)	General Steel (200–250 HB)	Alloy Steel (250–300 HB)	Stainless Steel (-200 HB)	Cast Iron	Aluminium Alloy	Heat-Resistant Steels
-Ø 1,0	v_c	40–50–60	40–50–60	40–50–60	20–30–40	40–50–60	50–60–70	5–10–15
	f	0,01– 0,02 –0,03	0,01– 0,02 –0,03	0,01– 0,02 –0,03	0,01– 0,02 –0,03	0,02– 0,03 –0,04	0,03– 0,04 –0,06	0,005– 0,01 –0,02
-Ø 1,5	v_c	40–50–60	40–50–60	40–50–60	20–30–40	40–50–60	50–60–70	5–10–15
	f	0,03– 0,05 –0,07	0,03– 0,05 –0,07	0,03– 0,05 –0,07	0,02– 0,04 –0,07	0,04– 0,07 –0,10	0,05– 0,08 –0,12	0,01– 0,02 –0,03
-Ø 2,0	v_c	40–50–60	40–50–60	40–50–60	20–30–40	40–50–60	50–60–70	5–10–15
	f	0,04– 0,06 –0,08	0,04– 0,06 –0,08	0,04– 0,06 –0,08	0,04– 0,06 –0,08	0,04– 0,07 –0,10	0,05– 0,08 –0,12	0,01– 0,02 –0,03

○ = Japan stock

MLDH-P



MLDH-L




Micro Long Drills


MLDH ...L/P Type

Internal Coolant Supply

● MLDH-P For Pilot Hole Drilling

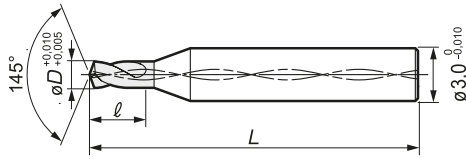

● MLDH-L For Deep Hole Drilling

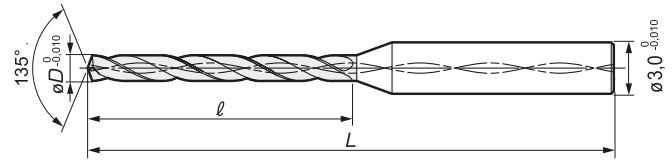

Stock


(mm)

ØD (mm)	P Type for Pilot Hole Drilling			L Type for Deep Hole Drilling																												
	Cat. No.	Stock	Dimensions		Cat. No. 5, 12, 20, 30	5x D		12x D		20x D		30x D																				
			L	ℓ		Stock [5]	Dimensions L ℓ	Stock [1][2]	Dimensions L ℓ	Stock [2][0]	Dimensions L ℓ	Stock [3][0]	Dimensions L ℓ																			
0,80	MLDH 0800P	○	45	3,2	MLDH 0800L□□	○	50	8	○	14	60	19	○	28																		
0,81	0810P	○			MLDH 0810L□□	○			○				○		○																	
0,82	MLDH 0820P	○			3,3	MLDH 0820L□□			○				9		55	15	21	21	○	○												
0,83	0830P	○				MLDH 0830L□□			○												○	○	○									
0,84	MLDH 0840P	○			3,4	MLDH 0840L□□			○				10		60	16	23	23	○	○												
0,85	0850P	○				MLDH 0850L□□			○												○	○	○									
0,86	0860P	○				MLDH 0860L□□			○												○	○	○									
0,87	MLDH 0870P	○			3,5	MLDH 0870L□□			○				12		65	17	24	24	○	○												
0,88	0880P	○				MLDH 0880L□□			○												○	○	○									
0,89	MLDH 0890P	○			45	3,6			MLDH 0890L□□				○		55	14	22	22	22	○	○											
0,90	0900P	○							MLDH 0900L□□				○									○	○	○								
0,91	0910P	○							3,7				MLDH 0910L□□									○	16	70	23	23	23	○	○			
0,92	MLDH 0920P	○											MLDH 0920L□□									○								○	○	○
0,93	0930P	○							3,8				MLDH 0930L□□									○	18	75	24	24	24	○	○			
0,94	MLDH 0940P	○											MLDH 0940L□□									○								○	○	○
0,95	0950P	○											MLDH 0950L□□									○								○	○	○
0,96	0960P	○							3,9				MLDH 0960L□□									○	20	80	25	25	25	○	○			
0,97	MLDH 0970P	○											MLDH 0970L□□									○								○	○	○
0,98	0980P	○											MLDH 0980L□□									○								○	○	○
0,99	MLDH 0990P	○	MLDH 0990L□□	○	○	○	○																									
1,00	1000P	○	50	4,0	MLDH 1000L□□	○	60	17	24	24	24	○	○																			
1,05	MLDH 1050P	○			MLDH 1050L□□	○								○	○	○																
1,10	MLDH 1100P	○			4,2	MLDH 1100L□□								○	12	70	26	26	26	○	○											
1,15	MLDH 1150P	○				MLDH 1150L□□								○								○	○	○								
1,20	MLDH 1200P	○			4,4	MLDH 1200L□□								○	14	75	27	27	27	○	○											
1,25	MLDH 1250P	○				MLDH 1250L□□								○								○	○	○								
1,30	MLDH 1300P	○			4,6	MLDH 1300L□□								○	16	80	28	28	28	○	○											
1,35	MLDH 1350P	○				MLDH 1350L□□								○								○	○	○								
1,40	MLDH 1400P	○				MLDH 1400L□□								○								○	○	○								
1,45	MLDH 1450P	○			4,8	MLDH 1450L□□								○	18	85	29	29	29	○	○											
1,50	MLDH 1500P	○	MLDH 1500L□□	○		○	○	○																								
1,55	MLDH 1550P	○	5,0	MLDH 1550L□□	○	20	90	30	30	30	○	○																				
1,60	MLDH 1600P	○		MLDH 1600L□□	○								○	○	○																	
1,65	MLDH 1650P	○		MLDH 1650L□□	○								○	○	○																	
1,70	MLDH 1700P	○	55	5,2	MLDH 1700L□□	○	70	22	22	22	○	○																				
1,75	MLDH 1750P	○			MLDH 1750L□□	○							○	○	○																	
1,80	MLDH 1800P	○			MLDH 1800L□□	○							○	○	○																	
1,85	MLDH 1850P	○			MLDH 1850L□□	○							○	○	○																	
1,90	MLDH 1900P	○	60	5,4	MLDH 1900L□□	○	75	23	23	23	○	○																				
1,95	MLDH 1950P	○			MLDH 1950L□□	○							○	○	○																	
2,00	MLDH 2000P	○			MLDH 2000L□□	○							○	○	○																	
					MLDH 2000L□□	○							○	○	○																	

PVD Coated Grade: ACV70

Solid Carbide Micro / MINI-DRILLS

MDUS / MDSS Type

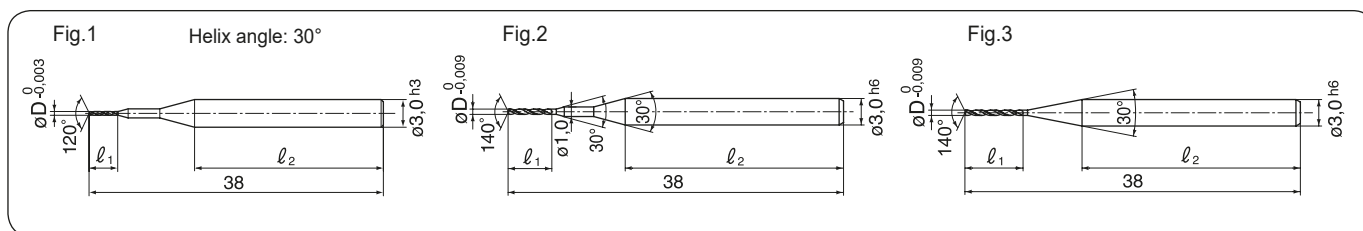

● Diameter Ø 0,03–0,19 mm

øD (mm)	Cat. No.	Stock	Dimensions		Fig.	Pcs./Pack-ing
			l ₁	l ₂		
0,030	MDUS 0030-30C	○	0,3		28	1
0,035	MDUS 0035-30C	○	0,4			
0,040	MDUS 0040-30C	○	0,4			
0,045	MDUS 0045-30C	○	0,5			
0,050	MDUS 0050-30C	○	0,5			
0,055	MDUS 0055-30C		0,6			
0,060	MDUS 0060-30C		0,6			
0,065	MDUS 0065-30C		0,7			
0,070	MDUS 0070-30C		0,7			
0,075	MDUS 0075-30C	○	0,8			
0,080	MDUS 0080-30C		0,8			
0,085	MDUS 0085-30C		1,0			
0,090	MDUS 0090-30C		1,0			
0,095	MDUS 0095-30C	○	1,0			
0,100	MDUS 0100-30C	○	1,0			
0,110	MDUS 0110-30C	○	1,2			
0,120	MDUS 0120-30C		1,2			
0,120	MDUS 0130-30C	○	1,5			
0,140	MDUS 0140-30C		1,5			
0,150	MDUS 0150-30C		1,5			
0,160	MDUS 0160-30C	○	1,8			
0,170	MDUS 0170-30C		1,8			
0,180	MDUS 0180-30C		1,8			
0,190	MDUS 0190-30C		1,9			

● Diameter Ø 0,20–0,59 mm

øD (mm)	Cat. No.	Stock	Dimensions		Fig.	Pcs./Pack-ing
			l ₁	l ₂		
0,20	MDSS 0020	□			2	2,5
0,21	MDSS 0021	□				
0,22	MDSS 0022	□				
0,23	MDSS 0023	□				
0,24	MDSS 0024	□				
0,25	MDSS 0025	□				
0,26	MDSS 0026	□				
0,27	MDSS 0027	□				
0,28	MDSS 0028	□				
0,29	MDSS 0029	□				
0,30	MDSS 0030	□			1	28
0,31	MDSS 0031	□				
0,32	MDSS 0032	□				
0,33	MDSS 0033	□				
0,34	MDSS 0034	□				
0,35	MDSS 0035	□				
0,36	MDSS 0036	□				
0,37	MDSS 0037	□				
0,38	MDSS 0038	□				
0,39	MDSS 0039	□				
0,40	MDSS 0040	□			3	27
0,41	MDSS 0041	□				
0,42	MDSS 0042	□				
0,43	MDSS 0043	□				
0,44	MDSS 0044	□				
0,45	MDSS 0045	□				
0,46	MDSS 0046	□				
0,47	MDSS 0047	□				
0,48	MDSS 0048	□				
0,49	MDSS 0049	□				
0,50	MDSS 0050	□			6	27
0,51	MDSS 0051	□				
0,52	MDSS 0052	□				
0,53	MDSS 0053	□				
0,54	MDSS 0054	□				
0,55	MDSS 0055	□				
0,56	MDSS 0056	□				
0,57	MDSS 0057	□				
0,58	MDSS 0058	□				
0,59	MDSS 0059	□				

● Diameter Ø 0,60–1,00 mm

øD (mm)	Cat. No.	Stock	Dimensions		Fig.	Pcs./Pack-ing
			l ₁	l ₂		
0,60	MDSS 0060	□			7	26
0,61	MDSS 0061	□				
0,62	MDSS 0062	□				
0,63	MDSS 0063	□				
0,64	MDSS 0064	□				
0,65	MDSS 0065	□				
0,66	MDSS 0066	□				
0,67	MDSS 0067	□				
0,68	MDSS 0068	□				
0,69	MDSS 0069	□				
0,70	MDSS 0070	□			9	24
0,71	MDSS 0071	□				
0,72	MDSS 0072	□				
0,73	MDSS 0073	□				
0,74	MDSS 0074	□				
0,75	MDSS 0075	□				
0,76	MDSS 0076	□				
0,77	MDSS 0077	□				
0,78	MDSS 0078	□				
0,79	MDSS 0079	□				
0,80	MDSS 0080	□			3	1
0,81	MDSS 0081	□				
0,82	MDSS 0082	□				
0,83	MDSS 0083	□				
0,84	MDSS 0084	□				
0,85	MDSS 0085	□				
0,86	MDSS 0086	□				
0,87	MDSS 0087	□				
0,88	MDSS 0088	□				
0,89	MDSS 0089	□				
0,90	MDSS 0090	□			11	22
0,91	MDSS 0091	□				
0,92	MDSS 0092	□				
0,93	MDSS 0093	□				
0,94	MDSS 0094	□				
0,95	MDSS 0095	□				
0,96	MDSS 0096	□				
0,97	MDSS 0097	□				
0,98	MDSS 0098	□				
0,99	MDSS 0099	□				
1,00	MDSS 0100	□	12	21		




■ MDSS Recommended Cutting Conditions (Wet)

Work Cond.	Alloy Steel, Pre-hardened Steel			Die Steel, Tempered Steel (HRC 30–40)			Stainless Steel		
	Drill-ø (mm)	Spindle (rpm)	Feed rate (mm/min)	Step-feed (mm)	Spindle (rpm)	Feed rate (mm/min)	Step-feed (mm)	Spindle (rpm)	Feed rate (mm/min)
Ø 0,2	26500	50	0,1D	21200	40	0,1D	10600	20	0,1D
Ø 0,3	26500	80		21200	60		10600	30	
Ø 0,4	25900	100		19900	80		9500	40	
Ø 0,5	25500	150		19100	110		9500	50	
Ø 1,0	15900	240		12700	190		5600	80	

- The above conditions are recommended under wet conditions, using water-soluble coolant.
- If machine noises and vibrations are present, please adjust the cutting conditions accordingly.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.

* Step feed is recommended for drilling of holes deeper than 3xD.



MDS...SDC

SUMIDIA Coated Drills SDC Type



General Features

SUMIDIA Coated SDC type drills for Carbon Fibre Reinforced Plastic (CFRP) employ Sumitomo Electric Hardmetal's proprietary multi-step point angle. Combined with a diamond coating, this technology improves the quality of machined surfaces and extends tool life.

Characteristics and Applications

- Excellent drilled-hole quality
 - Sharp cutting edge shape reduces delamination of fibre layers and burrs.
 - Continuously changing point angle disperses load placed on cutting edge and prevents breakage.
- Long tool life
 - Use of high-strength diamond coating with excellent adhesion delivers high quality and long tool life.

Performance

Comparison of Machined Surface Finish

Excellent Machined Face Quality
(Prevents Delamination And Burrs)

	SDC	Concurrent A	Concurrent B	Concurrent C
Hole Entrance				
Hole Exit				

Tool: SUMIDIA coated drill SDC type, Ø 6,375
Competitor A B C's drill Ø 6,35 & Ø 6,5
Work Material: CFRP
Cutting Conditions: n = 6.000 rpm, f=0,1 mm/rev, a_p =28 mm (Through) Dry

Tool Life Comparison

Effects of Diamond Coating

SDC type (After drilling 600 holes)	Competitor's product (After drilling 50 holes)
No delamination Low flank wear	More delamination from cutting edge to flank

Stable diamond layer adhesion prevents delamination.
Excellent wear resistance enables high-quality drilling with long tool life.

Tool Life Comparison

Tool	SDC	Competitor A's Diamond Coated Drill	Carbide Drill
Hole	0-600	0-100	0-100

Tool: SUMIDIA coated drill SDC type, Ø 6,375
Competitor A B C's drill Ø 6,35 & Ø 6,5
Work Material: CFRP
Cutting Conditions: n = 6.000 rpm, f=0,1 mm/rev, a_p =28 mm (Through) Dry

Series

Type	Diameter Range (mm)	Point angle	Hole Depth (L/d)
MDS□□□□SDC3	Ø 2,0 – 4,0	90°	-3
	Ø 4,851 – 10,0	130°	

Grade	Coating	Structural Steel	Carbon Steel	Alloy Steel	Precipitated Steel	Tempered Die Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	CFRP*
DCX20	SUMI-DIA						45-55 HRC	55-60 HRC	60-65 HRC				

* CFRP (Carbon Fibre Reinforced Plastic)

● Diameter Ø 2,0–4,0 mm

● Diameter Ø 4,851–10,0 mm

● Diameter ø 2,0–10,0 mm (mm)


DC (mm)	Ød (mm)	Cat. No.	3D Type		
			Stock	L	ℓ
2,0	3,0	MDS 02000SDC3	○		12,5
		02489SDC3	○	49	15,0
3,0	3,3	MDS 03300SDC3	○		17,5
		04000SDC3	○	60	20,0
4,0	4,0	MDS 04851SDC3	○		22,5
		05000SDC3	○	76	27,5
4,851	4,851	MDS 05600SDC3	○		30,0
		06000SDC3	○	81	32,5
6,375	6,375	MDS 06375SDC3	○		35,0
		07000SDC3	○	83	35,0
7,938	7,938	MDS 07938SDC3	○		40,0
		08000SDC3	○	90	40,0
9,0	9,0	MDS 09000SDC3	○		45,0
		09550SDC3	○	98	45,0
10,0	10,0	MDS 10000SDC3	○		50,0
		10000SDC3	○	105	50,0

Recommended Cutting Conditions

Work	Cond.	ØD	CFRP Only (Dry Machining)		Stacked Plates of CFRP, Aluminium Alloys (Dry Machining)	
			v _c	f	v _c	f
-Ø 6,0	v _c		80-120-150		40-60-80	
	f		0,05-0,08-0,10		0,05-0,05-0,10	
-Ø 10,0	v _c		80-100-120		40-60-80	
	f		0,05-0,08-0,10		0,05-0,05-0,10	

(v_c: Cutting Speed (m/min), f: Feed rate (mm/rev), Min - Optimum - Max)

Brazed Carbide MULTI-DRILLS KDS Type

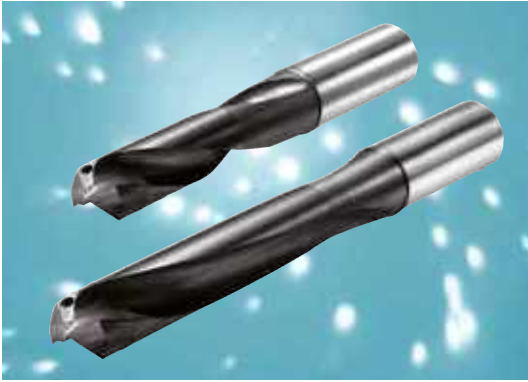

■ Description

The new AK type drill features an extra long carbide drill head, new cutting geometry, coolant holes and ultra hard TiAlN coating for reliable high productivity drilling.

- ## ■ Advantages
- General purpose drill for steels, stainless steels, cast irons
 - High productivity drilling even on deep holes up to 7 x D
 - Twice the tool life of conventionally coated drills
 - Self centering
 - Surface finish and tolerances comparable to solid carbide
 - Regrindable extra long carbide head halves drill replacement costs

■ Series

Type	Diameter range (mm)	Hole depth (L/D)	Remark
Short type (MAK Type)	Ø 9,5–40,5	-3	First choice general purpose drill
Long type (LAK Type)	Ø 9,5–40,5	-5	
Extra long type (DAK Type)	Ø 9,5–40,5	-7	Helix angle: 25° ---> 0°



Series

■ Performance

● High efficiency drilling	● Optimized drill geometry	● Comparison of cutting power (chip removal capability)
<p>Comparison of coating damage when high speed drilling</p> <p>TiAlN coated KDS...AK TiN coated type</p> <p>$v_c = 120$ m/min $v_c = 60$ m/min After 30 m cut length (600 holes)</p>	<p>Comparison of damage to drill margin After 40 min. cut length</p> <p>KDS...AK Competitor's drill</p>	<p>Cutting power (N)</p>
<p>Drill dia.: 18,0 mm Work material: C50 (HB230) $f = 0,3$ mm/rev $a_p = 50$ mm</p>	<p>Drill dia.: 18,0 mm Work material: C50 (HB230) $v_c = 50$ m/min $f = 0,25$ mm/rev $a_p = 38$ mm</p>	<p>Drill dia.: 18,0 mm $v_c = 50$ m/min Work material: C50 (HB230) $f = 0,3$ mm/rev $a_p = 90$ mm (L/D = 5)</p>


■ Application examples

● Workpiece material	● Automotive parts	● Automotive parts
<ul style="list-style-type: none"> - General steel and alloy steel - Low carbon steel - Die steel - Stainless steel - Ductile cast iron - Grey cast iron 	<p>Work material: C50 (HB250)</p>	<p>Work material: 42CrMo4 (HB250)</p>
	<p>Drill: KDS 180 LAK (Ø 18,0 mm) Conditions: $v_c = 55$ m/min, $f = 0,25$ mm/rev $a_p = 70$ mm</p>	<p>Drill: KDS 250 MAK (Ø 25,0 mm) Conditions: $v_c = 60$ m/min, $f = 0,25$ mm/rev $a_p = 65$ mm</p>

Brazed Carbide MULTI-DRILLS KDS ... MAK Type

Short Type (3 x D)

Brazed Carbide Drills with Coolant Holes

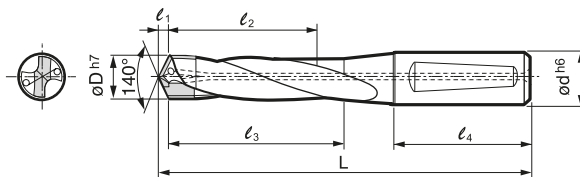

Helix angle: 20°
l₂ = Effective drilling length

● Diameter Ø 9,5–15,5 mm

Dimensions (mm)				Cat. No.	Short Series (3D)			
DC (mm)	Shank		Drill Head PL		Stock MAK	Dimensions (mm)		
	DCON	LS				OAL	LU	LUX
9,5~ 10,0 ~10,5	16	48	1,8	KDS 095 MAK	□	96,8	32	37
				100 MAK	□			
				105 MAK	□			
10,6~ 11,0 ~11,5	16	48	2	KDS 106 MAK	□	102,0	35	40
				110 MAK	□			
				115 MAK	□			
11,6				KDS 116 MAK	□			
11,7				117 MAK	□			
11,8	118 MAK	□						
11,9	119 MAK	□						
12,0	16	48	2,2	120 MAK	□	107,2	38	44
12,1				121 MAK	□			
12,2				122 MAK	□			
12,3				123 MAK	□			
12,4				124 MAK	□			
12,5				125 MAK	□			
12,6				KDS 126 MAK	□			
12,7				127 MAK	□			
12,8	128 MAK	□						
12,9	129 MAK	□						
13,0	16	48	2,4	130 MAK	□	112,4	41	47
13,1				131 MAK	□			
13,2				132 MAK	□			
13,3				133 MAK	□			
13,4				134 MAK	□			
13,5				135 MAK	□			
13,6				KDS 136 MAK	□			
13,7	137 MAK	□						
13,8	138 MAK	□						
13,9	139 MAK	□						
14,0	16	48	2,5	140 MAK	□	117,5	44	51
14,1				141 MAK	□			
14,2				142 MAK	□			
14,3				143 MAK	□			
14,4				144 MAK	□			
14,5				145 MAK	□			
14,6	KDS 146 MAK	□						
14,7	147 MAK	□						
14,8	148 MAK	□						
14,9	148 MAK	□						
15,0	20	50	2,7	150 MAK	□	127,7	47	54
15,1				151 MAK	□			
15,2				152 MAK	□			
15,3				153 MAK	□			
15,4				154 MAK	□			
15,5				155 MAK	□			

● Diameter Ø 15,6–20,0 mm

Dimensions (mm)				Cat. No.	Short Series (3D)			
DC (mm)	Shank		Drill Head PL		Stock MAK	Dimensions (mm)		
	DCON	LS				OAL	LU	LUX
15,6 15,7 15,8 15,9	20	50	2,9	KDS 156 MAK	□	132,9	50	58
				157 MAK	□			
				158 MAK	□			
				159 MAK	□			
16,0				160 MAK	□			
16,1				161 MAK	□			
16,2				162 MAK	□			
16,3				163 MAK	□			
16,4	164 MAK	□						
16,5	165 MAK	□						
16,6	20	50	3,1	KDS 166 MAK	□	138,1	53	61
16,7				167 MAK	□			
16,8				168 MAK	□			
16,9				169 MAK	□			
17,0				170 MAK	□			
17,1				171 MAK	□			
17,2				172 MAK	□			
17,3				173 MAK	□			
17,4	174 MAK	□						
17,5	175 MAK	□						
17,6	20	50	3,3	KDS 176 MAK	□	143,3	56	65
17,7				177 MAK	□			
17,8				178 MAK	□			
17,9				179 MAK	□			
18,0				180 MAK	□			
18,1				181 MAK	□			
18,2				182 MAK	□			
18,3				183 MAK	□			
18,4	184 MAK	□						
18,5	185 MAK	□						
18,6	25	56	3,5	KDS 186 MAK	□	158,5	59	68
18,7				187 MAK	□			
18,8				188 MAK	□			
18,9				189 MAK	□			
19,0				190 MAK	□			
19,1				191 MAK	□			
19,2				192 MAK	□			
19,3				193 MAK	□			
19,4	194 MAK	□						
19,5	195 MAK	□						
19,6	25	56	3,6	KDS 196 MAK	□	158,6	62	72
19,7				197 MAK	□			
19,8				198 MAK	□			
19,9				199 MAK	□			
20,0				200 MAK	□			

■ Recommended Cutting Conditions

(v_c: Cutting Speed (m/min), f: Feed rate (mm/rev)) (Min – Standard – Max)

Diameter (mm)		Steels (<250 HB)	Steels (250–320 HB)	Hardened Steels (45 HRC)	Stainless Steels (<200 HB)	Ductile Cast Irons	Cast Irons	Aluminium Alloys	Titanium Alloys (Ti–6Al–4V)	Inconel (Inconel 718)
		-Ø 15	v _c	50–65–75	50–60–70	30–35–45	35–45–50	55–65–75	60–80–100	70–85–100
	f	0,15–0,3	0,15–0,3	0,1–0,2	0,1–0,2	0,15–0,3	0,2–0,3	0,25–0,35	0,1–0,15	0,08–0,1
-Ø 20	v _c	50–65–75	50–60–70	35–40–50	35–45–50	60–70–80	60–80–100	70–90–110	20–30–40	10–20–30
	f	0,15–0,35	0,15–0,35	0,15–0,25	0,15–0,25	0,15–0,35	0,2–0,35	0,25–0,4	0,1–0,15	0,08–0,1
-Ø 30,5	v _c	55–70–90	55–65–90	35–40–50	35–45–50	60–70–90	60–90–110	75–100–120	25–35–40	15–25–35
	f	0,2–0,4	0,2–0,4	0,15–0,25	0,15–0,25	0,2–0,4	0,25–0,4	0,3–0,4	0,1–0,2	0,08–0,12

If the drilling operation is completely satisfactory with the above condition and the rigidity of the machine is sufficient, the cutting data can be raised. For more guidance, please contact our technical representative.

□ = Delivery on request

Brazed Carbide MULTI-DRILLS KDS ... MAK Type

TiAlN Coated Brazed Carbide Multi-Drills for General Steels, Cast Iron & Ductile Cast Iron



Specification:

- Brazed carbide drill TiAlN coated (Grade: ACW30) with coolant holes
- Shank with whistle notch

● Diameter Ø 20,1–24,5 mm

Dimensions (mm)				Cat. No.	Short Series (3D)			
DC (mm)	Shank		Drill Head PL		Stock MAK	Dimensions (mm)		
	DCON	LS				OAL	LU	LUX
20,1	25	56	3,6	KDS 201 MAK	□	158,6	62	72
20,2				202 MAK	□			
20,3				203 MAK	□			
20,4				204 MAK	□			
20,5				205 MAK	□			
20,6	25	56	3,8	KDS 206 MAK	□	158,8	65	75
20,7				207 MAK	□			
20,8				208 MAK	□			
20,9				209 MAK	□			
21,0				210 MAK	□			
21,1				211 MAK	□			
21,2				212 MAK	□			
21,3				213 MAK	□			
21,4				214 MAK	□			
21,5				215 MAK	□			
21,6	25	56	4,0	KDS 216 MAK	□	164,0	68	79
21,7				217 MAK	□			
21,8				218 MAK	□			
21,9				219 MAK	□			
22,0				220 MAK	□			
22,1				221 MAK	□			
22,2				222 MAK	□			
22,3				223 MAK	□			
22,4				224 MAK	□			
22,5				225 MAK	□			
22,6	25	56	4,2	KDS 226 MAK	□	164,2	71	82
22,7				227 MAK	□			
22,8				228 MAK	□			
22,9				229 MAK	□			
23,0				230 MAK	□			
23,1				231 MAK	□			
23,2				232 MAK	□			
23,3				233 MAK	□			
23,4				234 MAK	□			
23,5				235 MAK	□			
23,6	32	60	4,4	KDS 236 MAK	□	174,4	74	86
23,7				237 MAK	□			
23,8				238 MAK	□			
23,9				239 MAK	□			
24,0				240 MAK	□			
24,1				241 MAK	□			
24,2				242 MAK	□			
24,3				243 MAK	□			
24,4				244 MAK	□			
24,5				245 MAK	□			

● Diameter Ø 24,6– 40,5 mm

Dimensions (mm)				Cat. No.	Short Series (3D)									
DC (mm)	Shank		Drill Head PL		Stock MAK	Dimensions (mm)								
	DCON	LS				OAL	LU	LUX						
24,6	32	60	4,5	KDS 246 MAK	□	174,5	76	88						
24,7				247 MAK	□									
24,8				248 MAK	□									
24,9				249 MAK	□									
25,0				250 MAK	□									
25,1				251 MAK	□									
25,2				252 MAK	□									
25,3				253 MAK	□									
25,4				254 MAK	□									
25,5				255 MAK	□									
25,6	32	60	4,7	KDS 256 MAK	□	179,9	79	92						
25,7				257 MAK	□									
25,8				258 MAK	□									
25,9				259 MAK	□									
26,0				260 MAK	□									
26,1				261 MAK	□									
26,5				265 MAK	□									
26,6				32	60				4,9	KDS 266 MAK	□	179,9	81	94
27,5										275 MAK	□			
27,6				32	60				5,1	KDS 276 MAK	□	185,1	83	97
28,5	285 MAK	□												
28,6	32	60	5,3	KDS 286 MAK	□	190,3	86	100						
29,5				295 MAK	□									
29,6	32	60	5,5	KDS 296 MAK	□	190,5	89	104						
30,5				305 MAK	□									
30,6	40	70	5,6	KDS 306 MAK	□	210,6	95	112						
31,5				315 MAK	□									
31,6	40	70	5,8	KDS 316 MAK	□	215,8	98	115						
32,5				325 MAK	□									
32,6	40	70	6,0	KDS 326 MAK	□	221,0	101	119						
33,5				335 MAK	□									
33,6	40	70	6,2	KDS 336 MAK	□	226,2	104	122						
34,5				345 MAK	□									
34,6	40	70	6,4	KDS 346 MAK	□	231,4	107	125						
35,5				355 MAK	□									
35,6	40	70	6,6	KDS 356 MAK	□	231,6	110	128						
36,5				365 MAK	□									
36,6	40	70	6,7	KDS 366 MAK	□	236,7	113	132						
37,5				375 MAK	□									
37,6	40	70	6,9	KDS 376 MAK	□	241,9	116	163						
38,5				385 MAK	□									
38,6	40	70	7,1	KDS 386 MAK	□	247,1	119	168						
39,5				395 MAK	□									
39,6	40	70	7,3	KDS 396 MAK	□	252,3	122	173						
40,5				405 MAK	□									

■ How to Order

Non-Stock Items will be required minimum order quantity for 6 pcs. Please specify the Cat. No. For example, if the diameter of the drill is 10,2 mm, please indicate as follow.

E.g., **KDS 102 MAK**, **ACW30** (Grade)

KDS series: Brazed carbide drill with coolant holes

Drill diameter
10,2 mm

AK: Brazed carbide and TiAlN coated drill

M : 3 x D




Brazed Carbide MULTI-DRILLS

KDS ... LAK Type

Long Type (5 x D)

Brazed Carbide Drills with Coolant Holes

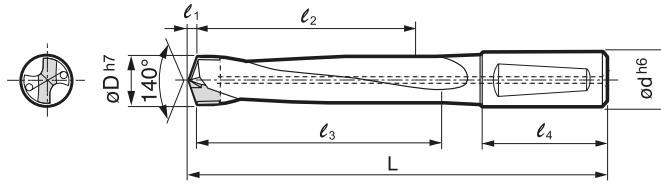

Helix angle: 20° ---> 6°
 l_2 = Effective drilling length

● Diameter Ø 9,5–15,5 mm

Dimensions (mm)			Cat. No.	Long Series (5D)				
DC (mm)	Shank			Drill Head	Stock	Dimensions (mm)		
	DCON	LS				PL	LAK	OAL
9,5~	16	48	1,8	KDS 095 LAK	□	116,8	52	57
10,0				100 LAK	□			
~10,5				105 LAK	□			
10,6~	16	48	2	KDS 106 LAK	□	127,0	57	63
11,0				110 LAK	□			
~11,5				115 LAK	□			
11,6	16	48	2,2	KDS 116 LAK	□	132,2	63	69
11,7				117 LAK	□			
11,8				118 LAK	□			
11,9				119 LAK	□			
12,0				120 LAK	□			
12,1				121 LAK	□			
12,2				122 LAK	□			
12,3				123 LAK	□			
12,4	124 LAK	□						
12,5	125 LAK	□						
12,6	16	48	2,4	KDS 126 LAK	□	142,4	67	74
12,7				127 LAK	□			
12,8				128 LAK	□			
12,9				129 LAK	□			
13,0				130 LAK	□			
13,1				131 LAK	□			
13,2				132 LAK	□			
13,3				133 LAK	□			
13,4	134 LAK	□						
13,5	135 LAK	□						
13,6	16	48	2,5	KDS 136 LAK	□	147,5	73	80
13,7				137 LAK	□			
13,8				138 LAK	□			
13,9				139 LAK	□			
14,0				140 LAK	□			
14,1				141 LAK	□			
14,2				142 LAK	□			
14,3				143 LAK	□			
14,4	144 LAK	□						
14,5	145 LAK	□						
14,6	20	50	2,7	KDS 146 LAK	□	157,7	77	85
14,7				147 LAK	□			
14,8				148 LAK	□			
14,9				149 LAK	□			
15,0				150 LAK	□			
15,1				151 LAK	□			
15,2				152 LAK	□			
15,3				153 LAK	□			
15,4				154 LAK	□			
15,5				155 LAK	□			

● Diameter Ø 15,6–20,0 mm

Dimensions (mm)			Cat. No.	Long Series (5D)				
DC (mm)	Shank			Drill Head	Stock	Dimensions (mm)		
	DCON	LS				PL	LAK	OAL
15,6	20	50	2,9	KDS 156 LAK	□	167,9	83	91
15,7				157 LAK	□			
15,8				158 LAK	□			
15,9				159 LAK	□			
16,0				160 LAK	□			
16,1				161 LAK	□			
16,2				162 LAK	□			
16,3				163 LAK	□			
16,4				164 LAK	□			
16,5				165 LAK	□			
16,6	20	50	3,1	KDS 166 LAK	□	173,1	87	96
16,7				167 LAK	□			
16,8				168 LAK	□			
16,9				169 LAK	□			
17,0				170 LAK	□			
17,1				171 LAK	□			
17,2				172 LAK	□			
17,3				173 LAK	□			
17,4				174 LAK	□			
17,5				175 LAK	□			
17,6	20	50	3,3	KDS 176 LAK	□	178,3	93	102
17,7				177 LAK	□			
17,8				178 LAK	□			
17,9				179 LAK	□			
18,0				180 LAK	□			
18,1				181 LAK	□			
18,2				182 LAK	□			
18,3				183 LAK	□			
18,4				184 LAK	□			
18,5				185 LAK	□			
18,6	25	56	3,5	KDS 186 LAK	□	193,5	97	107
18,7				187 LAK	□			
18,8				188 LAK	□			
18,9				189 LAK	□			
19,0				190 LAK	□			
19,1				191 LAK	□			
19,2				192 LAK	□			
19,3				193 LAK	□			
19,4				194 LAK	□			
19,5				195 LAK	□			
19,6	25	56	3,6	KDS 196 LAK	□	198,6	103	113
19,7				197 LAK	□			
19,8				198 LAK	□			
19,9				199 LAK	□			
20,0				200 LAK	□			

■ Recommended Cutting Conditions

(v_c : Cutting Speed (m/min), f : Feed rate (mm/rev)) (Min – Standard – Max)

Diameter (mm)		Steels (<250 HB)	Steels (250–320 HB)	Hardened Steels (45 HRC)	Stainless Steels (<200 HB)	Ductile Cast Irons	Cast Irons	Aluminium Alloys	Titanium Alloys (Ti-6Al-4V)	Inconel (Inconel 718)
		–Ø 15	v_c	50–65–75	50–60–70	30–35–45	35–45–50	55–65–75	60–80–100	70–85–100
	f	0,15–0,3	0,15–0,3	0,1–0,2	0,1–0,2	0,15–0,3	0,2–0,3	0,25–0,35	0,1–0,15	0,08–0,1
–Ø 20	v_c	50–65–75	50–60–70	35–40–50	35–45–50	60–70–80	60–80–100	70–90–110	20–30–40	10–20–30
	f	0,15–0,35	0,15–0,35	0,15–0,25	0,15–0,25	0,15–0,35	0,2–0,35	0,25–0,4	0,1–0,15	0,08–0,1
–Ø 30,5	v_c	55–70–90	55–65–90	35–40–50	35–45–50	60–70–90	60–90–110	75–100–120	25–35–40	15–25–35
	f	0,2–0,4	0,2–0,4	0,15–0,25	0,15–0,25	0,2–0,4	0,25–0,4	0,3–0,4	0,1–0,2	0,08–0,12

If the drilling operation is completely satisfactory with the above condition and the rigidity of the machine is sufficient, the cutting data can be raised. For more guidance, please contact our technical representative.

□ = Delivery on request

Brazed Carbide MULTI-DRILLS KDS ... LAK Type

TiAlN Coated Brazed Carbide Multi-Drills for General Steels, Cast Iron & Ductile Cast Iron



Specification:

- Brazed carbide drill TiAlN coated (Grade: ACW30) with coolant holes
- Shank with whistle notch

● Diameter Ø 20,1–24,5 mm

Dimensions (mm)				Cat. No.	Long Series (5D)			
DC (mm)	Shank		Drill Head PL		Stock LAK	Dimensions (mm)		
	DCON	LS				OAL	LU	LUX
20,1	25	56	3,6	KDS 201 LAK	□	198,6	103	113
20,2				202 LAK	□			
20,3				203 LAK	□			
20,4				204 LAK	□			
20,5				205 LAK	□			
20,6	25	56	3,8	KDS 206 LAK	□	198,8	107	118
20,7				207 LAK	□			
20,8				208 LAK	□			
20,9				209 LAK	□			
21,0				210 LAK	□			
21,1				211 LAK	□			
21,2				212 LAK	□			
21,3				213 LAK	□			
21,4				214 LAK	□			
21,5				215 LAK	□			
21,6	25	56	4,0	KDS 216 LAK	□	204,0	113	124
21,7				217 LAK	□			
21,8				218 LAK	□			
21,9				219 LAK	□			
22,0				220 LAK	□			
22,1				221 LAK	□			
22,2				222 LAK	□			
22,3				223 LAK	□			
22,4				224 LAK	□			
22,5				225 LAK	□			
22,6	25	56	4,2	KDS 226 LAK	□	214,2	117	129
22,7				227 LAK	□			
22,8				228 LAK	□			
22,9				229 LAK	□			
23,0				230 LAK	□			
23,1				231 LAK	□			
23,2				232 LAK	□			
23,3				233 LAK	□			
23,4				234 LAK	□			
23,5				235 LAK	□			
23,6	32	60	4,4	KDS 236 LAK	□	224,4	123	135
23,7				237 LAK	□			
23,8				238 LAK	□			
23,9				239 LAK	□			
24,0				240 LAK	□			
24,1				241 LAK	□			
24,2				242 LAK	□			
24,3				243 LAK	□			
24,4				244 LAK	□			
24,5				245 LAK	□			

● Diameter Ø 24,6–40,5 mm

Dimensions (mm)				Cat. No.	Long Series (5D)									
DC (mm)	Shank		Drill Head PL		Stock LAK	Dimensions (mm)								
	DCON	LS				OAL	LU	LUX						
24,6	32	60	4,5	KDS 246 LAK	□	229,5	127	140						
24,7				247 LAK	□									
24,8				248 LAK	□									
24,9				249 LAK	□									
25,0				250 LAK	□									
25,1				251 LAK	□									
25,2				252 LAK	□									
25,3				253 LAK	□									
25,4				254 LAK	□									
25,5				255 LAK	□									
25,6	32	60	4,7	KDS 256 LAK	□	234,7	133	146						
25,7				257 LAK	□									
25,8				258 LAK	□									
25,9				259 LAK	□									
26,0				260 LAK	□									
26,1				261 LAK	□									
-26,5				-265 LAK	□									
26,6				32	60				4,9	KDS 266 LAK	□	239,9	137	151
-27,5										-275 LAK	□			
27,6				32	60				5,1	KDS 276 LAK	□	245,1	143	157
-28,5	-285 LAK	□												
28,6	32	60	5,3	KDS 286 LAK	□	250,3	147	162						
-29,5				-295 LAK	□									
29,6	32	60	5,5	KDS 296 LAK	□	260,5	152	167						
-30,5				-305 LAK	□									
30,6	40	70	5,6	KDS 306 LAK	□	280,6	166	187						
-31,5				-315 LAK	□									
31,6	40	70	5,8	KDS 316 LAK	□	285,8	172	190						
-32,5				-325 LAK	□									
32,6	40	70	6,0	KDS 326 LAK	□	291,0	175	194						
-33,5				-335 LAK	□									
33,6	40	70	6,2	KDS 336 LAK	□	296,2	177	197						
-34,5				-345 LAK	□									
34,6	40	70	6,4	KDS 346 LAK	□	301,4	180	200						
-35,5				-355 LAK	□									
35,6	40	70	6,6	KDS 356 LAK	□	306,6	183	203						
-36,5				-365 LAK	□									
36,6	40	70	6,7	KDS 366 LAK	□	311,7	188	207						
-37,5				-375 LAK	□									
37,6	40	70	6,9	KDS 376 LAK	□	321,9	193	243						
-38,5				-385 LAK	□									
38,6	40	70	7,1	KDS 386 LAK	□	327,1	198	248						
-39,5				-395 LAK	□									
39,6	40	70	7,3	KDS 396 LAK	□	332,3	203	253						
-40,5				-405 LAK	□									

■ How to Order

Non-Stock Items will be required minimum order quantity for 6 pcs. Please specify the Cat. No.
For example, if the diameter of the drill is 10,2 mm, please indicate as follow.

E.g., **KDS 102 LAK**, **ACW30** (Grade)

KDS series: Brazed carbide drill with coolant holes

Drill diameter
10,2 mm


AK: Brazed carbide and TiAlN coated drill

L : 5 x D



Brazed Carbide MULTI-DRILLS KDS ... DAK Type

Extra Long Type (7 x D) Brazed Carbide Drills with Coolant Holes

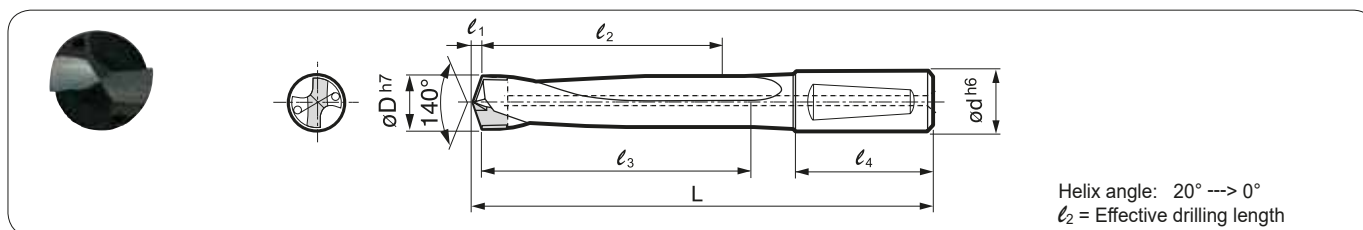

● Diameter Ø 9,5–15,5 mm

Dimensions (mm)			Cat. No.	Extra Long Series (7D)				
DC (mm)	Shank			Drill Head	Stock	Dimensions (mm)		
	DCON	LS			PL	DAK	OAL	LU
9,5~	16	48	1,8	KDS 095 DAK	□	141,8	75	80
10,0				100 DAK	□			
~10,5				105 DAK	□			
10,6~	16	48	2	KDS 106 DAK	□	152,0	81	87
11,0				110 DAK	□			
~11,5				115 DAK	□			
11,6	16	48	2,2	KDS 116 DAK	□	162,2	91	97
11,7				117 DAK	□			
11,8				118 DAK	□			
11,9				119 DAK	□			
12,0				120 DAK	□			
12,1				121 DAK	□			
12,2				122 DAK	□			
12,3				123 DAK	□			
12,4	124 DAK	□						
12,5	125 DAK	□						
12,6	16	48	2,4	KDS 126 DAK	□	177,4	99	106
12,7				127 DAK	□			
12,8				128 DAK	□			
12,9				129 DAK	□			
13,0				130 DAK	□			
13,1				131 DAK	□			
13,2				132 DAK	□			
13,3				133 DAK	□			
13,4	134 DAK	□						
13,5	135 DAK	□						
13,6	16	48	2,5	KDS 136 DAK	□	182,5	106	113
13,7				137 DAK	□			
13,8				138 DAK	□			
13,9				139 DAK	□			
14,0				140 DAK	□			
14,1				141 DAK	□			
14,2				142 DAK	□			
14,3				143 DAK	□			
14,4	144 DAK	□						
14,5	145 DAK	□						
14,6	20	50	2,7	KDS 146 DAK	□	197,7	114	122
14,7				147 DAK	□			
14,8				148 DAK	□			
14,9				149 DAK	□			
15,0				150 DAK	□			
15,1				151 DAK	□			
15,2				152 DAK	□			
15,3				153 DAK	□			
15,4	154 DAK	□						
15,5	155 DAK	□						

● Diameter Ø 15,6–20,0 mm

Dimensions (mm)			Cat. No.	Extra Long Series (7D)				
DC (mm)	Shank			Drill Head	Stock	Dimensions (mm)		
	DCON	LS			PL	DAK	OAL	LU
15,6	20	50	2,9	KDS 156 DAK	□	207,9	121	129
15,7				157 DAK	□			
15,8				158 DAK	□			
15,9				159 DAK	□			
16,0				160 DAK	□			
16,1				161 DAK	□			
16,2				162 DAK	□			
16,3				163 DAK	□			
16,4	164 DAK	□						
16,5	165 DAK	□						
16,6	20	50	3,1	KDS 166 DAK	□	218,1	129	138
16,7				167 DAK	□			
16,8				168 DAK	□			
16,9				169 DAK	□			
17,0				170 DAK	□			
17,1				171 DAK	□			
17,2				172 DAK	□			
17,3				173 DAK	□			
17,4	174 DAK	□						
17,5	175 DAK	□						
17,6	20	50	3,3	KDS 176 DAK	□	223,3	136	145
17,7				177 DAK	□			
17,8				178 DAK	□			
17,9				179 DAK	□			
18,0				180 DAK	□			
18,1				181 DAK	□			
18,2				182 DAK	□			
18,3				183 DAK	□			
18,4	184 DAK	□						
18,5	185 DAK	□						
18,6	25	56	3,5	KDS 186 DAK	□	243,5	144	154
18,7				187 DAK	□			
18,8				188 DAK	□			
18,9				189 DAK	□			
19,0				190 DAK	□			
19,1				191 DAK	□			
19,2				192 DAK	□			
19,3				193 DAK	□			
19,4	194 DAK	□						
19,5	195 DAK	□						
19,6	25	56	3,6	KDS 196 DAK	□	248,6	151	161
19,7				197 DAK	□			
19,8				198 DAK	□			
19,9				199 DAK	□			
20,0				200 DAK	□			

■ Recommended Cutting Conditions

(v_c : Cutting Speed (m/min), f : Feed rate (mm/rev)) (Min – Standard – Max)

Diameter (mm)		Steels (<250 HB)	Steels (250–320 HB)	Die Steels (about 250 HB)	Ductile Cast Irons	Remarks
–Ø 15	v_c	40–65–90	40–60–90	40–50–70	50–70–100	To avoid the drill bending, which can cause breakage, please pre-drill or reduce the cutting conditions at the entrance of hole: RPM: 100–300 f: 0,05–0,08 mm/rev
	f	0,15–0,2–0,3	0,1–0,2–0,25	0,1–0,2–0,25	0,2–0,3–0,35	
–Ø 20	v_c	40–65–90	40–60–90	40–50–70	50–70–100	
	f	0,2–0,3–0,4	0,15–0,25–0,35	0,15–0,25–0,3	0,2–0,35–0,4	
–Ø 30,5	v_c	40–70–90	40–65–90	40–55–70	50–70–100	
	f	0,2–0,35–0,45	0,2–0,3–0,4	0,2–0,3–0,35	0,25–0,4–0,5	

□ = Delivery on request

Brazed Carbide MULTI-DRILLS KDS ... DAK Type

TiAlN Coated Brazed Carbide Multi-Drills for General Steels & Ductile Cast Iron



Specification:

- Brazed carbide drill TiAlN coated (Grade: ACW30) with coolant holes
- Shank with whistle notch

● Diameter Ø 20,1–24,5 mm

Dimensions (mm)				Cat. No.	Extra Long Series (7D)			
DC (mm)	Shank		Drill Head		Stock	Dimensions (mm)		
	DCON	LS				PL	DAK	OAL
20,1	25	56	3,6	KDS 201 DAK	□	248,6	151	161
20,2				202 DAK	□			
20,3				203 DAK	□			
20,4				204 DAK	□			
20,5				205 DAK	□			
20,6	25	56	3,8	KDS 206 DAK	□	248,8	155	166
20,7				207 DAK	□			
20,8				208 DAK	□			
20,9				209 DAK	□			
21,0				210 DAK	□			
21,1				211 DAK	□			
21,2				212 DAK	□			
21,3				213 DAK	□			
21,4				214 DAK	□			
21,5				215 DAK	□			
21,6	25	56	4,0	KDS 216 DAK	□	259,0	166	177
21,7				217 DAK	□			
21,8				218 DAK	□			
21,9				219 DAK	□			
22,0				220 DAK	□			
22,1				221 DAK	□			
22,2				222 DAK	□			
22,3				223 DAK	□			
22,4				224 DAK	□			
22,5				225 DAK	□			
22,6	25	56	4,2	KDS 226 DAK	□	274,2	174	186
22,7				227 DAK	□			
22,8				228 DAK	□			
22,9				229 DAK	□			
23,0				230 DAK	□			
23,1				231 DAK	□			
23,2				232 DAK	□			
23,3				233 DAK	□			
23,4				234 DAK	□			
23,5				235 DAK	□			
23,6	32	60	4,4	KDS 236 DAK	□	284,4	178	190
23,7				237 DAK	□			
23,8				238 DAK	□			
23,9				239 DAK	□			
24,0				240 DAK	□			
24,1				241 DAK	□			
24,2				242 DAK	□			
24,3				243 DAK	□			
24,4				244 DAK	□			
24,5				245 DAK	□			

● Diameter Ø 24,6–40,5 mm

Dimensions (mm)				Cat. No.	Extra Long Series (7D)									
DC (mm)	Shank		Drill Head		Stock	Dimensions (mm)								
	DCON	LS				PL	DAK	OAL	LU	LUX				
24,6	32	60	4,5	KDS 246 DAK	□	294,5	187	200						
24,7				247 DAK	□									
24,8				248 DAK	□									
24,9				249 DAK	□									
25,0				250 DAK	□									
25,1				251 DAK	□									
25,2				252 DAK	□									
25,3				253 DAK	□									
25,4				254 DAK	□									
25,5				255 DAK	□									
25,6	32	60	4,7	KDS 256 DAK	□	304,7	197	210						
25,7				257 DAK	□									
25,8				258 DAK	□									
25,9				259 DAK	□									
26,0				260 DAK	□									
26,1				261 DAK	□									
26,5				-265 DAK	□									
26,6				32	60				4,9	KDS 266 DAK	□	309,9	201	215
27,5										-275 DAK	□			
27,6				32	60				5,1	KDS 276 DAK	□	315,1	206	200
28,5	-285 DAK	□												
28,6	32	60	5,3	KDS 286 DAK	□	325,3	215	230						
29,5				-295 DAK	□									
29,6	32	60	5,5	KDS 296 DAK	□	335,5	225	240						
30,5				-305 DAK	□									
30,6	40	70	5,6	KDS 306 DAK	□	350,6	229	245						
31,5				-315 DAK	□									
31,6	40	70	5,8	KDS 316 DAK	□	360,8	234	250						
32,5				-325 DAK	□									
32,6	40	70	6,0	KDS 326 DAK	□	371,0	243	260						
33,5				-335 DAK	□									
33,6	40	70	6,2	KDS 336 DAK	□	381,2	253	270						
34,5				-345 DAK	□									
34,6	40	70	6,4	KDS 346 DAK	□	391,4	257	275						
35,5				-355 DAK	□									
35,6	40	70	6,6	KDS 356 DAK	□	396,6	262	280						
36,5				-365 DAK	□									
36,6	40	70	6,7	KDS 366 DAK	□	406,7	271	290						
37,5				-375 DAK	□									
37,6	40	70	6,9	KDS 376 DAK	□	416,9	292	338						
38,5				-385 DAK	□									
38,6	40	70	7,1	KDS 386 DAK	□	422,1	296	343						
39,5				-395 DAK	□									
39,6	40	70	7,3	KDS 396 DAK	□	427,3	300	348						
40,5				-405 DAK	□									

■ How to Order

Non-Stock Items will be required minimum order quantity for 6 pcs. Please specify the Cat. No.
For example, if the diameter of the drill is 10,2 mm, please indicate as follow.

E.g., **KDS 102 DAK**, **ACW30** (Grade)

KDS series: Brazed carbide drill with coolant holes

AK: Brazed carbide and TiAlN coated drill

Drill diameter
10,2 mm


D : 7 x D



Brazed Carbide MULTI-DRILLS KDS ... FA Type

(Available on Request)

Extra Long Type (10 x D) Brazed Carbide Drills with Coolant Holes

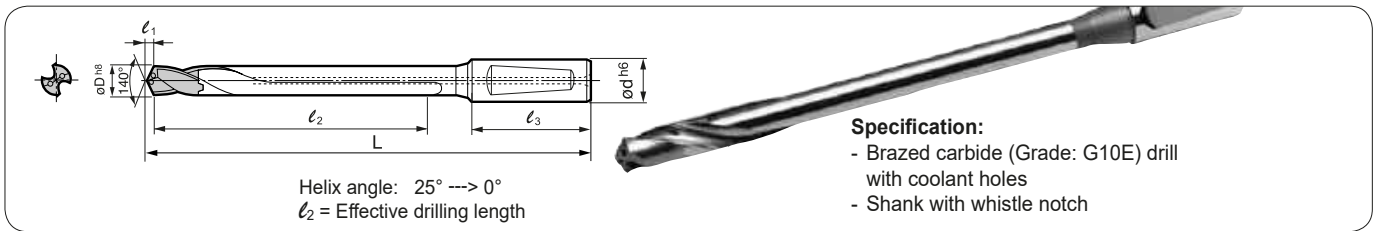

● Diameter Ø 8,0–15,0 mm

Dimensions (mm)			Cat. No.	Extra Long Series (10D)			
DC (mm)	Shank			Drill Head	Stock	Dimensions (mm)	
	DCON	LS			PL	FA10	OAL
8,0 -8,5	16	48	1,5	KDS 080 FA10 -085 FA10	□	156,5	93
8,6 -9,5	16	48	1,6	KDS 086 FA10 -095 FA10	□	171,6	104
9,6 -10,5	16	48	1,8	KDS 096 FA10 -105 FA10	□	181,8	115
10,6 -11,5	16	48	2,0	KDS 106 FA10 -115 FA10	□	197,0	126
11,6 -12,5	16	48	2,2	KDS 116 FA10 -125 FA10	□	207,2	137
12,6 -13,5	16	48	2,4	KDS 126 FA10 -135 FA10	□	222,4	148
13,6 -14,5	16	48	2,5	KDS 136 FA10 -145 FA10	□	232,5	159
14,6 -15,5	20	50	2,7	KDS 146 FA10 -155 FA10	□	247,7	170
15,6 -16,5	20	50	2,9	KDS 156 FA10 -165 FA10	□	262,9	181
16,6 -17,5	20	50	3,1	KDS 166 FA10 -175 FA10	□	273,1	192
17,6 -18,5	20	50	3,3	KDS 176 FA10 -185 FA10	□	288,3	203
18,6 -19,5	25	56	3,5	KDS 186 FA10 -195 FA10	□	303,5	214

● Diameter Ø 15,1–19,5 mm

Dimensions (mm)			Cat. No.	Extra Long Series (10D)			
DC (mm)	Shank			Drill Head	Stock	Dimensions (mm)	
	DCON	LS			PL	FA10	OAL
19,6 -20,5	25	56	3,6	KDS 196 FA10 -205 FA10	□	318,6	225
20,6 -21,5	25	56	3,8	KDS 206 FA10 -215 FA10	□	328,8	236
21,6 -22,5	25	56	4,0	KDS 216 FA10 -225 FA10	□	344,0	247
22,6 -23,5	25	56	4,2	KDS 226 FA10 -235 FA10	□	354,2	258
23,6 -24,5	32	60	4,4	KDS 236 FA10 -245 FA10	□	374,4	269
24,6 -25,5	32	60	4,5	KDS 246 FA10 -255 FA10	□	384,5	280
25,6 -26,5	32	60	4,7	KDS 256 FA10 -265 FA10	□	399,7	291
26,6 -27,5	32	60	4,9	KDS 266 FA10 -275 FA10	□	409,9	302
27,6 -28,5	32	60	5,1	KDS 276 FA10 -285 FA10	□	425,1	313
28,6 -29,5	32	60	5,3	KDS 286 FA10 -295 FA10	□	435,3	324
29,6 -30,5	32	60	5,5	KDS 296 FA10 -305 FA10	□	450,5	335

Brazed Carbide Multi-Drills for Cast Irons and Aluminium Alloys

■ How to Order

Non-Stock Items will be required minimum order quantity for 6 pcs. Please specify the Cat. No. For example, if the diameter of the drill is 10,2 mm, please indicate as follow.


E.g., **KDS 102 FA 10 ,G10E** (Grade)

KDS series: Brazed carbide drill with coolant holes

Drill diameter
10,2 mm

10: Effective drilling length

FA: Extra long type brazed carbide drill with special flutes (Helix angle: 25° ⇄ 0°)

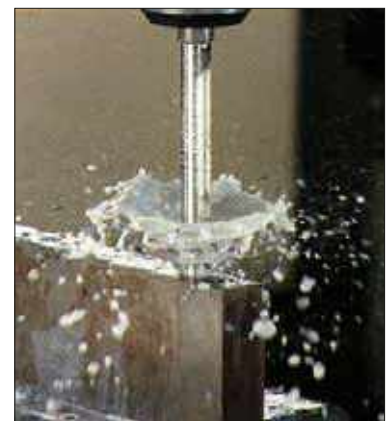

■ Recommended Cutting Conditions

(v_c : Cutting Speed (m/min), f : Feed rate (mm/rev)) (Min – Standard – Max)

Diameter (mm)	Cast Irons	Aluminium Alloys	Remarks
-Ø 12	30–55–60	50–70–90	To avoid the drill bending, which can cause breakage, please pre-drill or reduce the cutting conditions at the entrance of hole; RPM: 100–300, f : 0,05–0,08 mm/rev.
	0,1–0,2–0,25	0,1–0,2–0,3	
-Ø 20	40–60–70	60–70–100	Higher feed rates and deep holes require high coolant pressure. Cutting fluid : Water soluble oil Cutting fluid pressure : 4–10 bar
	0,2–0,3–0,4	0,3–0,35–0,5	
-Ø 30	40–60–70	70–100–150	
	0,3–0,4–0,5	0,3–0,4–0,5	

□ = Delivery on request

Replaceable Head Type MULTI-DRILLS SMD Type


General Features

Fast accurate and ideal for drilling steels, this newly developed drill from SUMITOMO gives similar hole accuracy to that of regrindable drills renowned within the industry as being the ultimate hole making tool.




- ## Advantages
- Available in diameters ranging from 12,0–42,5 mm
 - Drilling Depths 1,5–12 x Diameter
 - Optimised heat dissipation via precisely located coolant holes
 - Maximised rigidity from newly developed clamping system
 - High performance drilling of precision holes from solid
 - 3 different types of head for general and smooth cutting (MTL type, MEL type) and new MFS type for drilling in non-flat surfaces.


The newly developed tungsten carbide substrate with its ultra hard smooth coating proved that against competition users can expect to see holes with tolerances similar to that of reaming and tool life almost doubled.

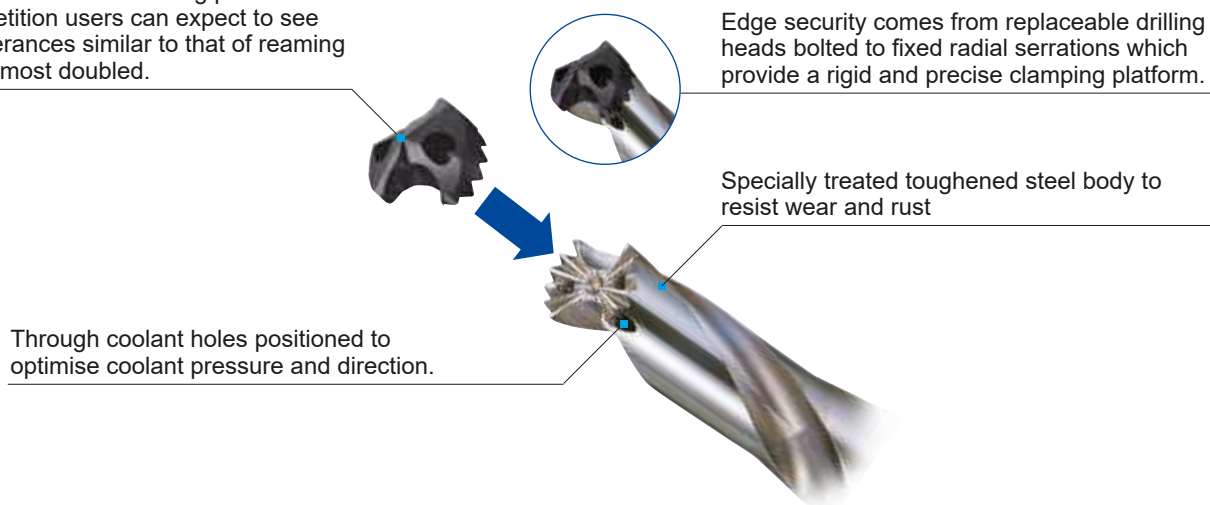

Drilling Precision

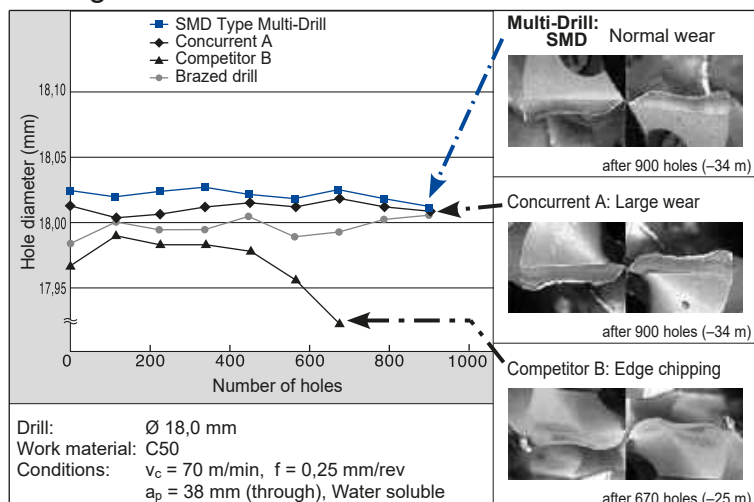

Application Example

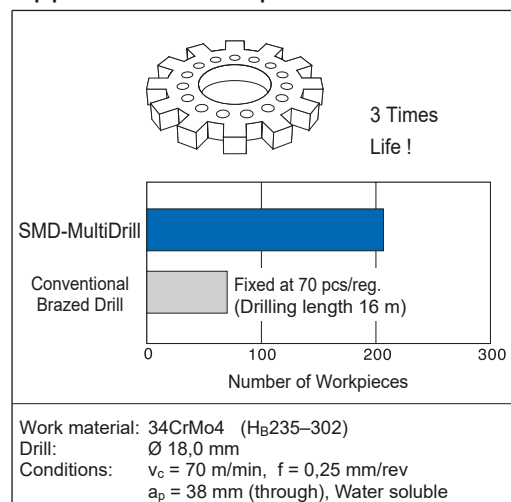


Replaceable Head Type Drill Holder

SMDH Type


● Holder 3D / 5D / 8D

Shank Type:
Whistle notch type

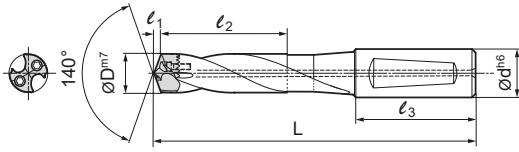


● Holder 1,5D

Shank Type:
Weldon type

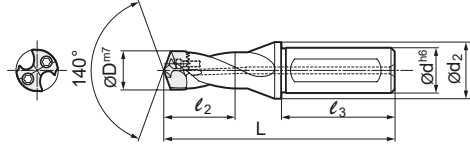

● Holder 12D

Shank Type:
Cylindrical type

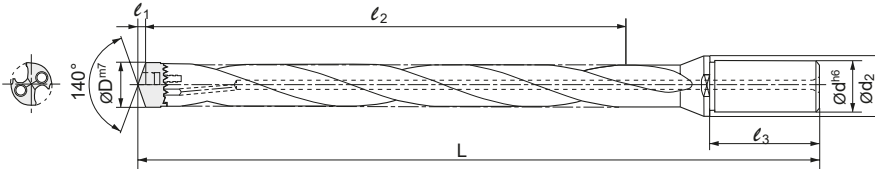

l_2 = Effective drilling length


■ Holder

(mm)



Dimensions				Series (1,5D)				Series (3D)				Series (5D)				Series (8D)				Series (12D)				Related Drill Heads DMTL / DMEL		
Drill Head		Shank		Cat. No.	Stock	Dimensions			Stock	Dimensions			Stock	Dimensions			Stock	Dimensions			Ød2					
Ø D	l ₁	Ø d	l ₃		S	L	l ₂	Ød ₂	M3	L	l ₂	M5	L	l ₂	M8	L	l ₂	M8	L	l ₂		12D	L		l ₂	Ød ₂
12,0	2,2	16	48	SMDH 120 □□	●	91	25,5	20	●	107,2	43,5	●	132,2	68,5												1200–1249
12,5	2,3			SMDH 125 □□	●	91	25,5	20	●	107,3	43,5	●	132,3	68,5												1250–1299
13,0	2,4			SMDH 130 □□	●	92	27,5	20	●	112,4	46,5	●	142,4	73,5												1300–1349
14,0	2,5			SMDH 140 □□□	●	96	31,5	20	●	119,0	52,5	●	149,0	81,5	●	194,0	124,5	●	238,5	168,5	20					1350–1450
15,0	2,7	20	50	SMDH 150 □□□	●	100	32,0	25	●	129,2	55,0	●	159,2	86,0	●	204,2	133,0	●	253,0	180,0	25					1451–1550
16,0	2,9			SMDH 160 □□□	●	103	35,0	25	●	134,4	59,0	●	169,4	92,0		214,4	141,0	●	265,5	192,0	25					1551–1650
17,0	3,1			SMDH 170 □□□	●	105	35,5	25	●	139,6	62,5	●	174,6	97,5	●	224,6	150,5	●	278,1	203,5	25					1651–1750
18,0	3,3			SMDH 180 □□□	●	107	39,7	25	●	144,8	66,5	●	179,8	103,5	●	229,8	158,5	●	290,5	215,5	25					1751–1850
19,0	3,5	25	56	SMDH 190 □□□	●	115	40,5	30	●	160,1	69,5	●	195,0	108,5	●	255,0	167,5	●	309,1	228,5	30					1851–1950
20,0	3,6			SMDH 200 □□□	●	118	43,0	30	●	160,1	73,0	●	200,1	114,0	●	265,1	175,0	●	321,4	240,0	30					1951–2050
21,0	3,8			SMDH 210 □□□	●	119	44,0	30	●	160,3	76,0	●	200,3	119,0	●	270,3	184,0	●	333,9	252,0	30					2051–2150
22,0	4,0			SMDH 220 □□□	●	121	47,0	30	●	165,1	80,0	●	205,1	125,0	●	275,1	192,0	●	347,0	264,0	30					2151–2280
23,0	4,2	32	60	SMDH 230 □□□	●	122	46,5	30	●	164,8	82,5	●	214,8	129,5	●	284,8	200,5	●	359,0	275,5	30					2281–2380
24,0	4,4			SMDH 240 □□□	●	129	49,5	37	●	174,6	86,5	●	224,6	135,5	●	299,6	208,5	●	376,1	284,5	37					2381–2480
25,0	4,6			SMDH 250 □□□	●	129	49,0	37	●	174,6	88,0	●	229,6	140,0	●	304,6	217,0	●	388,4	300,0	37					2481–2580
26,0	4,7			SMDH 260 □□	●	132	52,0	37	●	179,7	92,0	●	234,7	146,0	●	314,7	225,0									2581–2680
27,0	4,9	32	60	SMDH 270 □□	●	133	53,0	37	●	179,9	94,0	●	239,9	151,0	●	324,9	234,0									2681–2780
28,0	5,1			SMDH 280 □□	●	135	54,5	37	●	185,1	96,5	●	245,1	156,5	●	330,1	241,5									2781–2880
29,0	5,3			SMDH 290 □□	●	136	55,5	37	●	190,3	99,5	●	250,3	161,5	●	340,3	250,5									2881–2980
30,0	5,5			SMDH 300 □□	●	139	58,5	37	●	190,5	104,5	●	260,5	167,5	●	350,5	259,5									2981–3050

Drill order description example: SMDH210M3, drill heads ⇨ K59/H60

■ Recommended Torque

Screw		Applicable Insert
	N·m	
BXD 02208 IP	0,8–1,0	SMDT 1200 – 1550 D M □ L
BXD 02509 IP	0,9–1,2	SMDT 1551 – 1850 D M □ L
BXD 03011 IP	1,8–2,4	SMDT 1851 – 2150 D M □ L
BXD 03512 IP	2,8–3,7	SMDT 2151 – 2480 D M □ L
BXD 04014 IP	4,1–5,5	SMDT 2481 – 2780 D M □ L
BXD 04515 IP	5,0–6,6	SMDT 2781 – 3050 D M □ L



■ Spare Parts

Screw	Wrench	Applicable Holder
		
BXD 02208 IP	TRDR 08 IP	SMDT 120 – 150 M □
BXD 02509 IP	TRDR 10 IP	SMDT 160 – 180 M □
BXD 03011 IP	TRDR 15 IP	SMDT 190 – 210 M □
BXD 03512 IP	TRDR 15 IP	SMDT 220 – 240 M □
BXD 04014 IP	TRDR 20 IP	SMDT 250 – 270 M □
BXD 04515 IP	TRDR 25 IP	SMDT 280 – 300 M □



PVD coated grade: **ACX70**

Type MTL



■ Drill Head (Insert)

● Ø 12,0–15,3 mm

DC (mm)	Cat. No.	Stock	PL	LF
12,0	SMDT 1200 D MTL	●	2,2	6,9
12,1	1210 D MTL	●	2,2	
12,2	1220 D MTL	●	2,2	
12,3	1230 D MTL	●	2,2	
12,4	1240 D MTL	●	2,3	
12,5	SMDT 1250 D MTL	●	2,3	7,1
12,6	1260 D MTL	●	2,3	
12,7	1270 D MTL	●	2,3	
12,8	1280 D MTL	●	2,3	
12,9	1290 D MTL	●	2,3	
13,0	SMDT 1300 D MTL	●	2,4	7,3
13,1	1310 D MTL	●	2,4	
13,2	1320 D MTL	●	2,4	
13,3	1330 D MTL	●	2,4	
13,4	1340 D MTL	●	2,4	
13,5	SMDT 1350 D MTL	●	2,5	7,8
13,6	1360 D MTL	●	2,5	
13,7	1370 D MTL	●	2,5	
13,8	1380 D MTL	●	2,5	
13,9	1390 D MTL	●	2,5	
14,0	1400 D MTL	●	2,5	
14,1	1410 D MTL	●	2,6	
14,2	1420 D MTL	●	2,6	
14,3	1430 D MTL	●	2,6	
14,4	1440 D MTL	●	2,6	
14,5	1450 D MTL	●	2,6	
14,6	SMDT 1460 D MTL	●	2,7	8,3
14,7	1470 D MTL	●	2,7	
14,8	1480 D MTL	●	2,7	
14,9	1490 D MTL	●	2,7	
15,0	1500 D MTL	●	2,7	
15,1	1510 D MTL	●	2,7	
15,2	1520 D MTL	●	2,8	
15,3	1530 D MTL	●	2,8	

● Ø 15,4–18,7 mm

DC (mm)	Cat. No.	Stock	PL	LF
15,4	SMDT 1540 D MTL	●	2,8	8,3
15,5	1550 D MTL	●	2,8	
15,6	SMDT 1560 D MTL	●	2,8	8,7
15,7	1570 D MTL	●	2,9	
15,8	1580 D MTL	●	2,9	
15,9	1590 D MTL	●	2,9	
16,0	1600 D MTL	●	2,9	
16,1	1610 D MTL	●	2,9	
16,2	1620 D MTL	●	2,9	
16,3	1630 D MTL	●	3,0	
16,4	1640 D MTL	●	3,0	
16,5	1650 D MTL	●	3,0	
16,6	SMDT 1660 D MTL	●	3,0	9,2
16,7	1670 D MTL	●	3,0	
16,8	1680 D MTL	●	3,1	
16,9	1690 D MTL	●	3,1	
17,0	1700 D MTL	●	3,1	
17,1	1710 D MTL	●	3,1	
17,2	1720 D MTL	●	3,1	
17,3	1730 D MTL	●	3,1	
17,4	1740 D MTL	●	3,2	
17,5	1750 D MTL	●	3,2	
17,6	SMDT 1760 D MTL	●	3,2	9,6
17,7	1770 D MTL	●	3,2	
17,8	1780 D MTL	●	3,2	
17,9	1790 D MTL	●	3,3	
18,0	1800 D MTL	●	3,3	
18,1	1810 D MTL	●	3,3	
18,2	1820 D MTL	●	3,3	
18,3	1830 D MTL	●	3,3	
18,4	1840 D MTL	●	3,3	
18,5	1850 D MTL	●	3,4	
18,6	SMDT 1860 D MTL	●	3,4	10,1
18,7	1870 D MTL	●	3,4	

● Ø 18,8–30,5 mm

DC (mm)	Cat. No.	Stock	PL	LF	
18,8	SMDT 1880 D MTL	●	3,4	10,1	
18,9	1890 D MTL	●	3,4		
19,0	1900 D MTL	●	3,5		
19,1	1910 D MTL	●	3,5		
19,2	1920 D MTL	●	3,5		
19,3	1930 D MTL	●	3,5		
19,4	1940 D MTL	●	3,5		
19,5	1950 D MTL	●	3,5		
19,6	SMDT 1960 D MTL	●	3,6		10,5
19,7	1970 D MTL	●	3,6		
19,8	1980 D MTL	●	3,6		
19,9	1990 D MTL	●	3,6		
20,0	2000 D MTL	●	3,6		
20,5	SMDT 2050 D MTL	●	3,7		
21,0	SMDT 2100 D MTL	●	3,8	11,0	
21,5	2150 D MTL	●	3,9		
22,0	SMDT 2200 D MTL	●	4,0	11,0	
22,5	2250 D MTL	●	4,1		
23,0	SMDT 2300 D MTL	●	4,2	11,0	
23,5	2350 D MTL	●	4,3		
24,0	SMDT 2400 D MTL	●	4,4	11,0	
24,5	2450 D MTL	●	4,5		
25,0	SMDT 2500 D MTL	●	4,5		
25,5	2550 D MTL	●	4,6	11,3	
26,0	SMDT 2600 D MTL	●	4,7		
26,5	2650 D MTL	●	4,8	11,7	
27,0	SMDT 2700 D MTL	●	4,9		
27,5	2750 D MTL	●	5,0	12,2	
28,0	SMDT 2800 D MTL	●	5,1		
28,5	2850 D MTL	●	5,2		
29,0	SMDT 2900 D MTL	●	5,3	13,1	
29,5	2950 D MTL	●	5,4		
30,0	SMDT 3000 D MTL	●	5,5		
30,5	3050 D MTL	●	5,6	13,5	

■ Recommended Cutting Conditions

● For using 3 x D and 5 x D type drills

Work material Drill Ø (mm)		General steel (HB250–320)	Harden steel (HRC45)	Nodular cast iron
		~ 16,0	v_c	70 – 100 – 120
	f	0,15 – 0,2 – 0,3	0,1 – 0,15 – 0,2	0,2 – 0,25 – 0,3
~ 20,0	v_c	70 – 100 – 120	40 – 70 – 90	50 – 70 – 90
	f	0,15 – 0,25 – 0,35	0,15 – 0,2 – 0,25	0,2 – 0,25 – 0,35
~ 30,8	v_c	70 – 100 – 120	40 – 60 – 90	50 – 70 – 90
	f	0,2 – 0,25 – 0,35	0,15 – 0,2 – 0,25	0,25 – 0,3 – 0,35

Note: High cutting performance is enhanced when using a high quality machine and rigid set up.

● For using 8 x D and 12 x D type drills

Work material Drill Ø (mm)		General steel (HB250–320)	Harden steel (HRC45)	Nodular cast iron
		~ 16,0	v_c	50 – 70 – 80
	f	0,15 – 0,2 – 0,3	0,1 – 0,15 – 0,2	0,2 – 0,25 – 0,3
~ 20,0	v_c	50 – 70 – 80	30 – 50 – 70	40 – 60 – 80
	f	0,15 – 0,25 – 0,35	0,15 – 0,2 – 0,25	0,2 – 0,25 – 0,35
~ 25,0 (12D)	v_c	50 – 70 – 80	30 – 50 – 70	40 – 60 – 80
~ 30,5 (8D)	f	0,2 – 0,25 – 0,35	0,15 – 0,2 – 0,25	0,25 – 0,3 – 0,35

[v_c : Cutting Speed (m/min), f : Feed rate (mm/rev), Min - Optimum - Max]


Regrindable Drill Head Insert SMDT... D MEL Type

MEL Type for Smooth Cutting

(Soft Steel, Stainless Steel, Grey Cast Iron)

PVD coated grade: **ACX80**

Type MEL



■ Drill Head (Insert)

● Ø 12,0–15,3 mm

DC (mm)	Cat. No.	Stock	PL	LF
12,0	SMDT 1200 D MEL	●	2,2	6,9
12,1	1210 D MEL	●	2,2	
12,2	1220 D MEL	●	2,2	
12,3	1230 D MEL	●	2,2	
12,4	1240 D MEL	●	2,3	7,1
12,5	SMDT 1250 D MEL	●	2,3	
12,6	1260 D MEL	●	2,3	
12,7	1270 D MEL	●	2,3	
12,8	1280 D MEL	●	2,3	
12,9	1290 D MEL	●	2,3	
13,0	SMDT 1300 D MEL	●	2,4	7,3
13,1	1310 D MEL	●	2,4	
13,2	1320 D MEL	●	2,4	
13,3	1330 D MEL	●	2,4	
13,4	1340 D MEL	●	2,4	
13,5	SMDT 1350 D MEL	●	2,5	7,8
13,6	1360 D MEL	●	2,5	
13,7	1370 D MEL	●	2,5	
13,8	1380 D MEL	●	2,5	
13,9	1390 D MEL	●	2,5	
14,0	1400 D MEL	●	2,5	
14,1	1410 D MEL	●	2,6	
14,2	1420 D MEL	●	2,6	
14,3	1430 D MEL	●	2,6	
14,4	1440 D MEL	●	2,6	
14,5	1450 D MEL	●	2,6	
14,6	SMDT 1460 D MEL	●	2,7	8,3
14,7	1470 D MEL	●	2,7	
14,8	1480 D MEL	●	2,7	
14,9	1490 D MEL	●	2,7	
15,0	1500 D MEL	●	2,7	
15,1	1510 D MEL	●	2,7	
15,2	1520 D MEL	●	2,8	
15,3	1530 D MEL	●	2,8	

● Ø 15,4–18,7 mm

DC (mm)	Cat. No.	Stock	PL	LF	
15,4	SMDT 1540 D MEL	●	2,8	8,3	
15,5	1550 D MEL	●	2,8		
15,6	SMDT 1560 D MEL	●	2,8	8,7	
15,7	1570 D MEL	●	2,9		
15,8	1580 D MEL	●	2,9		
15,9	1590 D MEL	●	2,9		
16,0	1600 D MEL	●	2,9		
16,1	1610 D MEL	●	2,9		
16,2	1620 D MEL	●	2,9		
16,3	1630 D MEL	●	3,0		
16,4	1640 D MEL	●	3,0		
16,5	1650 D MEL	●	3,0		
16,6	SMDT 1660 D MEL	●	3,0		9,2
16,7	1670 D MEL	●	3,0		
16,8	1680 D MEL	●	3,1		
16,9	1690 D MEL	●	3,1		
17,0	1700 D MEL	●	3,1		
17,1	1710 D MEL	●	3,1		
17,2	1720 D MEL	●	3,1		
17,3	1730 D MEL	●	3,1		
17,4	1740 D MEL	●	3,2	9,6	
17,5	1750 D MEL	●	3,2		
17,6	SMDT 1760 D MEL	●	3,2		
17,7	1770 D MEL	●	3,2		
17,8	1780 D MEL	●	3,2		
17,9	1790 D MEL	●	3,3		
18,0	1800 D MEL	●	3,3		
18,1	1810 D MEL	●	3,3		
18,2	1820 D MEL	●	3,3		
18,3	1830 D MEL	●	3,3		
18,4	1840 D MEL	●	3,3		
18,5	1850 D MEL	●	3,4		
18,6	SMDT 1860 D MEL	●	3,4	10,1	
18,7	1870 D MEL	●	3,4		

● Ø 18,8–30,5 mm

DC (mm)	Cat. No.	Stock	PL	LF	
18,8	SMDT 1880 D MEL	●	3,4	10,1	
18,9	1890 D MEL	●	3,4		
19,0	1900 D MEL	●	3,5		
19,1	1910 D MEL	●	3,5		
19,2	1920 D MEL	●	3,5		
19,3	1930 D MEL	●	3,5		
19,4	1940 D MEL	●	3,5		
19,5	1950 D MEL	●	3,5		
19,6	SMDT 1960 D MEL	●	3,6		10,5
19,7	1970 D MEL	●	3,6		
19,8	1980 D MEL	●	3,6		
19,9	1990 D MEL	●	3,6		
20,0	2000 D MEL	●	3,6		
20,5	SMDT 2050 D MEL	●	3,7		
21,0	SMDT 2100 D MEL	●	3,8	11,0	
21,5	2150 D MEL	●	3,9		
22,0	SMDT 2200 D MEL	●	4,0	11,0	
22,5	2250 D MEL	●	4,1		
23,0	SMDT 2300 D MEL	●	4,2	11,0	
23,5	2350 D MEL	●	4,3		
24,0	SMDT 2400 D MEL	●	4,4	11,0	
24,5	2450 D MEL	●	4,5		
25,0	SMDT 2500 D MEL	●	4,5	11,3	
25,5	2550 D MEL	●	4,6		
26,0	SMDT 2600 D MEL	●	4,7	11,7	
26,5	2650 D MEL	●	4,8		
27,0	SMDT 2700 D MEL	●	4,9	12,2	
27,5	2750 D MEL	●	5,0		
28,0	SMDT 2800 D MEL	●	5,1	12,6	
28,5	2850 D MEL	●	5,2		
29,0	SMDT 2900 D MEL	●	5,3	13,1	
29,5	2950 D MEL	●	5,4		
30,0	SMDT 3000 D MEL	●	5,5	13,5	
30,5	3050 D MEL	●	5,6		

■ Recommended Cutting Conditions

● For using 3 x D and 5 x D type drills

Work material Drill Ø (mm)		Soft steel (-HB250)	Stainless steel (-HB200)	Grey cast iron
~ 16,0	v_c	80 – 100 – 120	50 – 60 – 80	50 – 70 – 90
	f	0,15 – 0,2 – 0,35	0,1 – 0,15 – 0,2	0,2 – 0,25 – 0,3
~ 20,0	v_c	80 – 100 – 120	60 – 70 – 90	60 – 80 – 100
	f	0,15 – 0,25 – 0,35	0,15 – 0,2 – 0,25	0,25 – 0,3 – 0,35
~ 30,8	v_c	80 – 100 – 120	60 – 70 – 90	60 – 80 – 100
	f	0,2 – 0,3 – 0,35	0,15 – 0,2 – 0,25	0,2 – 0,35 – 0,40

Note: High cutting performance is enhanced when using a high quality machine and rigid set up.

● For using 8 x D and 12 x D type drills

Work material Drill Ø (mm)		Soft steel (-HB250)	Stainless steel (-HB200)	Grey cast iron
~ 16,0	v_c	50 – 70 – 80	40 – 50 – 60	40 – 60 – 80
	f	0,15 – 0,2 – 0,35	0,1 – 0,15 – 0,2	0,2 – 0,25 – 0,3
~ 20,0	v_c	50 – 70 – 80	40 – 60 – 70	50 – 70 – 90
	f	0,15 – 0,25 – 0,35	0,15 – 0,2 – 0,25	0,25 – 0,3 – 0,35
~ 25,0 (12D)	v_c	60 – 70 – 80	40 – 60 – 70	50 – 70 – 90
	f	0,2 – 0,3 – 0,35	0,15 – 0,2 – 0,25	0,2 – 0,35 – 0,4

[v_c : Cutting Speed (m/min), f : Feed rate (mm/rev), Min - Optimum - Max]

● = Euro stock

Regrindable Drill Head Insert SMDT... MEL Type


Advantages

- Replaceable and regrindable drill head
- New design decreases cutting force by 25 %
- Ideal for stainless steels - soft steels etc
- Excellent tool life when drilling cast iron
- Improves drilling performance on low powered machines
- Increases productivity




Performance (Stainless steel machining)

Comparison of cutting force

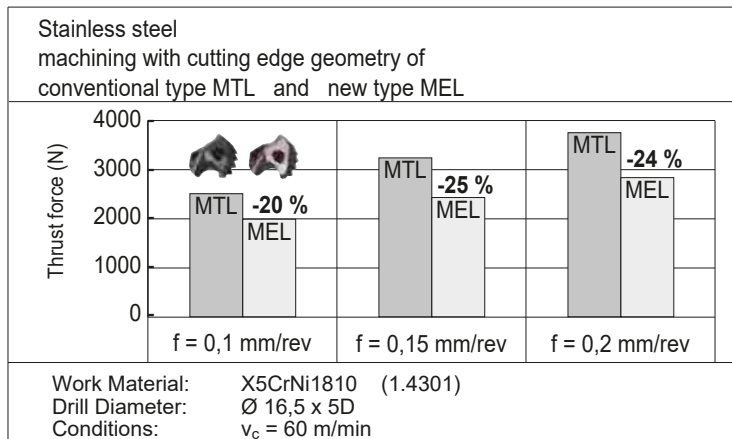


Chip comparison

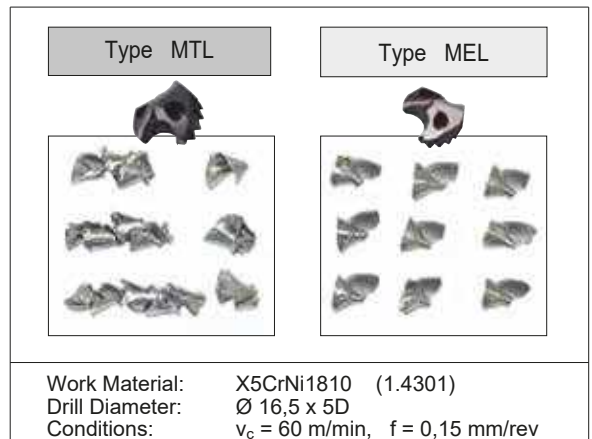


Performance (Cast iron machining)


Comparison of cutting force

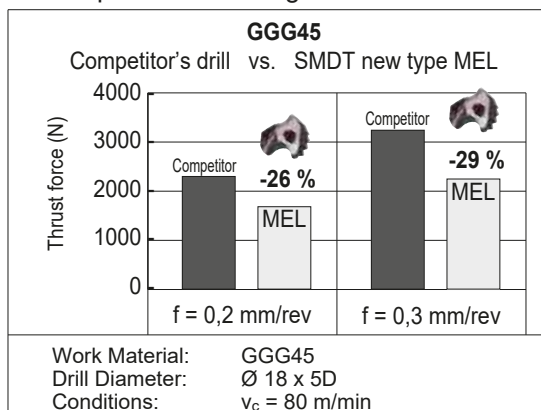

Comparison of wear resistance

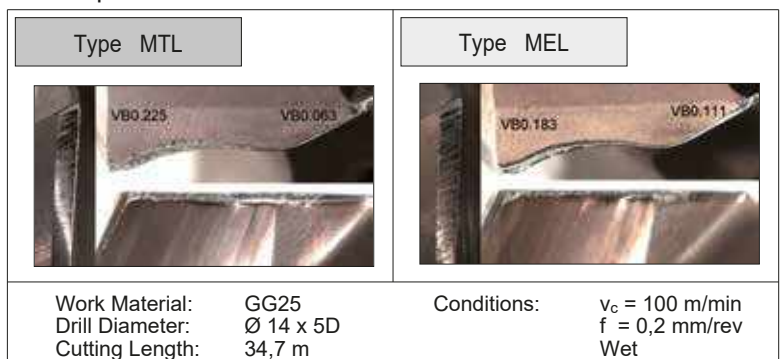


MFS Type Ideal for Drilling in Non-Flat Surfaces and Less Burr

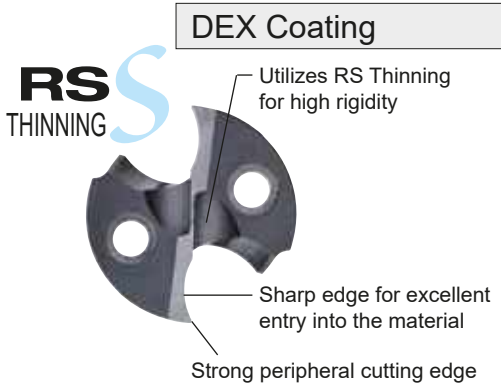

Advantages

- **Various Drilling Operations Thanks to a Point Angle of 180°**
Applicable to high-efficiency spot facing, drilling in non-flat surfaces such as inclined and cylindrical surfaces and interrupted drilling. Also reduces burrs at the hole exit.
- **Improves Machining Stability**
Achieves high rigidity by employing RS Thinning, which ensures thick web at the bottom.

Holder

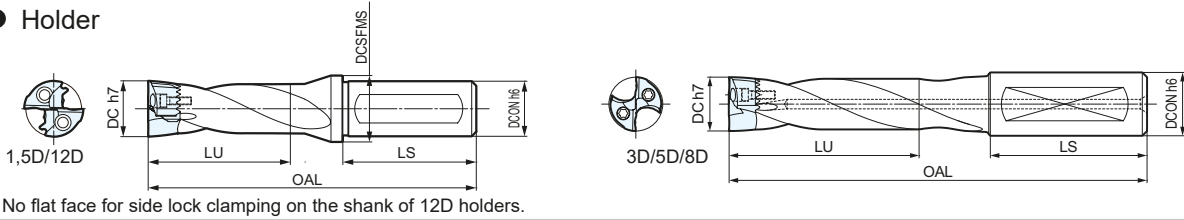

No flat face for side lock clamping on the shank of 12D holders.

Holder

Dimensions			Cat. No.	Series (1,5D)			Series (3D)			Series (5D)			Series (8D)			Series (12D)			Related Drill Heads MFS			
Drill Head	Shank			Stock	Dimensions		Stock	Dimensions		Stock	Dimensions		Stock	Dimensions		Stock	Dimensions					
DC	DCON	LS		S	OAL	LU	M3	OAL	LU	M5	OAL	LU	M8	OAL	LU	12D	OAL	LU		DCSFMS		
12,0	16	48	SMDH 120 □□	●	91	25,5	20	●	107,2	43,5	●	132,2	68,5							1200-1249		
12,5			SMDH 125 □□	●	91	25,5	20	●	107,3	43,5	●	132,3	68,5								1250-1299	
13,0			SMDH 130 □□	●	92	27,5	20	●	112,4	46,5	●	142,4	73,5								1300-1349	
14,0			SMDH 140 □□□	●	96	31,5	20	●	119,0	52,5	●	149,0	81,5	●	194,0	124,5	●	238,5	168,5	20		1350-1450
15,0	20	50	SMDH 150 □□□	●	100	32,0	25	●	129,2	55,0	●	159,2	86,0	●	204,2	133,0	●	253,0	180,0	25		1451-1550
16,0			SMDH 160 □□□	●	103	35,0	25	●	134,4	59,0	●	169,4	92,0	●	214,4	141,0	●	265,5	192,0	25		1551-1650
17,0			SMDH 170 □□□	●	105	35,5	25	●	139,6	62,5	●	174,6	97,5	●	224,6	150,5	●	278,1	203,5	25		1651-1750
18,0			SMDH 180 □□□	●	107	39,7	25	●	144,8	66,5	●	179,8	103,5	●	229,8	158,5	●	290,5	215,5	25		1751-1850
19,0	25	56	SMDH 190 □□□	●	115	40,5	30	●	160,1	69,5	●	195,0	108,5	●	255,0	167,5	●	309,1	228,5	30		1851-1950
20,0			SMDH 200 □□□	●	118	43,0	30	●	160,1	73,0	●	200,1	114,0	●	265,1	175,0	●	321,4	240,0	30		1951-2050
21,0			SMDH 210 □□□	●	119	44,0	30	●	160,3	76,0	●	200,3	119,0	●	270,3	184,0	●	333,9	252,0	30		2051-2150
22,0			SMDH 220 □□□	●	121	47,0	30	●	165,1	80,0	●	205,1	125,0	●	275,1	192,0	●	347,0	264,0	30		2151-2280
23,0			SMDH 230 □□□	●	122	46,5	30	●	164,8	82,5	●	214,8	129,5	●	284,8	200,5	●	359,0	275,5	30		2281-2380
24,0	32	60	SMDH 240 □□□	●	129	49,5	37	●	174,6	86,5	●	224,6	135,5	●	299,6	208,5	●	376,1	284,5	37		2381-2480
25,0			SMDH 250 □□□	●	129	49,0	37	●	174,6	88,0	●	229,6	140,0	●	304,6	217,0	●	388,4	300,0	37		2481-2580
26,0			SMDH 260 □□	●	132	52,0	37	●	179,7	92,0	●	234,7	146,0	●	314,7	225,0						2581-2680
27,0			SMDH 270 □□	●	133	53,0	37	●	179,9	94,0	●	239,9	151,0	●	324,9	234,0						2681-2780
28,0			SMDH 280 □□	●	135	54,5	37	●	185,1	96,5	●	245,1	156,5	●	330,1	241,5						2781-2880
29,0			SMDH 290 □□	●	136	55,5	37	●	190,3	99,5	●	250,3	161,5	●	340,3	250,5						2881-2980
30,0			SMDH 300 □□	●	139	58,5	37	●	190,5	104,5	●	260,5	167,5	●	350,5	259,5						2981-3050

Drill order description example: SMDH210M3, drill heads ⇨ K63


Recommended Torque

Screw		Applicable Insert
	(N·m)	
BXD 02208 IP	0,8-1,0	SMDT 1200 - 1550 MFS
BXD 02509 IP	0,9-1,2	SMDT 1551 - 1850 MFS
BXD 03011 IP	1,8-2,4	SMDT 1851 - 2150 MFS
BXD 03512 IP	2,8-3,7	SMDT 2151 - 2480 MFS
BXD 04014 IP	4,1-5,5	SMDT 2481 - 2780 MFS
BXD 04515 IP	5,0-6,6	SMDT 2781 - 3050 MFS

Spare Parts

Screw	Wrench	Applicable Holder
BXD 02208 IP	TRDR 08 IP	SMDT 120 - 150 □□
BXD 02509 IP	TRDR 10 IP	SMDT 160 - 180 □□
BXD 03011 IP	TRDR 15 IP	SMDT 190 - 210 □□
BXD 03512 IP	TRDR 15 IP	SMDT 220 - 240 □□
BXD 04014 IP	TRDR 20 IP	SMDT 250 - 270 □□
BXD 04515 IP	TRDR 25 IP	SMDT 280 - 300 □□

Type MFS



PVD coated grade: **ACX70**

■ Drill Head (Insert)

● \varnothing 12,0 ~ 21,5 mm

DC (mm)	Cat. No.	Stock	LF (mm)	Applicable Holders
12,0	SMDT 1200 MFS	●	7,1	SMDH120 □□
12,5	SMDT 1250 MFS	●	7,2	SMDH125 □□
13,0	SMDT 1300 MFS	●	7,5	SMDH130 □□
13,5	SMDT 1350 MFS	●		
14,0	SMDT 1400 MFS	●	7,9	SMDH140 □□
14,5	SMDT 1450 MFS	●		
15,0	SMDT 1500 MFS	●	8,3	SMDH150 □□
15,5	SMDT 1550 MFS	●		
16,0	SMDT 1600 MFS	●	8,8	SMDH160 □□
16,5	SMDT 1650 MFS	●		
17,0	SMDT 1700 MFS	●	9,3	SMDH170 □□
17,5	SMDT 1750 MFS	●		
18,0	SMDT 1800 MFS	●	9,8	SMDH180 □□
18,5	SMDT 1850 MFS	●		
19,0	SMDT 1900 MFS	●	10,2	SMDH190 □□
19,5	SMDT 1950 MFS	●		
20,0	SMDT 2000 MFS	●	10,7	SMDH200 □□
20,5	SMDT 2050 MFS	●		
21,0	SMDT 2100 MFS	●	11,2	SMDH210 □□
21,5	SMDT 2150 MFS	●		

● \varnothing 22,0 ~ 30,0 mm

DC (mm)	Cat. No.	Stock	LF (mm)	Applicable Holders
22,0	SMDT 2200 MFS	●	11,2	SMDH220 □□
22,5	SMDT 2250 MFS	●		
23,0	SMDT 2300 MFS	●	11,2	SMDH230 □□
23,5	SMDT 2350 MFS	●		
24,0	SMDT 2400 MFS	●	11,3	SMDH240 □□
24,5	SMDT 2450 MFS	●		
25,0	SMDT 2500 MFS	●	11,7	SMDH250 □□
25,5	SMDT 2550 MFS	●		
26,0	SMDT 2600 MFS	●	12,2	SMDH260 □□
26,5	SMDT 2650 MFS	●		
27,0	SMDT 2700 MFS	●	12,7	SMDH270 □□
27,5	SMDT 2750 MFS	●		
28,0	SMDT 2800 MFS	●	13,2	SMDH280 □□
28,5	SMDT 2850 MFS	●		
29,0	SMDT 2900 MFS	●	13,6	SMDH290 □□
29,5	SMDT 2950 MFS	●		
30,0	SMDT 3000 MFS	●	14,1	SMDH300 □□

■ MFS Type Head Important Notes

Application	No Guide Hole (Solid Workpiece Hole Drilling)	With Guide Hole	Flat Finishing of Hole Bottom
	<p>Flat Surface Non-Flat Surface</p>	<p>Guide Holes</p>	
1,5D Holder	○	○ (Guide Hole not required)	○
3D-12D Holder	X	X	○

■ Recommended Cutting Conditions

v_c : Cutting speed (m/min)
f: Feed rate (mm/rev)

Work Material		Soft Steel (<250 HB)	General Steel (250-320HB)	Hardened Steel (45HRC)	Stainless Steel (<200 HB)	Gray Cast Iron	Ductile Cast Iron	Aluminum Alloy (*)
Drill Diameter DC (mm)	Cutting Conditions	Min.-Optimum-Max.	Min.-Optimum-Max.	Min.-Optimum-Max.	Min.-Optimum-Max.	Min.-Optimum-Max.	Min.-Optimum-Max.	Min.-Optimum-Max.
- \varnothing 16,0	v_c	60-100-120	70-100-120	40-60-90	50-60-80	50-70-90	50-60-80	200-240-260
	f	0,15-0,20-0,35	0,15-0,20-0,30	0,10-0,15-0,20	0,10-0,15-0,20	0,20-0,25-0,30	0,20-0,25-0,30	0,35-0,45-0,55
- \varnothing 20,0	v_c	80-100-120	70-100-120	40-60-90	60-70-90	60-80-100	50-70-90	200-240-260
	f	0,15-0,25-0,35	0,15-0,25-0,35	0,15-0,20-0,25	0,15-0,20-0,25	0,20-0,30-0,35	0,20-0,25-0,35	0,35-0,50-0,60
- \varnothing 30,8	v_c	80-100-120	70-100-120	40-60-90	60-70-90	60-80-100	50-70-90	200-240-260
	f	0,20-0,30-0,35	0,20-0,25-0,35	0,15-0,20-0,25	0,15-0,20-0,25	0,20-0,30-0,40	0,25-0,30-0,35	0,35-0,50-0,60

Note: The recommended hole depth is 2 x DC. The depth is measured from the highest point of the hole when drilling on inclined surfaces. The recommended cutting conditions above are for drilling on flat horizontal surfaces. Adjust the feed rate according to the inclination angle when drilling on an inclined surface. Set the feed rate at 70 % or lower when inclination angle is 30° or less. Set the feed rate at 50 % or lower when the inclination angle is larger than 30°. This product is a drilling tool. Do not use it for traverse or helical milling.

(*) Inquire about drills specifically for aluminum alloy.



Replaceable Head Type MULTI-DRILLS SMD Type

Large Hole MTL Type

For Large Holes




Tool edge design ideal for malleable material used for large casings, etc.
Edge design suitable for malleable material commonly used for large hole drilling.

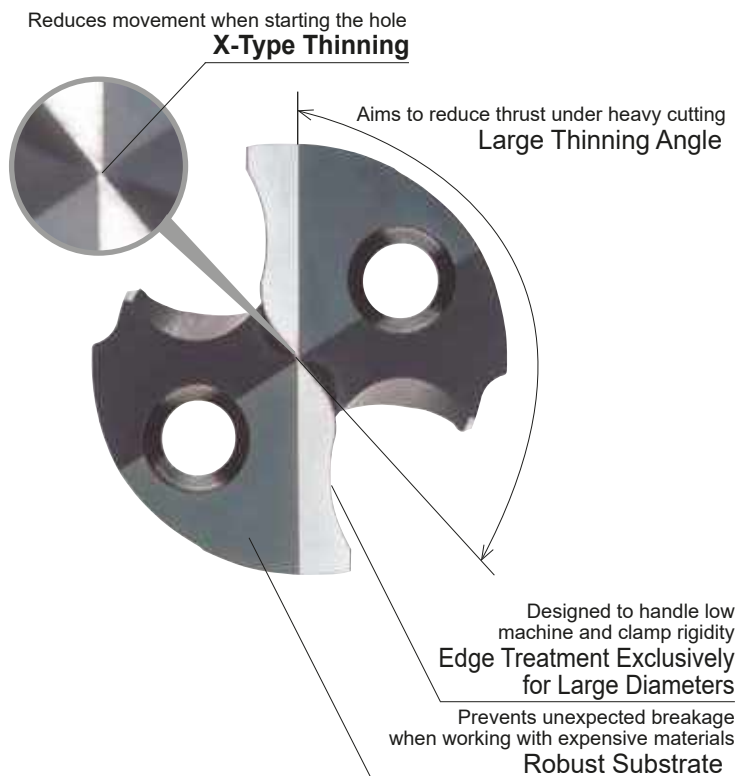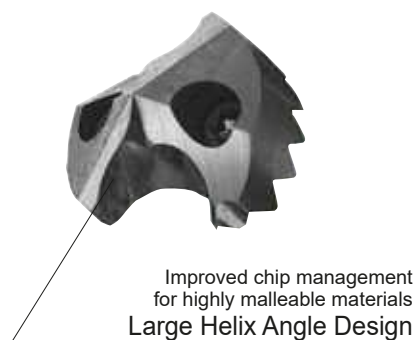

■ Machined Surface Accuracy

Work Material: St 52-3 (Base substrate for construction use)
Drill Size: Ø 33,0 mm x 5D
Cutting Conditions: $v_c = 120$ m/min, $f = 0,25$ mm/rev
Cutting Environment: Emulsion Type


High drilling accuracy with large diameters

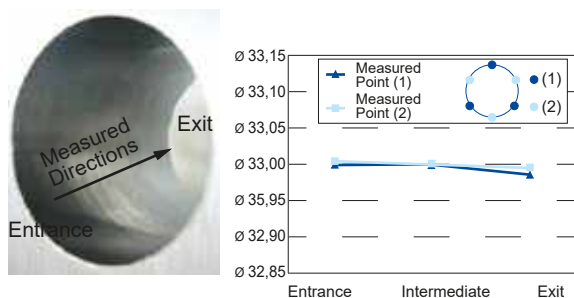

■ Cutting Force Comparison (Thrust)

Work Material: St 42-2 (Laminated plates)
Drill Size: Ø 37,5 mm x 5D
Cutting Conditions: $v_c = 90$ m/min, $f = 0,35$ mm/rev
Cutting Environment: Emulsion Type

Stable even when machining laminated plates

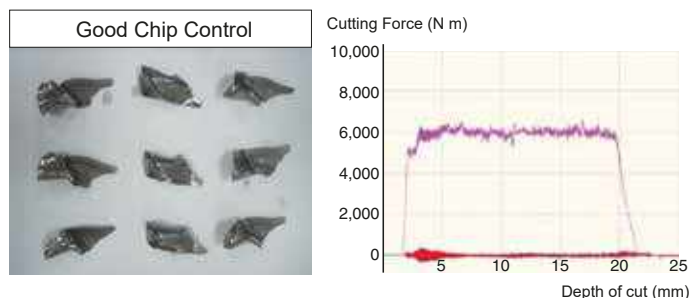

■ Recommended Cutting Conditions

v_c =Cutting Speed (m/min) f =Feed Rate (mm/rev)


Work Material	Recommended Head Drill Ø (mm)	Cutt. Conditions	Soft Steel (-250 HB)	General Steel (250-320 HB)	Hardened Steel (45 HRC)	Stainless Steel (-200 HB)	Grey Cast Iron	Ductil Cast Iron
			MTL Type	MTL Type	MTL Type	MTL Type	MTL Type	MTL Type
-36,5		v_c	60-120 (40-80)	60-120 (40-80)	40-80 (30-60)	40-80 (30-60)	50-100 (40-90)	50-90 (40-70)
		f	0,25-0,4	0,2-0,35	0,15-0,3	0,15-0,25	0,25-0,45	0,25-0,35
-42,5		v_c	60-120 (40-80)	60-120 (40-80)	40-80 (30-60)	40-80 (30-60)	50-100 (40-90)	50-90 (40-70)
		f	0,25-0,4	0,2-0,35	0,15-0,3	0,15-0,25	0,25-0,45	0,25-0,35

Note: Where machining and work clamp rigidity are good, conditions may be increased up to the maximum.
For 8D drills, please use feed rates stated within the (). Before drilling 8D holes, a guide hole of similar diameter must be made.

Regrindable Drill Head Insert SMDT... MTL Type

For Large Holes

● Indexable Head MTL Type



● Toolholder




■ Drill Head (\varnothing 31,0–42,5 mm), Grade MTL Type - ACX80

■ Holders M (3D), L (5D), D (8D)

Drill Diameter $\varnothing D$	Heads			Toolholder					
	MTL Type		h_1	M (3D)		L (5D)		D (8D)	
	Cat. No.	Stock		Cat. No.	Stock	Cat. No.	Stock	Cat. No.	Stock
31,0	SMDT 3100 MTL	○	15,2	SMDH 320 M	○	SMDH 320 L	○	SMDH 320 D	○
31,5	SMDT 3150 MTL	□							
32,0	SMDT 3200 MTL	○							
32,5	SMDT 3250 MTL	□	15,2	SMDH 335 M	○	SMDH 335 L	○	SMDH 335 D	○
33,0	SMDT 3300 MTL	○							
33,5	SMDT 3350 MTL	□							
34,0	SMDT 3400 MTL	○	16,6	SMDH 350 M	○	SMDH 350 L	○	SMDH 350 D	○
34,5	SMDT 3450 MTL	□							
35,0	SMDT 3500 MTL	○							
35,5	SMDT 3550 MTL	□	16,4	SMDH 365 M	○	SMDH 365 L	○	SMDH 365 D	○
36,0	SMDT 3600 MTL	○							
36,5	SMDT 3650 MTL	□							
37,0	SMDT 3700 MTL	○	18,1	SMDH 380 M	○	SMDH 380 L	○	SMDH 380 D	○
37,5	SMDT 3750 MTL	○							
38,0	SMDT 3800 MTL	○							
38,5	SMDT 3850 MTL	□	17,8	SMDH 395 M	○	SMDH 395 L	○	SMDH 395 D	○
39,0	SMDT 3900 MTL	○							
39,5	SMDT 3950 MTL	□							
40,0	SMDT 4000 MTL	○	19,5	SMDH 410 M	○	SMDH 410 L	○	SMDH 410 D	○
40,5	SMDT 4050 MTL	○							
41,0	SMDT 4100 MTL	○							
41,5	SMDT 4150 MTL	□	19,3	SMDH 425 M	○	SMDH 425 L	○	SMDH 425 D	○
42,0	SMDT 4200 MTL	○							
42,5	SMDT 4250 MTL	□							

● Mounted Figure

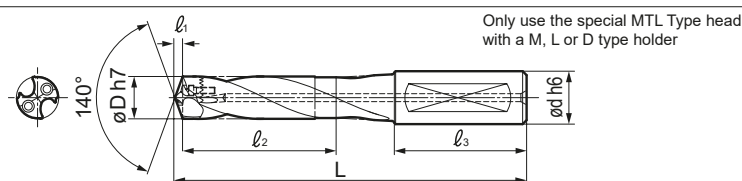

Dimensions (mm)		M (3D)		L (5D)		D (8D)		Shank		Cap Screw	Wrench	N·m
Drill Head		Dimensions (mm)		Dimensions (mm)		Dimensions (mm)		Dimensions (mm)				
$\varnothing D$	l_1	l_2	L	l_2	L	l_2	L	l_3	$\varnothing d$			
31,0	5,7	97,9	200,7	163	265,7	257,9	360,7	60	32,0	BXD04515IP	TRDR25IP	5–6,6
31,5												
32,0												
32,5	6,0	103,3	206,0	171,5	276,0	273,3	376,0	60	32,0	BXD04515IP	TRDR25IP	5–6,6
33,0												
33,5												
34,0	6,3	106,8	221,3	182	296,3	287	401,3	70	40,0	BX0515	HD040	7,2
34,5												
35,0												
35,5	6,6	112,3	226,6	187,5	301,6	297,3	411,6	70	40,0	BX0515	HD040	7,2
36,0												
36,5												
37,0	6,8	115,8	231,8	195,8	311,8	310,8	426,8	70	40,0	BX0515	HD040	7,2
37,5												
38,0												
38,5	7,1	121,3	237,1	206,3	322,1	321,3	437,1	70	40,0	BX0515	HD040	7,2
39,0												
39,5												
40,0	7,4	129,8	252,4	209,8	332,4	334,8	457,4	70	40,0	BX0515	HD040	7,2
40,5												
41,0												
41,5	7,6	135,3	257,6	220,3	342,6	345,3	467,6	70	40,0	BX0515	HD040	7,2
42,0												
42,5												

Indexable Insert Type "SumiDrill" WDX Type

ECONOMICAL - FAST - ACCURATE - RIGID

High Feed Drilling - 4 Edge Inserts



General Features

The newly designed WDX drill features indexable inserts with 4 cutting edges and a range of optimised chipbreakers; light (L) - general purpose (G) - heavy (H) for rapid chip removal.

The balanced cut design maximises feed rates and accuracy whilst the super ZX ultra hard coated inserts double the tool life.

Advantages

Rigid - Economical - Multi-function

Drills - Bores - External Turns
Diameter range 13,0-55,0 mm
Drilling depth -2D, -3D, -4D, -5D

Excellent chip control

Wide application suitability - choose from 3 styles of chipbreaker




L Type

- Excellent chip control under low feed rate conditions
- Excellent hole accuracy
- Excellent surface finish



G Type

- General purpose chipbreaker
- Excellent chip control
- Low cutting force
- Low / medium feed rates



H Type

- Strong cutting edge at higher feed rates
- Stable machining - eliminates vibration and noise

Additional grooves for optimised swarf control



Outer cutting edge Inner cutting edge
Inner cutting edge Outer cutting edge

One insert style for both pockets


4 Edge insert provides both Inner and Outer cutting edges
Newly designed insert style simplifies insert management.

Ultra hard Super ZX inserts double tool life


ACP300 for steels - stainless steels - difficult to cut materials
ACK300 for cast irons

Features of Super ZX Coating

- Super-multi layered coating with ultra-thin (nanometer) layers of TiAlN and AlCrN, alternately stacked up to 1.000 layers.
- 40 % increase in coating hardness and 200 % increase in oxidation temperature as compared with conventional grades



Coating Structure

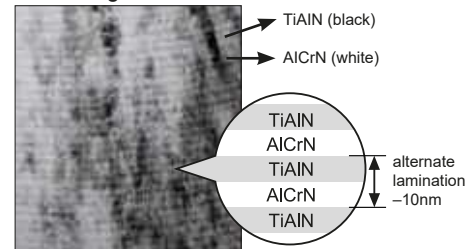

"AURORA" Coating DLC (Diamond Like Carbon)

Coated Grade **DL1500** for Aluminium

G Type



Super smooth surface and low coefficient of friction

Achieving beautiful finishing on Aluminium and non-ferrous metall with its high resistance to build-up edge.

Peripheral Insert		Central Insert	
DL1500	ACK300	DL1500	ACK300

Multi-Drills

K60




● = Euro stock
○ = Japan stock

Recommended Tightening Torque (N·m)

Indexable Insert Type "SumiDrill" WDX Type (2D)



Max. Depth: 2D

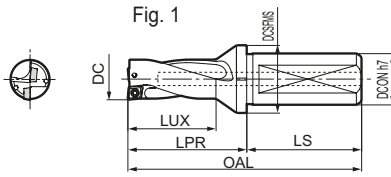

Holder

DC (mm)	Cat. No.	Stock	Dimensions (mm)					Applicable Insert	Fig.	
			OAL	LUX	LPR	DCON	DCSFMS			LS
13,0	WDX 130D2S20	●	88	29	44				1	
13,5	WDX 135D2S20	●	89	30	45					
14,0	WDX 140D2S20	●	90	31	46	20	28	44		WDX 042004
14,5	WDX 145D2S20	●	91	32	47					
15,0	WDX 150D2S20	●	92	33	48					
15,5	WDX 155D2S20	●	93	34	49					
16,0	WDX 160D2S20	●	94	35	50					
16,5	WDX 165D2S20	●	95	36	51	20	30	44		WDX 052504
17,0	WDX 170D2S20	●	96	37	52					
17,5	WDX 175D2S25	●	109	38	53	25	32	56		
18,0	WDX 180D2S25	●	110	39	54					
18,5	WDX 185D2S25	●	111	40	55					
19,0	WDX 190D2S25	●	112	41	56					
19,5	WDX 195D2S25	●	113	42	57					
20,0	WDX 200D2S25	●	114	43	58					
20,5	WDX 205D2S25	●	115	44	59	25	33	56		WDX 063006
21,0	WDX 210D2S25	●	116	45	60					
21,5	WDX 215D2S25	●	117	46	61					
22,0	WDX 220D2S25	●	118	47	62					
22,5	WDX 225D2S25	●	119	48	63					
23,0	WDX 230D2S25	●	123	49	67					
23,5	WDX 235D2S25	●	124	50	68					
24,0	WDX 240D2S25	●	125	51	69	25	37	56		
24,5	WDX 245D2S25	●	126	52	70					
25,0	WDX 250D2S25	●	127	53	71					
25,5	WDX 255D2S32	●	134	54	74					
26,0	WDX 260D2S32	●	135	55	75					
26,5	WDX 265D2S32	●	136	56	76					
27,0	WDX 270D2S32	●	137	57	77	32	41	60	WDX 073506	
27,5	WDX 275D2S32	●	138	58	78					
28,0	WDX 280D2S32	●	139	59	79					
28,5	WDX 285D2S32	●	140	60	80					
29,0	WDX 290D2S32	●	143	62	83	32	50	60		
29,5	WDX 295D2S32	●	144	63	84					
30,0	WDX 300D2S40	●	158	64	88					
31,0	WDX 310D2S40	●	160	66	90					
32,0	WDX 320D2S40	●	162	68	92					
33,0	WDX 330D2S40	●	164	70	94	40	54	70	WDX 094008	
34,0	WDX 340D2S40	●	166	72	96					
35,0	WDX 350D2S40	●	168	74	98					
36,0	WDX 360D2S40	●	170	76	100					
37,0	WDX 370D2S40	●	179	79	109					
38,0	WDX 380D2S40	●	181	81	111					
39,0	WDX 390D2S40	●	183	83	113					
40,0	WDX 400D2S40	●	185	85	115					
41,0	WDX 410D2S40	●	187	87	117	40	49,5	70	WDX 125012	
42,0	WDX 420D2S40	●	189	89	119					
43,0	WDX 430D2S40	●	191	91	121					
44,0	WDX 440D2S40	●	193	93	123					
45,0	WDX 450D2S40	●	195	95	125					
46,0	WDX 460D2S40	●	197	97	127					
47,0	WDX 470D2S40	●	199	99	129					
48,0	WDX 480D2S40	●	201	101	131					
49,0	WDX 490D2S40	●	203	103	133					
50,0	WDX 500D2S40	●	205	105	135					
51,0	WDX 510D2S40	●	207	107	137	40		70	WDX 156012	
52,0	WDX 520D2S40	●	209	109	139					
53,0	WDX 530D2S40	●	211	111	141		50,5			
54,0	WDX 540D2S40	●	213	113	143		51,5			
55,0	WDX 550D2S40	●	215	115	145		52,5			
56,0	WDX 560D2S40	○	222	120	152		53,5			
57,0	WDX 570D2S40	○	224	122	154		54			
58,0	WDX 580D2S40	○	226	124	156		55			
59,0	WDX 590D2S40	○	228	126	158		56			
60,0	WDX 600D2S40	○	230	128	160		57			
61,0	WDX 610D2S40	○	232	130	162	40		70	WDX 186012	
62,0	WDX 620D2S40	○	234	132	164					
63,0	WDX 630D2S40	○	236	134	166					
64,0	WDX 640D2S40	○	238	136	168					
65,0	WDX 650D2S40	○	240	138	170					

Inserts

Cat. No.	Coated				Fig.	Dimensions (mm)			Applicable Holder	
	ACP100	ACP300	ACK300	DL1500		W1	Thickness	RE		
WDX 042004-L	○	●	●	●	4				WDX 130 ~ 150	
WDX 042004-G	●	●	●	●	5	4,2	2,0	0,4		
WDX 042004-H	○	●	●	●	6					
WDX 052504-L	○	●	●	●	4					WDX 155 ~ 180
WDX 052504-G	●	●	●	●	5	5,0	2,5	0,4		
WDX 052504-H	○	●	●	●	6					
WDX 063006-L	●	●	●	●	4				WDX 185 ~ 225	
WDX 063006-G	●	●	●	●	5	6,0	3,0	0,6		
WDX 063006-H	○	●	●	●	6					
WDX 073506-L	●	●	●	●	4					WDX 230 ~ 285
WDX 073506-G	●	●	●	●	5	7,5	3,5	0,6		
WDX 073506-H	●	●	●	●	6					
WDX 094008-L	●	●	●	●	4				WDX 290 ~ 360	
WDX 094008-G	●	●	●	●	5	9,6	4,0	0,8		
WDX 094008-H	●	●	●	●	6					
WDX 125012-L	●	●	●	●	4					WDX 370 ~ 450
WDX 125012-G	●	●	●	●	5	12,4	5,0	1,2		
WDX 125012-H	●	●	●	●	6					
WDX 156012-L	●	●	●	●	4				WDX 460 ~ 550	
WDX 156012-G	●	●	●	●	5	15,2	6,0	1,2		
WDX 156012-H	●	●	●	●	6					
WDX 186012-G	●	●	●	●	5	18,0	6,0	1,2		WDX 560 ~ 650

Spare Parts

Screw	Wrench	Wrench	Applicable Holders	(N·m)
BFTX 01604 N	TRX 06	—	WDX 130D_S20 – 150D_S20	0,3
BFTX 0204 N	TRX 06	—	WDX 155D_S20 – 180D_S25	0,5
BFTX 02206	—	TRX 07	WDX 185D_S25 – 225D_S25	1,0
BFTX 02506 N	—	TRX 08	WDX 230D_S25 – 285D_S32	1,5
BFTX 03584	—	TRX 15	WDX 290D_S32 – 360D_S40	3,5
BFTX 0511 N	—	TRX 20	WDX 370D_S40 – 450D_S40	5,0
BFTX 0615 N	—	TRX 25	WDX 460D_S40 – 550D_S40	7,5

Identification of Drill Body

WDX 200 D2 S25


Drill Diameter (Ø 20,0 mm) | Flute Length L/D (2 x D) | Shank Size (Ø 25,0 mm)

Identification of Indexable Insert


WDX 06 30 06 -G

Width Across Flats (6,0 mm) | Thickness (3,0 mm) | Breaker Type | Corner Radius (0,6 mm)

Indexable Insert Type "SumiDrill" WDX Type (3D)

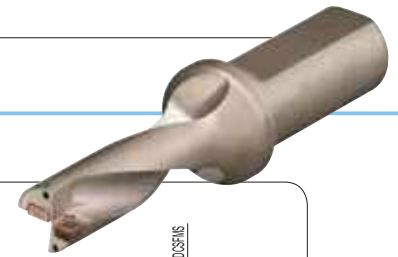

Max. Depth: 3 D

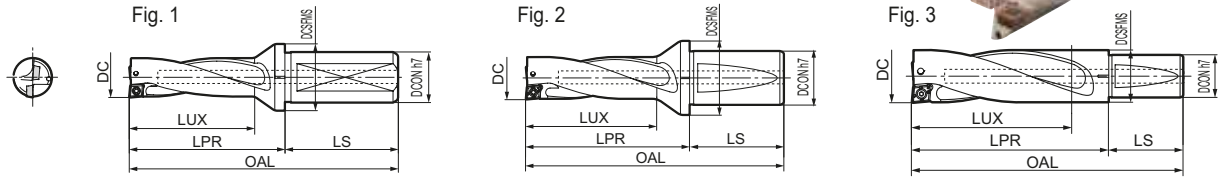

Holder

DC (mm)	Cat. No.	Stock	Dimensions (mm)					Applicable Insert	Fig.
			OAL	LUX	LPR	DCON	DCSFMS		
13,0	WDX 130D3S20	●	101,0	42,0	57,0	20	28	44	WDX 042004
13,5	WDX 135D3S20	●	102,5	43,5	58,5				
14,0	WDX 140D3S20	●	104,0	45,0	60,0				
14,5	WDX 145D3S20	●	105,5	46,5	61,5				
15,0	WDX 150D3S20	●	107,0	58,0	63,0	20	30	44	WDX 052504
15,5	WDX 155D3S20	●	108,5	49,5	64,5				
16,0	WDX 160D3S20	●	110,0	51,0	66,0				
16,5	WDX 165D3S20	●	111,5	52,5	67,5				
17,0	WDX 170D3S20	●	113,0	54,0	69,0	25	32	56	WDX 063006
17,5	WDX 175D3S25	●	126,5	55,5	70,5				
18,0	WDX 180D3S25	●	128,0	57,0	72,0				
18,5	WDX 185D3S25	●	129,5	58,5	73,5				
19,0	WDX 190D3S25	●	131,0	60,0	75,0	25	37	56	WDX 073506
19,5	WDX 195D3S25	●	132,5	61,5	76,5				
20,0	WDX 200D3S25	●	134,0	63,0	78,0				
20,5	WDX 205D3S25	●	135,5	64,5	79,5				
21,0	WDX 210D3S25	●	137,0	66,0	81,0	32	41	60	WDX 094008
21,5	WDX 215D3S25	●	138,5	67,5	82,5				
22,0	WDX 220D3S25	●	140,0	69,0	84,0				
22,5	WDX 225D3S25	●	141,5	70,5	85,5				
23,0	WDX 230D3S25	●	146,0	72,0	90,0	40	54	70	WDX 125012
23,5	WDX 235D3S25	●	147,5	73,5	91,5				
24,0	WDX 240D3S25	●	149,0	75,0	93,0				
24,5	WDX 245D3S25	●	150,5	76,5	94,5				
25,0	WDX 250D3S25	●	152,0	78,0	96,0	40	49,5	70	WDX 156012
25,5	WDX 255D3S32	●	159,5	79,5	97,5				
26,0	WDX 260D3S32	●	161,0	81,0	101,0				
26,5	WDX 265D3S32	●	162,5	82,5	102,5				
27,0	WDX 270D3S32	●	164,0	84,0	104,0	40	50,5	70	WDX 186012
27,5	WDX 275D3S32	●	165,5	85,5	105,5				
28,0	WDX 280D3S32	●	167,0	87,0	107,0				
28,5	WDX 285D3S32	●	168,5	88,5	108,5				
29,0	WDX 290D3S32	●	172,0	91,0	112,0	40	51,5	70	WDX 186012
29,5	WDX 295D3S32	●	173,5	92,5	113,5				
30,0	WDX 300D3S40	●	188,0	94,0	118,0				
31,0	WDX 310D3S40	●	191,0	97,0	121,0				
32,0	WDX 320D3S40	●	194,0	100,0	124,0	40	52,5	70	WDX 186012
33,0	WDX 330D3S40	●	197,0	103,0	127,0				
34,0	WDX 340D3S40	●	200,0	106,0	130,0				
35,0	WDX 350D3S40	●	203,0	109,0	133,0				
36,0	WDX 360D3S40	●	206,0	112,0	136,0	40	53,5	70	WDX 186012
37,0	WDX 370D3S40	●	216,0	116,0	146,0				
38,0	WDX 380D3S40	●	219,0	119,0	149,0				
39,0	WDX 390D3S40	●	222,0	122,0	152,0				
40,0	WDX 400D3S40	●	225,0	125,0	155,0	40	54,5	70	WDX 186012
41,0	WDX 410D3S40	●	228,0	128,0	158,0				
42,0	WDX 420D3S40	●	231,0	131,0	161,0				
43,0	WDX 430D3S40	●	234,0	134,0	164,0				
44,0	WDX 440D3S40	●	237,0	137,0	167,0	40	55,5	70	WDX 186012
45,0	WDX 450D3S40	●	240,0	140,0	170,0				
46,0	WDX 460D3S40	●	243,0	143,0	173,0				
47,0	WDX 470D3S40	●	246,0	146,0	176,0				
48,0	WDX 480D3S40	●	249,0	149,0	179,0	40	56,5	70	WDX 186012
49,0	WDX 490D3S40	●	252,0	152,0	182,0				
50,0	WDX 500D3S40	●	255,0	155,0	185,0				
51,0	WDX 510D3S40	●	258,0	158,0	188,0				
52,0	WDX 520D3S40	●	261,0	161,0	191,0	40	57,5	70	WDX 186012
53,0	WDX 530D3S40	●	264,0	164,0	194,0				
54,0	WDX 540D3S40	●	267,0	167,0	197,0				
55,0	WDX 550D3S40	●	270,0	170,0	200,0				
56,0	WDX 560D3S40	○	278,0	176,0	208,0	40	58,5	70	WDX 186012
57,0	WDX 570D3S40	○	281,0	179,0	211,0				
58,0	WDX 580D3S40	○	284,0	182,0	214,0				
59,0	WDX 590D3S40	○	287,0	185,0	217,0				
60,0	WDX 600D3S40	○	290,0	188,0	220,0	40	59,5	70	WDX 186012
61,0	WDX 610D3S40	○	293,0	191,0	223,0				
62,0	WDX 620D3S40	○	296,0	194,0	226,0				
63,0	WDX 630D3S40	○	299,0	197,0	229,0				
64,0	WDX 640D3S40	○	302,0	200,0	232,0	40	60,5	70	WDX 186012
65,0	WDX 650D3S40	○	305,0	203,0	235,0				

Inserts

Cat. No.	Coated				Fig.	Dimensions (mm)			Applicable Holder
	ACP100	ACP300	ACK300	DL1500		W1	Thickness	RE	
WDX 042004-L	○	●	●	●	4	4,2	2,0	0,4	WDX 130 ~ 150
WDX 042004-G	●	●	●	●	5				
WDX 042004-H	○	●	●	●	6				
WDX 052504-L	○	●	●	●	4	5,0	2,5	0,4	WDX 155 ~ 180
WDX 052504-G	●	●	●	●	5				
WDX 052504-H	○	●	●	●	6				
WDX 063006-L	●	●	●	●	4	6,0	3,0	0,6	WDX 185 ~ 225
WDX 063006-G	●	●	●	●	5				
WDX 063006-H	○	●	●	●	6				
WDX 073506-L	●	●	●	●	4	7,5	3,5	0,6	WDX 230 ~ 285
WDX 073506-G	●	●	●	●	5				
WDX 073506-H	●	●	●	●	6				
WDX 094008-L	●	●	●	●	4	9,6	4,0	0,8	WDX 290 ~ 360
WDX 094008-G	●	●	●	●	5				
WDX 094008-H	●	●	●	●	6				
WDX 125012-L	●	●	●	●	4	12,4	5,0	1,2	WDX 370 ~ 450
WDX 125012-G	●	●	●	●	5				
WDX 125012-H	●	●	●	●	6				
WDX 156012-L	●	●	●	●	4	15,2	6,0	1,2	WDX 460 ~ 550
WDX 156012-G	●	●	●	●	5				
WDX 156012-H	●	●	●	●	6				
WDX 186012-G	●	●	●	●	5	18,0	6,0	1,2	WDX 560 ~ 650

Spare Parts

Screw	Wrench	Wrench	Applicable Holders	N·m
BFTX 01604 N	TRX 06	—	WDX 130D_S20 – 150D_S20	0,3
BFTX 0204 N	TRX 06	—	WDX 155D_S20 – 180D_S25	0,5
BFTX 02206	—	TRX 07	WDX 185D_S25 – 225D_S25	1,0
BFTX 02506 N	—	TRX 08	WDX 230D_S25 – 285D_S32	1,5
BFTX 03584	—	TRX 15	WDX 290D_S32 – 360D_S40	3,5
BFTX 0511 N	—	TRX 20	WDX 370D_S40 – 450D_S40	5,0
BFTX 0615 N	—	TRX 25	WDX 460D_S40 – 550D_S40	7,5

Identification of Drill Body

WDX 200 D3 S25

Drill Diameter (Ø 20,0 mm) Flute Length L/D (3 x D) Shank Size (Ø 25,0 mm)

Identification of Indexable Insert


WDX 06 30 06 -G

Width Across Flats (6,0 mm) Thickness (3,0 mm) Breaker Type
Corner Radius (0,6 mm)

Indexable Insert Type "SumiDrill" WDX Type (4D)



Max. Depth: 4 D

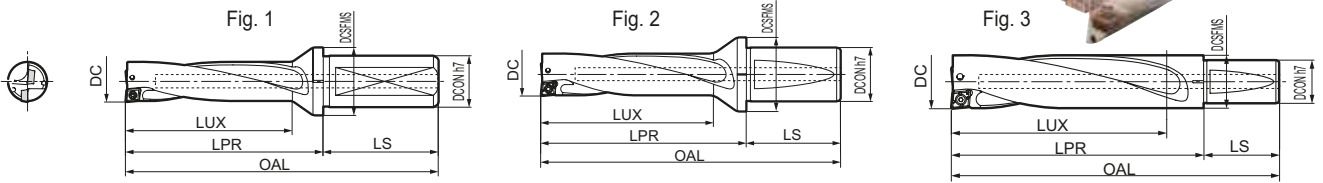

Holder

DC (mm)	Cat. No.	Stock	Dimensions (mm)						Applicable Insert	Fig.
			OAL	LUX	LPR	DCON1/7	DCSFMS	LS		
13,0	WDX 130D4S20	●	114	55	70				WDX 042004	1
13,5	WDX 135D4S20	●	116	57	72					
14,0	WDX 140D4S20	●	118	59	74	20	28	44		
14,5	WDX 145D4S20	●	120	61	76					
15,0	WDX 150D4S20	●	122	63	78					
15,5	WDX 155D4S20	●	124	65	80					
16,0	WDX 160D4S20	●	126	67	82	20	30	44		
16,5	WDX 165D4S20	●	128	69	84					
17,0	WDX 170D4S20	●	130	71	86					
17,5	WDX 175D4S25	●	144	73	88	25	32	56		
18,0	WDX 180D4S25	●	146	75	90					
18,5	WDX 185D4S25	●	148	77	92					
19,0	WDX 190D4S25	●	150	79	94					
19,5	WDX 195D4S25	●	152	81	96					
20,0	WDX 200D4S25	●	154	83	98					
20,5	WDX 205D4S25	●	156	85	100	25	33	56		
21,0	WDX 210D4S25	●	158	87	102					
21,5	WDX 215D4S25	●	160	89	104					
22,0	WDX 220D4S25	●	162	91	106					
22,5	WDX 225D4S25	●	164	93	108					
23,0	WDX 230D4S25	●	169	95	113					
23,5	WDX 235D4S25	●	171	97	115					
24,0	WDX 240D4S25	●	173	99	117	25	37	56		
24,5	WDX 245D4S25	●	175	101	119					
25,0	WDX 250D4S25	●	177	103	121					
25,5	WDX 255D4S32	●	185	105	125					
26,0	WDX 260D4S32	●	187	107	127					
26,5	WDX 265D4S32	●	189	109	129					
27,0	WDX 270D4S32	●	191	111	131	32	41	60		
27,5	WDX 275D4S32	●	193	113	133					
28,0	WDX 280D4S32	●	195	115	135					
28,5	WDX 285D4S32	●	197	117	137					
29,0	WDX 290D4S32	●	201	120	141	32	50	60		
29,5	WDX 295D4S32	●	203	122	143					
30,0	WDX 300D4S40	●	218	124	148					
31,0	WDX 310D4S40	●	222	128	152					
32,0	WDX 320D4S40	●	226	132	156					
33,0	WDX 330D4S40	●	230	136	160	40	54	70		
34,0	WDX 340D4S40	●	234	140	164					
35,0	WDX 350D4S40	●	238	144	168					
36,0	WDX 360D4S40	●	242	148	172					
37,0	WDX 370D4S40	●	253	153	183					
38,0	WDX 380D4S40	●	257	157	187					
39,0	WDX 390D4S40	●	261	161	191					
40,0	WDX 400D4S40	●	265	165	195					
41,0	WDX 410D4S40	●	269	169	199	40	49,5	70		
42,0	WDX 420D4S40	●	273	173	203					
43,0	WDX 430D4S40	●	277	177	207					
44,0	WDX 440D4S40	●	281	181	211					
45,0	WDX 450D4S40	●	285	185	215					
46,0	WDX 460D4S40	●	289	189	219					
47,0	WDX 470D4S40	●	293	193	223					
48,0	WDX 480D4S40	●	297	197	227					
49,0	WDX 490D4S40	●	301	201	231					
50,0	WDX 500D4S40	●	305	205	235					
51,0	WDX 510D4S40	●	309	209	239	40	70	WDX 156012		
52,0	WDX 520D4S40	●	313	213	243					
53,0	WDX 530D4S40	●	317	217	247					
54,0	WDX 540D4S40	●	321	221	251					
55,0	WDX 550D4S40	●	325	225	255					
56,0	WDX 560D4S40	○	334	232	264					
57,0	WDX 570D4S40	○	338	236	268					
58,0	WDX 580D4S40	○	342	240	272	40	70	WDX 186012		
59,0	WDX 590D4S40	○	346	244	276					
60,0	WDX 600D4S40	○	350	248	280					

Inserts

Cat. No.	Coated				Fig.	Dimensions (mm)			Applicable Holder
	ACP100	ACP300	ACK300	DL1500		W1	Thickness	RE	
WDX 042004-L	○	●	●	●	4				WDX 130 ~ 150
WDX 042004-G	○	●	●	●	5	4,2	2,0	0,4	
WDX 042004-H	○	●	●	●	6				
WDX 052504-L	○	●	●	●	4				WDX 155 ~ 180
WDX 052504-G	●	●	●	●	5	5,0	2,5	0,4	
WDX 052504-H	○	●	●	●	6				
WDX 063006-L	●	●	●	●	4				WDX 185 ~ 225
WDX 063006-G	●	●	●	●	5	6,0	3,0	0,6	
WDX 063006-H	○	●	●	●	6				
WDX 073506-L	●	●	●	●	4				WDX 230 ~ 285
WDX 073506-G	●	●	●	●	5	7,5	3,5	0,6	
WDX 073506-H	●	●	●	●	6				
WDX 094008-L	●	●	●	●	4				WDX 290 ~ 360
WDX 094008-G	●	●	●	●	5	9,6	4,0	0,8	
WDX 094008-H	●	●	●	●	6				
WDX 125012-L	●	●	●	●	4				WDX 370 ~ 450
WDX 125012-G	●	●	●	●	5	12,4	5,0	1,2	
WDX 125012-H	●	●	●	●	6				
WDX 156012-L	●	●	●	●	4				WDX 460 ~ 550
WDX 156012-G	●	●	●	●	5	15,2	6,0	1,2	
WDX 156012-H	●	●	●	●	6				
WDX 186012-G	●	●	●	●	5	18,0	6,0	1,2	WDX 560 ~ 650

Spare Parts

Screw	Wrench	Wrench	Applicable Holders	(N·m)
BFTX 01604 N	TRX 06	—	WDX 130D_S20 – 150D_S20	0,3
BFTX 0204 N	TRX 06	—	WDX 155D_S20 – 180D_S25	0,5
BFTX 02206	—	TRX 07	WDX 185D_S25 – 225D_S25	1,0
BFTX 02506 N	—	TRX 08	WDX 230D_S25 – 285D_S32	1,5
BFTX 03584	—	TRX 15	WDX 290D_S32 – 360D_S40	3,5
BFTX 0511 N	—	TRX 20	WDX 370D_S40 – 450D_S40	5,0
BFTX 0615 N	—	TRX 25	WDX 460D_S40 – 550D_S40	7,5

Identification of Drill Body

WDX 200 D4 S25

Drill Diameter (Ø 20,0 mm) | Flute Length L/D (4 x D) | Shank Size (Ø 25,0 mm)

Identification of Indexable Insert


WDX 06 30 06 -G

Width Across Flats (6,0 mm) | Thickness (3,0 mm) | Corner Radius (0,6 mm) | Breaker Type

Indexable Insert Type "SumiDrill" WDX Type (5D)



Max. Depth: 5 D

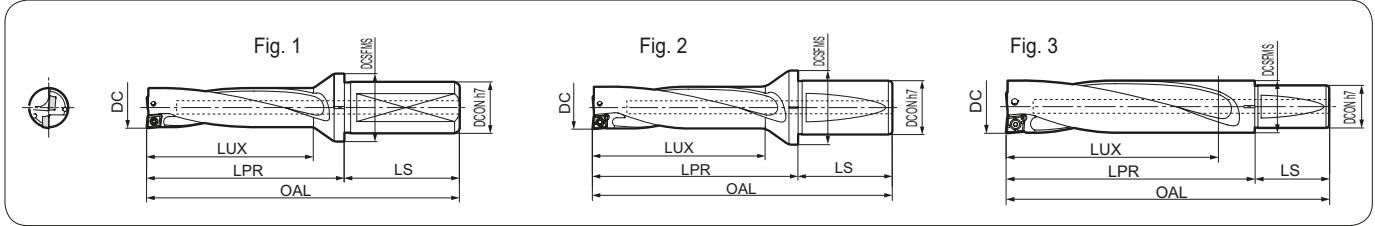

Holder

DC (mm)	Cat. No.	Stock	Dimensions (mm)					Applicable Insert	Fig.
			OAL	LUX	LPR	DCON	DCSFMS		
13.0	WDX 130D5S20	●	127.0	68.0	83.0	20	28	44	WDXT 042004
13.5	WDX 135D5S20	●	129.5	70.5	85.5				
14.0	WDX 140D5S20	●	132.0	73.0	88.0				
14.5	WDX 145D5S20	●	134.5	75.5	90.5	20	30	44	WDXT 052504
15.0	WDX 150D5S20	●	137.0	78.0	93.0				
15.5	WDX 155D5S20	●	139.5	80.5	95.5				
16.0	WDX 160D5S20	●	142.0	83.0	98.0	25	32	56	WDXT 063006
16.5	WDX 165D5S20	●	144.5	85.5	100.5				
17.0	WDX 170D5S20	●	147.0	88.0	103.0				
17.5	WDX 175D5S20	●	161.5	90.5	105.5	25	37	56	WDXT 073506
18.0	WDX 180D5S25	●	164.0	93.0	108.0				
18.5	WDX 185D5S25	●	166.5	95.5	110.5				
19.0	WDX 190D5S25	●	169.0	98.0	113.0	32	41	60	WDXT 094008
19.5	WDX 195D5S25	●	171.5	100.5	115.5				
20.0	WDX 200D5S25	●	174.0	103.0	118.0				
20.5	WDX 205D5S25	●	176.5	105.5	120.5	40	54	70	WDXT 125012
21.0	WDX 210D5S25	●	179.0	108.0	123.0				
21.5	WDX 215D5S25	●	181.5	110.5	125.5				
22.0	WDX 220D5S25	●	184.0	113.0	128.0	40	49.5	70	WDXT 156012
22.5	WDX 225D5S25	●	186.5	115.5	130.5				
23.0	WDX 230D5S25	●	192.0	118.0	136.0				
23.5	WDX 235D5S25	●	194.5	120.5	138.5	40	51.5	70	WDXT 156012
24.0	WDX 240D5S25	●	197.0	123.0	141.0				
24.5	WDX 245D5S25	●	199.5	125.5	143.5				
25.0	WDX 250D5S25	●	202.0	128.0	146.0	40	52.5	70	WDXT 156012
26.0	WDX 260D5S32	●	213.0	133.0	153.0				
27.0	WDX 270D5S32	●	218.0	138.0	158.0				
28.0	WDX 280D5S32	●	223.0	143.0	163.0	40	53.5	70	WDXT 156012
29.0	WDX 290D5S32	●	230.0	149.0	170.0				
30.0	WDX 300D5S40	●	248.0	154.0	178.0				
31.0	WDX 310D5S40	●	253.0	159.0	183.0	40	53.5	70	WDXT 156012
32.0	WDX 320D5S40	●	258.0	164.0	188.0				
33.0	WDX 330D5S40	●	263.0	169.0	193.0				
34.0	WDX 340D5S40	●	268.0	174.0	198.0	40	53.5	70	WDXT 156012
35.0	WDX 350D5S40	●	273.0	179.0	203.0				
36.0	WDX 360D5S40	●	278.0	184.0	208.0				
37.0	WDX 370D5S40	○	290.0	190.0	220.0	40	53.5	70	WDXT 156012
38.0	WDX 380D5S40	○	295.0	195.0	225.0				
39.0	WDX 390D5S40	○	300.0	200.0	230.0				
40.0	WDX 400D5S40	○	305.0	205.0	235.0	40	53.5	70	WDXT 156012
41.0	WDX 410D5S40	○	310.0	210.0	240.0				
42.0	WDX 420D5S40	○	315.0	215.0	245.0				
43.0	WDX 430D5S40	○	320.0	220.0	250.0	40	53.5	70	WDXT 156012
44.0	WDX 440D5S40	○	325.0	225.0	255.0				
45.0	WDX 450D5S40	○	330.0	230.0	260.0				
46.0	WDX 460D5S40	○	335.0	235.0	265.0	40	53.5	70	WDXT 156012
47.0	WDX 470D5S40	○	340.0	240.0	270.0				
48.0	WDX 480D5S40	○	345.0	245.0	275.0				
49.0	WDX 490D5S40	○	350.0	250.0	280.0	40	53.5	70	WDXT 156012
50.0	WDX 500D5S40	○	355.0	255.0	285.0				
51.0	WDX 510D5S40	○	360.0	260.0	290.0				
52.0	WDX 520D5S40	○	365.0	265.0	295.0	40	53.5	70	WDXT 156012
53.0	WDX 530D5S40	○	370.0	270.0	300.0				
54.0	WDX 540D5S40	○	375.0	275.0	305.0				
55.0	WDX 550D5S40	○	380.0	280.0	310.0				

Inserts


Cat. No.	Coated				Fig.	Dimensions (mm)			Applicable Holder
	ACP100	ACP300	ACK300	DL1500		W1	Thickness	RE	
WDXT 042004-L	○	●	●		4	4,2	2,0	0,4	WDX 130 ~ 150
WDXT 042004-G	●	●	●	●	5				
WDXT 042004-H	○	●	●		6				
WDXT 052504-L	○	●	●		4	5,0	2,5	0,4	WDX 155 ~ 180
WDXT 052504-G	●	●	●	●	5				
WDXT 052504-H	○	●	●		6				
WDXT 063006-L	●	●	●		4	6,0	3,0	0,6	WDX 185 ~ 225
WDXT 063006-G	●	●	●	●	5				
WDXT 063006-H	○	●	●		6				
WDXT 073506-L	●	●	●		4	7,5	3,5	0,6	WDX 230 ~ 285
WDXT 073506-G	●	●	●	●	5				
WDXT 073506-H	●	●	●		6				
WDXT 094008-L	●	●	●		4	9,6	4,0	0,8	WDX 290 ~ 360
WDXT 094008-G	●	●	●	●	5				
WDXT 094008-H	●	●	●		6				
WDXT 125012-L	●	●	●		4	12,4	5,0	1,2	WDX 370 ~ 450
WDXT 125012-G	●	●	●	●	5				
WDXT 125012-H	●	●	●		6				
WDXT 156012-L	●	●	●		4	15,2	6,0	1,2	WDX 460 ~ 550
WDXT 156012-G	●	●	●	●	5				
WDXT 156012-H	●	●	●		6				

Spare Parts


Screw	Wrench	Wrench	Applicable Holders	N·m
BFTX 01604 N	TRX 06	—	WDX 130D_S20 – 150D_S20	0,3
BFTX 0204 N	TRX 06	—	WDX 155D_S20 – 180D_S25	0,5
BFTX 02206	—	TRX 07	WDX 185D_S25 – 225D_S25	1,0
BFTX 02506 N	—	TRX 08	WDX 230D_S25 – 285D_S32	1,5
BFTX 03584	—	TRX 15	WDX 290D_S32 – 360D_S40	3,5
BFTX 0511 N	—	TRX 20	WDX 370D_S40 – 450D_S40	5,0
BFTX 0615 N	—	TRX 25	WDX 460D_S40 – 550D_S40	7,5

Identification Details

Drill Body

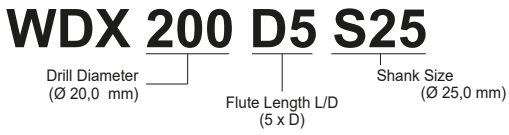


Indexable Insert

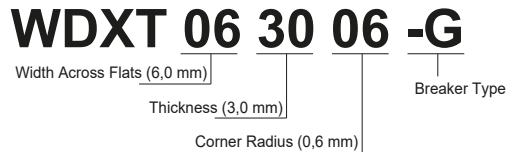

Multi-Purpose Functionality

● Applications for machining centre

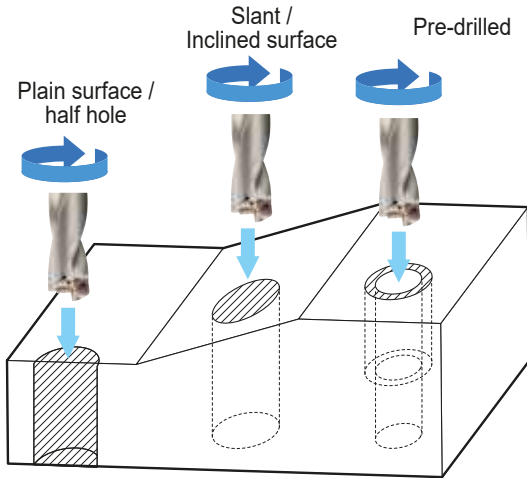

Recommended conditions - reduce feed rate to 70 %


● Hole profile

	Drill Diameter (mm)	a (mm)
	Ø13,0–18,0	0,4
	Ø18,5–28,5	0,6
	Ø29,0–36,0	0,8
	Ø37,0–55,0	1,2

Applications for Lathes


● Setting Instruction

Ensure the face of the drill flange is hard against the face of the tool holder.
Align the centreline of the drill to the centreline of the lathes Y axis

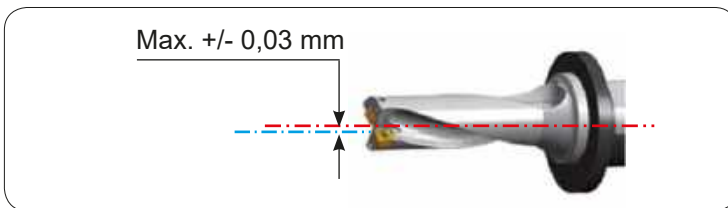

Drilling Over Holes


Offset the lathes X axis within the maximum amount stated in the table

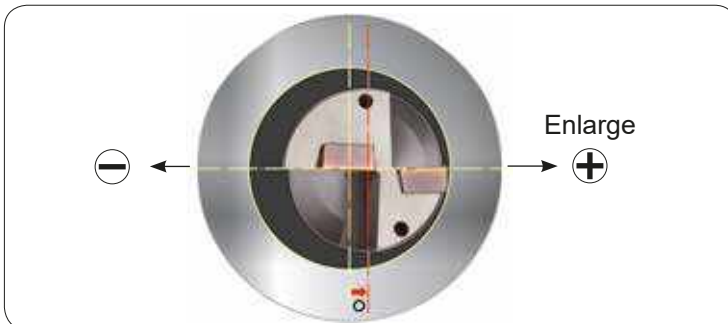

Drill description	Max. Offset (mm)	Drill description	Max. Offset (mm)
WDX130...	0,35	WDX280...	0,15
WDX135...	0,30	WDX285...	0,10
WDX140...	0,25	WDX290...	1,00
WDX145...	0,20	WDX295...	0,95
WDX150...	0,15	WDX300...	0,90
WDX155...	0,40	WDX310...	0,80
WDX160...	0,40	WDX320...	0,70
WDX165...	0,35	WDX330...	0,55
WDX170...	0,30	WDX340...	0,45
WDX175...	0,25	WDX350...	0,35
WDX180...	0,20	WDX360...	0,20
WDX185...	0,50	WDX370...	1,00
WDX190...	0,45	WDX380...	1,00
WDX195...	0,40	WDX390...	0,90
WDX200...	0,30	WDX400...	0,80
WDX205...	0,30	WDX410...	0,70
WDX210...	0,20	WDX420...	0,60
WDX215...	0,15	WDX430...	0,50
WDX220...	0,10	WDX440...	0,50
WDX225...	0,06	WDX450...	0,40
WDX230...	0,70	WDX460...	1,50
WDX235...	0,70	WDX470...	1,40
WDX240...	0,60	WDX480...	1,30
WDX245...	0,50	WDX490...	1,20
WDX250...	0,50	WDX500...	1,10
WDX255...	0,45	WDX510...	1,00
WDX260...	0,40	WDX520...	0,90
WDX265...	0,35	WDX530...	0,80
WDX270...	0,25	WDX540...	0,60
WDX275...	0,20	WDX550...	0,50

Recommended conditions - reduce feed rate to 30 %

Turning by lathes

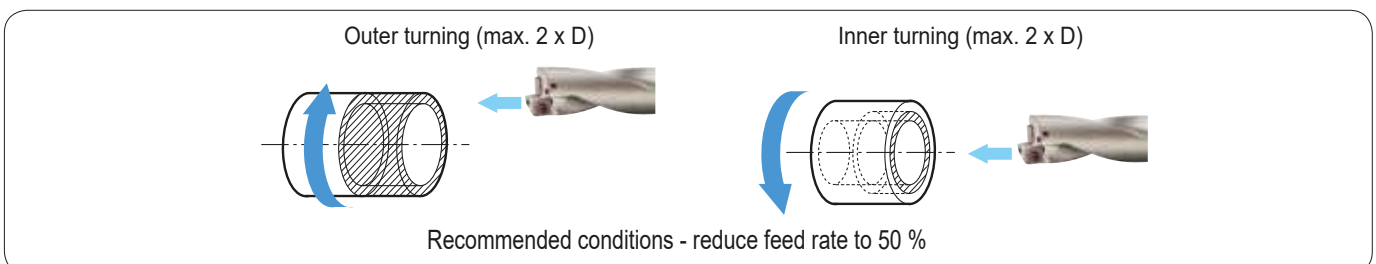


Recommended conditions - reduce feed rate to 50 %

WDX Type

Eccentric Sleeve WAS Type


The Eccentric Sleeve WAS Type, exclusively designed for "SumiDrill" WDX Type, provides up to $\pm 0,3$ mm of hole size adjustment.

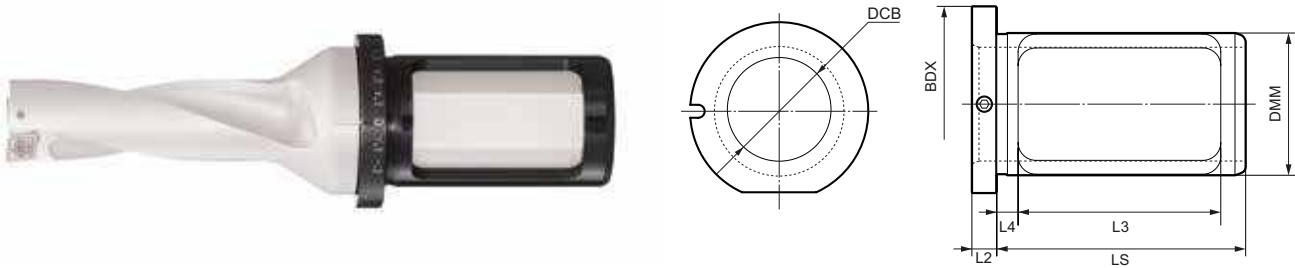

■ Dimensions

Cat. No.	Stock	DCB	DMM	BDX	LS	L2	L3	L4	Diameter Adjustment Range (max.)
WAS 2025-48	●	20	25	33	43	5	32	5	+0,3 – -0,2
WAS 2532-60	●	25	32	42	60	7	46	6	+0,3 – -0,3
WAS 3240-70	●	32	40	55	70	7	57	6	+0,3 – -0,3
WAS 4050-85	●	40	50	60	70	7	54	6	+0,3 – -0,3

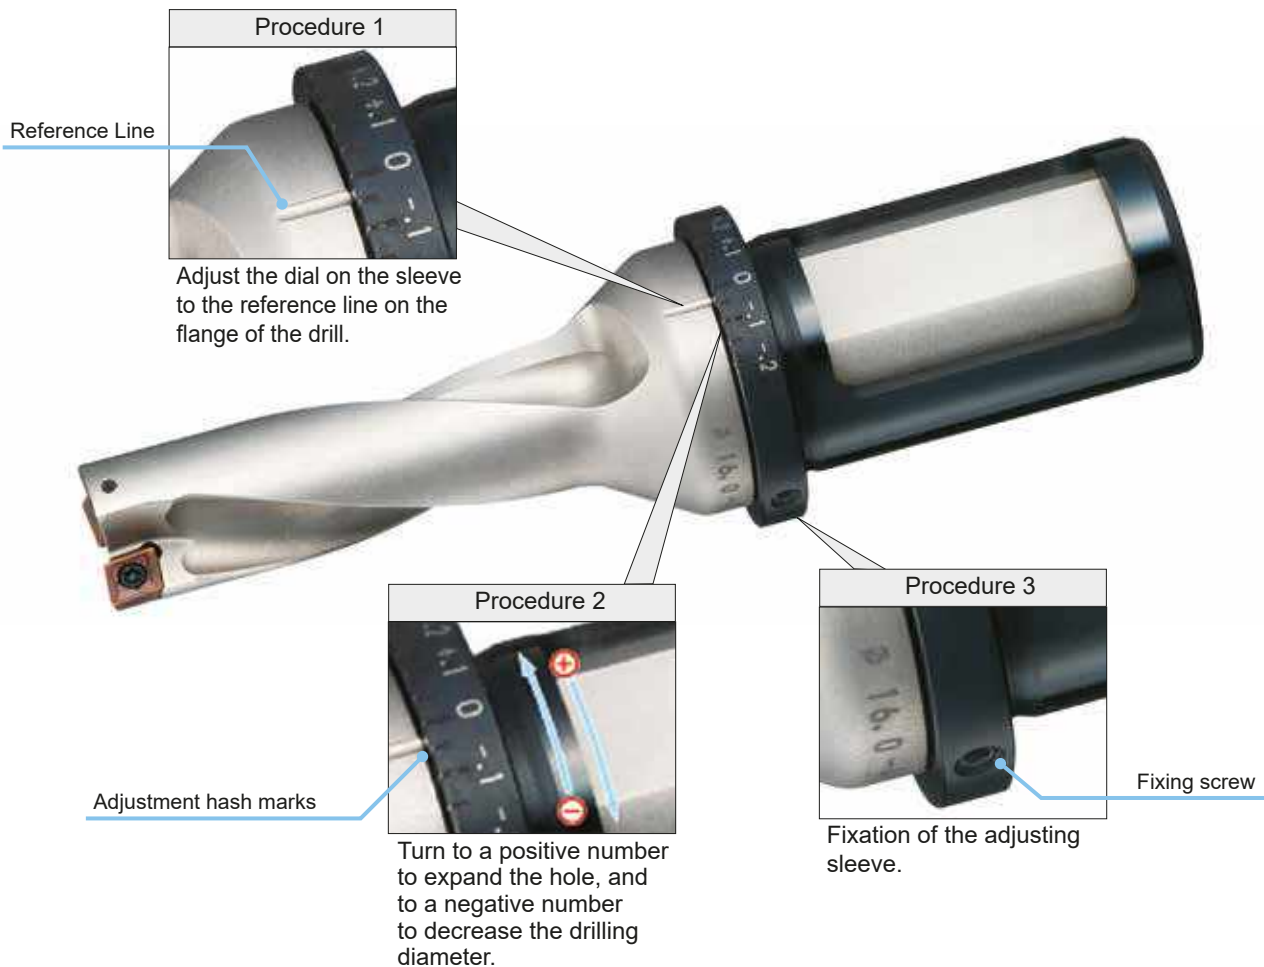



■ Diameter Adjustment







Note 1: The dial is for reference purposes. Always measure the actual drilling diameter and adjust accordingly.
 Note 2: Not usable with collet chuck type holders. Only use with a side-locking holder like Weldon.



Indexable Insert Type "SumiDrill" WDX Type




Application Examples

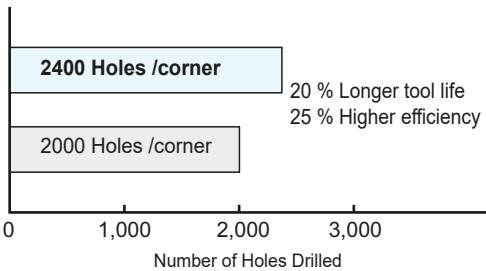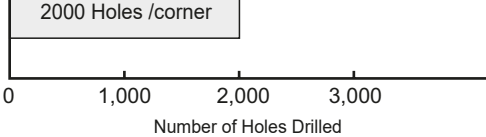

"SumiDrill" WDX type	Normal wear	Good chip control
		
Competitor	Breakage	Long chips
		
Drill Body:	Automotive Component (SUS304) WDX220D2S25	
Drill Insert:	WDXT063006-L (ACP300)	
Conditions:	$v_c = 125$ m/min, $f = 0,07$ mm/rev, $H = 5$ mm, through, Wet	
Insert breakage was eliminated with improved chip control and better surface finish.		

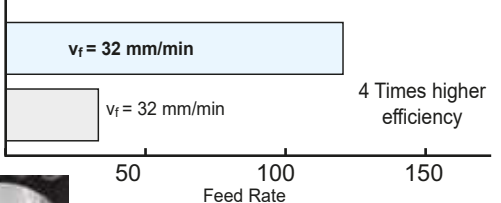"SumiDrill" WDX type	Good chip form
	
Competitor	Entangled chips
	
Drill Body:	Structural Steel WDX190D4S25
Drill Insert:	WDXT063006-L (ACP300)
Conditions:	$v_c = 100$ m/min, $f = 0,06$ mm/rev, $H = 40$ mm, through, Wet
Eliminated the problem of entangled chips.	

"SumiDrill" WDX type	2400 Holes /corner	20 % Longer tool life 25 % Higher efficiency
		
Competitor	2000 Holes /corner	
		
Drill Body:	Machine Component (SCM440) WDX220D3S25	
Drill Insert:	WDXT063006-G (ACP300)	
Conditions (Sumitomo):	$v_c = 157$ m/min, $f = 0,19$ mm/rev, $H = 19$ mm, through, Wet	
Conditions (Comp.):	$v_c = 157$ m/min, $f = 0,15$ mm/rev, $H = 19$ mm, through, Wet	
Good chip control even under high efficiency conditions. Better stability through lower cutting force, resulting in 25 % higher efficiency and 20 % higher tool life.		

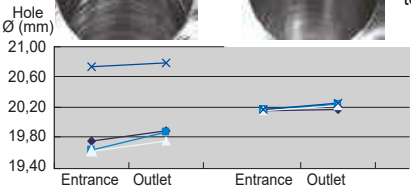"SumiDrill" WDX type	$v_f = 32$ mm/min	4 Times higher efficiency
		
Competitor	$v_f = 32$ mm/min	
		
Drill Body:	Plate (S48C) WDX600D3S40	
Drill Insert:	WDXT186012-G (ACP300)	
Conditions (Sumitomo):	$v_c = 150$ m/min, $f = 0,16$ mm/rev, $H = 60$ mm, through, Wet	
Conditions (Comp.):	$v_c = 30$ m/min, $f = 0,20$ mm/rev, $H = 60$ mm, through, Wet	
Stable drilling performance. 4 times higher efficiency.		

Competitor		Good surface and hole tolerance.
"SumiDrill" WDX type		
		
Drill Body:	Automotive Component (SCM415) WDX200D5S25	
Drill Insert:	WDXT063006-G (ACP300)	
Conditions:	$v_c = 185$ m/min, $f = 0,12$ mm/rev, $H = 87$ mm, through, Wet	
Good surface roughness. Stable hole diameter.		

"SumiDrill" WDX type	Normal flank wear
	
Competitor	Breakage
	
Drill Body:	Bearing Component for Windmill (42CrMo) WDX330D5S40
Drill Insert:	WDXT094008-L (ACP300)
Conditions:	$v_c = 146$ m/min, $f = 0,10$ mm/rev, $H = 158$ mm, through, Wet
WDX shows stable drilling performance, no cutting edge breakage.	

Indexable Insert Type "SumiDrill" WDX Type

Recommended Cutting Conditions

■ Recommended Cutting Conditions (2D)

[min. - optimal - max.]

Material Group		Hardness (HB)	Chip breaker & Grade	Cutting Speed	Feed rate (mm/rev)				
ISO	Work material			Vc (m/min)	Ø 13,0–18,0	Ø 18,5–29,0	Ø 29,5–36,0	Ø 37,0–55,0	Ø 56,0–65,0
P	Carbon steel	125	L ACP300	150–220–250	0,04–0,08–0,12	0,04–0,08–0,12	0,04–0,08–0,13	0,05–0,10–0,15	0,06–0,11–0,17
		190	G ACP300	150–220–250	0,08–0,13–0,24	0,08–0,13–0,24	0,08–0,14–0,26	0,09–0,16–0,29	0,10–0,17–0,32
		250	G ACP300	125–170–230	0,06–0,11–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22	0,08–0,14–0,24
		270	G ACP300	125–170–230	0,08–0,13–0,22	0,08–0,14–0,24	0,08–0,14–0,23	0,09–0,16–0,26	0,10–0,17–0,29
		300	G ACP300	100–130–170	0,06–0,11–0,17	0,06–0,12–0,18	0,06–0,12–0,18	0,07–0,13–0,20	0,08–0,14–0,22
	Low alloyed steel	180	L ACP300	150–180–220	0,05–0,08–0,14	0,05–0,08–0,14	0,05–0,08–0,16	0,06–0,09–0,17	0,07–0,10–0,19
		275	G ACP300	125–150–200	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20	0,08–0,14–0,22
		300	G ACP300	100–140–170	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20	0,08–0,14–0,22
	High alloyed steel	350	G ACP300	80–120–150	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20	0,08–0,14–0,22
		200	G ACP300	100–150–200	0,08–0,13–0,24	0,08–0,13–0,24	0,08–0,14–0,26	0,09–0,16–0,29	0,10–0,17–0,32
M	Stainless steel, martensitic / ferritic martensitic / tempered austenitic / quenched austenitic / ferritic (Duplex)	200	L/G ACP300	100–150–200	0,06–0,11–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22	0,08–0,14–0,24
		240	L/G ACP300	90–120–150	0,06–0,11–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22	0,08–0,14–0,24
		180	L/G ACP300	100–150–200	0,04–0,08–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22	0,08–0,14–0,24
		230	L/G ACP300	80–120–150	0,04–0,08–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22	0,08–0,14–0,24
K	Cast iron (GG)	180	H ACK300	120–160–200	0,09–0,20–0,32	0,10–0,22–0,36	0,11–0,24–0,39	0,12–0,26–0,44	0,13–0,29–0,48
		260	H ACK300	120–160–200	0,09–0,20–0,32	0,10–0,22–0,36	0,11–0,24–0,39	0,12–0,26–0,44	0,13–0,29–0,48
	Nodular cast iron (GGG)	160	H ACK300	90–120–250	0,09–0,20–0,32	0,10–0,22–0,36	0,11–0,24–0,39	0,12–0,26–0,44	0,13–0,29–0,48
		250	H ACK300	90–120–250	0,09–0,20–0,32	0,10–0,22–0,36	0,11–0,24–0,39	0,12–0,26–0,44	0,13–0,29–0,48
S	Heat resistant alloy	200	L/G ACP300	25–50–70	0,06–0,11–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22	0,08–0,14–0,24
N	Aluminium alloy		G DL1500	200–260–320	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20	0,08–0,14–0,22
	Copper alloy		G DL1500	180–230–280	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20	0,08–0,14–0,22

■ Recommended Cutting Conditions (3D)

[min. - optimal - max.]

Material Group		Hardness (HB)	Chip breaker & Grade	Cutting Speed	Feed rate (mm/rev)				
ISO	Work material			Vc (m/min)	Ø 13,0–18,0	Ø 18,5–29,0	Ø 29,5–36,0	Ø 37,0–55,0	Ø 56,0–65,0
P	Carbon steel	125	L ACP300	150–220–250	0,04–0,07–0,1	0,04–0,07–0,10	0,04–0,08–0,11	0,05–0,09–0,12	0,06–0,10–0,13
		190	G ACP300	150–220–250	0,08–0,12–0,2	0,08–0,12–0,20	0,08–0,13–0,22	0,09–0,14–0,24	0,10–0,16–0,27
		250	G ACP300	125–170–230	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18	0,08–0,13–0,20
		270	G ACP300	125–170–230	0,08–0,12–0,18	0,08–0,12–0,18	0,08–0,13–0,19	0,09–0,14–0,22	0,10–0,16–0,24
		300	G ACP300	100–130–170	0,06–0,10–0,14	0,06–0,10–0,14	0,06–0,11–0,15	0,07–0,12–0,17	0,08–0,13–0,19
	Low alloyed steel	180	L ACP300	150–180–220	0,05–0,07–0,12	0,05–0,07–0,12	0,05–0,08–0,13	0,06–0,08–0,15	0,07–0,09–0,16
		275	G ACP300	125–150–200	0,06–0,10–0,14	0,06–0,10–0,14	0,06–0,11–0,15	0,07–0,12–0,17	0,08–0,13–0,19
		300	G ACP300	100–140–170	0,06–0,10–0,14	0,06–0,10–0,14	0,06–0,11–0,15	0,07–0,12–0,17	0,08–0,13–0,19
	High alloyed steel	350	G ACP300	80–120–150	0,06–0,10–0,14	0,06–0,10–0,14	0,06–0,11–0,15	0,07–0,12–0,17	0,08–0,13–0,19
		200	G ACP300	100–150–200	0,08–0,12–0,2	0,08–0,12–0,20	0,08–0,13–0,22	0,09–0,14–0,24	0,10–0,16–0,27
M	Stainless steel, martensitic / ferritic martensitic / tempered austenitic / quenched austenitic / ferritic (Duplex)	200	L/G ACP300	100–150–200	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18	0,08–0,13–0,20
		240	L/G ACP300	90–120–150	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18	0,08–0,13–0,20
		180	L/G ACP300	100–150–200	0,04–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18	0,08–0,13–0,20
		230	L/G ACP300	80–120–150	0,04–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18	0,08–0,13–0,20
K	Cast iron (GG)	180	H ACK300	12–160–200	0,09–0,18–0,27	0,10–0,20–0,30	0,11–0,22–0,32	0,12–0,24–0,36	0,13–0,26–0,40
		260	H ACK300	120–160–200	0,09–0,18–0,27	0,10–0,20–0,30	0,11–0,22–0,32	0,12–0,24–0,36	0,13–0,26–0,40
	Nodular cast iron (GGG)	160	H ACK300	90–120–250	0,09–0,18–0,27	0,10–0,20–0,30	0,11–0,22–0,32	0,12–0,24–0,36	0,13–0,26–0,40
		250	H ACK300	90–120–250	0,09–0,18–0,27	0,10–0,20–0,30	0,11–0,22–0,32	0,12–0,24–0,36	0,13–0,26–0,40
S	Heat resistant alloy	200	L/G ACP300	25–50–70	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18	0,08–0,13–0,20
N	Aluminium alloy		G DL1500	200–260–320	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20	0,08–0,14–0,22
	Copper alloy		G DL1500	180–230–280	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20	0,08–0,14–0,22

Recommended Cutting Conditions (4D)

[min. - optimal - max.]

Material Group		Hardness (HRC)	Chip breaker & Grade	Cutting Speed Vc (m/min)	Feed rate (mm/rev)				
ISO	Work material				Ø 13,0-18,0	Ø 18,5-29,0	Ø 29,5-36,0	Ø 37,0-55,0	Ø 56,0-65,0
P	Carbon steel	125	L ACP300	150-220-250	0,04-0,07-0,09	0,04-0,07-0,09	0,04-0,07-0,09	0,05-0,08-0,10	0,05-0,08-0,10
		190	G ACP300	150-220-250	0,08-0,11-0,17	0,08-0,11-0,17	0,08-0,12-0,18	0,09-0,14-0,21	0,09-0,14-0,21
		250	G ACP300	125-170-230	0,06-0,10-0,13	0,06-0,10-0,13	0,06-0,10-0,14	0,07-0,11-0,15	0,07-0,11-0,15
		270	G ACP300	125-170-230	0,08-0,11-0,15	0,08-0,11-0,15	0,08-0,12-0,17	0,09-0,14-0,19	0,09-0,14-0,19
		300	G ACP300	100-130-170	0,06-0,10-0,12	0,06-0,10-0,12	0,06-0,10-0,13	0,07-0,11-0,14	0,07-0,11-0,14
	Low alloyed steel	180	L ACP300	150-180-220	0,05-0,07-0,10	0,05-0,07-0,10	0,05-0,07-0,11	0,06-0,08-0,12	0,06-0,08-0,12
		275	G ACP300	125-150-200	0,06-0,10-0,12	0,06-0,10-0,12	0,06-0,10-0,13	0,07-0,11-0,14	0,07-0,11-0,14
		300	G ACP300	100-140-170	0,06-0,10-0,12	0,06-0,10-0,12	0,06-0,10-0,13	0,07-0,11-0,14	0,07-0,11-0,14
		350	G ACP300	80-120-150	0,06-0,10-0,12	0,06-0,10-0,12	0,06-0,10-0,13	0,07-0,11-0,14	0,07-0,11-0,14
	High alloyed steel	200	G ACP300	100-150-200	0,08-0,11-0,17	0,08-0,11-0,17	0,08-0,12-0,18	0,09-0,14-0,21	0,09-0,14-0,21
325		G ACP300	80-120-160	0,06-0,10-0,13	0,06-0,10-0,13	0,06-0,10-0,14	0,07-0,11-0,15	0,07-0,11-0,15	
M	Stainless steel, martensitic / ferritic martensitic / tempered austenitic / quenched austenitic / ferritic (Duplex)	200	L/G ACP300	100-150-200	0,06-0,10-0,13	0,06-0,10-0,13	0,06-0,10-0,14	0,07-0,11-0,15	0,07-0,11-0,15
		240	L/G ACP300	90-120-150	0,06-0,10-0,13	0,06-0,10-0,13	0,06-0,10-0,14	0,07-0,11-0,15	0,07-0,11-0,15
		180	L/G ACP300	100-150-200	0,04-0,10-0,13	0,06-0,10-0,13	0,06-0,10-0,14	0,07-0,11-0,15	0,07-0,11-0,15
		230	L/G ACP300	80-120-150	0,04-0,10-0,13	0,06-0,10-0,13	0,06-0,10-0,14	0,07-0,11-0,15	0,07-0,11-0,15
K	Cast iron (GG)	180	H ACK300	120-160-200	0,09-0,17-0,23	0,10-0,19-0,26	0,11-0,21-0,28	0,12-0,23-0,31	0,12-0,23-0,31
		260	H ACK300	120-160-200	0,09-0,17-0,23	0,10-0,19-0,26	0,11-0,21-0,28	0,12-0,23-0,31	0,12-0,23-0,31
	Nodular cast iron (GGG)	160	H ACK300	90-120-150	0,09-0,17-0,23	0,10-0,19-0,26	0,11-0,21-0,28	0,12-0,23-0,31	0,12-0,23-0,31
		250	H ACK300	90-120-150	0,09-0,17-0,23	0,10-0,19-0,26	0,11-0,21-0,28	0,12-0,23-0,31	0,12-0,23-0,31
S	Heat resistant alloy	200	L/G ACP300	25-50-70	0,06-0,10-0,13	0,06-0,10-0,13	0,06-0,10-0,14	0,07-0,11-0,15	0,07-0,11-0,15
N	Aluminium alloy		G DL1500	200-260-320	0,05-0,10-0,15	0,05-0,10-0,15	0,06-0,11-0,16	0,06-0,12-0,18	0,07-0,13-0,20
	Copper alloy		G DL1500	180-230-280	0,05-0,10-0,15	0,05-0,10-0,15	0,06-0,11-0,16	0,06-0,12-0,18	0,07-0,13-0,20

Recommended Cutting Conditions (5D)

[min. - optimal - max.]

Material Group		Hardness (HRC)	Chip breaker & Grade	Cutting Speed Vc (m/min)	Feed rate (mm/rev)				
ISO	Work material				Ø 13,0-18,0	Ø 18,5-29,0	Ø 29,5-36,0	Ø 37,0-55,0	Ø 56,0-65,0
P	Carbon steel	125	L ACP300	150-220-250	0,04-0,06-0,09	0,04-0,06-0,08	0,04-0,06-0,08	0,05-0,07-0,09	
		190	G ACP300	150-220-250	0,07-0,10-0,15	0,07-0,10-0,15	0,08-0,11-0,17	0,09-0,12-0,19	
		250	G ACP300	125-170-230	0,05-0,09-0,11	0,05-0,09-0,11	0,06-0,09-0,12	0,06-0,10-0,14	
		270	G ACP300	125-170-230	0,07-0,10-0,14	0,07-0,10-0,14	0,08-0,11-0,15	0,09-0,12-0,17	
		300	G ACP300	100-130-170	0,05-0,09-0,11	0,05-0,09-0,11	0,06-0,09-0,12	0,06-0,10-0,13	
	Low alloyed steel	180	L ACP300	150-180-220	0,05-0,06-0,09	0,05-0,06-0,09	0,05-0,06-0,10	0,05-0,07-0,11	
		275	G ACP300	125-150-200	0,05-0,09-0,11	0,05-0,09-0,11	0,06-0,09-0,12	0,06-0,10-0,13	
		300	G ACP300	100-140-170	0,05-0,09-0,11	0,05-0,09-0,11	0,06-0,09-0,12	0,06-0,10-0,13	
		350	G ACP300	80-120-150	0,05-0,09-0,11	0,05-0,09-0,11	0,06-0,09-0,12	0,06-0,10-0,13	
	High alloyed steel	200	G ACP300	100-150-200	0,07-0,10-0,15	0,07-0,10-0,15	0,08-0,11-0,17	0,09-0,12-0,19	
325		G ACP300	80-120-160	0,05-0,09-0,11	0,06-0,09-0,11	0,06-0,09-0,12	0,06-0,10-0,14		
M	Stainless steel, martensitic / ferritic martensitic / tempered austenitic / quenched austenitic / ferritic (Duplex)	200	L/G ACP300	100-150-200	0,05-0,09-0,11	0,05-0,09-0,11	0,06-0,09-0,12	0,06-0,10-0,14	
		240	L/G ACP300	90-120-150	0,05-0,09-0,11	0,05-0,09-0,11	0,06-0,09-0,12	0,06-0,10-0,14	
		180	L/G ACP300	100-150-200	0,05-0,09-0,11	0,05-0,09-0,11	0,06-0,09-0,12	0,06-0,10-0,14	
		230	L/G ACP300	80-120-150	0,05-0,09-0,11	0,05-0,09-0,11	0,06-0,09-0,12	0,07-0,12-0,18	
K	Cast iron (GG)	180	H ACK300	120-160-200	0,08-0,15-0,21	0,09-0,17-0,23	0,09-0,18-0,25	0,11-0,20-0,28	
		260	H ACK300	120-160-200	0,08-0,15-0,21	0,09-0,17-0,23	0,09-0,18-0,25	0,11-0,20-0,28	
	Nodular cast iron (GGG)	160	H ACK300	90-120-150	0,08-0,15-0,21	0,09-0,17-0,23	0,09-0,18-0,25	0,11-0,20-0,28	
		250	H ACK300	90-120-150	0,08-0,15-0,21	0,09-0,17-0,23	0,09-0,18-0,25	0,11-0,20-0,28	
S	Heat resistant alloy	200	L/G ACP300	25-50-70	0,05-0,09-0,11	0,05-0,09-0,11	0,06-0,09-0,12	0,06-0,10-0,14	
N	Aluminium alloy		G DL1500	200-260-320	0,05-0,10-0,15	0,05-0,10-0,15	0,06-0,11-0,16	0,06-0,12-0,18	
	Copper alloy		G DL1500	180-230-280	0,05-0,10-0,15	0,05-0,10-0,15	0,06-0,11-0,16	0,06-0,12-0,18	



Indexable Plunge Drill / Plunge Mill

PDL Type / PCT Type




Description

The tool cuts in the Z axis direction where tool rigidity is highest, allowing high efficiency roughing for aeronautic components and dies with long tool overhang must be used to machine deep holes and pockets.


- Characteristics**
 - The flat cutting edge design produces near-flat bottom profiles to reduce depth of cut variation during finishing.
 - All sizes come with an air hole for supplying coolant internally to improve chip evacuation.
 - Durable body with special surface treatment offers improved tool life and reliability.
 - The tools use SumiDrill WDX type inserts for handling a wide range of work materials, from steel to non-ferrous metals and exotic alloys.

- The PDL type has a central insert making it possible to make radial cuts beyond the tool's radius, pitch feed cutting, and drilling. (Pocket milling, etc.)

- Although the PCT type has limited radial cutting ability, the tool has many effective teeth enabling it to perform high feed cutting. (Medium finishing of corners, hole expansion, deep grooving, etc.)



Keep the value of P_f for PDL type tools to less than 70 % of the tool diameter (DC).

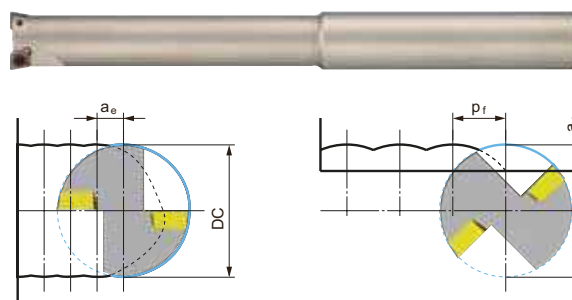

Keep the value of P_f for PCT type tools to less than 50 % of the tool diameter (DC).

For a_e refer to the dimension under "a_e max" in the stock / dimensions tables titled "Holders Max, Depth: 3D/5D".



Application examples

PDL Pocketing
Work Material: Ti Alloy

Tool: PDL400D2S40 (Ø 40)
Insert: WDXT125012-G
Grade: ACK300

Cutting Conditions:
 $v_c = 40$ m/min
 $f = 0,07$ mm/rev
($v_f = 22,3$ mm/min)
 $P_f = 25$ mm

PCT Corner Finishing
Work Material: Ti Alloy

Tool: PCT320D3S32 (Ø 32)
PCT250D3S25 (Ø 25)
PCT200D3S20 (Ø 20)
Grade: ACK300

Insert: WDXT094008-G
WDXT073506-G
WDXT063006-G

Cutting Conditions:
 $v_c = 50$ m/min
 $f_t = 0,08$ mm/tooth
($v_f = 80-127$ mm/min)
 $a_e = 3,2-6,5$ mm

PCT Grooving
Work Material: Ti Alloy

Tool: PCT320D5S32 (Ø 32)
Insert: WDXT094008-G
Grade: ACK300

Cutting Conditions:
 $v_c = 40$ m/min
 $f_t = 0,07$ mm/tooth
($v_f = 56$ mm/min)
 $P_f = 5,0$ mm

PDL Drilling
Work Material: X4 CrNiMo 17 12 2

Tool: PDL200D3S25 (Ø 20)
Insert: WDXT063006-G
Grade: ACP300

Cutting Conditions:
 $v_c = 180$ m/min
 $f = 0,10$ mm/rev
($v_f = 286$ mm/min)
DC = 20 mm

PCT Aeronautic Components
Work Material: X5 CrNi 18 10

Tool: PCT320D3S32 (Ø 32)
Insert: WDXT094008-G
Grade: ACP300

Cutting Conditions:
 $v_c = 180$ m/min
 $f_t = 0,15$ mm/tooth
($v_f = 537$ mm/min)
 $a_e = 7,0$ mm, $P_f = 5,0$ mm

PCT Machine Components
Work Material: 34 Cr Ni 4

Tool: PCT200D5S20 (Ø 20)
Insert: WDXT063006-G
Grade: ACK300

Cutting Conditions:
 $v_c = 150$ m/min
 $f_t = 0,15$ mm/tooth
($v_f = 716$ mm/min)
 $a_e = 3,5$ mm

Indexable Plunge Drill PDL Type (2D, 3D)



2D	3D	Carbon Steel, Alloy Steel	Hardened Steel	Stainless Steel	Ti Alloy	Heat Resistant Alloy	Cast Iron	Ductile Cast Iron	Al Alloy	Cu Alloy	Composite CFRP*
		C≤0.28% C>0.28%	HRC≤45 HRC>45								
		Tempered Steel									
		W									

Fig 1


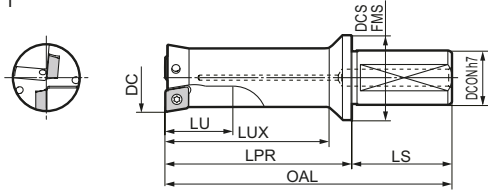


Fig 2

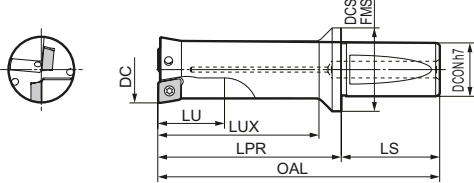

Holder (Max a_p : 2D)

Cat. No.	Stock	Dimensions (mm)							Applicable Insert	Fig.	
		DC	OAL	LU	LUX	LPR	LS	DCON			DCSFMS
PDL 160D2S20	●	16,0	94	32	35	50	44	20	28	WDXT052504	1
200D2S25	●	20,0	114	40	43	58	56	25	33	WDXT063006	
250D2S25	●	25,0	127	50	53	71	56	25	37	WDXT073506	
PDL 320D2S40	●	32,0	162	64	68	92	70	40	54	WDXT094008	2
400D2S40	●	40,0	185	80	85	115	70	40	54	WDXT125012	


Holder (Max a_p : 3D)

Cat. No.	Stock	Dimensions (mm)							Applicable Insert	Fig.	
		DC	OAL	LU	LUX	LPR	LS	DCON			DCSFMS
PDL 160D3S20	●	16,0	110	48	51	66	44	20	28	WDXT052504	1
200D3S25	●	20,0	134	60	63	78	56	25	33	WDXT063006	
250D3S25	●	25,0	152	75	78	96	56	25	37	WDXT073506	
PDL 320D3S40	●	32,0	194	96	100	124	70	40	54	WDXT094008	2
400D3S40	●	40,0	225	120	125	155	70	40	54	WDXT125012	

Spare Parts

Screw	Wrench	Wrench	(N.m)	Applicable Holders
BFTX0204N	TRX06	-	0,5	PDL 160 D2 S20, PDL 160 D3 S20 PCT 160 D3 S16, PCT 160 D5 S16
BFTY02206	-	TRD07	1,0	PDL 200 D2 S25, PDL 200 D3 S25 PCT 200 D3 S20, PCT 200 D5 S20
BFTX02506N	-	TRD08	1,5	PDL 250 D2 S25, PDL 250 D3 S25 PCT 250 D3 S25, PCT 250 D5 S25
BFTX03584	-	TRD15	3,5	PDL 320 D2 S40, PDL 320 D3 S40 PCT 320 D3 S32, PCT 320 D5 S32
BFTX0511N	-	TRD20	5,0	PDL 400 D2 S40, PDL 400 D3 S40 PCT 400 D3 S42, PCT 400 D5 S42

Notes about Mounting Inserts

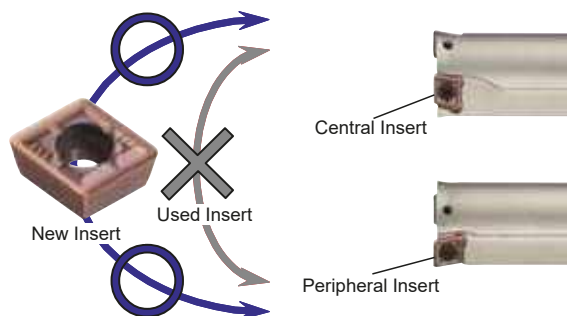

PDL type: Inserts can be used on either the centre or the outside.
 Inserts used on the outside cannot be used in the centre. Similarly,
 inserts used in the centre cannot be used on the outside.
 PCT type: 2 corners can be used only for the outer inserts.


Indexable Plunge Mill PCT Type (3D, 5D)



3D	5D	Carbon Steel, Alloy Steel	Hardened Steel	Stainless Steel	Ti Alloy	Heat Resistant Alloy	Cast Iron	Ductile Cast Iron	Al Alloy	Cu Alloy	Composite CFRP*
		C≤0.28% C>0.28%	HRC≤45 HRC>45								
		Tempered Steel									
		W									

* CFRP (Carbon Fibre Reinforced Plastic)

Fig 3

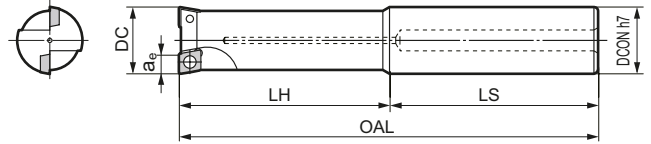


Holder (Max a_p : 3D)

Cat. No.	Stock	Dimensions (mm)						No. of teeth	Applicable Insert	Fig.
		DC	a_e max	OAL	LH	LS	DCON			
PCT 160D3S16	●	16,0	4,0	123	53	70	16	2	WDXT052504	3
200D3S20	●	20,0	5,0	145	65	80	20	2	WDXT063006	
250D3S25	●	25,0	6,5	160	80	80	25	2	WDXT073506	
PCT 320D3S32	●	32,0	8,5	191	101	90	32	2	WDXT094008	3
400D3S42	●	40,0	11,0	225	125	100	42	3	WDXT125012	

Holder (Max a_p : 5D)

Cat. No.	Stock	Dimensions (mm)						No. of teeth	Applicable Insert	Fig.
		ϕD	a_e max	OAL	LH	LS	DCON			
PCT 160D5S16	●	16,0	4,0	155	85	70	16	2	WDXT052504	3
200D5S20	●	20,0	5,0	185	105	80	20	2	WDXT063006	
250D5S25	●	25,0	6,5	210	130	80	25	2	WDXT073506	
PCT 320D5S32	●	32,0	8,5	255	165	90	32	2	WDXT094008	3
400D5S42	●	40,0	11,0	305	205	100	42	3	WDXT125012	

Inserts

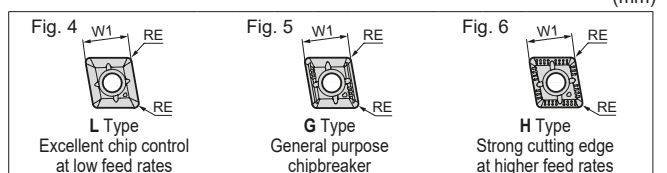

Application	Coated				Fig.	Dimensions (mm)			Applicable Holder
	High Speed / Light Cutting	General Purpose	Roughing			W1	Thickness	RE	
High Speed / Light Cutting				N					
General Purpose		M							
Roughing		PM	K						
Cat. No.	ACP100	ACP300	ACK300	DL1500	Fig.	Dimensions (mm)			Applicable Holder
	○	●	●	●		W1	Thickness	RE	
WDXT 052504-L	○	●	●	●	4				PDL160D2S20
052504-G	○	●	●	●	5	5,0	2,5	0,4	PDL160D3S20
052504-H	○	●	●	●	6				PCT160D3S16
WDXT 063006-L	○	●	●	●	4				PCT160D5S16
063006-G	○	●	●	●	5	6,0	3,0	0,6	PDL200D2S25
063006-H	○	●	●	●	6				PDL200D3S25
WDXT 073506-L	○	●	●	●	4				PCT200D3S20
073506-G	○	●	●	●	5	7,5	3,5	0,6	PCT200D5S20
073506-H	○	●	●	●	6				PDL250D2S25
WDXT 094008-L	○	●	●	●	4				PDL250D3S25
094008-G	○	●	●	●	5	9,6	4,0	0,8	PCT250D3S25
094008-H	○	●	●	●	6				PCT250D5S25
WDXT 125012-L	○	●	●	●	4				PDL320D2S40
125012-G	○	●	●	●	5	12,4	5,0	1,2	PDL320D3S40
125012-H	○	●	●	●	6				PCT320D3S32
									PCT320D5S32
									PDL400D2S40
									PDL400D3S40
									PCT400D3S42
									PCT400D5S42

Identification Details

PCT, PDL Type

PCT 250 D3 S25

Tool Diameter (Ø 25,0) | Max Depth L/D (3D) | Shank Size (Ø 25,0)


PCT, PDL Type Insert Identification

WDXT 07 35 06 -G

Width Across Flats (7,5) | Thickness x 10 (3,5) | Corner Radius x 10 (R0,6) | Breaker Type

Recommended Cutting Conditions

PDL Type / PCT Type

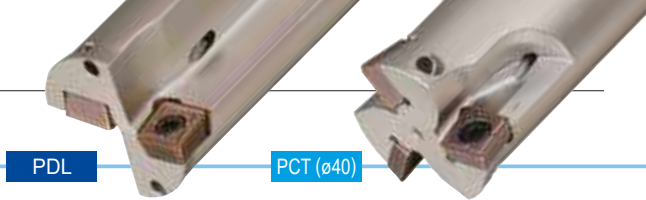

Recommended Cutting Conditions (2D)

[min. - optimal - max.]

ISO	Material Group Work material	Hardness (HB)	Chip breaker & Grade	Cutting Speed				PDL Type: f (mm/rev)			
				Vc (m/min)	Ø 16,0	Ø 20,0–25,0	Ø 32,0	Ø 40,0			
P	Carbon steel	125	G ACP300	120–180–240	0,05–0,08–0,10	0,05–0,08–0,10	0,05–0,08–0,11	0,05–0,08–0,12			
		125	L ACP300	130–170–220	0,04–0,08–0,12	0,04–0,08–0,12	0,04–0,08–0,13	0,05–0,10–0,15			
		190	G ACP300	100–150–200	0,08–0,13–0,24	0,08–0,13–0,24	0,08–0,14–0,26	0,09–0,16–0,29			
		250	G ACP300	80–120–160	0,06–0,11–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22			
		270	G ACP300	100–130–160	0,08–0,13–0,22	0,08–0,13–0,22	0,08–0,14–0,23	0,09–0,16–0,26			
	Low alloyed steel	300	G ACP300	70–100–140	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20			
		180	L ACP300	100–140–180	0,05–0,08–0,14	0,05–0,08–0,14	0,05–0,08–0,16	0,06–0,09–0,17			
		275	G ACP300	80–120–160	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20			
		300	G ACP300	75–110–140	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20			
		350	G ACP300	60–85–110	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20			
High alloyed steel	200	G ACP300	100–130–160	0,08–0,13–0,24	0,08–0,13–0,24	0,08–0,14–0,26	0,09–0,16–0,29				
	325	G ACP300	80–100–120	0,06–0,11–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22				
M	Stainless steel, martensitic / ferritic martensitic / tempered austenitic / quenched austenitic / ferritic (Duplex)	200	G ACP300	100–140–180	0,06–0,11–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22			
		240	G ACP300	90–120–150	0,06–0,11–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22			
		180	G ACP300	100–140–180	0,06–0,08–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22			
		230	G ACP300	80–120–150	0,04–0,08–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22			
K	Cast iron (GG)	180	H ACK300	120–160–200	0,09–0,20–0,32	0,10–0,22–0,36	0,11–0,24–0,39	0,12–0,26–0,44			
		260	H ACP300	90–120–150	0,09–0,20–0,32	0,10–0,22–0,36	0,11–0,24–0,39	0,12–0,26–0,44			
S	Heat resistant alloy	200	G ACP300	25–50–70	0,06–0,11–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22			
		200	G ACP300	25–50–70	0,06–0,11–0,18	0,06–0,11–0,18	0,06–0,12–0,19	0,07–0,13–0,22			
N	Aluminium alloy		G DL1500	200–260–320	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20			
			G DL1500	180–230–280	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20			

Recommended Cutting Conditions (3D)

[min. - optimal - max.]

ISO	Material Group Work material	Hardness (HB)	Chip breaker & Grade	Cutting Speed				PDL Type: f (mm/rev) / PCT Type: f _t (mm/tooth)			
				Vc (m/min)	Ø 16,0	Ø 20,0–25,0	Ø 32,0	Ø 40,0			
P	Carbon steel	125	G ACP300	120–180–240	0,05–0,07–0,10	0,05–0,07–0,10	0,05–0,08–0,11	0,05–0,08–0,12			
		125	L ACP300	130–170–220	0,04–0,07–0,10	0,04–0,07–0,10	0,04–0,08–0,11	0,05–0,09–0,12			
		190	G ACP300	100–150–200	0,08–0,12–0,20	0,08–0,12–0,20	0,08–0,13–0,22	0,09–0,14–0,24			
		250	G ACP300	80–120–160	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18			
		270	G ACP300	100–130–160	0,08–0,12–0,18	0,08–0,12–0,18	0,08–0,13–0,19	0,09–0,14–0,22			
	Low alloyed steel	300	G ACP300	70–100–140	0,06–0,10–0,14	0,06–0,10–0,14	0,06–0,11–0,15	0,07–0,12–0,17			
		180	L ACP300	100–140–180	0,05–0,07–0,12	0,05–0,07–0,12	0,05–0,07–0,13	0,06–0,07–0,15			
		275	G ACP300	80–120–160	0,06–0,10–0,14	0,06–0,10–0,14	0,06–0,11–0,15	0,07–0,12–0,17			
		300	G ACP300	75–110–140	0,06–0,10–0,14	0,06–0,10–0,14	0,06–0,11–0,15	0,07–0,12–0,17			
		350	G ACP300	60–85–110	0,06–0,10–0,14	0,06–0,10–0,14	0,06–0,11–0,15	0,07–0,12–0,17			
High alloyed steel	200	G ACP300	100–130–160	0,08–0,12–0,20	0,08–0,12–0,20	0,08–0,13–0,22	0,09–0,14–0,24				
	325	G ACP300	80–100–120	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18				
M	Stainless steel, martensitic / ferritic martensitic / tempered austenitic / quenched austenitic / ferritic (Duplex)	200	G ACP300	100–140–180	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18			
		240	G ACP300	90–120–150	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18			
		180	G ACP300	100–140–180	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18			
		230	G ACP300	80–120–150	0,04–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18			
K	Cast iron (GG)	180	H ACK300	120–160–200	0,09–0,18–0,27	0,10–0,20–0,30	0,11–0,22–0,32	0,12–0,24–0,36			
		260	H ACP300	90–120–150	0,09–0,18–0,27	0,10–0,20–0,30	0,11–0,22–0,32	0,12–0,24–0,36			
S	Heat resistant alloy	200	G ACP300	25–50–70	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18			
		200	G ACP300	25–50–70	0,06–0,10–0,15	0,06–0,10–0,15	0,06–0,11–0,16	0,07–0,12–0,18			
N	Aluminium alloy		G DL1500	200–260–320	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20			
			G DL1500	180–230–280	0,06–0,11–0,17	0,06–0,11–0,17	0,06–0,12–0,18	0,07–0,13–0,20			

Recommended Cutting Conditions (5D)



[min. - optimal - max.]

ISO	Material Group Work material	Hardness (HB)	Chip breaker & Grade	Cutting Speed				PCT Type: f _t (mm/tooth)			
				Vc (m/min)	Ø 16,0	Ø 20,0–25,0	Ø 32,0	Ø 40,0			
P	Carbon steel	125	G ACP300	120–180–240	0,05–0,06–0,09	0,05–0,06–0,09	0,05–0,06–0,09	0,05–0,07–0,09			
		125	L ACP300	130–170–220	0,04–0,06–0,08	0,04–0,06–0,08	0,04–0,06–0,08	0,05–0,07–0,09			
		190	G ACP300	100–150–200	0,07–0,10–0,15	0,07–0,10–0,15	0,08–0,11–0,17	0,09–0,12–0,19			
		250	G ACP300	80–120–160	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,14			
		270	G ACP300	100–130–160	0,07–0,10–0,14	0,07–0,10–0,14	0,08–0,11–0,15	0,09–0,12–0,17			
	Low alloyed steel	300	G ACP300	70–100–140	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,13			
		180	L ACP300	100–140–180	0,05–0,06–0,09	0,05–0,06–0,09	0,05–0,06–0,10	0,05–0,07–0,11			
		275	G ACP300	80–120–160	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,13			
		300	G ACP300	75–110–140	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,13			
		350	G ACP300	60–85–110	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,13			
High alloyed steel	200	G ACP300	100–130–160	0,07–0,10–0,15	0,07–0,10–0,15	0,08–0,11–0,17	0,09–0,12–0,19				
	325	G ACP300	80–100–120	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,14				
M	Stainless steel, martensitic / ferritic martensitic / tempered austenitic / quenched austenitic / ferritic (Duplex)	200	G ACP300	100–140–180	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,14			
		240	G ACP300	90–120–150	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,14			
		180	G ACP300	100–140–180	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,14			
		230	G ACP300	80–120–150	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,14			
K	Cast iron (GG)	180	H ACK300	120–160–200	0,08–0,15–0,21	0,09–0,17–0,23	0,09–0,18–0,25	0,11–0,20–0,28			
		260	H ACP300	90–120–150	0,08–0,15–0,21	0,09–0,17–0,23	0,09–0,18–0,25	0,11–0,20–0,28			
S	Heat resistant alloy	200	G ACP300	25–50–70	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,14			
		200	G ACP300	25–50–70	0,05–0,09–0,11	0,05–0,09–0,11	0,06–0,09–0,12	0,06–0,10–0,14			
N	Aluminium alloy		G DL1500	200–260–320	0,05–0,10–0,15	0,05–0,10–0,15	0,06–0,11–0,16	0,06–0,12–0,18			
			G DL1500	180–230–280	0,05–0,10–0,15	0,05–0,10–0,15	0,06–0,11–0,16	0,06–0,12–0,18			

SUMIBORON SUMIDIA

L1–L30



CBN Grades	SUMIBORON Series	L2
	Recommended Grades	L3
	Edge Specification of SUMIBORON Inserts	L4
Insert types and cutting edge geometries	LE / LT / LF / LS / ES / HS	L5
SUMIBORON Chipbreaker "Break Master" Type	FV / LV & SV Types	L6
One-Use "Wiper" Insert Type	WG / WH & W Types	L7
Uncoated SUMIBORON Grades	BN1000 / BN2000	L8-9
	BN350	L17
Coated SUMIBORON Grades	BNC2010 / BNC2020	L10-13
	BNC100	L14
	BNC160	L15
	BNC200	L16
	BNC300	L17
	BNC500	L18
Uncoated SUMIBORON Grades	BN7000	L19
	BN7500	L20
	BNS800	L21
SUMIBORON Binderless	NCB100 	L22-23
SUMIBORON / SUMIDIA	Production Process	L24-25
SUMIDIA Binderless	NPD10 / DA90 	L26-27
SUMIDIA PCD Grades	DA1000	L28
SUMIDIA Insert	NF Type	L28
SUMIDIA Chipbreaker "Break Master"	LD / GD Type	L29
	DM Type	L30

New generation Sumiboron inserts – an even better way to machine hardened steels







■ General

Building on its global success machining hardened steels with Sumiboron inserts the addition of heat and wear resistant coatings to a variety of tough new CBN substrates has resulted in a new generation of high performance grades. With economy in mind the new inserts are multi cornered.

Choose the coated insert suitable for your application and take your hard part machining operations to the new industry standard.

■ Types and Application

Type	ISO	Grade	Application	Characteristic	Hardness Hv (GPa)	TRS (GPa)
Microstructure  Uncoated CBN	H	BN1000	High speed Continuous cutting	Best wear resistance grade and suitable for high speed continuous cutting	27–31	0,90–1,00
		BN2000	Continuous and Interrupted cutting	Micro-grain CBN with Ceramic binder improves fracture toughness and wear resistance	31–34	1,05–1,15
		BNX25	High efficiency cutting (Continuous–Interrupted)	Binder with high heat resistance improves tool life during high speed machining	31–33	0,95–1,10
		BNX25	High speed Interrupted cutting	Superior fracture toughness in high speed cutting and suitable for high speed interrupted hard turning	29–31	1,00–1,10
		BN350	Interrupted cutting (Heavy)	Micro-grain CBN with higher fracture toughness that improves cutting edge strength	33–35	1,20–1,30
Microstructure  Coated CBN	H	BNC2010	High precision continuous cutting	New generation TiCN layer improves notch wear resistance and provides an excellent surface finish.	30–32	1,10–1,20
		BNC100	High speed continuous and light interrupted cutting	High speed finishing grade for continuous and light interrupted cutting applications	29–32	1,00–1,10
		BNC160	High precision continuous cutting	High precision grade for continuous cutting - ideal when an excellent surface finish is required	31–33	1,10–1,20
		BNC2020	High efficiency general purpose	New coating technology offers excellent adhesion during both continuous and interrupted cut applications.	34–36	1,20–1,30
		BNC200	Continuous and Interrupted cutting (Light–Medium Interrupted)	General purpose grade with low to high speed cutting capability and extended tool life - removes the carburised layer on heat treated components	33–35	1,10–1,20
		BNC300	Interrupted cutting (Heavy)	Tough grade for heavy interrupted cutting applications	33–35	1,15–1,25
		BNC500	GG and GGG machining	For Cast Iron machining with a good balance of wear and fracture resistance	32–34	1,00–1,10
Microstructure  Uncoated CBN	S PM	BN7000	High speed machining of GG Cast Iron machining Iron based products Rolls of high hardness Heat resistant alloy	First choice for high speed finishing of grey cast iron	41–44	1,25–1,35
		BN7500	High efficiency machining of powdered metal	Less burrs when machining sintered parts due to excellent edge sharpness	41–44	1,40–1,50
		BNS800	High speed machining of GG Machining rolls of high hardness Sintered component roughing Special cast Iron machining	High thermal impact resistance with high heat transfer ability and higher CBN content ratio	39–42	0,95–1,10
Binderless CBN 	S K	NCB100	Ultimate CBN grade achieves highly efficient and precise finishing of hard-to-cut materials	Binderless CBN is harder and has better thermal conductivity. Therefore, it enables higher efficiency and longer tool life in machining of hard-to-cut materials, such as titanium alloy and cobalt-chromium alloy.	51–54	1,8–1,9


H

HARDENED STEEL MACHINING

Advantages of using CBN

In terms of cost investment, it is much lower in machine cost and overhead cost due to the fact that a CNC lathe is cheaper than a grinding machine. As for the quality of finish, inserts can machine different profiles and the finishing is also commendable as compared to grinding. Environmentally, sludge treatment for grinding is a hazard to the environment but for turning, the chips can be collected and recycled.

Application Range

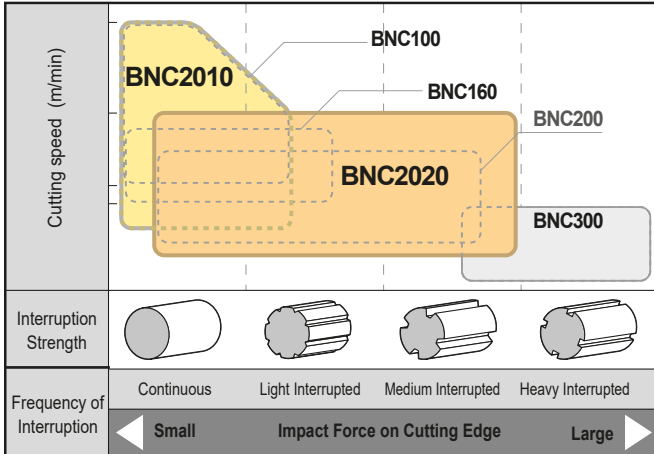

Conditions		Recommended Cutting Speed (m/min)				
Application		100	200	300	400	
Hardened Steel	Finishing	General Purpos (Continuous to Light interrupted Rz = above 3,2)	BNC2020 / BNC2010		BNC200 / BNC100	
		Heavy Interrupted	BNC300			
	High Precision (Rz = 1,6 to 3,2)	BNC2010				BNC160
		High Efficiency (Carburized layer removal)	BNC2020		BNC200	
	Cast Iron	Ductile Cast Iron	BNC500			


K

CAST IRON MACHINING


Advantages of using CBN

Following charts show merits of using CBN in cast iron machining compared with conventional tools, such as carbide, cermet or ceramics. SumiBoron performs longer tool life than conventional tools in high speed machining and brings higher efficiency and superior precision.


High Speed Machining

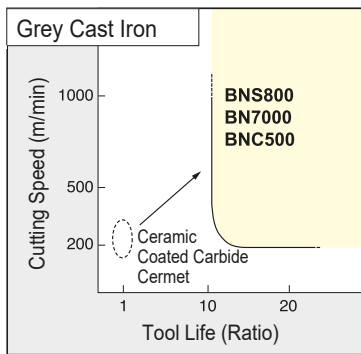



High Speed Machining

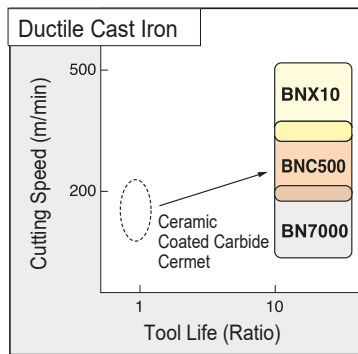

High Precision Machining

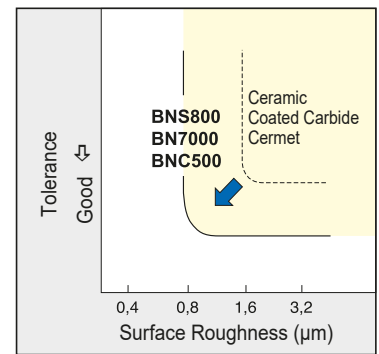

Application Range

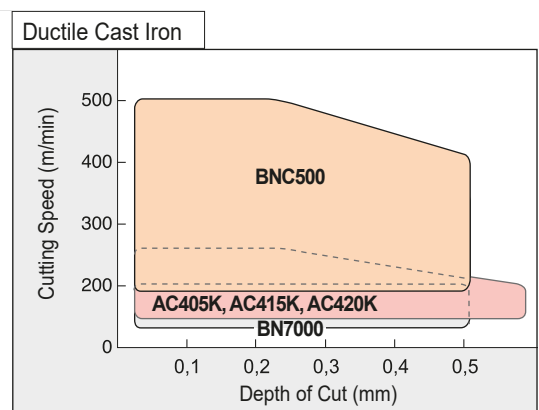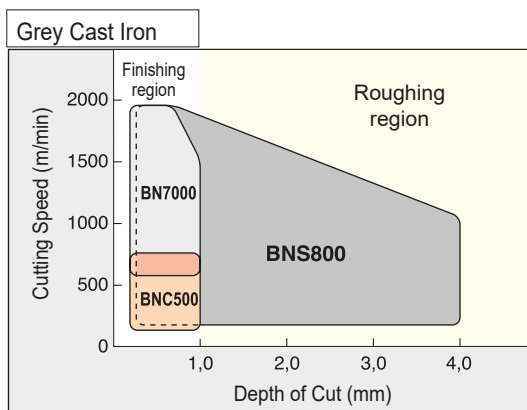


Edge Specification of SUMIBORON Inserts

Sumiboron Inserts and Edge Preparation

All SUMIBORON inserts are enhanced with the optimum cutting edge preparation for various grades and geometries (shown on the right).

This is to avoid cutting edge fracture caused by the heavy loads generated during the machining of high hardness materials such as Hardened Steel.

As the pioneer of CBN tools „SUMIBORON“, various selection of grades and edge preparation combinations is our strong point for Hardened Steel machining.

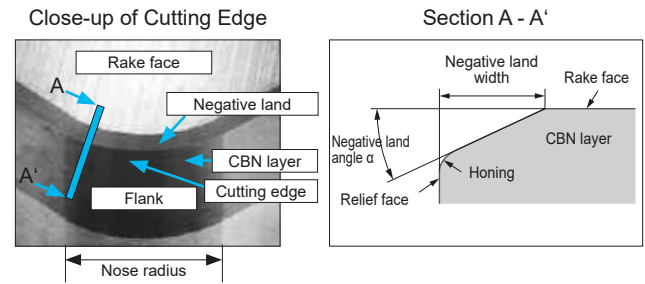

SUMIBORON Insert Cutting Edge Specification

Series	Work Material	Grade	Negative / Positive	Standard				Low Resistance Type L / High Efficiency Type E				Strong Edge Type H						
				Identification Code	α	W	Honing	Notation	Identification Code	α	W	Honing	Notation	Identification Code	α	W	Honing	
Uncoated SUMIBORON	Hardened Steel	BNX10	Neg./Pos.	T01225	25°	0,12	No	-	-	-	-	-	-	-	-	-	-	
		BNX20	Neg./Pos.	S01225	25°	0,12	Yes	LT	T01215*	15°	0,12	No	-	-	-	-	-	
		BNX25	Neg./Pos.	S01725	25°	0,17	Yes	-	-	-	-	-	-	-	-	-	-	
		BN1000	Neg./Pos.	S01225	25°	0,12	Yes	-	-	-	-	-	-	-	-	-	-	
		BN2000	Neg./Pos.	S01225	25°	0,12	Yes	LT	T01215	15°	0,12	No	HS	S01235	35°	0,12	Yes	
		BN350	Neg. / Pos.	T01225 / T01235	25° / 35°	0,12	No	-	-	-	-	-	-	-	-	-	-	
	Cast Iron	Cast Iron	BN700	Neg./Pos.	T01215	15°	0,12	No	LF	(Sharp edge)	0°	0	No	HS	S01225	25°	0,12	Yes
			BN7000	Neg./Pos.	T01215	15°	0,12	No	LF	(Sharp edge)	0°	0	No	HS	S01225	25°	0,12	Yes
		Exotic Alloy	BN7500	Neg./Pos.	T01215	15°	0,12	No	LF	(Sharp edge)	0°	0	No	HS	S00525	25°	0,05	Yes
									LS	S00715	15°	0,07	Yes					
BNS800			Neg.	T02020	20°	0,20	No	LF	(Sharp edge)	0°	0	No	-	-	-	-	-	
Coated SUMIBORON	Hardened Steel	BNC2010	Neg./Pos.	S01225	25°	0,12	Yes	LE	(Sharp edge)	0°	0	Yes	HS	S01730	30°	0,17	Yes	
		BNC2020	Neg./Pos.	S01225	25°	0,12	Yes	LT	T00515	15°	0,05	No	HS	S02735	35°	0,27	Yes	
		BNC100	Neg./Pos.	S01225	25°	0,12	Yes	ES	S00535	35°	0,05	Yes	-	-	-	-		
		BNC160	Neg./Pos.	S01225	25°	0,12	Yes	LS	S01715	15°	0,17	Yes	-	-	-	-		
		BNC200	Neg./Pos.	S01225	25°	0,12	Yes	LS	S01020	20°	0,10	Yes	HS	S01730	30°	0,17	Yes	
		BNC300	Neg./Pos.	S01225	25°	0,12	Yes	LS	S01015	15°	0,10	Yes	HS	S01735	35°	0,17	Yes	
	Cast Iron	BNC500	Neg./Pos.	S01215	15°	0,12	Yes	-	-	-	-	-	HS	S01225	25°	0,12	Yes	
	Binder-less CBN	Cast Iron, Exotic Alloy, Carbide, Cermet	NCB100	Neg./Pos.	T01215	15°	0,12	No	-	-	-	-	-	-	-	-	-	

* BNX20 Identification code will be T00715 for inserts with inscribed circle of less than Ø 4,76.

Cutting Edge Preparation of Inserts with Wiper / Chipbreakers

Series	Work Material	Grade	Other Types					
			Notation	Identification Code	α	W	Honing	Type
Uncoated SUMIBORON	Hardened Steel	BN2000	WG	S01215	15°	0,12	Yes	Wiper
			WH	S01215	15°	0,12	Yes	Wiper
			N-FV	-	0°	0	Yes	With breaker
			N-LV	S00535	35°	0,05	Yes	With breaker
	Cast Iron Exotic Alloy	BNS800	W	T02020	20°	0,20	No	Wiper
LFW			(Sharp edge)	0°	0	No	With sharpe edge	
Coated SUMIBORON	Hardened Steel	BNC2010 BNC2020	WG	S01215	15°	0,12	Yes	Wiper
			WH	S01215	15°	0,12	Yes	Wiper
			N-FV	-	0°	0	Yes	With breaker
			N-LV	S00535	35°	0,05	Yes	With breaker
		N-SV	S01235	35°	0,12	Yes	With breaker	
		BNC100	W	S01715	15°	0,17	Yes	Wiper
			WG	S01215	15°	0,12	Yes	Wiper
		BNC160 BNC200	WH	S01215	15°	0,12	Yes	Wiper
	W		S01215	15°	0,12	Yes	Wiper	
	N-FV		-	0°	0	Yes	With breaker	
	N-LV		S00535	35°	0,05	Yes	With breaker	
	N-SV		S01235	35°	0,12	Yes	With breaker	
	Cast Iron		BNC500	W	S01215	15°	0,12	Yes

Cutting Edge Specification Identification Code

Notation of Edge Preparation			
No.	Standard Type		
L	Low cutting forces	F	Sharp edge
E		E	Honing
E	High efficiency	T	Negative land
H		S	Negative land + honing
WG / WH / W		Wiper	
N-FV / N-LV / N-SV		With Chipbreaker	

Edge Preparation Identification Code

S 0 1 2 2 5

W: Negative land width α : Negative land angle

Cutting edge: T - Negative land
S - Negative land + R - Honing

Example: **S01225**
→ 25°/0,12 mm width negative land with honing

SUMIBORON

Insert Types and Cutting Edge Geometries

Multi Cornered One-Use Type Inserts




■ Characteristics


- One-use type inserts improve machining efficiency by using each cutting edge to its full potential following the numbering system on each cutting edge then throwing the insert away.
- Multi cornered inserts have a single piece of Sumiboron mounted on every useable corner. Single sided inserts use the top corners whilst double sided inserts use both top and bottom corners. Diamond shaped inserts have 4 corners and triangular inserts have 6 corners.
- A variety of Sumiboron coated grades readily replace expensive grinding operations for high precision tolerances outstanding surface finish, heavy interrupted cutting and efficient cost effective machining of hardened parts.

Cutting Edge Preparation

Machining of Hardened Steel

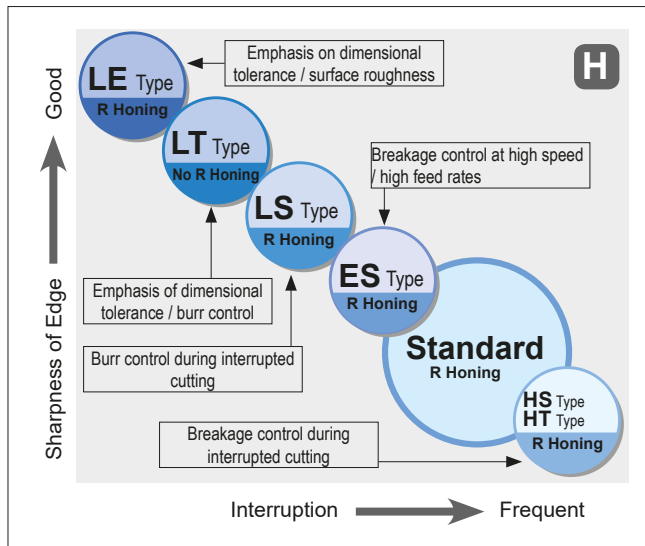

Sintered Alloy Machining

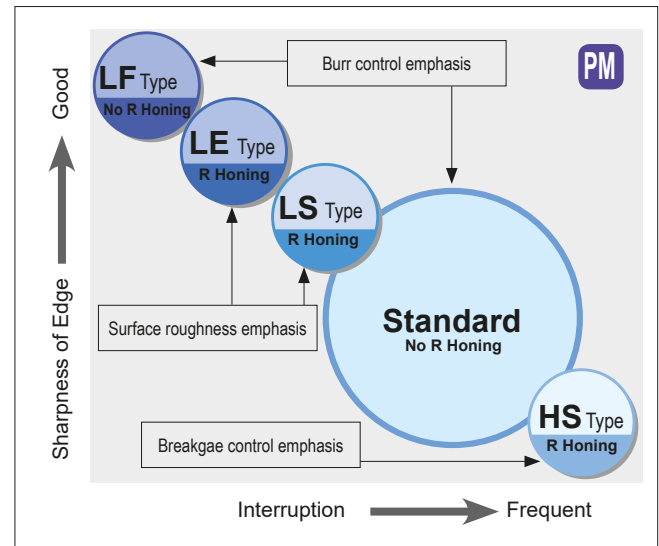

One-Use Wiper Insert



■ Characteristics

- New lineup includes:
 - WG Type ⇨ for low-feed cutting
 - WH Type ⇨ for high-feed cutting
- SUMIBORON one-use insert with wiper edge for hardened steel machining
- Excellent surface finish similar to grinding
- Improved efficiency with higher speeds and feeds

Break Master N - FV, N - LV, N - SV




Break Master N-SV Type

■ Characteristics

- N-SV type is perfect for carburised layer removal while N-FV / N-LV types are best suited to finishing of hardened steel.
- First CBN insert to feature an integral chipbreaker
- Ideal for removing carburised layer - can be used on both hardened and unhardened materials.
- Effective chip control solution protects component from swarf damage.

SUMIBORON Insert With Chipbreaker Break Master N-FV /-LV /-SV

H Hardened Steel


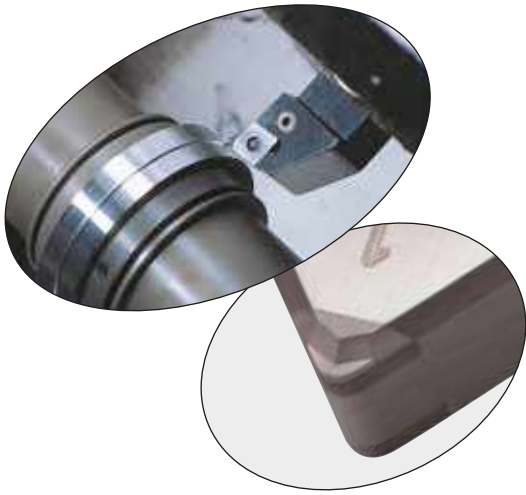


Characteristics

- SUMIBORON one-use insert with chipbreaker.
- N-SV type is perfect for carburised layer removal while N-FV/N-LV types are best suited to finishing of hardened steel.
- Breaker included on the CBN edge, chipbreaking effect can be maintained throughout machining process.
- Unique breaker design can be applied to both hardened and non-hardened parts with effective chip control.
- SV type lineup now includes BNC2010/BNC160 for good wear resistance, while SUMIBORON BNC2020/BNC200 allows high efficiency machining.

In addition to general purpose SUMIBORON BNC2020/BNC200, the N-FV / N-LV type lineup includes BNC2010/BNC160 for excellent wear resistance and general purpose uncoated SUMIBORON BN2000.

Application Range

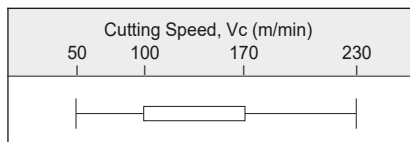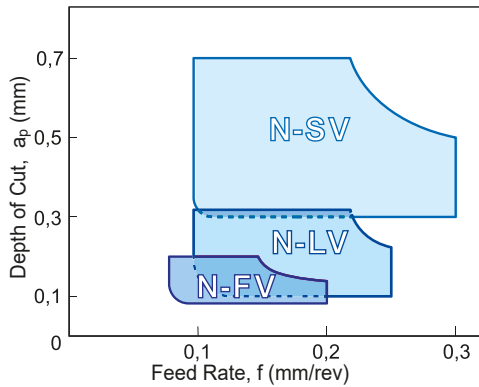

* When machining heat treated steel harder than H_RC50 the depth of cut should not exceed 0,5 mm.

Application Examples

External Carburised Layer Removal	
<p>No constant stopages or incorrect part dimension problem and the chips are small.</p> <p>Double the tool life of competitor's CBN</p> <p>Work material: 42CrMo4, Carburised steel (shaft) Insert: CNGG 120408 N-SV NC4 (BNC200) Conditions: $v_c = 150$ m/min, $f = 0,15$ mm/rev, $a_p = 0,5$mm, x 2 passes, wet</p>	<p>Break Master N-SV Tool life = 200 pcs</p>
	<p>BNC200 (no breaker) Tool life = 200 pcs</p>
	<p>Comp. CBN (no breaker) Tool life = 100 pcs</p>

Carburised Face Layer Removal	
<p>Break Master N-SV type improves chip control with increased productivity until the pre-set tool life.</p>	<p>Break Master N-SV: No chip control problem (relative productivity ~1.5)</p> <p>No breaker: Constant chip control problem (relative productivity 1.0)</p> <p>No. of pcs / unit of time (relative)</p>
	<p>Work material: 42CrMo4 (HRC30-62) Insert: CNGG 120408 N-SV NC4 (BNC200) Conditions: $v_c = 140$ m/min, $f = 0,15$ mm/rev, $a_p = 0,3$ mm, wet</p>




Characteristics

- SUMIBORON one-use insert with wiper edge for hardened steel machining
- Excellent surface finish similar to grinding
- Improved efficiency with higher speeds and feeds
- New lineup includes:
 - WG** type ⇨ for low-feed cutting
 - WH** type ⇨ for high-feed cutting



Purpose of Wiper Edge

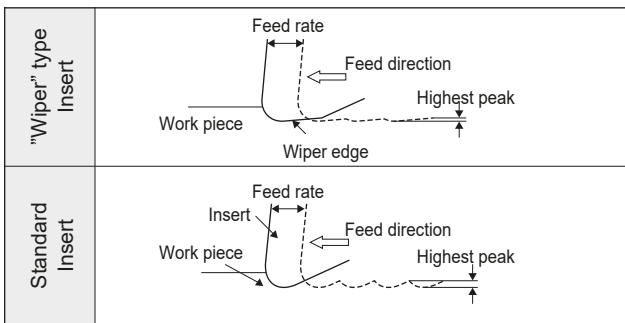


Surface Roughness of Wiper Insert

	"Wiper" Insert (RE 0,8)		Standard Insert (RE0,8)	
	Finishing (f = 0,10 mm/rev)	High feed cutting (f = 0,30 mm/rev)	Finishing (f = 0,10 mm/rev)	High feed cutting (f = 0,30 mm/rev)
Surface Roughness Profile	WG Type	WH Type		
Surface Roughness Rz	0,63 µm	1,39 µm	1,98 µm	9,20 µm

Recommended Cutting Conditions (Surface Roughness Standard: Rz = 1,6–3,2 µm)

- For optimum effectiveness, use wiper inserts for continuous cutting.
- For copy turning, inserts with nose-radius is recommended.
- Chattering and undulation may occur, please use work and machine with high rigidity.

Two types are available depending on the feed rate:
 WG type: Recommended feed rate: less than $f \leq 0,20$ mm/rev
 WH type: Recommended feed rate: more than $f \geq 0,20$ mm/rev
 Range of good surface roughness: Rz = 1,6 µm to 3,2 µm
 Available grades: BN2000, BNC2010, BNC160, BNC2020, BNC200

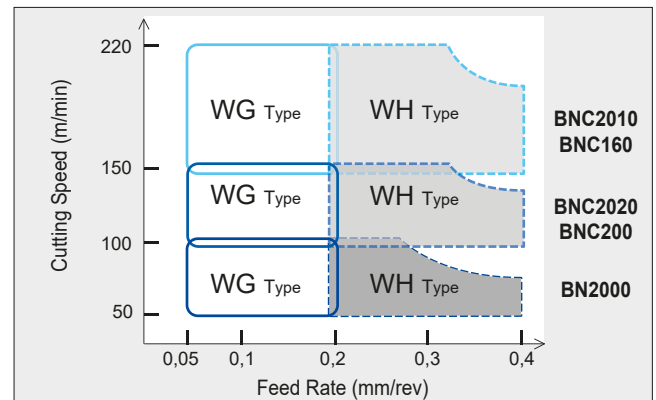


Tool-Setup WG / WH Wiper


CNGA / CCGW / WNGA Type Wiper

1. Use a holder with a 95° approach angle.
2. Tool compensation required.

CNGA / CCGW / WNGA type wiper inserts do not follow the ISO standard. Correction of the tool offset of the cutting edge as explained on the right.



Cutting Edge Position Compensation, Outer Processing




Nose Radius	Type	X-Direction	Z-Direction
RE 0,4	WG	-0,02	-0,02
	WH	-0,06	-0,06
RE 0,8/1,2	WG	-0,01	-0,01
	WH	-0,06	-0,06

DNGA / DCGW Type Wiper


1. Use a holder with a 93° approach angle.
2. Tool compensation required.

DNGA / DCGW type wiper inserts do not follow the ISO standard. Correction of the tool offset of the cutting edge as explained on the right.

Note: DNGA/DCGW type wiper inserts are only possible for external and internal turning, not for facing.



Cutting Edge Position Compensation, Outer Processing



Nose Radius	Type	X-Direction	Z-Direction
RE 0,4	WG	-0,17	-0,01
	WH	-0,70	-0,06
RE 0,8	WG	-0,05	0
	WH	-0,58	-0,05

Uncoated SUMIBORON BN1000/BN2000

H Hardened Steel



Uncoated CBN grades for hardened steel machining


General Features

A new uncoated type of SUMIBORON that has a newly developed high-purity ceramic binder. Both fracture and wear resistance are combined to achieve a stable tool life in a wide variety of hardened steel machining.

Available in single corner and multi-corner type inserts.


Characteristics

- BN1000** - Superior high-speed machining grade with the highest wear resistance of any uncoated SUMIBORON. Delivers excellent tool life in continuous cutting to light-interrupted cutting.
 - Improved fracture resistance while also emphasizing wear resistance.
 - Improved hardness and heat resistance from the high-purity TiCN ceramic binder.
- BN2000** - General purpose grade suitable for typical hardened steel machining applications. Provides stable tool life in everything from continuous cutting to light-to-medium interrupted cutting.
 - High degrees of both fracture resistance and wear resistance.
 - Significant improvements in the performance of both by employing a high-purity ceramic binder.
 - Stable surface roughness by increasing sharpness (Figure on right).

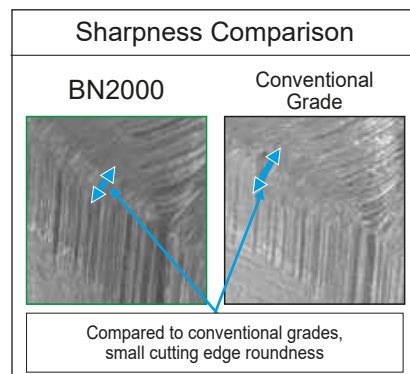


Newly Developed High-Purity Ceramic Binder

Conventional Grade

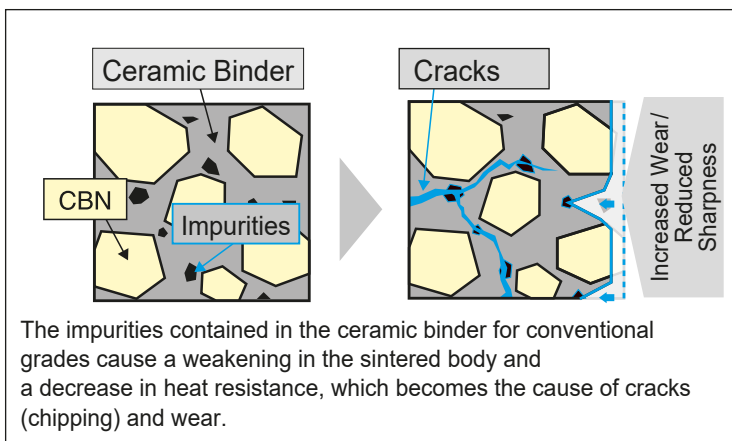


BN1000/BN2000

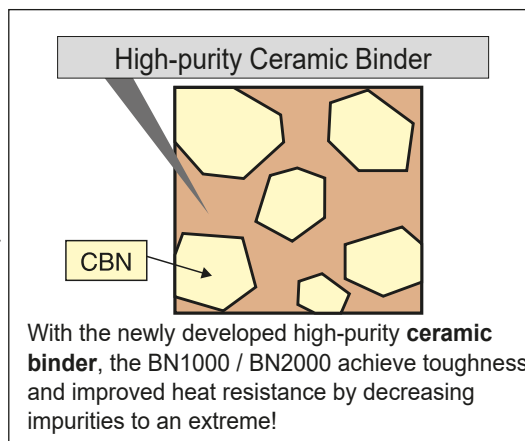


Recommended Application Range

Continuous Cutting

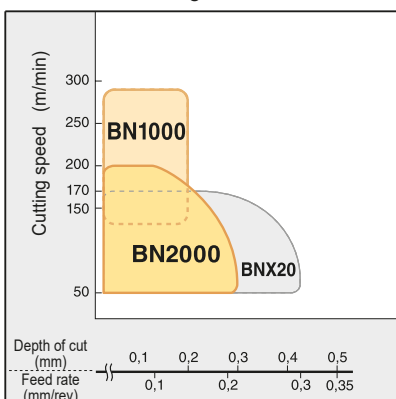

Interrupted Cutting

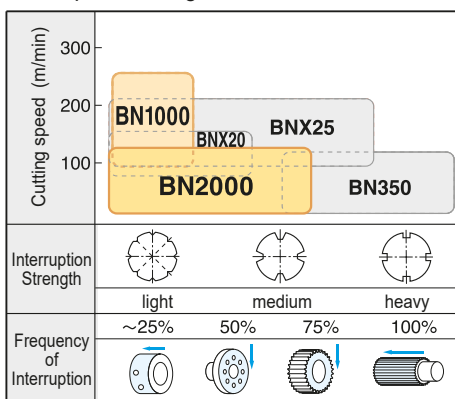

Cutting Conditions

BN1000

v_c (m/min)	f (mm/rev)	a_p (mm)
100 150 200 250 300		
120	0,03-0,15	0,03-0,2

BN2000


v_c (m/min)	f (mm/rev)	a_p (mm)
50 100 150 200 250		
80 120	0,03-0,2	0,0-0,3

* Coolant ... Continuous cutting: dry or wet
Interrupted cutting: dry

Cutting Performance

BN1000


Wear Resistance Comparison

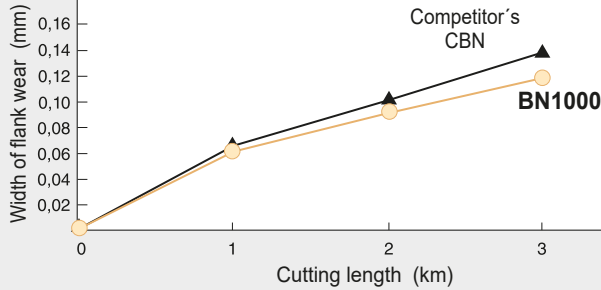

Work material: 100Cr6 (H_RC58-62), Round Bar
Insert: CNGA 120408 NU-2
Cutting data: v_c = 150 m/min, f = 0,1 mm/rev, a_p = 0,2 mm, dry

BN1000


Chipping Resistance Comparison

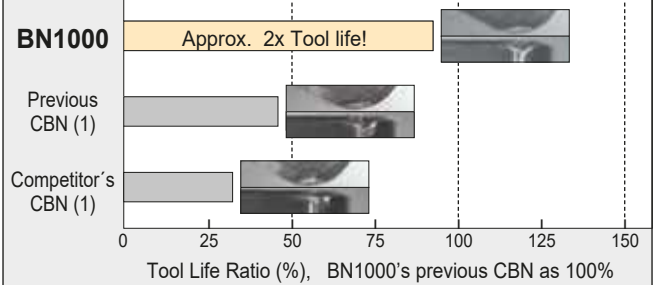

Work material: 15CrMo5 (H_RC58-62), 8 Grooves
Insert: CNGA 120408 NU-2
Cutting data: v_c = 150 m/min, f = 0,1 mm/rev, a_p = 0,2 mm, dry

BN2000


Wear Resistance Comparison

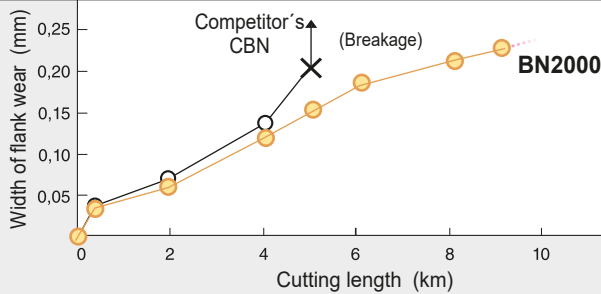

Work material: 15CrMo5 (H_RC58-62), Round Bar
Insert: CNGA 120408 NU-2
Cutting data: v_c = 100 m/min, f = 0,1 mm/rev, a_p = 0,2 mm, dry

BN2000

Chipping Resistance Comparison

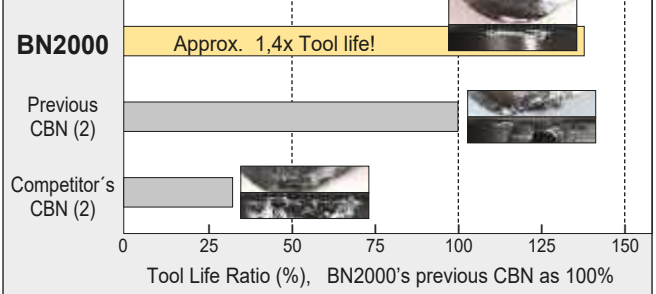


Work material: 15CrMo5 (H_RC58-62), 8 Grooves
Insert: CNGA 120408 NU-2
Cutting data: v_c = 150 m/min, f = 0,1 mm/rev, a_p = 0,2 mm, dry

Machining Precision

BN1000


Accuracy Comparison

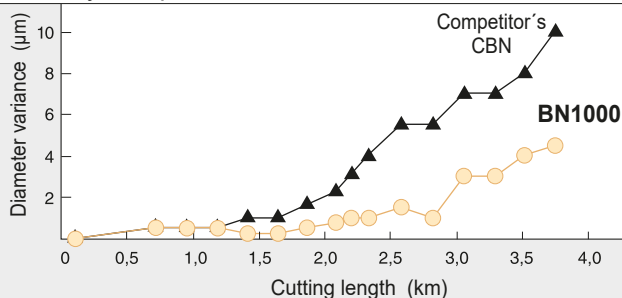

Work material: 15CrMo5 (H_RC58-62), Round Bar Ø 130
Insert: CNGA 120408 NU-2
Cutting data: v_c = 200 m/min, f = 0,1 mm/rev, a_p = 0,1 mm, wet

BN2000

Surface Roughness Comparison

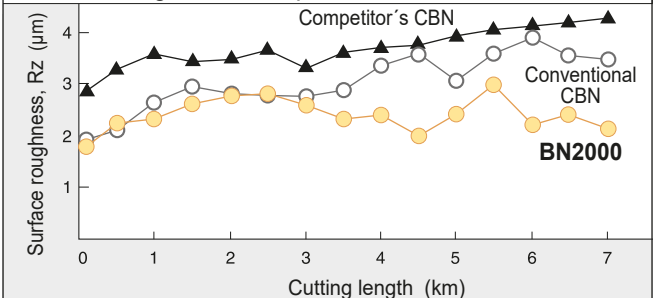

Work material: 15CrMo5 (H_RC58-62), Round Bar
Insert: CNGA 120408 NU-2
Cutting data: v_c = 100 m/min, f = 0,08 mm/rev, a_p = 0,2 mm, dry

Coated SUMIBORON Characteristics

H Hardened Steel



BNC2010

BNC2020



BNC100

BNC160

BNC200

BNC300

BNC500

New Coated SUMIBORON Series achieving

- higher speed
- higher efficiency and
- higher precision

■ General Features

Using a high heat resistant and tough CBN substrate coupled with a special ceramic coating, this series caters to a wide variety of applications with improved precision and longer tool life as compared to conventional CBN.

There is a comprehensive lineup of economical and easy-to-use insert selection, such as the cost effective double-sided, multi-cornered, one-use type inserts.

BNC2010 and BNC2020 are the latest additions to the Coated SUMIBORON series, to provide even better stability and longer tool life for hardened steel machining.

■ Characteristics

Double sided, Multi-cornered One-use Insert
More cost effective than conventional one-use inserts.

Easy Edge Management
Numbering of cutting edges.

Strong Brazing
Utilizing a new brazing method with improved strength.

Special Ceramic Coating and Newly Developed CBN Substrate
Provides longer tool life.

■ Cutting Performance

Application		Conditions	Recommended Cutting Speed (m/min)			
			100	200	300	400
Hardened Steel	Finishing	General Purpos (Continuous to Light interrupted Rz = above 3,2)	BNC2020 / BNC2010		BNC200 / BNC100	
			BNC300			
		High Precision (Rz = 1,6 to 3,2)	BNC2010		BNC160	
	High Efficiency (Carburized layer removal)	BNC2020		BNC200		
BNC500						
Cast Iron	Ductile Cast Iron	BNC500				


■ Cutting Edge Management

Before usage

After usage

The edge numbers are still visible after machining, which makes the management of used cutting edges easy.

BNC2010 and BNC2020 are coated in gold, which makes it easy to distinguish used edges.

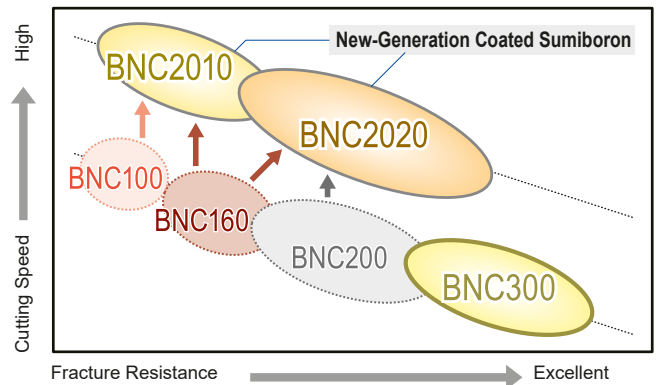

Characteristics of Grades

BNC2010

CBN Content: 50 ~ 55 %
 Grain Size: 2 μm
 Hardness HV: 30 ~ 32 GPa
 TRS: 1,10 ~ 1,20 GPa
 Main Coating Components: Multi-layered TiCN
 Coating Thickness: 1,5 μm



High Precision Machining

Newly developed CBN substrate with high crater wear resistance coated with special multi-layered TiCN, which exhibits excellent notch wear resistance. Ideal for finishing of hardened steel requiring excellent accuracy or surface roughness. Able to stably maintain 1,6 R_z finishing.

BNC2020

CBN Content: 70 ~ 75 %
 Grain Size: 5 μm
 Hardness HV: 34 ~ 36 GPa
 TRS: 1,20 ~ 1,30 GPa
 Main Coating Components: Multi-layered TiAlN
 Coating Thickness: 1,5 μm



General and High Efficiency Cutting

Newly developed tough CBN substrate with highly wear resistant TiAlN coating. Provides improved stability by inserting a highly adhesive layer between the substrate and the TiAlN layer. Ideal for general machining including finishing and interrupted cutting as well as high-efficiency machining such as carburi- sed layer removal.

BNC100

CBN Content: 40 ~ 45 %
 Grain Size: 1 μm
 Hardness HV: 29 ~ 32 GPa
 TRS: 1,05-1,15GPa
 Main Coating Components: TiAlN/TiCN
 Coating Thickness: 2,5 μm



High Speed Cutting

BNC160

CBN Content: 60 ~ 65 %
 Grain Size: 3 μm
 Hardness HV: 31 ~ 33 GPa
 TRS: 1,10-1,20GPa
 Main Coating Components: TiAlN/TiCN
 Coating Thickness: 2,0 μm



High Precision Machining

BNC200

CBN Content: 65 ~ 70 %
 Grain Size: 4 μm
 Hardness HV: 33 ~ 35 GPa
 TRS: 1,15-1,25GPa
 Main Coating Components: TiAlN
 Coating Thickness: 2,0 μm



General and High Efficiency Cutting

BNC300

CBN Content: 60 ~ 65 %
 Grain Size: 1 μm
 Hardness HV: 33 ~ 35 GPa
 TRS: 1,15-1,25GPa
 Main Coating Components: TiAlN
 Coating Thickness: 1,0 μm




Heavy Interrupted Cutting

Recommended Cutting Conditions

Grade	Cutting Speed v _c (m/min)								
	50	100	(120)	150	(180)	200	(220)	250	300
BNC2010									
BNC2020									
BNC300									
BNC100									
BNC160									
BNC200									

Grade	Feed Rate (mm/rev)		Depth of Cut (mm)			
	0	0,1	0,2	0,3	0,4	0,5
BNC2010	0,03	0,03	0,25			0,35
BNC2020	0,03	0,03	0,40			0,50
BNC300	0,03	0,03	0,20			0,30
BNC100	0,03	0,03	0,20			0,30
BNC160	0,03	0,03	0,20			0,35
BNC200	0,05	0,05	0,35			0,50

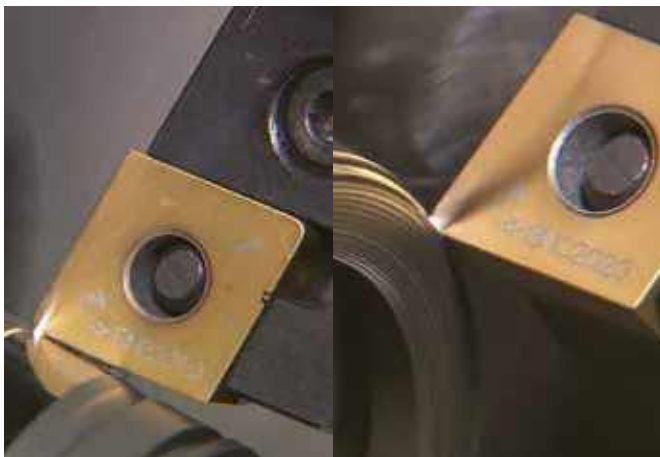

■ Characteristics

BNC2010 - High Precision


A grade for high-precision machining applicable for finishing requiring good surface roughness and dimensional accuracy. Provides further improved wear resistance thanks to a newly developed CBN substrate coated with a TiCN layer. Reduces flank wear and achieves excellent surface finish thanks to newly developed special stable multi-layered coating.

BNC2020 - General Purpose & High Efficiency

A general-purpose grade applicable to general hardened steel machining. A newly developed tough CBN-substrate coated with a highly wear-resistant TiAlN layer. Achieves more stable machining and longer tool life by employing a highly adhesive layer for high chipping resistance.


■ CBN-Substrate and Coating Structure of BNC2010 and BNC2020

BNC2010

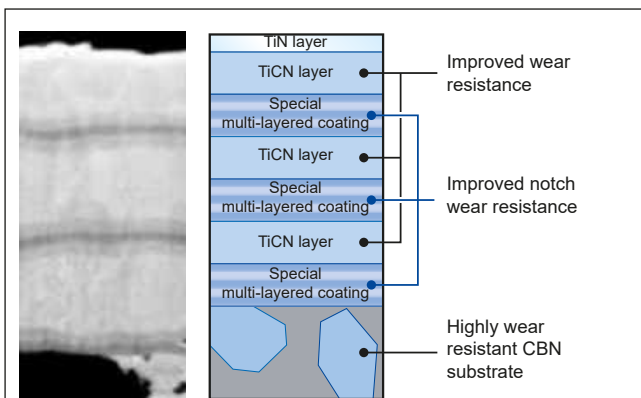


Achieves excellent flank wear resistance thanks to a laminated structure of a TiCN-layer and special multi-layer coating.

BNC2020

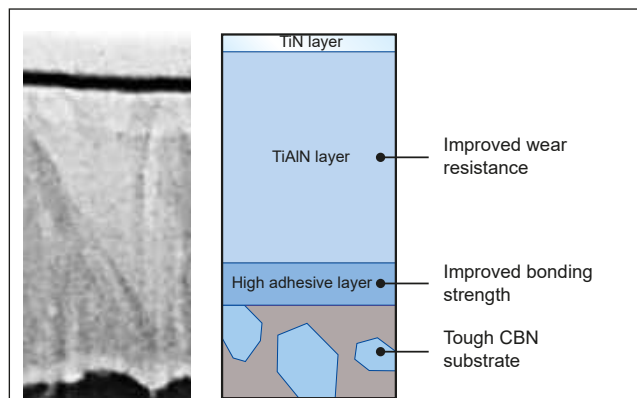

Achieves further stability thanks to TiAlN coating layers with high bonding strength.

■ Application Range

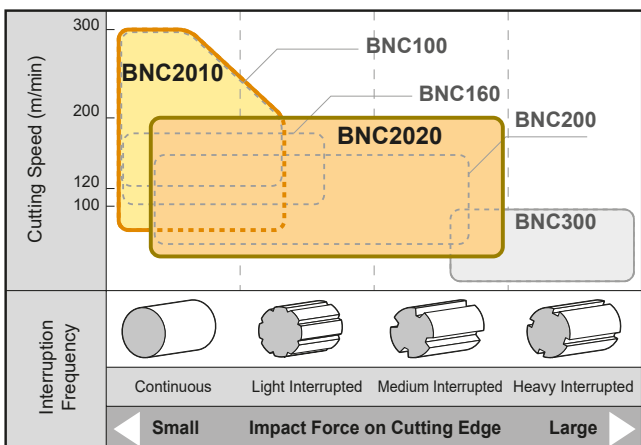

■ Recommended Cutting Conditions

BNC2010


Cutting Speed (m/min)	
120	150 200 250 300
Feed Rate (mm/rev)	Depth of Cut (mm)
0,03-0,25	0,03-0,35

BNC2020

Cutting Speed (m/min)	
50	100 150 200 220
Feed Rate (mm/rev)	Depth of Cut (mm)
0,03-0,40	0,03-0,50


Cutting Performance

BNC2010

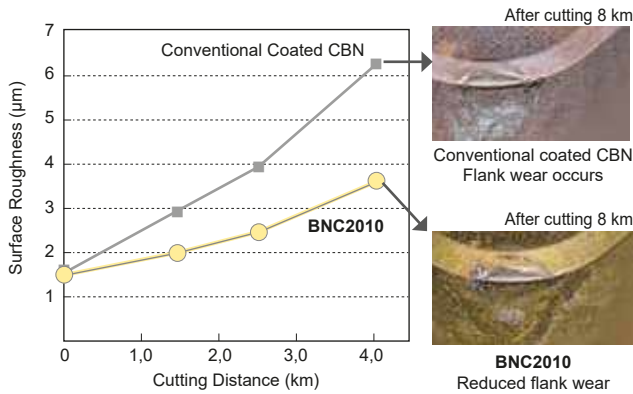

Work Material: 15CrMo5, 58-62HRC, Continuous
 Insert: DNGA150408NC4 (BNC2010)
 Cutting Edge Treatment: S01225
 Cutting Conditions: $v_c = 160$ m/min, $f = 0,08$ mm/rev, $a_p = 0,1$ mm, wet

BNC2020

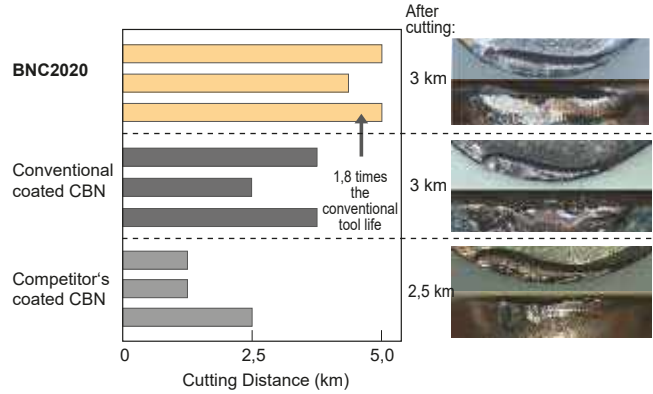


Work Material: SCM415-5V, 58-62HRC, Interrupted
 Insert: CNGA120412NC4 (BNC2020)
 Cutting Edge Treatment: S01225
 Cutting Conditions: $v_c = 130$ m/min, $f = 0,1$ mm/rev, $a_p = 0,6$ mm, dry

Application Example

Continuous External Turning of Main Shaft


BNC2010 provides excellent wear resistance and achieves excellent surface roughness.

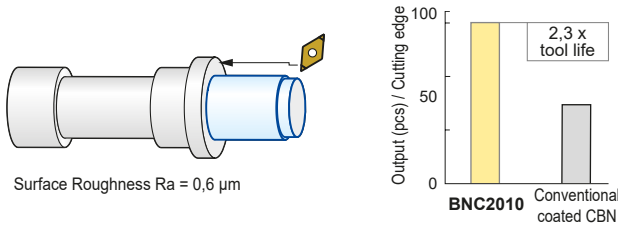

Insert: DNGA150408NC4 (BNC2010)
 Cutting Conditions: $v_c = 200$ m/min, $f = 0,10$ mm/rev, $a_p = 0,35$ mm, dry

Carburised Layer Removal for Sun Gears


BNC2020 achieves a longer tool life in high load cutting.

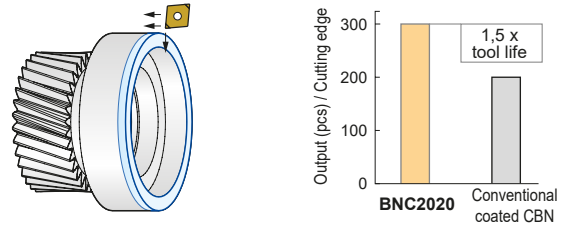

Insert: DNGA120408NC4 (BNC2020)
 Cutting Conditions: $v_c = 100$ m/min, $f = 0,15$ mm/rev, $a_p = 0,5$ mm, wet

Facing of CVJ Outer Race


BNC2010 with a WH type wiper insert maintains excellent surface finish for an extended time.

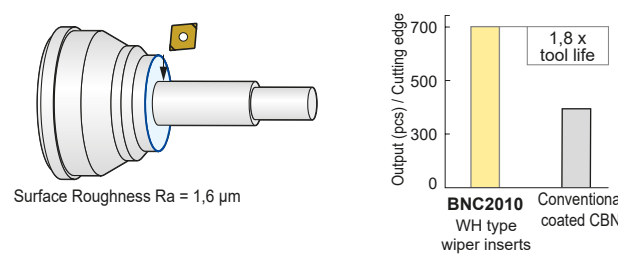

Insert: CNGA120412NCWH2 (BNC2010)
 Cutting Conditions: $v_c = 150$ m/min, $f = 0,2$ mm/rev, $a_p = 0,2$ mm, dry

Interrupted Machining of CVJ Cage Window


BNC2020 strong edge HS type provides stable performance in interrupted cutting.

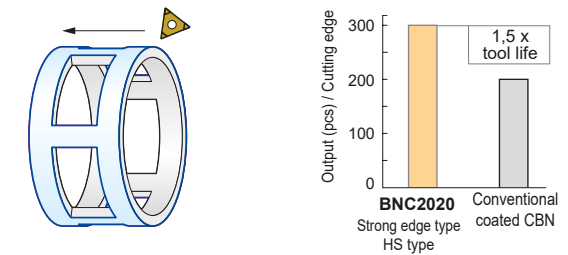


Insert: TNGA160420HSNC3 (BNC2020)
 Cutting Conditions: $v_c = 120$ m/min, $f = 0,10$ mm/rev, $a_p = 0,15$ mm, dry

Cutting Edge Preparation

Grade	General Edge Treatment	Strong Edge Type: HS
	Edge Treatment	Edge Treatment
BNC2010	S01225	S01730
BNC2020	S01225	S02735

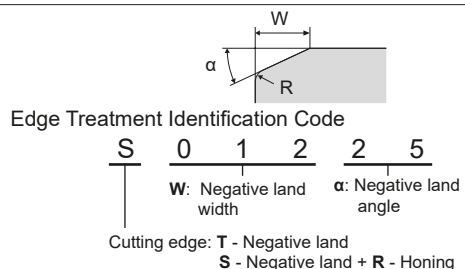

Coated Sumiboron premium grade for high speed machining of hardened steels

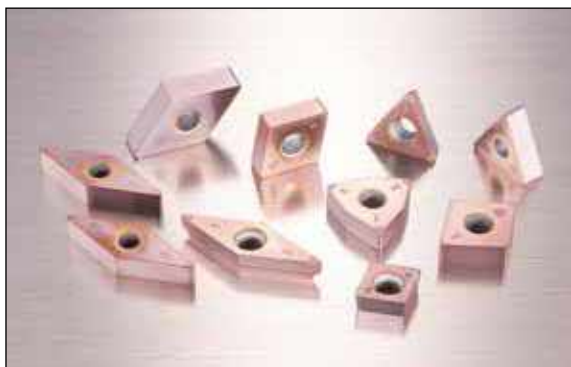

General Features



Our copper coloured Sumiboron grade BNC 100 resists premature plastic deformation of the cutting edge by withstanding the high temperatures that occur when machining hardened steels. This new grade features a heat resistant CBN substrate and a special TiCN based ceramic coating to enhance surface finish across a broad range of finishing applications at elevated cutting speeds.

Ideal for higher speed machining and suitable for continuous or light interrupted cuts BNC100 delivers reliable performance and excellent tool life.

Advantages


- High speed machining!
Suitable for continuous to light interrupted high speed cutting with $v_c = 150 \sim 300$ m/min.
- Extended tool life!
Wear resistant ceramic coating and tough CBN substrate considerably extends tool life.
- Excellent surface finish!
A consistent surface finish to values less than 6,3 Rz is easily achieved on both continuous and light interrupted cut applications.

Performance

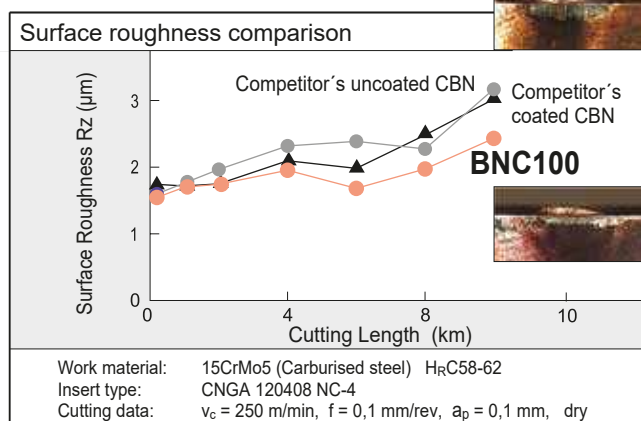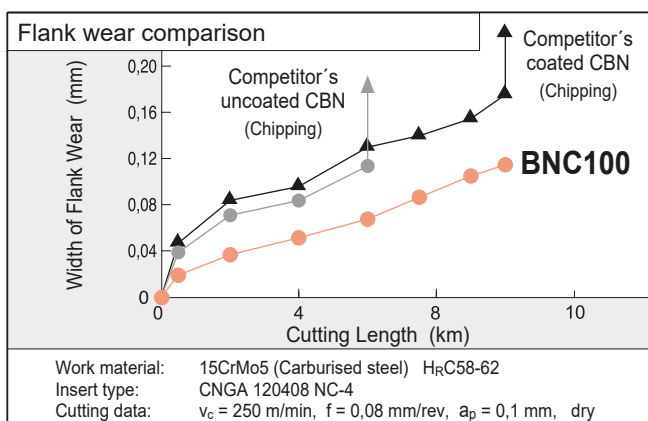


Application Range

Continuous Cutting

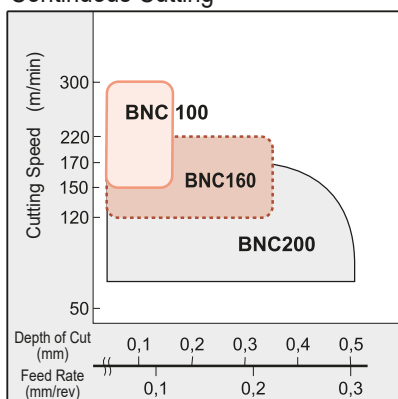

Interrupted Cutting

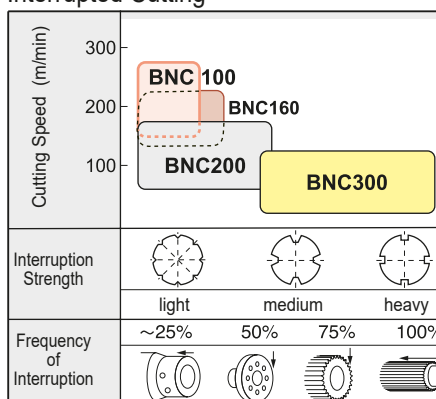

Recommended Cutting Conditions

v_c (m/min)	f (mm/rev)	d_{oc} (mm)
100 - 300	0,03-0,2	0,03-0,3

Coolant ... Continuous cutting: dry or wet
 Interrupted cutting: dry

High precision machining with surface finishes down to 1,6 Rz possible thanks to smooth coating!



■ General

Use the copper coloured Sumiboron grade BNC160 to improve surface integrity as well as machining accuracy. The TiCN based smooth surface ceramic coating and the newly developed Sumiboron substrate enhances edge strength and wear resistance making high precision machining with surface finishes as low as 1,6 Rz readily achievable.


This new grade is ideal for turning components that previously relied on precision grinding machines for final machining.

■ Advantages


- Excellent surface roughness!
A consistent surface roughness is maintained for hours because wear at the boundary is so gradual.
- High Precision Machining
High precision work previously ground, can now be turned.
- Enlarged scope of application!
A wider range of hardened steels can be cut using Sumiboron the result being high productivity on close tolerance machining applications.

■ Performance


Continuous Cutting

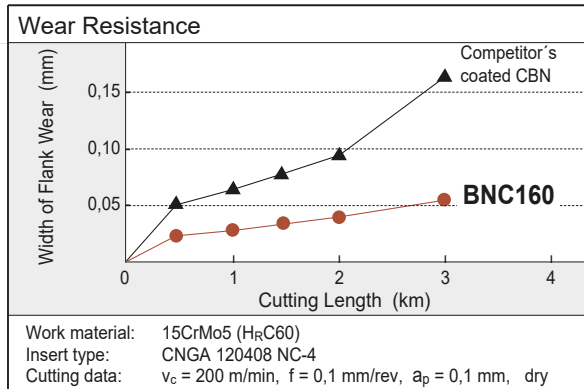

Machining Accuracy

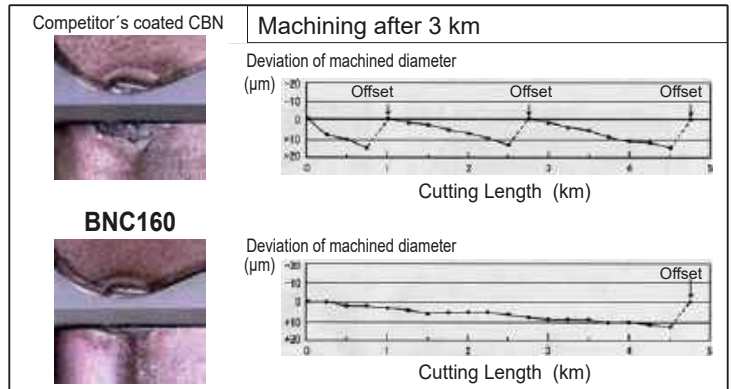

Continuous Cutting

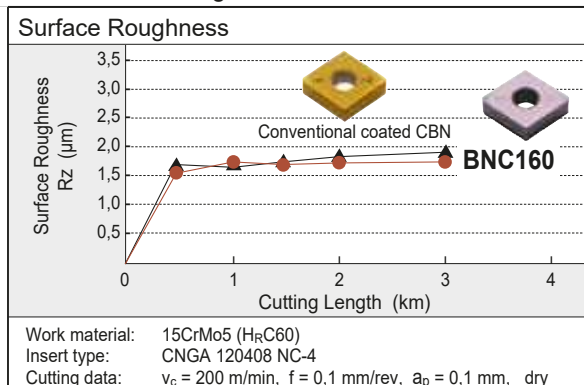

■ Recommended cutting Conditions

v _c (m/min)		f (mm/rev)	d _{oc} (mm)
120	150	0,03–0,2	0,03–0,35
200	220		
250			

Feed rate and nose radius are set such that the theoretical surface roughness is 1/2 to 1/3 of the required surface roughness.

Coolant ... Continuous cutting: Dry or Wet
Interrupted cutting: Dry

Most suitable for high speed finishing !

**Excellent wear and fracture resistance!
Predictable tool life on a wide range of applications!**



General

Our silver coloured Sumiboron insert grade BNC200 offers safe reliable cutting and predictable tool life.



The newly developed cutting material with enhanced edge strength is coated with TiAlN based ceramic for excellent wear resistance and realises extended tool life even when interrupted cutting.

This grade is especially suitable for medium speed machining of carburised surfaces.

Advantages


- Predictable tool life!
Extended tool life is realised even when high speed cutting thanks to excellent wear resistance.
- Wide range of applications!
Sumiboron is suitable for a wide range of applications eg. from low to high speed interrupted cutting.
- The newly developed brazing technology maximises edge strength making Sumiboron suitable for interrupted and continuous cutting.

Performance

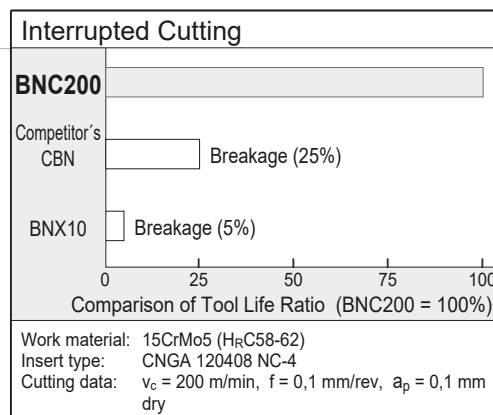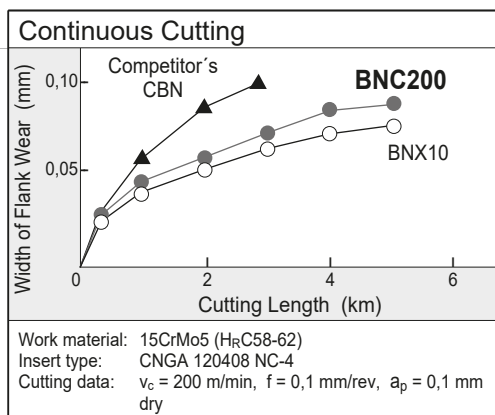

- BNC200 features excellent wear resistance comparable with BNX10, plus outstanding fracture resistance.

Application Range

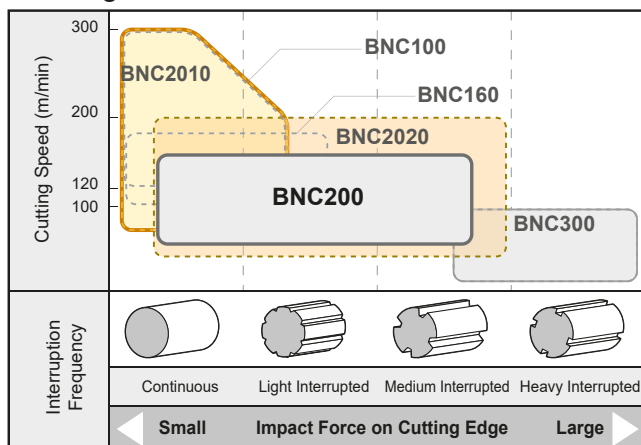


Recommended Cutting Conditions

v_c (m/min)	f (mm/rev)	d_{oc} (mm)
50 80 170 220	0,03-0,25	0,05-0,5

Coolant ... Continuous cutting: dry or wet
Interrupted cutting: dry

Can be used in a wide range of applications from low to high speed operation.

The ultimate grades BNC300 and BN350 in interrupted machining of hardened steel

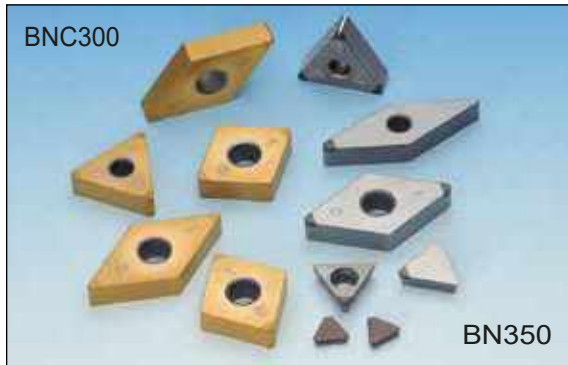



■ General Features

- **BNC300**
CBN substrate that emphasizes on toughness coupled with a highly wear resistant TiAlN based coating layer that has improved adhesion strength. With a good balance of fracture and wear resistance, stable and longer tool life can be achieved in interrupted cut or in a mixture of continuous and interrupted cutting.
- **BN350**
SUMIBORON series highest fracture resistance and toughest CBN. Reliable grade for achieving stable tool life in heavy interrupted cutting conditions.

■ Characteristics


- BNC300**
- Stable and long tool life in interrupted cutting
Achieving stable and long tool life in heavy interrupted cutting, with superior fracture resistance.
 - Superior dimensional precision
Good adhesion strength, TiAlN based, high wear resistance coating. Achieving superior dimensional precision even in interrupted cutting.
 - Suitable for different types of workpieces
Achieving significantly longer tool life even on workpieces that have a mixture of continuous and interrupted cutting.
- BN350**
- Stable and long tool life in interrupted cutting
Stable and long tool life with superior fracture resistance, that prevents fractures which commonly occurs during interrupted cutting.

■ Performance

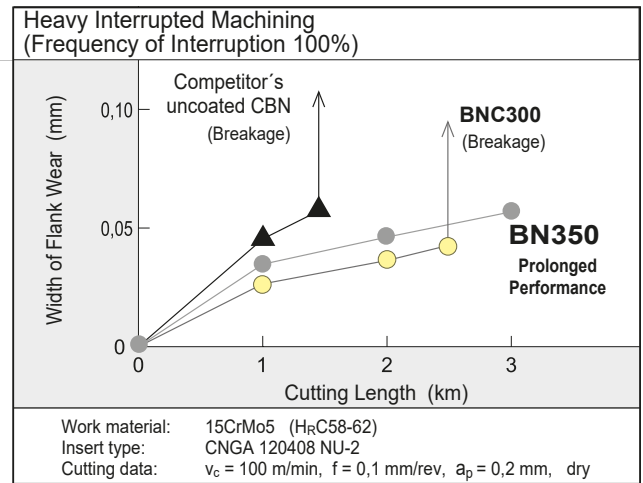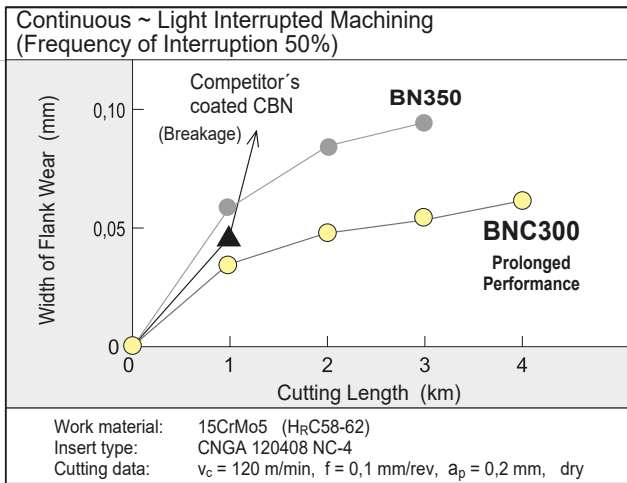


■ Recommended Application Range

Coated SUMIBORON

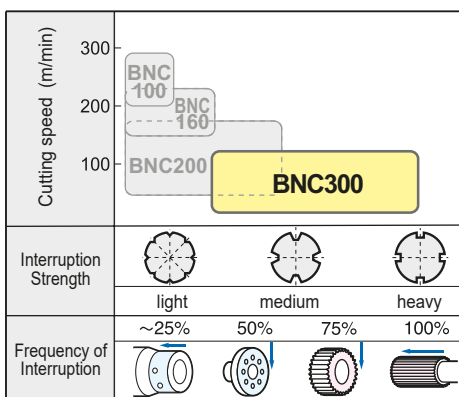

Uncoated SUMIBORON

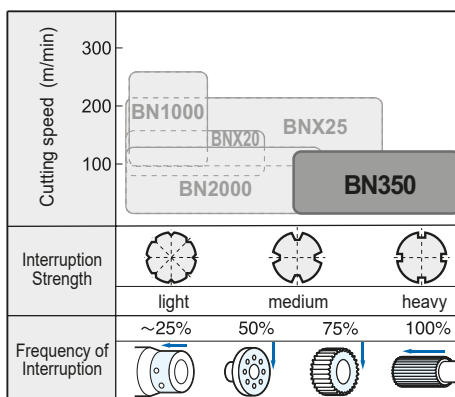


■ Recommended Cutting Conditions (BNC300, BN350)

v _c (m/min)	f (mm/rev)	d _{oc} (mm)
50 100 150 200	80 120	0,03-0,2 0,03-0,3

■ Coolant ... Interrupted cutting: dry

Coated CBN grade for ductile cast iron machining

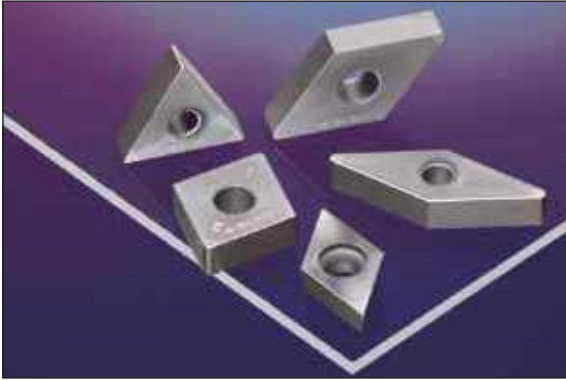


General Features



Further improvements in the toughness of the sintered CBN and wear resistance from the application of a newly developed high-purity TiC binder. In addition, it demonstrates exceptional wear resistance by combining a ceramic coating with excellent heat resistance. High-speed and high-precision machining is achieved when finishing ductile cast iron. It also provides a long, stable tool life in machining high-strength ductile cast iron, special cast irons such as vermicular cast iron, and centrifugal cast iron.

Characteristics


- Achieves a Long, Stable Tool Life at $v_c = 400$ m/min
Superior wear resistance, makes stable machining possible under high-speed conditions.
- Supports High-precision Machining
Can maintain excellent dimensional tolerance and surface roughness.

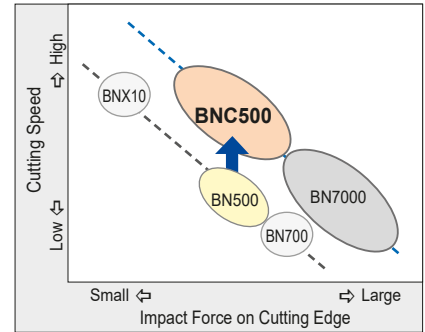


Cutting Performance

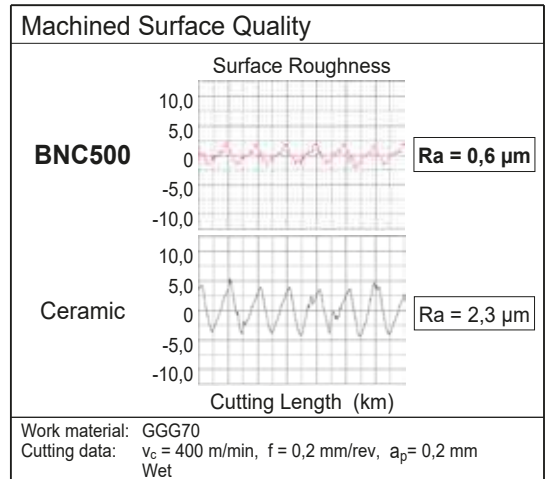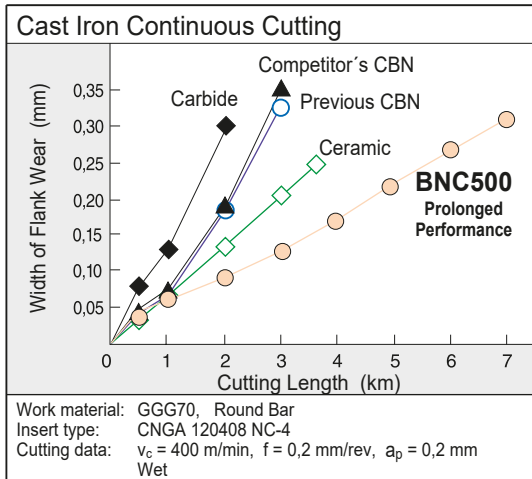

Application Range

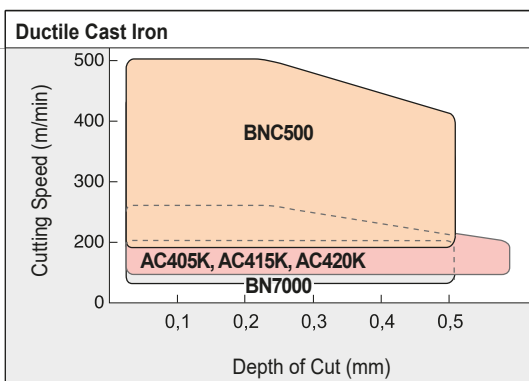

High Precision Machining

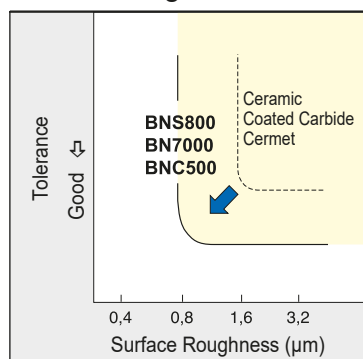


Recommended Cutting Conditions

v_c (m/min)	
100	200
[Graph showing recommended cutting speed range]	
f (mm/rev)	a_p (mm)
0,1-0,4	0,03-0,5

* Coolant ... Wet


Uncoated CBN grade for high-speed finishing of cast iron, powdered metals, and difficult-to-machine materials!

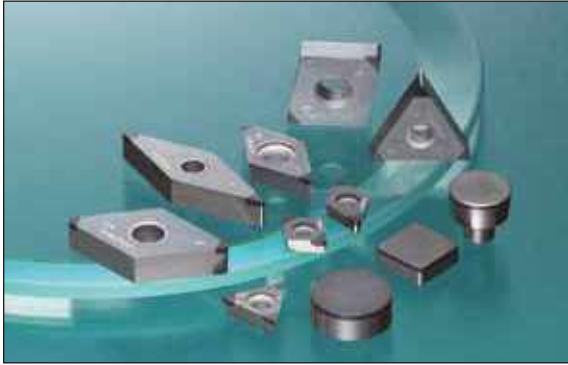

General Features

Medium-grain CBN sintered to a high density to achieve the maximum content percentage.




Also delivers superior fracture resistance by increasing the binding strength between CBN particles. Provides stable, long tool life for high-speed finishing work with cast iron, powdered metals, and difficult-to-machine materials.

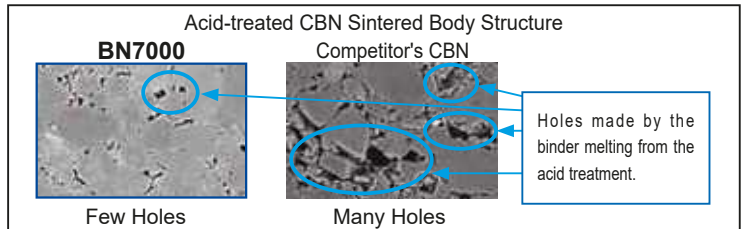


Characteristics

- Excellent for high speed finishing of Cast Iron!
Good wear and fracture resistance in high speed machining of Grey Cast Iron.
- High efficiency machining of powdered metal
With 4 different types of edge treatment, stable and long tool life can be achieved from machining of Sintered Alloys of any shape or hardness.
- Able to machine any Exotic Metals.
Long tool life can also be achieved for the machining of exotic materials such as Roll, HSS and Heat-Resistive Alloy etc.

Cutting Performance

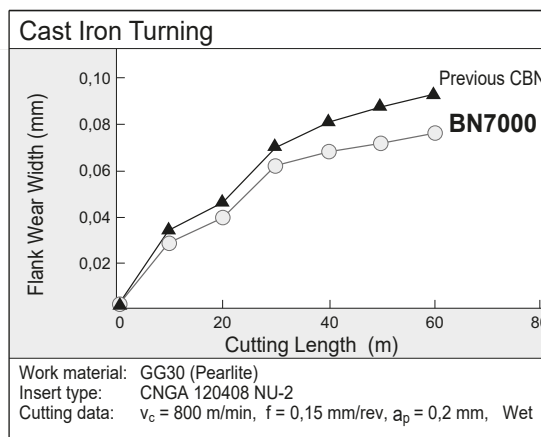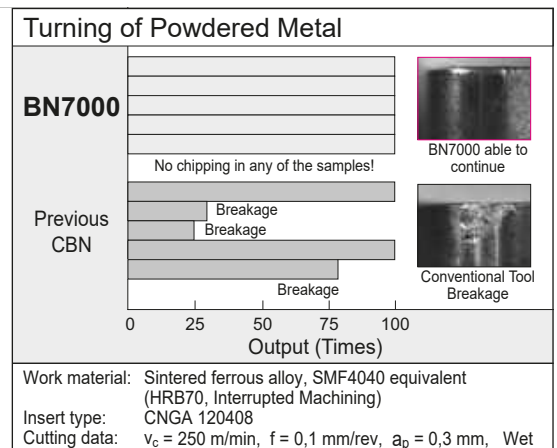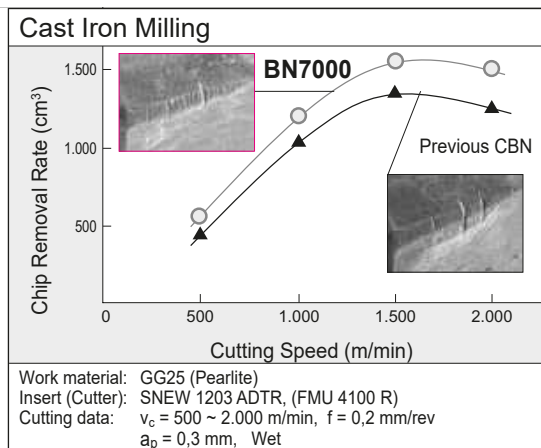

Recommended Edge Treatment


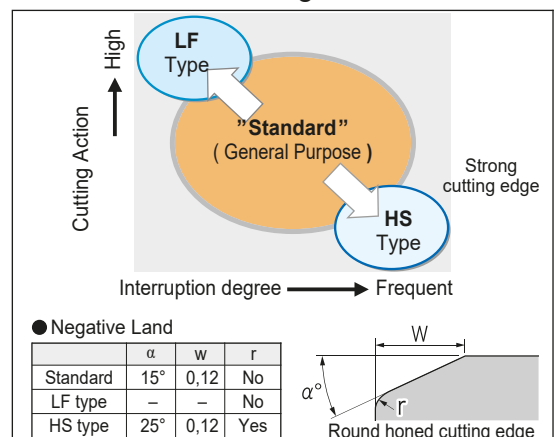


Uncoated CBN grade for high precision and high efficiency machining of powdered metal



General Features

High density sintered material made of micro-grained CBN grains provide excellent sharpness and wear resistance for high quality surfaces in sintered alloy finishing.

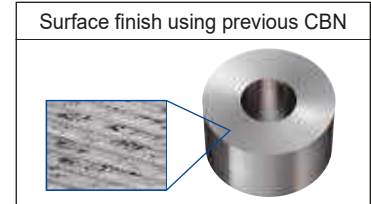
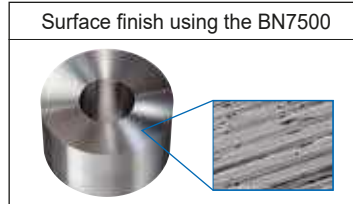


The previous CBN left white blemishes on the finished surface whereas the BN7500 leaves a better, glossy surface finish.


Characteristics

- Excellent for finishing of powdered metal
Excellent machined surface finish and surface appearance.
- Available with 5 different types of edge treatment for machining sintered alloys of any shape or hardness
The LF type has a sharper edge designed specifically for machining sintered alloys with minimal burr and improved machining precision.
The HS Type has a strengthened cutting edge for stable chipping resistance during interrupted cutting and finishing.

Cutting Performance

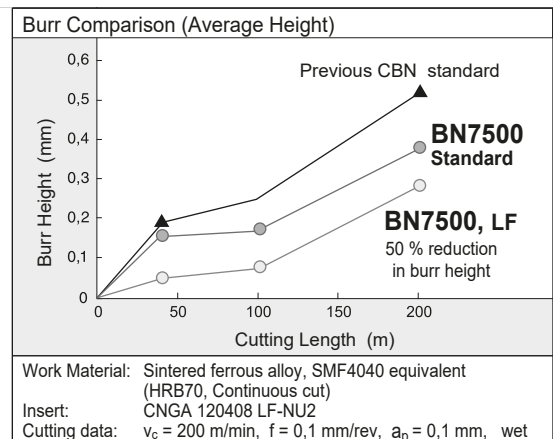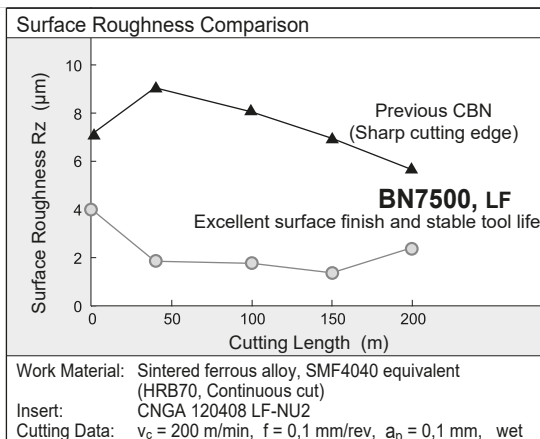


Feed and Burr Relationship

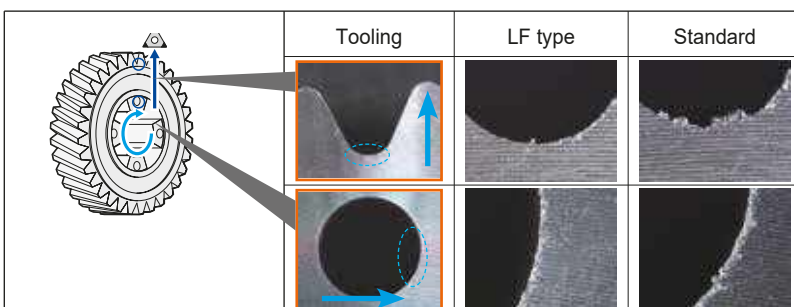


The LF Type without negative land has a cutting edge sharpness superior to the standard type and can control burrs better.

Work Material: VVT Facing
Insert: TNGA 160404 NU3
Cutting Data: $v_c = 200$ m/min, $f = 0,1$ mm/rev, $a_p = 0,1$ mm, wet

Recommended Edge Treatment

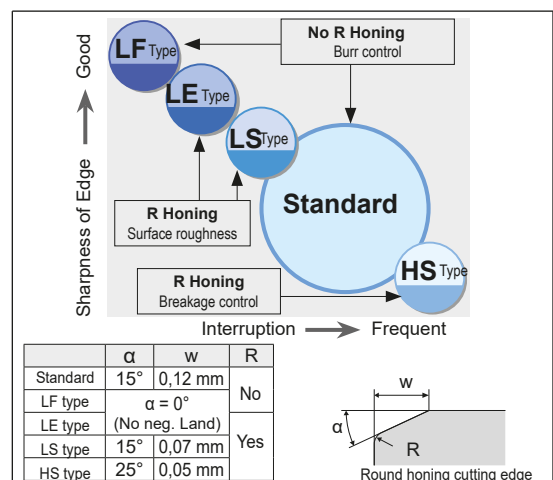

Solid CBN grade for high speed rough and finish machining of cast iron

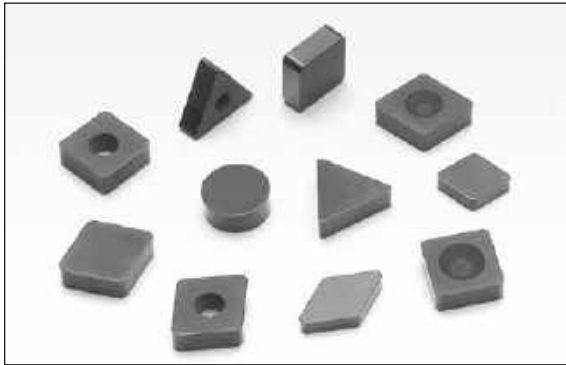

General



Solid CBN grade with high content CBN and special binder phase provide high fracture toughness and high thermal conductivity.

Solid inserts for roughing with high depth of cut and also for finishing of cast iron and alloyed cast iron at wet and dry conditions.

Advantages

- High wear resistance !
High CBN-content and special binder phase provide a excellent wear resistance and a tight dimensional control in finish machining.
- High edge stability !
High thermal conductivity of BNS800 and high edge stability provide a long tool life at wet and dry machining.

Performance

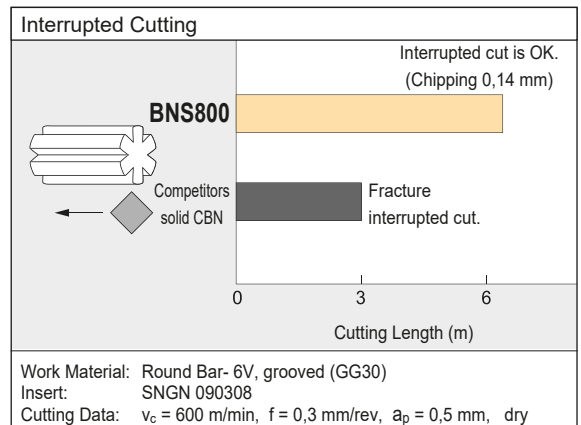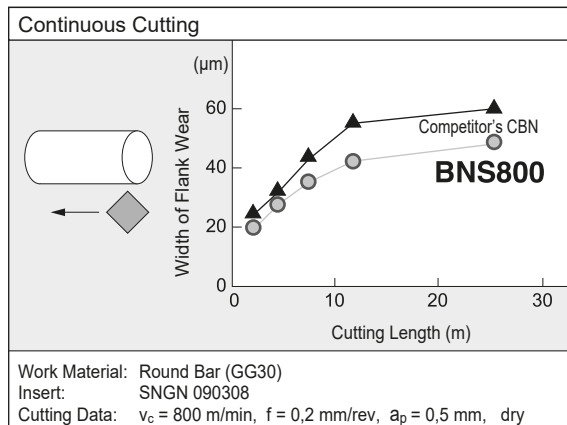

Application Example

Cylinder Bore		Brake Disc		Carbide Roll		Sprayed Face Bore		
<p>Light Cut GG25 Finishing</p>		<p>GG25 Turning</p>		<p>Carbide (Co 15%) Turning</p>		<p>Colmonoy Boring</p>		
<p>Tool life criteria: Finishing</p> <p>BNS800 7500 Bore Comp. sold CBN 2500 Bore</p>		<p>Tool life criteria: Breakage</p> <p>BNS800 400 pcs Comp. sold CBN 200 pcs</p>		<p>Tool life criteria: Breakage</p> <p>BNS800 5 pass Comp. CBN 1 pass Breakage</p>		<p>Tool life criteria: Breakage</p> <p>BNS800 10 pcs Comp. CBN 6 pcs</p>		
Tooling	Light Cut	Tooling	Finishing	Tooling	Finishing	Tooling	Roughing	Finishing
Grade	BNS800	Grade	BNS800	Grade	BNS800	Grade	BNS800	
Insert	SNGN090308	Insert	DNGN110312	Insert	RNGN090300	Insert	SNGN090312	SNGN090308
v_c	1000 m/min	v_c	600 m/min	v_c	40 m/min	v_c	80 m/min	
f	0,3 mm/rev 0,25 mm/rev	f	0,3 mm/rev	f	0,15 mm/rev	f	0,04 mm/rev	0,03 mm/rev
a_p	0,2 mm	a_p	0,5 mm	a_p	0,2 mm	a_p	~3 mm	0,5 mm
Coolant	wet	Coolant	dry	Coolant	wet	Coolant	wet	

SUMIBORON Binderless NCB100



Cemented Carbide

Brittle Materials




■ Features

SUMIBORON Binderless is a polycrystalline cubic boron nitrid (CBN) that directly binds nanometer- or sub-micron-level CBN particles without binder materials.

Binderless CBN is harder and has better thermal conductivity. Therefore, it enables higher efficiency and longer tool life in machining of hard-to-cut materials, such as titanium alloy and cobalt-chromium alloy.

■ Mikrostructure of Sintered Body

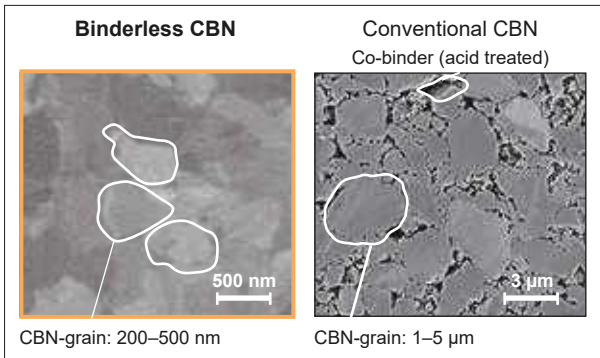

■ Physical Properties

	Binderless CBN	Conventional CBN
CBN Content (%)	100	90-95
Binder Material	-	WC-Co
Hardness (GPa)	51-54	41-44
Thermal Conductivity (W/m·K)	180-200	100-120


SUMIBORON Binderless CBN

■ Advantages


- Higher efficient machining and longer tool life have been realized by the effects of higher hardness and thermal conductivity than conventional CBN grades.
- Achieves high precise machining and better surface integrity because of less adhesion by not containing any binder materials.
- Ideal tool material for high-efficient finishing of hard-to-cut materials, such as titanium alloy and cobalt-chromium alloy, cemented carbides and cermets.
- NBC100 is able to maintain excellent dimensional accuracy and surface roughness for a long period.
- Shows improved work efficiency and cost reduction by less frequency of exchanging inserts compared to conventional tool grades.

■ Application Range and Performance

Turning of Titanium Alloy (Ti-6Al-4V)

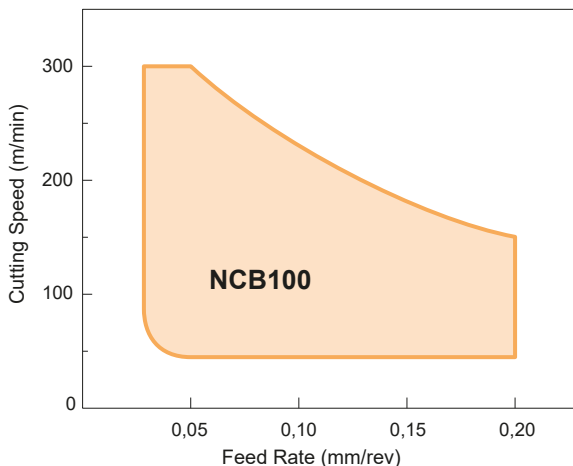


Turning of Cobalt-Chromium Alloy (Co-Cr)


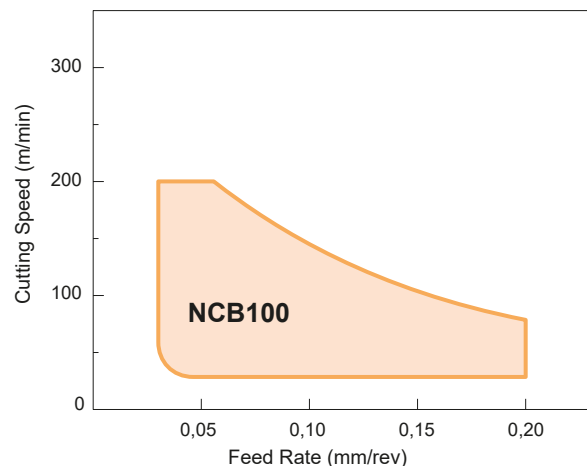


Turning of Titanium Alloy (Ti-6Al-4V)

Wear Resistance

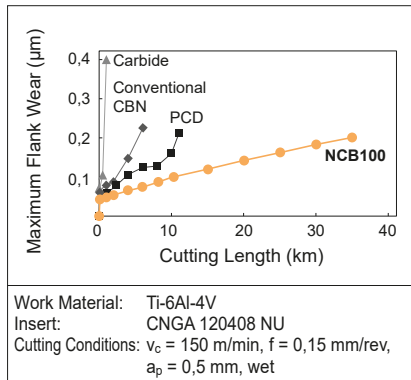


Surface Roughness

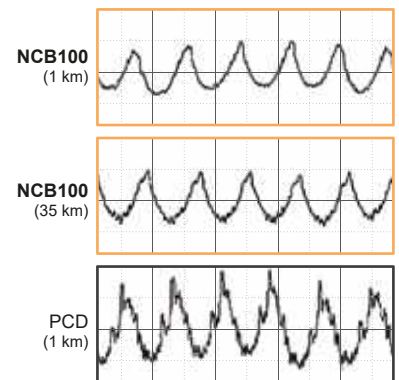
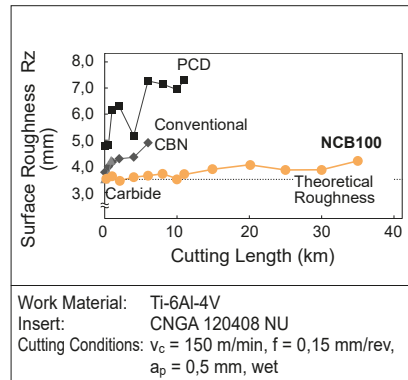


Turning of Cobalt-Chromium Alloy (Co-Cr)

Wear Resistance

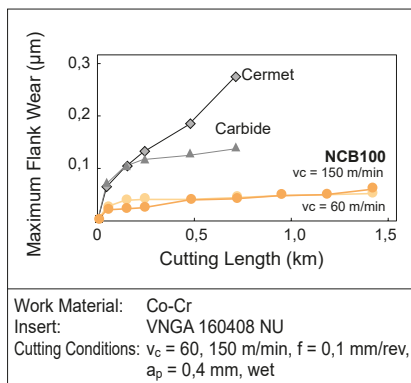

Surface Roughness

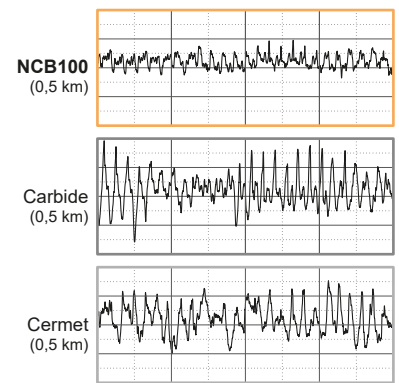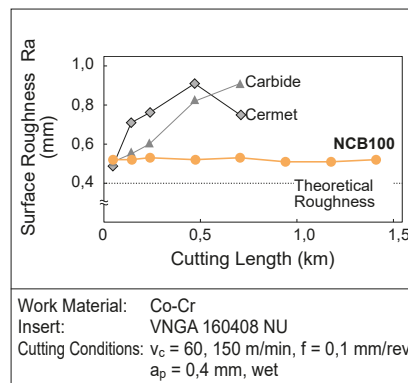

Recommended Cutting Conditions

Titanium Alloys

Work Material		Grade	Cutting Conditions		
Composition	Hardness (HRC)		Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Ti-6Al-4V	30-35	NCB100	0,1-0,3-0,5	0,05-0,15-0,20	50-200-300
Ti-5Al-5V-5Mo-3Cr	32-38	NCB100	0,1-0,3-0,5	0,05-0,10-0,20	50-150-250
Ti-10V-2Fe-3Al	32-38	NCB100	0,1-0,3-0,5	0,05-0,10-0,20	50-150-250

Min. - Optimum - Max.

Cobalt-Chromium Alloys

Work Material		Grade	Cutting Conditions		
Composition	Hardness (HRC)		Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Co-30Cr-5Mo	35-45	NCB100	0,10-0,15-0,30	0,05-0,15-0,20	50-200-300

Min. - Optimum - Max.

Carbides

Work Material		Grade	Cutting Conditions		
Composition	Hardness (HRC)		Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
WC-20Co	<85	NCB100	0,03-0,10-0,20	0,03-0,10-0,20	5-20-40

Min. - Optimum - Max.

SUMIDIA BINDERLESS NPD10 is recommended for: > 85 HRA

Other Work Materials

Work Material		Grade	Cutting Conditions		
Composition	Hardness (HRC)		Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Pure Titanium	130-230	NCB100	0,1-0,3-0,5	0,05-0,10-0,20	100-250-400
Cermet	1.000-1.500	NCB100	0,1-0,2-0,3	0,05-0,10-0,20	10-30-50

Min. - Optimum - Max.

SUMIBORON / SUMIDIA Production Process



■ General

Since 1970s, Sumitomo has pioneered the development of sintered cubic boron nitride (CBN) and sintered diamond (PCD) tools successfully used in the tool making industries. These tool materials can be epoch-making in a sense of broadening the cutting application range.

■ Production Process

In the production process of **SUMIBORON / SUMIDIA**, CBN powder / diamond powder is firstly synthesized under the ultra - high pressure, and secondly, the synthesized crystalline grains are sintered.

Fig. 2 shows a diagram of high temperature high pressure apparatus for processing the ultra - high pressure sintering operation.

This apparatus is basically composed of a piston and a cylinder to generate ultra - high pressure as high as 5000 N/mm² with a special device. The piston and cylinder are made of cemented carbide.

To manufacture final products round discs of SUMIBORON and SUMIDIA material are cut into specific shapes and brazed on to tool bodies made of cemented carbide, or steel, etc., and after that finished by grinding the edge. In another process the final product can be obtained only by cutting blanks and finishing them.

Fig. 1






Fig. 2

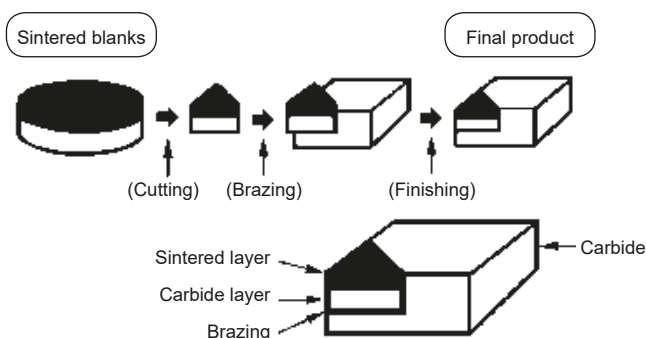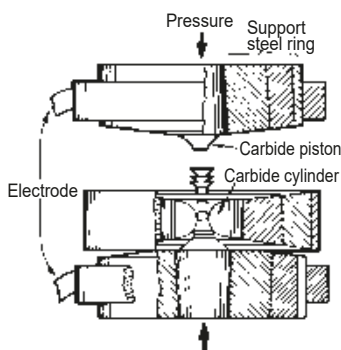

■ SumiBoron / SumiDia Grinding Method

Items		SumiBoron	SumiDia
Grinding machine	-	1) Carbide grinding machine is applicable. 2) R Pointer should be used. 3) Should be wet grinding.	1) Special-purpose high rigidity grinding machine is desirable. 2) Be sure of applying with wet system.
Wheel	Abrasive	Diamond	Diamond
	Grain size	D 25 - medium, D20 - fine (#400-800)	Rough grinding: D 35 (#400 mesh) Finish grinding: D 25 (#800-1500 mesh)
	Bond	Resinoid or vitrified	Special-purpose metal bond for diamond sintered tool or vitrified
	Concentration	100	100-125
	Dressing	Use #400 WA stick	Execute dressing with a WA stick of about 400 mesh.
Grinding condition	Wheel speed	800-1000 m/min.	800-1000 m/min.
	Table cycle	30-60 cycles/min.	30-60 cycles/min.
	Grinding oil	Water soluble grinding coolant oil	Water soluble grinding coolant (Solution type)
Others	-	1) Check chipping of the cutting edge with microscope after finishing. 2) Blank surface cut by EDM should be ground more than 0,05 mm	1) Rake surface is lapped generally 2) Inspect with microscope of magnification of 30-50 times if there is edge chipping. 3) Edge treatment of tool should be sharp for cutting non-ferrous metals. 4) Remove the wire-cut surface of blank by 0,05 mm or more in grinding operation.

SUMIDIA Series



General Features

SUMIDIA sintered diamond series has 3 grades (DA1000, DA150, DA90) with individual features depending on the optimum combination of diamond particle size and binder, as well as the NPD10 grade (nano-polycrystalline diamond) where nano-order diamond particles are directly bound with high strength without using binders.

This series is suited to a wide range of applications from machining of aluminium alloy to machining of hard brittle materials and cemented carbide.

Series • Features • Application

Grade	Features	Application	Average size of Diamond grains (µm)	Hardness Hv	TRS (GPa)
SUMIDIA	DA1000	High density sintered material made of ultra-fine diamond particles that demonstrates optimum wear resistance and excellent edge sharpness.	< 0,5	50 ~ 60	≈ 2,60
	DA150	Micro-grained sintered diamond grade with strong diamond-to-diamond bonding. It is suitable for the machining of non-ferrous metals and other very hard materials.	5	50 ~ 60	≈ 1,95
	New DA90	Contains coarser diamond particles than other grades, giving it good wear resistance suitable for the machining of carbides and high-silicon aluminium. Shows the highest diamond content for excellent wear resistance.	< 50	50 ~ 60	≈ 1,10
SUMIDIA Binderless	NPD10	A 100% diamond grade made by nano-level diamond grains with direct conversion sintering. Has the highest wear resistance and fracture resistance and the best edge sharpness.	< 0,05	120 ~ 130	≈ 3,15

Application Range

Machinability	Work Material	Turning		Milling	Example Part	
		Roughing	Finishing			
Good ↑ ↓ Difficult	Sintered aluminium	DA1000			Cylinder liner	
	Die cast aluminium (ADC12)				Transmission case, oil pan, cylinder block, aluminium wheel	
	Low silicon (AC2B-T6, AC4C-T6)				Cylinder head	
	High silicon (T6)				Cylinder block	
					DA150	


Aluminium

Non-Aluminium

Machinability	Work Material	Turning		Milling	Example Part
		Roughing	Finishing		
Good ↑ ↓ Difficult	Non-ferrous sintered alloy	DA1000			Bushing
	Gunmetal carbon				Connection rod
	Carbide	DA90	NPD10		Punches, dies, rolls
	Iron combined	DA90	DA150		Cylinder block, bearing cap


Cutting Performance

Continuous Cutting




Work Material: MMC (Al-20% SiC)
Insert: CNMX 120408, Holder: PCLN2525
Cutting Cond.: $v_c = 350$ m/min, $f = 0,2$ mm/rev, $a_p = 0,18$ mm, wet

Continuous Cutting



Work Material: Cemented Carbide (87 HRA)
Insert: DCMW 070204 NF
Cutting Cond.: $v_c = 20$ m/min, $f = 0,1$ mm/rev, $a_p = 0,2$ mm, wet

Continuous Cutting



Work Material: Cemented Carbide (91 HRA)
Insert: DCMW 11T304 RH (NPD10), DCMW 11T304 NF (DA90)
Cutting Cond.: $v_c = 20$ m/min, $f = 0,05$ mm/rev, $a_p = 0,05$ mm, dry

Recommended Cutting Conditions

Cutting Conditions	Work Materials	Aluminium Alloys	Copper Alloy	Reinforced Plastics	Wood or Organic Materials	Carbide	Carbon
		v_c (m/min)	f (mm/rev)	a_p (mm)			
Cutting Speed	v_c (m/min)	~ 3.000	~ 1.000	~ 1.000	~ 4.000	10 ~ 30	100 ~ 600
Feed rate	f (mm/rev)	~ 0.2	~ 0.2	~ 0.4	~ 0.4	~ 0.2	~ 1.0
Depth of cut	a_p (mm)	~ 3.0	~ 3.0	~ 2.0	-	~ 0.5	~ 2.0

SUMIDIA Binderless

Nano-Polycrystalline Diamond



■ General Features


Nano-polycrystalline diamond is a type of polycrystalline diamond, produced by directly binding nano-level diamond grains without using any binders.

This material is unique to our company and as compared to conventional diamond grades containing binders, it exhibits higher strength, excellent wear resistance and fracture resistance.

SUMIDIA Binderless is the series of tools with cutting edges made from this high performance nano-polycrystalline diamond.


■ Micro-Structure Comparison

Nano-Polycrystalline Diamond
SEM Structure




Diamond particle average grain diameter (30 - 50 nm)

Conventional PCD
SEM Structure



Diamond particle average grain diameter (1 - 10 µm)


■ Hardness

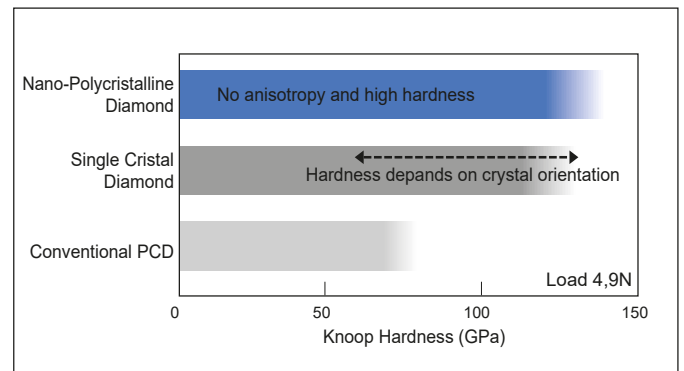

SUMIDIA Binderless

■ Application Examples

- Ballnose Endmill / Radius Endmill (Carbide Machining)

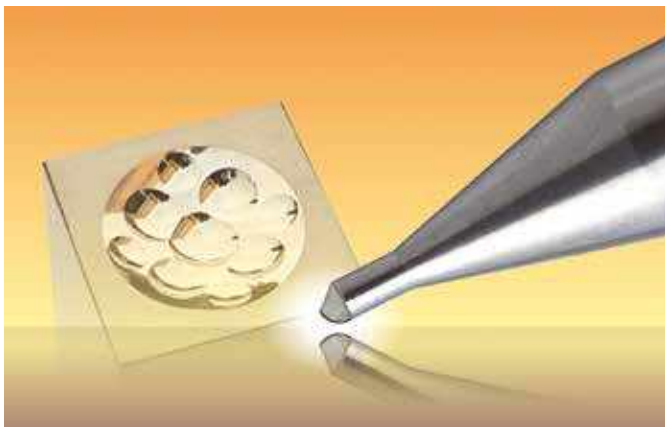

- Indexable Inserts (Carbide Machining)





General Features

NPD10 is made from high-hardness nano-polycrystalline diamond. This is a pure diamond material, but unlike single-crystal diamonds, it has no anisotropy.

It achieves extended tool life and machining accuracy superior to conventional diamond tools when machining hard brittle materials such as cemented carbide.


DA90 is a polycrystalline diamond grade in which coarse diamond particles have been sintered to form a dense structure. The high diamond content, with high wear resistance, makes it ideal for roughing of cemented carbide and hard brittle material.

Optimized design and mass production technology have been developed, achieving the same performance as conventional tools with higher cost performance.

Characteristics

- **Ideal for Finishing of Hard Brittle Materials Including Cemented Carbide (NPD10)**
High-precision cutting of cemented carbide thanks to the outstanding wear resistance of nano-polycrystalline diamond.
- **Superior Dimensional Tolerance Maintained for a Long Time (NPD10)**
Tool replacement count can be drastically reduced compared to conventional diamond tools, enabling work efficiency to be improved and total costs to be reduced.
- **Ideal for Roughing of Hard Brittle Materials Including Cemented Carbide (DA90)**
Stable tool life in sintered surface machining of cemented carbide and roughing of hard brittle materials thanks to the outstanding wear resistance of the coarse-grained polycrystalline diamond.
- **Uses SUMIDIA NF Insert (DA90)**
Optimized design and mass production technology have been developed, achieving the same performance as conventional tools with higher cost-performance.

Applicable Range (Cemented Carbide)

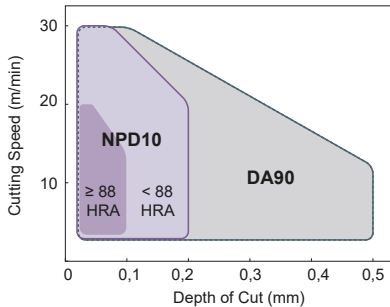

Applications of NPD10 and DA90 (Cemented Carbide)


Grade	SUMIDIA Binderless NPD10	SUMIDIA DA90
Dimensional Tolerance	Best (⊙)	The first recommendation is NPD10 (△)
Tool Life (Wear Resistance)	Best (⊙) $a_p \leq 0,2 \text{ mm}, f \leq 0,1 \text{ mm/rev}$	$a_p \geq 0,2 \text{ mm}$ can also be used (○)
Sintered Surface Machining of Cemented Carbide	Impossible (×)	Best (⊙)
Machined Surface Quality	Best (⊙)	The first recommendation is NPD10 (△)

Recommended Cutting Conditions (Carbide Machining)


Work Material			Grade	Cutting Conditions			
Class	Hardness (HRA)	SEI Grades		Cutting Speed v_c (m/min)	Feed Rate f (mm/rev)	Depth of Cut a_p (mm/rev)	
VM, VC	40	≥ 88	G5, D2	NPD10	5-15-20	0,03-0,05-0,07	0,03-0,05-0,07
VM, VC	70, 60, 50	83 - <88	G7, G6	NPD10	5-20-30	0,03-0,10-0,20	0,03-0,10-0,20
VM, VC	-	≥ 83	G7, G6, G5, D2	DA90	5-20-30	0,03-0,10-0,20	0,03-0,20-0,50

Min. - Optimum - Max., Cutting conditions: NPD10: dry, DA90: wet

Machining Precision of NPD10

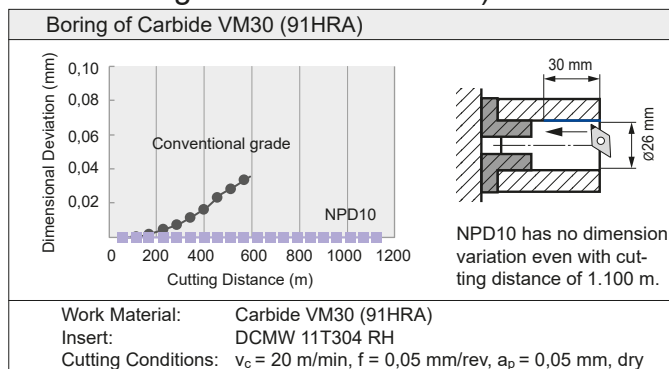

Wear Resistance of DA90

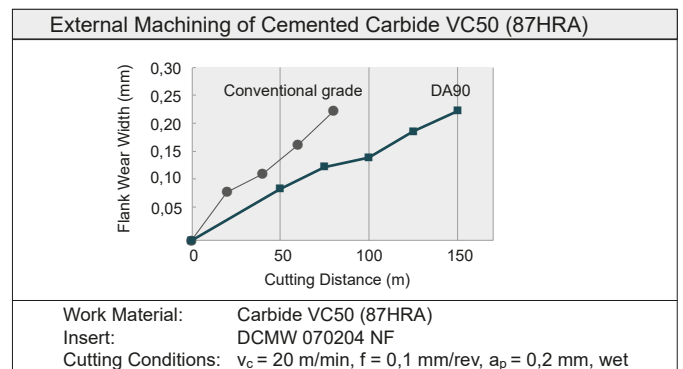





General Features

SumiDia DA1000 is a high density, ultra fine grained sintered PCD with high toughness similar to that of cemented carbides.

SumiDia DA1000, with its great improvement in fracture resistance, eliminates the breakage problems faced by conventional PCD tools especially during the milling of Aluminium alloys and achieves a longer and more stable tool life.

Furthermore, the NF type inserts makes it even more cost effective.

Cutting Performance

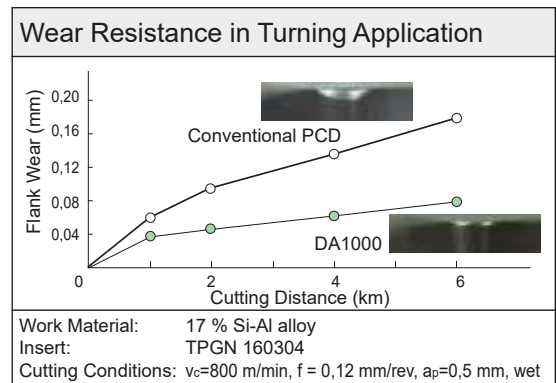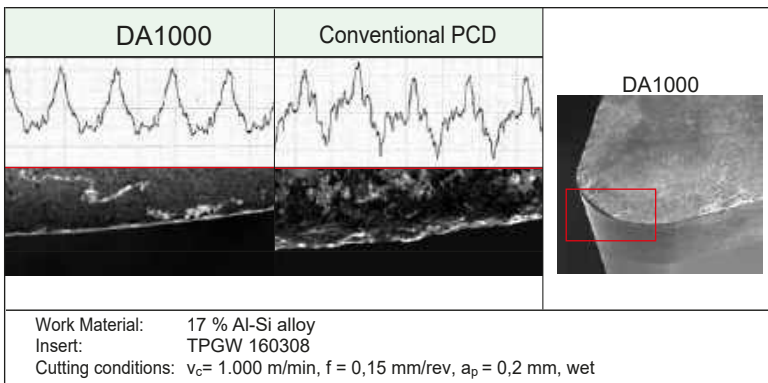


NF Type Inserts

General Features

- Total Cost Effectiveness with High Performance and Lower Price
 - Optimum design utilizing improved mass production techniques provides a relatively lower cost.
 - Regrindable type results in huge total cost reduction.
- Wide Application Range
 - Wide range of stocked items for small hole boring, OD turning to milling processes.
 - Negative and positive type inserts that are applicable on standard lever-lock, pin-lock type holders.



Efficiency

SumiDia NF-type inserts preserve the excellent basic performance of DA1000 while achieving high cost performance through optimal design and development of mass production technology. These inserts achieve the high performance of SUMIDIA DA1000, including excellent fracture resistance, wear resistance and smooth work material surface finishing.



(NF-type is precision ground just like conventional inserts.)

Application Examples

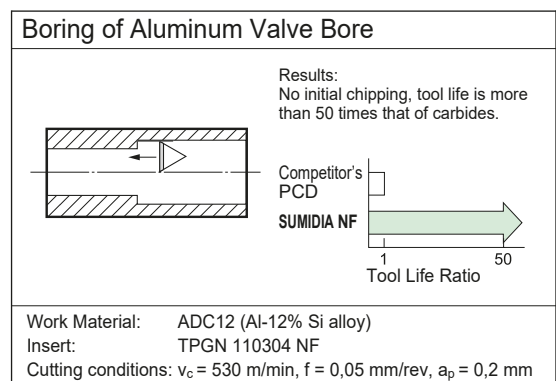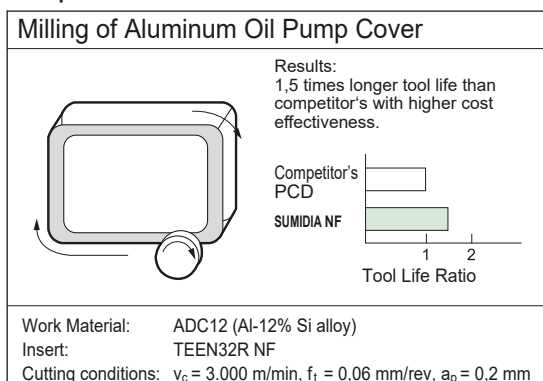




■ Characteristics

- Provides excellent chip control in semi finishing and finishing of aluminium alloy.
- Solves chip control problems and dramatically improves work efficiency.
- Achieves stable tool life by employing high toughness grade DA1000.

■ Applications Range

Wrought Aluminium Alloy (A6061)

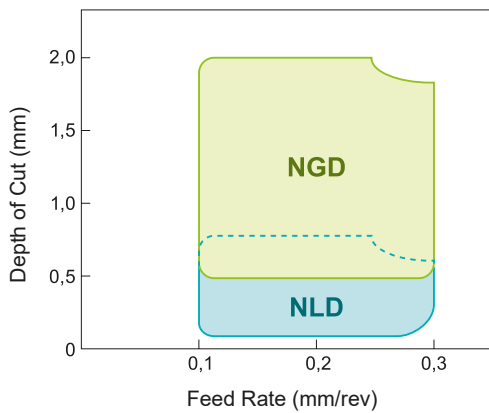


NLD Type Chipbreaker

Achieves excellent chip control for finishing.



Casted Aluminium Alloy (ADC12)

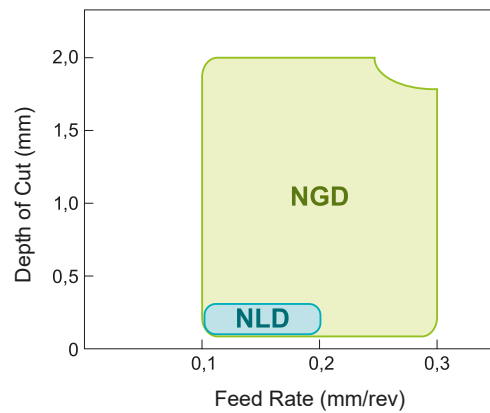

NGD Type Chipbreaker


Achieves excellent chip control for semi finishing.



■ Application Examples

Internal Turning of Machine Component

Provides good chip control in small-depth cutting of wrought Al alloy.



Breakmaster **NLD** type




Without chip breaker

Work Material: A6061
Insert: VCMT110302 **NLD** NF (DA1000)
Cutting Conditions: $v_c = 200$ m/min, $f = 0,20$ mm/rev, $a_p = 0,10$ mm, wet

Internal Turning of Transmission Component

Offers good chip control in casted material. Small chips - easy to remove.



Breakmaster **NGD** type



Without chip breaker

Work Material: ADC12
Insert: TPMT110304 **NGD** NF (DA1000)
Cutting Conditions: $v_c = 400$ m/min, $f = 0,23$ mm/rev, $a_p = 1,20$ mm, wet

SUMIDIA One-Use Inserts Break Master DM Type

N Non-ferrous Metal



General Features

Economy One-Use Insert

- Similar to SumiBoron One-Use type inserts

With Built-in Chipbreaker for Effective Chip Removal


- Solving chip control problems and improving efficiency with DM-type chipbreaker.

Extensive Insert Range for External and Facing Operation


- 80° and 55° diamond shaped inserts are added to expand the application range of this series.

Application Range

Triangular Type Insert (Boring)

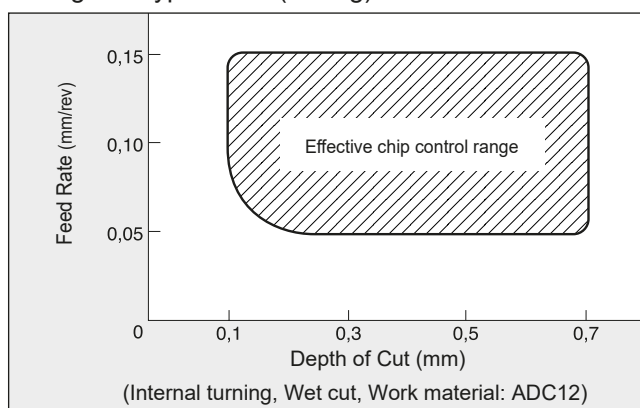

CCMT/DCMT Type (External Turning & Facing)

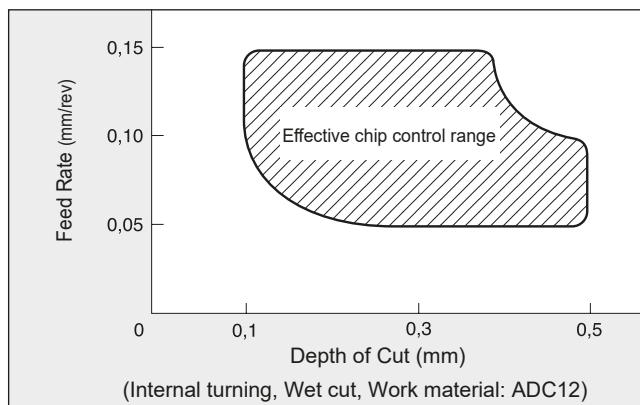

Chip Control

Break Master



No Chipbreaker



Application

Machining Details	Cutting Conditions	Results
Work Material: AC2A-T6	$v_c = 300$ m/min $f = 0,06$ mm/rev $a_p = 0,35$ mm	Surface finish of the bore hole was less than $Ra = 1 \mu\text{m}$.
Operation: Internal Boring	Wet cut	Chips formed was of a uniform curl of about 2 mm in length. There was almost no chips left inside the bore hole.

Recommended Conditions

Boring (Triangular Insert)

Feed Rate	Depth of Cut	Type
-0.15 mm/rev.	-0,7 mm	Wet cut

External Copying (55°, 80° Diamond Shaped Inserts)

Feed Rate	Depth of Cut	Type
-0.15 mm/rev.	-0,5 mm	Wet cut

For facing process, D.O.C. should be less than 0,4 mm

Series


External Turning & Facing		Boring	
	CCMT 0602__ L/R-DM NU		TPMT 0802__ L/R-DM NU
	CCMT 09T3__ L/R-DM NU		TPMT 0902__ L/R-DM NU
	DCMT 0702__ L/R-DM NU		TPMR 1103__ L/R-DM NU ^(*)
	DCMT 11T3__ L/R-DM NU		TPMR 1603__ L/R-DM NU ^(*)

(*) Stock in Japan
Delivery on request

SUMIBORON / SUMIDIA Indexable Inserts & Tools

M1-M62

M

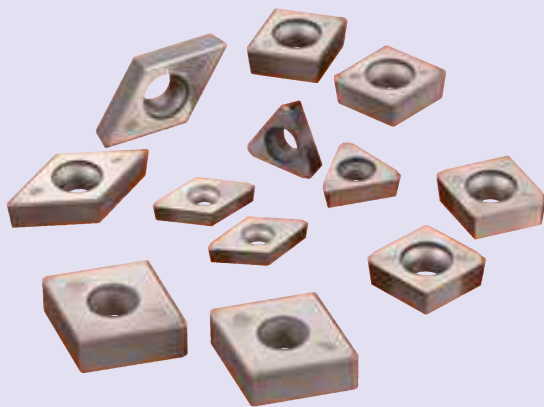

SUMIBORON / SUMIDIA Insert

C / 80° Diamond

D / 55° Diamond

R / Round

S / Square

T / Triangle

V / 35° Diamond

W / Polygon

Special

SUMIDIA Binderless

SUMIBORON / SUMIDIA Precision Tools

SUMIBORON

SUMIDIA

High Speed Non-Ferrous Mill ^{New}

SUMIBORON "BN Finish Mill"

"Helical Master"

"Mould Finish Master"

SUMIDIA "Mould Finish Master" Binderless

SUMIDIA Drills

Insert Identification	M2-3	
CC _ 7° pos. Type	M4,6-8	C
CP _ 11° pos. Type	M5	
CN _ neg. Type	M9-11	
DC _ 7° pos. Type	M12-14	D
DN _ neg. Type	M15-18	
RN _ neg. Type	M18	R
SC _ 7° pos. Type	M19	S
SN _ neg. Type	M19-20	
TB _ 5° pos. Type	M20	T
TC _ 7° pos. Type	M21	
TN _ neg. Type	M22-24	
TP _ 11° pos. Type (Without Hole)	M24	
TP _ 11° pos. Type (With Hole)	M25-27	
VB _ 5° pos. Type	M28	V
VC _ 7° pos. Type	M29	W
VN _ neg. Type	M30-31	Z
WN _ neg. Type	M32	
ZNEX neg.-pos. Type	M32	
Neg.-pos. Type	M33	

Guidance	M34-35	
BSME / SEXC Type Small Hole Boring Bars	M36-39	
BNBB Type Small Hole Boring Bars	M40	
BNZ / BNB Type Small Hole Boring Bars	M41	
GWB / PSC Type Grooving Holder	M42-43	
BNGG Type Threading Holder	M44	
DABB Type Small Hole Boring Bars	M45	
ANX Type Face Mill	M46-51	
RF Type Face Mill	M52	
SRF Type Face Mill	M52	
FMU Type Face Mill	M54-55	
BNES Type Endmill	M56	
BNBP Type Micro Ball Nose Endmill	M57	
NPDRS / NPDB(S) Type	M58-59	
DAL / DDL / DML Type Drills	M60-61	

SUMIBORON Insert Identification

Regrindable Type

CNMA 120408

B

①

Insert ISO Code
ISO ⇨ C2/C3

②

Additional Information
Chart 1

Chart 1

Symbol	Description
B	Full-top CBN insert

One-Use Type

CNGG 120408

N-SV

NC

WG

4

①

Insert ISO Code
ISO ⇨ C2/C3

②

Chip Breaker
Chart 2

③

One-Use Type
Chart 3

④

Wiper Insert
Chart 4

Chart 2

Symbol	Description
—	Standard Type
LF LE	Sharp cutting edge
LT	Small edge treatment type
LS	Low cutting force
ES	High efficiency type
HS	Strong cutting edge
N-FV N-LV N-SV	Chipbreaker Type

Chart 3

Symbol	One-Use Type	Grade
NC	Coated SUMIBORON	BNC2010, 2020 BNC100, 160 BNC200, 300 BNC500
NU	Uncoated CBN	BNX10, 20 BN1000, 2000 BN350, BN7000, 7500
NS		BNX25

Chart 4

Symbol	Wiper Insert
WG	Finishing $0,05 \leq f \leq 0,20$
WH	High feed cutting $0,20 \leq f < 0,40$
W	Surface Roughness Standard: $R_z 1,6 \sim 3,2\mu\text{m}$

f : Feed Rate (mm/rev)

⑤

No. of Cutting Edges
Chart 5

Chart 5

Symbol	No. of Cutting Edges	Type
—	1 cutting edge	Single-corner
2	2 cutting edges	Multi-corner
3	3 cutting edges	
4	4 cutting edges	
6	6 cutting edges	

- C
- D
- R
- S
- T
- V
- W
- Z

Regrindable Type

CNMA 120408

RH





Chart 1

Symbol	Description
RH	Honing specification (treated cutting edge)

One-Use Type

CNMA 120408

N-LD

NF






Chart 2

Symbol	Description
N-LD	Chipbreaker type (neutral)
N-GD	
R-DM	Chipbreaker type (right handed)
L-DM	Chipbreaker type (left handed)

Chart 3

Symbol	Description
NF	NF insert ⇨ L26
NU	One use insert

C

D

R

S

T

V

W

Z

SUMIBORON / SUMIDIA Indexable Inserts

CC-- Type 7° pos. Inserts

80° Diamond Type 7° Relief
With Insert Hole

Coated

Dimensions (mm)				
CC--	L	IC	S	D ₁
0602--	6,45	6,35	2,38	2,8
09T3--	9,7	9,525	3,97	4,4

- H Hardened Steel
- K Cast Iron
- N Non-Ferrous Metal
- S Exotic Alloy
- PM Sintered Component
- Carbide/Hard Brittle Material

CCGT / CCGW

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Material																								
			Coated					Uncoated																			
			CBN														PCD		Sumidia								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	BCBN	DA90	DA150	DA1000	NPD10	
 CBN with chipbreaker with 2 CBN cutting edges	CCGT 060204 N-FV NC2	0,4	●	●	●																						
	CCGT 09T304 N-FV NC2	0,4	●	●	●																						
	CCGT 09T308 N-FV NC2	0,8	●	●	●																						
	CCGT 09T304 N-LV NC2	0,4	●	●	●																						
CCGT 09T308 N-LV NC2	0,8	●	●	●																							
 Standard - Normal cut geometry with 2 CBN cutting edges	CCGW 060202 NC2	0,2	●	●	●	●	●	●	●																		
	CCGW 060204 NC2	0,4	●	●	●	●	●	●	●	●																	
	CCGW 060208 NC2	0,8	●	●	●	●	●	●	●	●	●																
	CCGW 09T302 NC2	0,2	●	●	●	●	●	●	●	●																	
	CCGW 09T304 NC2	0,4	●	●	●	●	●	●	●	●	●																
	CCGW 09T308 NC2	0,8	●	●	●	●	●	●	●	●	●																
	CCGW 09T304 NC-W2	0,4	●		●	●	●																				
CCGW 09T308 NC-W2	0,8	●		●	●	●																					
 Wiper Wiper (Wiper Type)	CCGW 09T304 NC-WG2	0,4	●	●	●	●	●	●																			
	CCGW 09T308 NC-WG2	0,8	●	●	●	●	●	●																			
	CCGW 09T304 NC-WH2	0,4	●	●	●	●	●	●																			
CCGW 09T308 NC-WH2	0,8	●	●	●	●	●	●																				
 LE - Type Low cutting force with 2 CBN cutting edges	CCGW 060202 LE-NC2	0,2	●	●	●																						
	CCGW 060204 LE-NC2	0,4	●	●	●																						
	CCGW 09T302 LE-NC2	0,2	●	●	●																						
	CCGW 09T304 LE-NC2	0,4	●	●	●																						
CCGW 09T308 LE-NC2	0,8	●	●	●																							
 LT - Type Sharp cutting edge with 2 CBN cutting edges	CCGW 060202 LT-NC2	0,2		●																							
	CCGW 060204 LT-NC2	0,4		●																							
	CCGW 09T302 LT-NC2	0,2		○																							
	CCGW 09T304 LT-NC2	0,4		●																							
CCGW 09T308 LT-NC2	0,8		●																								
 LS - Type Low cutting force with 2 CBN cutting edges	CCGW 060202 LS-NC2	0,2		●	●	●																					
	CCGW 060204 LS-NC2	0,4		●	●	●																					
	CCGW 09T304 LS-NC2	0,4		●	●	●	●																				
	CCGW 09T308 LS-NC2	0,8		●	●	●	●																				
 HS - Type Strong cutting edge with 2 CBN cutting edges	CCGW 09T304 HS-NC2	0,4	●	●																							
	CCGW 09T308 HS-NC2	0,8	●	●																							

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

L4, L5 Edge Specification of SUMIBORON Inserts

80° Diamond Type 11° Relief
With Insert Hole


Coated

Dimensions (mm)				
CP--	L	IC	S	D ₁
0602--	6,45	6,35	2,38	2,8
0802--		7,94	2,38	3,4
0903--		9,525	3,18	4,4

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

CPGW


● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Material																									
			H		K										S		N											
			Coated	Uncoated	CBN										Bleness CBN	Uncoated PCD	Bleness Sumidias											
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
	CPGW 080202 NC2 CPGW 080204 NC2	0,2	○	○																								
		0,4	○	○																								
		0,2	○	○																								
		0,4	○	○																								

Uncoated

CPMW

● M-Class SumiDia (PCD, NF Type)

Shape	ISO Cat. No.	RE	Material																									
			H		K										S		N											
			Coated	Uncoated	CBN										Bleness CBN	PCD	Bleness Sumidias											
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
	CPMW 060202 NF CPMW 060204 NF CPMW 060208 NF	0,2																										
		0,4																										
		0,8																								●	●	●

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

- C**
- D**
- R**
- S**
- T**
- V**
- W**
- Z**

SumiBoron / SumiDia
Inserts

SUMIBORON / SUMIDIA Indexable Inserts

CC-- Type 7° pos. Inserts

80° Diamond Type 7° Relief
With Insert Hole








Uncoated

Dimensions (mm)				
CC--	L	IC	S	D ₁
0602--	6,45	6,35	2,38	2,8
09T3--	9,7	9,525	3,97	4,4

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

CCGT / CCGW

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	H		K		H		K		S		N															
			Coated		Uncoated		Uncoated		Uncoated		Uncoated		Uncoated															
			CBN																									
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
Break Master - FV, LV  CBN with chipbreaker with 2 CBN cutting edges	CCGT 060204 N-FV NU2	0,4								●																		
	CCGT 09T304 N-FV NU2	0,4								●																		
	CCGT 09T308 N-FV NU2	0,8								●																		
 with 2 CBN cutting edges	CCGT 09T304 N-LV NU2	0,4								●																		
	CCGT 09T308 N-LV NU2	0,8								●																		
 with 2 CBN cutting edges	CCGW 060204 NU2	0,4																			●							
	CCGW 060208 NU2	0,8																			●							
	CCGW 09T304 NU2	0,4								●	●	▲	●		▲	▲	●				●							
	CCGW 09T308 NU2	0,8								●	●	●		▲	▲	●					●							
 (Wiper Type)	CCGW 09T304 NU-WG2	0,4								●																		
	CCGW 09T308 NU-WG2	0,8								●																		
 (Wiper Type)	CCGW 09T304 NU-WH2	0,4								●																		
	CCGW 09T308 NU-WH2	0,8								●																		
 LF - Type Sharp cutting edge with 2 CBN cutting edges	CCGW 09T304 LF-NU2	0,4																			●							
	CCGW 09T308 LF-NU2	0,8																				●						
 HS - Type Strong cutting edge with 2 CBN cutting edges	CCGW 09T304 HS-NU2	0,4																			●							
	CCGW 09T308 HS-NU2	0,8																				●						

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

80° Diamond Type 7° Relief
With Insert Hole

Uncoated

Dimensions (mm)				
CC--	L	IC	S	D ₁
0602--	6,45	6,35	2,38	2,8
09T3--	9,7	9,525	3,97	4,4
1204--	12,9	12,7	4,76	5,5

- H Hardened Steel
- K Cast Iron
- N Non-Ferrous Metal
- S Exotic Alloy
- PM Sintered Component
- Carbide/Hard Brittle Material

CCGW ○○○○○○

● G-Class SumiBoron (CBN, Regrindable Type)

Shape	ISO Cat. No.	RE	H		K		H		K		S		N	
			Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated		
	CCGW 09T304 CCGW 09T308	0,4												
		0,8												

● G-Class SumiBoron (CBN, One-Use Type)

		CCGW 060204 NS	0,4											
		CCGW 060208 NS	0,8											
		CCGW 09T304 NS	0,4											
		CCGW 09T308 NS	0,8											
		CCGW 060202 NU	0,2											
		CCGW 060204 NU	0,4											
		CCGW 09T302 NU	0,2											
		CCGW 09T304 NU	0,4											
		CCGW 09T308 NU	0,8											
		CCGW 120408 NU	0,8											

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

L4, L5 Edge Specification of SUMIBORON Inserts

- C
- D
- R
- S
- T
- V
- W
- Z

SumiBoron / Sumidia
Inserts

SUMIBORON / SUMIDIA Indexable Inserts

CC-- Type 7° pos. Inserts

80° Diamond Type 7° Relief
With Insert Hole

Uncoated

Dimensions (mm)				
CC--	L	IC	S	D ₁
0602--	6,45	6,35	2,38	2,8
09T3--	9,7	9,525	3,97	4,4

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

CCMT / CCMW

● M-Class SumiDia (PCD, Regrindable Type)

Shape	ISO Cat. No.	RE	Material																							
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7500	BN7500	BN5800	NCB100	DA90	DA150	DA1000	NPD10
	CCMT 060202	0,2																								
	CCMT 060204	0,4																								
	CCMT 09T302	0,2																								

● M-Class SumiDia (PCD, NF Type)

Shape	ISO Cat. No.	RE	Material																							
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7500	BN7500	BN5800	NCB100	DA90	DA150	DA1000	NPD10
	CCMT 060201 NF	0,1																								
	CCMT 060202 NF	0,2																								
	CCMT 060204 NF	0,4																								
	CCMT 09T301 NF	0,1																								
	CCMT 09T302 NF	0,2																								
	CCMT 09T304 NF	0,4																								
	CCMT 09T308 NF	0,8																								

● M-Class SumiDia (PCD, One-Use "Break Master" Type)

Break Master Type	Shape	ISO Cat. No.	RE	Material																							
				BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7500	BN7500	BN5800	NCB100	DA90	DA150	DA1000	NPD10
Break Master - DM		CCMT 060202 L-DM NU	0,2																								
		CCMT 060204 L-DM NU	0,4																								
		CCMT 09T302 L-DM NU	0,2																								
Break Master - DM		CCMT 09T304 L-DM NU	0,4																								
		CCMT 060202 R-DM NU	0,2																								
Break Master - DM		CCMT 060204 R-DM NU	0,4																								
		CCMT 09T302 R-DM NU	0,2																								
Break Master - DM		CCMT 09T304 R-DM NU	0,4																								
		CCMT 060202 N-LD NF	0,2																								
Break Master - LD		CCMT 060204 N-LD NF	0,4																								
		CCMT 09T302 N-LD NF	0,2																								
		CCMT 09T304 N-LD NF	0,4																								
Break Master - LD		CCMT 09T308 N-LD NF	0,8																								
		CCMT 060202 N-GD NF	0,2																								
Break Master - GD		CCMT 060204 N-GD NF	0,4																								
		CCMT 09T302 N-GD NF	0,2																								
		CCMT 09T304 N-GD NF	0,4																								
Break Master - GD		CCMT 09T308 N-GD NF	0,8																								

● M-Class SumiDia (PCD, Binderless)

Shape	ISO Cat. No.	RE	Material																							
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7500	BN7500	BN5800	NCB100	DA90	DA150	DA1000	NPD10
	CCMW 03X102 RH	0,2																								
	CCMW 03X104 RH	0,4																								
	CCMW 04X102 RH	0,2																								
	CCMW 04X104 RH	0,4																								
	CCMW 060202 RH	0,2																								
	CCMW 060204 RH	0,4																								
	CCMW 09T302 RH	0,2																								
	CCMW 09T304 RH	0,4																								
	CCMW 09T308 RH	0,8																								

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

L4, L5 Edge Specification of SUMIBORON Inserts

C
D
R
S
T
V
W
Z

Sumiboron / SumiDia
Inserts

80° Diamond Type 0° Relief
With Insert Hole









Coated

CNGA / CNGG

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Dimensions (mm)				
CN--	L	IC	S	D ₁
1204--	12,9	12,7	4,76	5,16

H Hardened Steel
K Cast Iron
N Non-Ferrous Metal
S Exotic Alloy
PM Sintered Component
■ Carbide/Hard Brittle Material

Shape	ISO Cat. No.	RE	Material																									
			Coated			Uncoated																						
			BN	BN	BN	CBN																						
			BN2010	BN2020	BN100	BN160	BN200	BN300	BN500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BN5800	NCB100	DA90	DA150	DA1000	NPD10		
 Standard - Normal cut geometry (Wiper Type)	CNGA 120402 NC4 CNGA 120404 NC4 CNGA 120408 NC4 CNGA 120412 NC4	0,2 0,4 0,8 1,2	●	○	●	●	●	●	●	○	○																	
	CNGA 120404 NC-W4 CNGA 120408 NC-W4 CNGA 120412 NC-W4	0,4 0,8 1,2			▲	▲	▲																					
	CNGA 120404 NC-WG4 CNGA 120408 NC-WG4 CNGA 120412 NC-WG4	0,4 0,8 1,2	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	CNGA 120404 NC-WH4 CNGA 120408 NC-WH4 CNGA 120412 NC-WH4	0,4 0,8 1,2	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
 LE - Type Low cutting force	CNGA 120404 LE-NC2 CNGA 120408 LE-NC2 CNGA 120412 LE-NC2	0,4 0,8 1,2	●	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
 LT - Type Sharp cutting edge	CNGA 120402 LT-NC2 CNGA 120404 LT-NC2 CNGA 120408 LT-NC2 CNGA 120412 LT-NC2	0,2 0,4 0,8 1,2	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
 LS - Type Low cutting force	CNGA 120404 LS-NC2 CNGA 120408 LS-NC2 CNGA 120412 LS-NC2	0,4 0,8 1,2			●	●	●	○																				
 ES - Type Crater wear stability	CNGA 120404 ES-NC4 CNGA 120408 ES-NC4 CNGA 120412 ES-NC4	0,4 0,8 1,2	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
 HS - Type Strong cutting edge	CNGA 120404 HS-NC2 CNGA 120408 HS-NC2 CNGA 120412 HS-NC2	0,4 0,8 1,2	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
 Break Master - FV, LV, SV  CBN with chipbreaker	CNGG 120404 N-FV NC4 CNGG 120408 N-FV NC4 CNGG 120412 N-FV NC4	0,4 0,8 1,2	●	●	□	●																						
	CNGG 120404 N-LV NC4 CNGG 120408 N-LV NC4 CNGG 120412 N-LV NC4	0,4 0,8 1,2	○	●	□	●																						
	CNGG 120408 N-SV NC4 CNGG 120412 N-SV NC4	0,8 1,2	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● = Euro stock
 ○ = Stock item in Japan

▲ = To be replaced by new item
 □ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

C
D
R
S
T
V
W
Z

Sumiboron Sumidia Inserts

SUMIBORON / SUMIDIA Indexable Inserts

CN- Type neg. Inserts

80° Diamond Type 0° Relief
With Insert Hole








Uncoated

Dimensions (mm)				
CN--	L	IC	S	D ₁
1204--	12,9	12,7	4,76	5,16

H Hardened Steel
K Cast Iron
N Non-Ferrous Metal
S Exotic Alloy
PM Sintered Component
■ Carbide/Hard Brittle Material

CNGA / CNGM

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	H		K		H		K		S		N														
			Coated		Uncoated		Uncoated		Uncoated		Uncoated		Uncoated														
			CBN																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
 with 2 CBN cutting edges	CNGA 120404 NS2	0,4																									
	CNGA 120408 NS2	0,8																									
	CNGA 120412 NS2	1,2																									
	CNGA 120404 NU2	0,4																									
 (Wiper Type)	CNGA 120404 NU2	0,8																									
	CNGA 120408 NU2	0,8																									
	CNGA 120412 NU2	1,2																									
	CNGA 120404 NU-W2	0,4																									
 (Wiper Type)	CNGA 120408 NU-W2	0,8																									
	CNGA 120404 NU-WG2	0,4																									
	CNGA 120408 NU-WG2	0,8																									
	CNGA 120412 NU-WG2	1,2																									
 (Wiper Type)	CNGA 120404 NU-WH2	0,4																									
	CNGA 120408 NU-WH2	0,8																									
	CNGA 120412 NU-WH2	1,2																									
	 LF - Type Sharp cutting edge	CNGA 120404 LF-NU2	0,4																								
CNGA 120408 LF-NU2		0,8																									
 HS - Type Strong cutting edge	CNGA 120408 HS-NU2	0,8																									
 Break Master - LV CBN with chipbreaker	CNGM 120404 N-LV NU2	0,4																									
	CNGM 120408 N-LV NU2	0,8																									
	CNGM 120412 N-LV NU2	1,2																									

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

80° Diamond Type	0° Relief
	—

Uncoated

Dimensions (mm)				
CN_-	L	IC	S	D ₁
0903--	9,7	9,525	3,18	4,4
1204--	12,9	12,7	4,76	5,16

- H Hardened Steel
- K Cast Iron
- N Non-Ferrous Metal
- S Exotic Alloy
- PM Sintered Component
- Carbide/Hard Brittle Material

CNGN / CNGX

● G-Class SumiBoron (Solid CBN Type)

Shape	ISO Cat. No.	RE	Material																							
			Coated		Uncoated										Uncoated											
			CBN																							
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10
	CNGN 090308 CNGN 090312	0,8																								
		1,2																								
	CNGN 120412 CNGN 120416	1,2																								
		1,6																								

● G-Class SumiBoron (Solid CBN, "Dimple" Type)

Shape	ISO Cat. No.	RE	Material																							
			Coated		Uncoated										Uncoated											
			CBN																							
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10
	CNGX 120412 CNGX 120416	1,2																								
		1,6																								

CNMA / CNMX

● M-Class SumiBoron (CBN, Regrindable Type)

Shape	ISO Cat. No.	RE	Material																								
			Coated		Uncoated										Uncoated												
			CBN																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
	CNMA 120404 CNMA 120408 CNMA 120412	0,4																									
		0,8																									
		1,2																									

● M-Class SumiBoron (CBN, One-use Type)

Shape	ISO Cat. No.	RE	Material																								
			Coated		Uncoated										Uncoated												
			CBN																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
	CNMA 120404 NS CNMA 120408 NS CNMA 120412 NS	0,4																									
		0,8																									
		1,2																									
	CNMA 120404 NU CNMA 120408 NU CNMA 120412 NU	0,4																									
		0,8																									
		1,2																									
	CNMA 120408 NU-W	0,8																									

● M-Class SumiDia (PCD, NF Type)

Shape	ISO Cat. No.	RE	Material																								
			Coated		Uncoated										Uncoated												
			CBN																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
	CNMX 120402 NF CNMX 120404 NF CNMX 120408 NF	0,2																									
		0,4																									
		0,8																									

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

L4, L5 Edge Specification of SUMIBORON Inserts

C

D

R

S

T

V

W

Z

SumiBoron / SumiDia Inserts

SUMIBORON / SUMIDIA Indexable Inserts

DC-- Type 7° pos. Inserts

55° Diamond Type 7° Relief
With Insert Hole






Coated

Dimensions (mm)				
DC--	L	IC	S	D ₁
0702--	7,75	6,35	2,38	2,8
11T3--	11,6	9,525	3,97	4,4

- H Hardened Steel
- K Cast Iron
- N Non-Ferrous Metal
- S Exotic Alloy
- PM Sintered Component
- Carbide/Hard Brittle Material

DCGT / DCGW

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Coated		Uncoated																					
			CBN															Uncoated	Sumidia							
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350			BN700	BN7000	BN7500	BN8000	NCB100	DA90	DA150
Break Master - FV, LV  CBN with chipbreaker with 2 CBN cutting edges	DCGT 070204 N-FV NC2 DCGT 11T304 N-FV NC2 DCGT 11T308 N-FV NC2	0,4 0,4 0,8	● ● ○	● ● ●	● ● ●																					
	DCGT 11T304 N-LV NC2 DCGT 11T308 N-LV NC2	0,4 0,8	● ●	● ●	□ ●																					
 Standard - Normal cut geometry  (Wiper Type)	DCGW 070202 NC2 DCGW 070204 NC2 DCGW 070208 NC2	0,2 0,4 0,8	● ● ○	● ● ●	● ● ●																					
	DCGW 11T302 NC2 DCGW 11T304 NC2 DCGW 11T308 NC2	0,2 0,4 0,8	● ● ●	● ● ●	● ● ●																					
DCGW 11T304 NC-WG2 DCGW 11T308 NC-WG2	0,4 0,8	● ●	● ●	● ●																						
	DCGW 11T304 NC-WH2 DCGW 11T308 NC-WH2	0,4 0,8	● ●	○ ●	● ●																					
DCGW 11T302 LE-NC2 DCGW 11T304 LE-NC2 DCGW 11T308 LE-NC2	0,2 0,4 0,8	○ ● ●																								
 LT - Type Sharp cutting edge	DCGW 070202 LT-NC2 DCGW 070204 LT-NC2	0,2 0,4		● ●																						
	DCGW 11T302 LT-NC2 DCGW 11T304 LT-NC2 DCGW 11T308 LT-NC2	0,2 0,4 0,8		● ● ●																						
 LS - Type Low cutting force	DCGW 070202 LS-NC2 DCGW 070204 LS-NC2	0,2 0,4		● ●	● ●																					
	DCGW 11T304 LS-NC2 DCGW 11T308 LS-NC2	0,4 0,8		● ●	● ●																					
DCGW 11T304 HS-NC2 DCGW 11T308 HS-NC2	0,4 0,8		● ●		● ●																					

● = Euro stock
 ○ = Stock item in Japan

▲ = To be replaced by new item
 □ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

55° Diamond Type 7° Relief
With Insert Hole







Uncoated

Dimensions (mm)				
DC--	L	IC	S	D ₁
0702--	7,75	6,35	2,38	2,8
11T3--	11,6	9,525	3,97	4,4



H Hardened Steel
K Cast Iron
N Non-Ferrous Metal
S Exotic Alloy
PM Sintered Component
 Carbide/Hard Brittle Material

DCGT / DCGW

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Material																								
			H Coated			H Uncoated							K PM		S		N										
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BN5800	Bi-Ingress CBN	Uncoated PCD	Uncoated PCDD	Sumidias		
Break Master - FV, LV  CBN with chipbreaker with 2 CBN cutting edges	DCGT 070204 N-FV NU2	0,4							●																		
	DCGT 11T304 N-FV NU2	0,4							●																		
	DCGT 11T308 N-FV NU2	0,8							●																		
	DCGT 11T304 N-LV NU2	0,4							●																		
DCGT 11T308 N-LV NU2	0,8							●																			
 with 2 CBN cutting edges	DCGW 070202 NU2	0,2							●																		
	DCGW 070204 NU2	0,4							●	▲			▲	▲					●								
	DCGW 070208 NU2	0,8							●	▲			▲	▲					●								
	DCGW 11T302 NU2	0,2							●											●							
	DCGW 11T304 NU2	0,4							●	▲				▲	▲					●							
	DCGW 11T308 NU2	0,8							●	▲				▲	▲					●							
 (Wiper Type)	DCGW 11T304 NU-WG2	0,4							●																		
	DCGW 11T308 NU-WG2	0,8							●																		
 LF - Type Sharp cutting edge with 2 CBN cutting edges	DCGW 070204 LF-NU2	0,4																	●								
	DCGW 070208 LF-NU2	0,8																		●							
 HS - Type Strong cutting edge with 2 CBN cutting edges	DCGW 11T304 LF-NU2	0,4																	●								
	DCGW 11T308 LF-NU2	0,8																		●							
 HS - Type Strong cutting edge with 2 CBN cutting edges	DCGW 070204 HS-NU2	0,4																	●								
	DCGW 070208 HS-NU2	0,8																		●							
	DCGW 11T304 HS-NU2	0,4																		●							
	DCGW 11T308 HS-NU2	0,8																		●							

● G-Class SumiBoron (CBN, One-Use Type)

 with 2 CBN cutting edges	DCGW 11T304 NS	0,4																									
	DCGW 11T308 NS	0,8																		●							
 with 2 CBN cutting edges	DCGW 070202 NU	0,2							●											●							
	DCGW 070204 NU	0,4							●	▲				▲	▲					●							
	DCGW 070208 NU	0,8							●	▲				▲	▲					●							
	DCGW 11T302 NU	0,2							●												●						
DCGW 11T304 NU	0,4							●	▲					▲	▲					●							
DCGW 11T308 NU	0,8							●	▲					▲	▲					●							

● = Euro stock
 ○ = Stock item in Japan

▲ = To be replaced by new item
 □ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

C
 D
 R
 S
 T
 V
 W
 Z

SumiBoron / Sumidia Inserts

SUMIBORON / SUMIDIA Indexable Inserts

DC-- Type 7° pos. Inserts


55° Diamond Type 7° Relief
With Insert Hole

Dimensions (mm)				
DC--	L	IC	S	D ₁
0702--	7,75	6,35	2,38	2,8
11T3--	11,6	9,525	3,97	4,4


- H Hardened Steel
- K Cast Iron
- N Non-Ferrous Metal
- S Exotic Alloy
- PM Sintered Component
- Carbide/Hard Brittle Material

Uncoated


DCMT / DCMW ●●●●●

		H	K	H	K	S	N																		
		Coated		Uncoated																					
		CBN																							
							Packless CBN	Uncoated PCD	Ingress Sumidia																
		BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10
Shape	ISO Cat. No.	RE																							
	DCMT 070202	0,2																							
	DCMT 070204	0,4																							
	DCMT 11T302	0,2																							
	DCMT 11T304	0,4																							
	DCMT 11T308	0,8																							

● M-Class SumiDia (PCD, Regrindable Type)

Shape	ISO Cat. No.	RE
	DCMT 070202	0,2
	DCMT 070204	0,4
	DCMT 11T302	0,2
	DCMT 11T304	0,4
	DCMT 11T308	0,8

● M-Class SumiDia (PCD, NF Type)

Shape	ISO Cat. No.	RE
	DCMT 070201 NF	0,1
	DCMT 070202 NF	0,2
	DCMT 070204 NF	0,4
	DCMT 070208 NF	0,8
	DCMT 11T301 NF	0,1
	DCMT 11T302 NF	0,2
	DCMT 11T304 NF	0,4
	DCMT 11T308 NF	0,8

● M-Class SumiDia (PCD, One-Use "Break Master" Type)

Break Master Type	ISO Cat. No.	RE
Break Master - DM	DCMT 070202 L-DM NU	0,2
	DCMT 070204 L-DM NU	0,4
	DCMT 11T302 L-DM NU	0,2
	DCMT 11T304 L-DM NU	0,4
Break Master - DM	DCMT 070202 R-DM NU	0,2
	DCMT 070204 R-DM NU	0,4
	DCMT 11T302 R-DM NU	0,2
	DCMT 11T304 R-DM NU	0,4
Break Master - LD	DCMT 070202 N-LD NF	0,2
	DCMT 070204 N-LD NF	0,4
	DCMT 11T302 N-LD NF	0,2
	DCMT 11T304 N-LD NF	0,4
Break Master - LD	DCMT 11T308 N-LD NF	0,8
	DCMT 070202 N-GD NF	0,2
	DCMT 070204 N-GD NF	0,4
	Break Master - GD	DCMT 11T302 N-GD NF
DCMT 11T304 N-GD NF		0,4
DCMT 11T308 N-GD NF		0,8

● M-Class SumiDia (PCD, Binderless)

ISO Cat. No.	RE
DCMW 070202 RH	0,2
DCMW 070204 RH	0,4
DCMW 11T302 RH	0,2
DCMW 11T304 RH	0,4
DCMW 11T308 RH	0,8

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

55° Diamond Type 0° Relief
With Insert Hole







Coated

Dimensions (mm)				
DN_	L	IC	S	D ₁
1104--	11,6	9,525	4,76	3,81
1504--	15,5	12,7	4,76	5,16
1506--	15,5	12,7	6,35	5,16

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

DNGA

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Material																								
			Coated		Uncoated										Uncoated												
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
 Standard - Normal cut geometry with 2 CBN cutting edges	DNGA 110404 NC2 DNGA 110408 NC2 DNGA 110412 NC2	0,4 0,8 1,2	● ● ○	● ● ○			● ○ ○																				
	 Standard - Normal cut geometry with 4 CBN cutting edges	DNGA 150402 NC4 DNGA 150404 NC4 DNGA 150408 NC4 DNGA 150412 NC4	0,2 0,4 0,8 1,2	○ ○ ○ ○																							
		DNGA 150604 NC4 DNGA 150608 NC4 DNGA 150612 NC4	0,4 0,8 1,2	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●																		
 Standard - Normal cut geometry (Wiper Type)		DNGA 150404 NC-WG4 DNGA 150408 NC-WG4	0,4 0,8			○ ○	○ ○																				
	DNGA 150604 NC-WG4 DNGA 150608 NC-WG4 DNGA 150612 NC-WG4	0,4 0,8 1,2	● ● ●	● ● ●	● ● ●	● ● ●																					
	DNGA 150404 NC-WH4 DNGA 150408 NC-WH4	0,4 0,8			○ ○	○ ○																					
 LE - Type Low cutting force with 2 CBN cutting edges	DNGA 150404 LE-NC2 DNGA 150408 LE-NC2 DNGA 150412 LE-NC2	0,4 0,8 1,2	○ ○ ○																								
	DNGA 150604 LE-NC2 DNGA 150608 LE-NC2 DNGA 150612 LE-NC2	0,4 0,8 1,2	● ● ●																								
	 LT - Type Sharp cutting edge with 2 CBN cutting edges	DNGA 150402 LT-NC2 DNGA 150404 LT-NC2 DNGA 150408 LT-NC2 DNGA 150412 LT-NC2	0,2 0,4 0,8 1,2	○ ○ ○ ○																							
DNGA 150604 LT-NC2 DNGA 150608 LT-NC2 DNGA 150612 LT-NC2		0,4 0,8 1,2	● ● ●																								
 LS - Type Low cutting force with 2 CBN cutting edges		DNGA 150404 LS-NC2 DNGA 150408 LS-NC2 DNGA 150412 LS-NC2	0,4 0,8 1,2																								
	DNGA 150604 LS-NC2 DNGA 150608 LS-NC2 DNGA 150612 LS-NC2	0,4 0,8 1,2		□ □ □	● ● ●	● ● ●	● ● ●	○ ○ ○																			

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5

- C
- D
- R
- S
- T
- V
- W
- Z

Sumiboron / Sumidia Inserts

SUMIBORON / SUMIDIA Indexable Inserts

DN_ _ Type neg. Inserts

55° Diamond Type 0° Relief
With Insert Hole




Coated

Dimensions (mm)				
DN_ _	L	IC	S	D ₁
1504--	15,5	12,7	4,76	5,16
1506--	15,5	12,7	6,35	5,16

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

DNGA / DNGG

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Coated		Uncoated																							
			CBN													PCD	Sumidia											
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250			BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10
ES - Type Crater wear stability 	DNGA 150604 ES-NC2 DNGA 150608 ES-NC2 DNGA 150612 ES-NC2	0,4 0,8 1,2	● ● ●																									
	DNGA 150404 ES-NC4 DNGA 150408 ES-NC4 DNGA 150412 ES-NC4	0,4 0,8 1,2	○ ○ ○																									
HS - Type Strong cutting edge 	DNGA 150604 HS-NC2 DNGA 150608 HS-NC2 DNGA 150612 HS-NC2	0,4 0,8 1,2	● ● ●	● ● ●	● ● ●	● ● ●																						
	DNGA 150412 HS-NC4	1,2					○																					
Break Master - FV, LV, SV  CBN with chipbreaker with 4 CBN cutting edges	DNGG 150404 N-FV NC4 DNGG 150408 N-FV NC4 DNGG 150412 N-FV NC4	0,4 0,8 1,2	○ ○ ○	○ ○ ○	○ ○ ○																							
	DNGG 150604 N-FV NC4 DNGG 150608 N-FV NC4 DNGG 150612 N-FV NC4	0,4 0,8 1,2	● ● ●	● ● ●	□ ● □	● ● ●																						
	DNGG 150404 N-LV NC4 DNGG 150408 N-LV NC4 DNGG 150412 N-LV NC4	0,4 0,8 1,2	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○																						
	DNGG 150604 N-LV NC4 DNGG 150608 N-LV NC4 DNGG 150612 N-LV NC4	0,4 0,8 1,2	● ● ●	● ● ●	● ● □	● ● ●																						
	DNGG 150408 N-SV NC4 DNGG 150412 N-SV NC4	0,8 1,2	○ ○	○ ○																								
	DNGG 150608 N-SV NC4 DNGG 150612 N-SV NC4	0,8 1,2	● ●	● ●		● ●																						

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

55° Diamond Type 0° Relief
With Insert Hole

Uncoated

Dimensions (mm)				
DN_ _	L	IC	S	D ₁
1504--	15,5	12,7	4,76	5,16
1506--	15,5	12,7	6,35	5,16

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

DNGA / DNGM

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Material																							
			H		K		H		K		S		N		N											
			Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated										
			CBN																							
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10
 with 2 CBN cutting edges	DNGA 150604 NU2 DNGA 150608 NU2 DNGA 150612 NU2	0,4 0,8 1,2							●	●	●				▲	▲			●							
 (Wiper Type)	DNGA 150404 NU-WG2 DNGA 150408 NU-WG2	0,4 0,8								○																
	DNGA 150604 NU-WG2 DNGA 150608 NU-WG2 DNGA 150612 NU-WG2	0,4 0,8 1,2								○																
	DNGA 150404 NU-WH2 DNGA 150408 NU-WH2	0,4 0,8								○																
 Break Master - LV	DNGM 150404 N-LV NU2 DNGM 150408 N-LV NU2 DNGM 150412 N-LV NU2	0,4 0,8 1,2								○																
	DNGM 150604 N-LV NU2 DNGM 150608 N-LV NU2 DNGM 150612 N-LV NU2	0,4 0,8 1,2								●	●	●														

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

L4, L5 Edge Specification of SUMIBORON Inserts

-
-
-
-
-
-
-
-

Sumiboron / Sumidia
Inserts

SUMIBORON / SUMIDIA Indexable Inserts

DN--, RN-- neg. Type and SC-- Type 7° pos. Inserts

55° Diamond Type 0° Relief With Insert Hole

Coated / Uncoated

Dimensions (mm)				
DN--	L	IC	S	D ₁
1506--	15,5	12,7	6,35	5,16

H Hardened Steel
K Cast Iron
N Non-Ferrous Metal
S Exotic Alloy
PM Sintered Component
■ Carbide/Hard Brittle Material

DNMA

● M-Class SumiBoron (CBN, Regrindable Type)

Shape	ISO Cat. No.	RE	Material																									
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
	DNMA 150604 DNMA 150608 DNMA 150612	0,4																										
		0,8										●																
		1,2										●				▲												

● M-Class SumiBoron (CBN, One-Use Type)

Shape	ISO Cat. No.	RE	Material																									
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
	DNMA 150604 NS DNMA 150608 NS	0,4																										
		0,8																										
		1,2									●					▲												

● M-Class SumiDia (PCD, Binderless)

Shape	ISO Cat. No.	RE	Material																									
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
	DNMA 150408 RH DNMA 150412 RH	0,8																										
		1,2																										

Round Type 0° Relief Without Insert Hole

Coated / Uncoated

Dimensions (mm)				
RN--	L	IC	S	D ₁
0903--	9,525	9,525	3,18	-
1203--	12,7	12,7	3,18	-
1204--	12,7	12,7	4,76	-

H Hardened Steel
K Cast Iron
N Non-Ferrous Metal
S Exotic Alloy
PM Sintered Component
■ Carbide/Hard Brittle Material

RNGN

● G-Class SumiBoron (Solid CBN Type)

Shape	ISO Cat. No.	RE	Material																									
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
	RNGN 090300 RNGN 120300 RNGN 120400	-																										
		-																										
		-																										

● G-Class SumiBoron (CBN, Full Top Type)

Shape	ISO Cat. No.	RE	Material																									
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
	RNGN 090300 B	-																										
		-																										
		-																										

● = Euro stock
 ○ = Stock item in Japan

▲ = To be replaced by new item
 □ = Delivery on request

L4, L5 Edge Specification of SUMIBORON Inserts

Square Type 0° Relief
With Insert Hole

Coated / Uncoated

Dimensions (mm)				
SN_ _	L	IC	S	D ₁
09T3--	9,525	9,525	3,97	4,4
1204--	12,7	12,7	4,76	5,16

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

SCGW / SNGA

● G-Class SumiBoron (CBN, One-Use Type)

Shape	ISO Cat. No.	RE	Materials																								
			Coated										Uncoated														
			CBN																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BN5800	NCB100	DA90	DA150	DA1000	NPD10	
	SCGW 09T304 NU SCGW 09T308 NU	0,4 0,8											●						▲	●							

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Materials																								
			CBN																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BN5800	NCB100	DA90	DA150	DA1000	NPD10	
	SNGA 120408 NC4 SNGA 120412 NC4	0,8 1,2		●			●	●																			
	SNGA 120408 HS-NC2 SNGA 120412 HS-NC2	0,8 1,2					●	●																			
	SNGA 120408 HS-NC4 SNGA 120412 HS-NC4	0,8 1,2		□																							

Square Type 0° Relief
Without Insert Hole

Uncoated

Dimensions (mm)				
SN_ _	L	IC	S	D ₁
0903--	9,525	9,525	3,18	-
1204--	12,7	12,7	4,76	-

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

SNGN / SNGX

● G-Class SumiBoron (Solid CBN Type)

Shape	ISO Cat. No.	RE	Materials																								
			Coated										Uncoated														
			CBN																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BN5800	NCB100	DA90	DA150	DA1000	NPD10	
	SNGN 090308 SNGN 090312	0,8 1,2																			●						
	SNGN 120412 SNGN 120416	1,2 1,6																			○	○					

● G-Class SumiBoron (Solid CBN, "Dimple" Type)

Shape	ISO Cat. No.	RE	Materials																								
			CBN																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BN5800	NCB100	DA90	DA150	DA1000	NPD10	
	SNGX 120412 SNGX 120416	1,2 1,6																			○	○					

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

Edge Specification of SUMIBORON Inserts

C
D
R
S
T
V
W
Z

Sumiboron / Sumidia
Inserts

SUMIBORON / SUMIDIA Indexable Inserts

SN-- neg. Type and TB-- Type 5° pos. Inserts

Square Type

0° Relief
With Insert Hole

Coated / Uncoated

Dimensions (mm)				
SN--	L	IC	S	D ₁
1204--	12,7	12,7	4,76	5,16

H Hardened Steel
K Cast Iron
N Non-Ferrous Metal
S Exotic Alloy
PM Sintered Component
■ Carbide/Hard Brittle Material

SNMA

● M-Class SumiBoron (CBN, One-Use Type)

Shape	ISO Cat. No.	RE	Material																							
			Coated								Uncoated															
			CBN																							
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10
	SNMA 120408 NS SNMA 120412 NS	0,8 1,2											□													
	SNMA 120408 NU SNMA 120412 NU	0,8 1,2								●		●		▲	▲	●		●								

● M-Class SumiDia (PCD, Binderless)

Shape	ISO Cat. No.	RE	Material																								
	SNMA 120408 RH SNMA 120412 RH	0,8 1,2																								○	○

60° Triangle Type

5° Relief

Dimensions (mm)				
TBGN	L	IC	S	D ₁
0601--	6,9	3,97	1,59	-
TBGW				
0601--	6,9	3,97	1,59	2,8

H Hardened Steel
K Cast Iron
N Non-Ferrous Metal
S Exotic Alloy
PM Sintered Component
■ Carbide/Hard Brittle Material

TBGN / TBGW

● G-Class SumiBoron (CBN, Full Top Type)

Shape	ISO Cat. No.	RE	Material																							
			Coated								Uncoated															
			CBN																							
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10
	TBGN 060102 B TBGN 060104 B	0,2 0,4					●			●		●														

● G-Class SumiDIA (PCD, NF Type)

Shape	ISO Cat. No.	RE	Material																								
	TBGN 060102 NF TBGN 060104 NF	0,2 0,4																								●	●

● G-Class SumiDIA (PCD, NF Type)

Shape	ISO Cat. No.	RE	Material																								
	TBGW 060102 NF TBGW 060104 NF	0,2 0,4																								●	●

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

L4, L5 Edge Specification of SUMIBORON Inserts

C
D
R
S
T
V
W
Z
SumiBoron / SumiDia
Inserts

60° Triangle Type

7° Relief
With Insert Hole







Coated / Uncoated

Dimensions (mm)				
TC--	L	IC	S	D ₁
0902--	9,62	5,56	2,38	2,5
1102--	11,0	6,35	2,38	2,8
16T3--	16,5	9,525	3,97	4,3

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material



TCGW

● G-Class SumiBoron (CBN, One-Use Type)

Shape	ISO Cat. No.	RE	H		K		H		K		S		N															
			Coated		Uncoated		Coated		Uncoated		Uncoated		Uncoated															
			CBN												Business CBN	PCD	Business Sumidia											
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
  TCGW 090204 NC TCGW 090208 NC		0,4	●																									
		0,8	●																									
		0,2	●																									
		0,4	●																									
  TCGW 16T304 NC3 TCGW 16T308 NC3 with 3 CBN cutting edges		0,4	●																									
		0,8	●																									
  TCGW 090204 NU TCGW 090208 NU TCGW 110202 NU TCGW 110204 NU TCGW 110208 NU TCGW 16T304 NU TCGW 16T308 NU		0,4																▲	●									
		0,8																	▲	●								
		0,2									●								▲	●								
		0,4									●								▲	●								
		0,8									●								▲	●								
		0,4									●								▲	●								

TCMT

● M-Class SumiDia (PCD, NF Type)

Shape	ISO Cat. No.	RE	H		K		H		K		S		N															
			Coated		Uncoated		Coated		Uncoated		Uncoated		Uncoated															
			CBN												Business CBN	PCD	Business Sumidia											
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
  TCMT 090202 NF TCMT 090204 NF		0,2																										
		0,4																										
		0,1																										
		0,2																										
0,4																												

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

- C**
- D**
- R**
- S**
- T**
- V**
- W**
- Z**

SumiBoron / SumiDia
Inserts

SUMIBORON / SUMIDIA Indexable Inserts

TN-- Type neg. Inserts

60° Triangle Type 0° Relief With Insert Hole








Coated

Dimensions (mm)				
TN--	L	IC	S	D ₁
1604--	16,5	9,525	4,76	3,81

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

TNGA / TNGG

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Coated		Uncoated																						
			CBN		Uncoated																						
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
 Standard - Normal cut geometry with 6 CBN cutting edges	TNGA 160402 NC6 TNGA 160404 NC6 TNGA 160408 NC6 TNGA 160412 NC6	0,2 0,4 0,8 1,2	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	
 LE - Type Low cutting force with 3 CBN cutting edges	TNGA 160404 LE-NC3 TNGA 160408 LE-NC3 TNGA 160412 LE-NC3	0,4 0,8 1,2	● ● ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○
 LT - Type Sharp cutting edge with 3 CBN cutting edges	TNGA 160402 LT-NC3 TNGA 160404 LT-NC3 TNGA 160408 LT-NC3 TNGA 160412 LT-NC3	0,2 0,4 0,8 1,2	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	○ ○ ○ ○	
 LS - Type Low cutting force with 3 CBN cutting edges	TNGA 160404 LS-NC3 TNGA 160408 LS-NC3 TNGA 160412 LS-NC3	0,4 0,8 1,2	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○
 ES - Type Crater wear stability with 6 CBN cutting edges	TNGA 160404 ES-NC6 TNGA 160408 ES-NC6 TNGA 160412 ES-NC6	0,4 0,8 1,2	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○
 HS - Type Strong cutting edge with 3 CBN cutting edges with 6 CBN cutting edges	TNGA 160404 HS-NC3 TNGA 160408 HS-NC3 TNGA 160412 HS-NC3 TNGA 160412 HS-NC6	0,4 0,8 1,2 1,2	● ● ● ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○
 Break Master - FV, LV, SV CBN with chipbreaker with 6 CBN cutting edges	TNGG 160404 N-FV NC6 TNGG 160408 N-FV NC6 TNGG 160412 N-FV NC6 TNGG 160404 N-LV NC6 TNGG 160408 N-LV NC6 TNGG 160412 N-LV NC6 TNGG 160408 N-SV NC6 TNGG 160412 N-SV NC6	0,4 0,8 1,2 0,4 0,8 1,2 0,8 1,2	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○ ○ ○

● = Euro stock ○ = Stock item in Japan ▲ = To be replaced by new item □ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

60° Triangle Type 7° Relief
With Insert Hole







Uncoated

Dimensions (mm)				
TN_	L	IC	S	D ₁
1604--	16,5	9,525	4,76	3,81

- H Hardened Steel
- K Cast Iron
- N Non-Ferrous Metal
- S Exotic Alloy
- PM Sintered Component
- Carbide/Hard Brittle Material

TNGA / TNGM

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Material																								
			H			K			H			K			S			N									
			Coated			Uncoated			Uncoated			Uncoated			Uncoated												
			CBN																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	BiIngress CBN	NCB100	DA90	DA150	DA1000	NPD10
	 with 3 CBN cutting edges	0,4 0,8 1,2																									
	 with 3 CBN cutting edges	0,4 0,8																									
Break Master - LV 	 with 3 CBN cutting edges	0,4 0,8 1,2								●	●																

- C
- D
- R
- S
- T
- V
- W
- Z

Sumiboron / Sumidia Inserts

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

L4, L5 Edge Specification of SUMIBORON Inserts

SUMIBORON / SUMIDIA Indexable Inserts

TN__ Type neg. Inserts

TP__ Type 11° pos. Inserts

60° Triangle Type

0° Relief
With Insert Hole

Uncoated

Dimensions (mm)				
TN__	L	IC	S	D ₁
1604--	16,5	9,525	4,76	3,81

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

TNMA

● M-Class SumiBoron (CBN, Regrindable Type)

Shape	ISO Cat. No.	RE	Material Compatibility																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
	TNMA 160404 TNMA 160408	0,4																									
		0,8										●				▲											

● M-Class SumiBoron (CBN, One-Use Type)

Shape	ISO Cat. No.	RE	Material Compatibility																									
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
	TNMA 160404 NU TNMA 160408 NU TNMA 160412 NU	0,4																										
		0,8								●		●																
		1,2							●		●	▲	●		▲	▲	●											

60° Triangle Type

11° Relief
Without Insert Hole

Dimensions (mm)				
TP__	L	IC	S	D ₁
1103--	11,0	6,35	3,18	-
1603--	16,5	9,525	3,18	-

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

TPGN

● G-Class SumiBoron (CBN, One-Use Type)

Shape	ISO Cat. No.	RE	Material Compatibility																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
	TPGN 110304 NU TPGN 110308 NU	0,4																									
		0,8										●	●						▲	○							
	TPGN 160304 NU TPGN 160308 NU	0,4									●	●						▲	○								
		0,8									●	●							▲	○							

● G-Class SumiDia (PCD, NF Type)

Shape	ISO Cat. No.	RE	Material Compatibility																									
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
	TPGN 110304 NF TPGN 110308 NF	0,4																										
		0,8																										●
	TPGN 160302 NF TPGN 160304 NF TPGN 160308 NF	0,2																									●	
		0,4																										●
		0,4																										●
		0,8																										●

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

L4, L5 Edge Specification of SUMIBORON Inserts

C
D
R
S
T
V
W
Z
SumiBoron / SumiDia Inserts

60° Triangle Type 11° Relief With Insert Hole







Coated

Dimensions (mm)				
TP_ _	L	IC	S	D ₁
0802--	8,2	4,76	2,39	2,3
0902--	9,62	5,56	2,38	2,5
1103--	11,0	6,35	3,18	3,4

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

TPGT / TPGW

● G-Class SumiBoron (CBN, One-Use Type)

Shape	ISO Cat. No.	RE	Material																						
			Coated		Uncoated										Uncoated		Uncoated								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000
Break Master - FV  CBN with chipbreaker with 3 CBN cutting edges	TPGT 110304 N-FV NC3 TPGT 110308 N-FV NC3	0,4 0,8	●	●	□	●																			
Standard - Normal cut geometry 	TPGW 080202 NC TPGW 080204 NC TPGW 110304 NC TPGW 110308 NC	0,2 0,4 0,4 0,8	●	●		●																			
Standard Type  with 3 CBN cutting edges	TPGW 080202 NC3 TPGW 080204 NC3 TPGW 090202 NC3 TPGW 090204 NC3	0,2 0,4 0,2 0,4	○	○																					
LE - Type Low cutting force  with 3 CBN cutting edges	TPGW 110302 LE-NC3 TPGW 110304 LE-NC3 TPGW 110308 LE-NC3	0,2 0,4 0,8	○	○																					
LT - Type Sharp cutting edge  with 3 CBN cutting edges	TPGW 110302 LT-NC3 TPGW 110304 LT-NC3 TPGW 110308 LT-NC3	0,2 0,4 0,8	○	○																					
LS - Type Low cutting force  with 3 CBN cutting edges	TPGW 110304 LS-NC3 TPGW 110308 LS-NC3	0,4 0,8																							

● = Euro stock
 ○ = Stock item in Japan

▲ = To be replaced by new item
 □ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

C
D
R
S
T
V
W
Z

Sumiboron Sumidia Inserts

SUMIBORON / SUMIDIA Indexable Inserts

TP-- Type 11° pos. Inserts

60° Triangle Type 11° Relief
With Insert Hole

Dimensions (mm)





TP--	L	IC	S	D ₁
0802--	8,2	4,76	2,39	2,3
0902--	9,62	5,56	2,38	2,5
1102--	11,0	6,35	2,38	2,8
1103--			3,18	3,4
1604--	16,5	9,525	4,76	4,3

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material



Uncoated

TPGT / TPGW



● G-Class SumiBoron (CBN, One-Use Type)

Shape	ISO Cat. No.	RE	Coated		Uncoated																										
			H	K	H	K	S	N	PCD		Sumidia																				
			CBN																												
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10					
Break Master - FV  CBN with chipbreaker	 with 3 CBN cutting edges	TPGT 110304 N-FV NU3 TPGT 110308 N-FV NU3	0,4 0,8																												
													●																		
 CBN with chipbreaker	 with 3 CBN cutting edges	TPGW 080202 NU TPGW 080204 NU TPGW 110304 NU TPGW 110308 NU	0,2 0,4 0,4 0,8																												
													●		●			▲													
													●		●			▲	▲	●											
													●		●			▲	▲	●											

● G-Class SumiBoron (CBN, Regrindable Type)

Shape	ISO Cat. No.	RE	BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
 CBN with chipbreaker	 with 3 CBN cutting edges	TPGW 110304 TPGW 110308																									
													●		▲												
												●		▲													

● G-Class SumiDia (PCD, NF Type)

Shape	ISO Cat. No.	RE	Coated		Uncoated																									
			H	K	H	K	S	N	PCD		Sumidia																			
			CBN																											
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10				
 CBN with chipbreaker	 with 3 CBN cutting edges	TPGW 080202 NF TPGW 080204 NF	0,2 0,4																											
																														●
																														●
																														●
																												○		
																												○		
																												○		
																												○		
																												○		
																												○		
																												○		

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

60° Triangle Type 11° Relief
With Insert Hole

Uncoated





Dimensions (mm)

TP--	L	IC	S	D ₁
0802--	8,2	4,76	2,39	2,3
0902--	9,62	5,56	2,38	2,5
1102--	11,0	6,35	2,38	2,8
1103--			3,18	3,4
1604--	16,5	9,525	4,76	4,3


- H Hardened Steel
- K Cast Iron
- N Non-Ferrous Metal
- S Exotic Alloy
- PM Sintered Component
- Carbide/Hard Brittle Material

TPMT / TPMW

● M-Class SumiDia (PCD, One-Use "Break Master" Type)

Shape	ISO Cat. No.	RE	Material																									
			H Coated		H Uncoated										K S N		S N											
			CBN																									
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10		
Break Master - DM 	TPMT 080204 L-DM NU	0,4																										
	TPMT 090204 L-DM NU	0,4																							○	●		
Break Master - LD 	TPMT 080202 N-LD NF	0,2																										○
	TPMT 080204 N-LD NF	0,4																										○
	TPMT 090202 N-LD NF	0,2																										○
	TPMT 090204 N-LD NF	0,4																										○
	TPMT 110202 N-LD NF	0,2																										○
	TPMT 110204 N-LD NF	0,4																										○
	TPMT 110302 N-LD NF	0,2																										○
	TPMT 110304 N-LD NF	0,4																										○
TPMT 110308 N-LD NF	0,8																										○	
Break Master - GD 	TPMT 160402 N-LD NF	0,2																									○	
	TPMT 160404 N-LD NF	0,4																									○	
	TPMT 160408 N-LD NF	0,8																									○	
	TPMT 080202 N-GD NF	0,2																									○	
	TPMT 080204 N-GD NF	0,4																									○	
	TPMT 090202 N-GD NF	0,2																									○	
TPMT 090204 N-GD NF	0,4																									○		
Break Master - GD 	TPMT 110202 N-GD NF	0,2																									○	
	TPMT 110204 N-GD NF	0,4																									○	
	TPMT 110302 N-GD NF	0,2																									○	
	TPMT 110304 N-GD NF	0,4																									○	
	TPMT 110308 N-GD NF	0,8																									○	
	TPMT 160402 N-GD NF	0,2																									○	
TPMT 160404 N-GD NF	0,4																									○		
TPMT 160408 N-GD NF	0,8																									○		

● M-Class SumiDia (PCD, Binderless)

	TPMW 080202 RH	0,2																										○
	TPMW 080204 RH	0,4																										○
	TPMW 110302 RH	0,2																										○
	TPMW 110304 RH	0,4																										○
	TPMW 110308 RH	0,8																										○
	TPMW 160402 RH	0,2																										○
TPMW 160404 RH	0,4																										○	
TPMW 160408 RH	0,8																										○	

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

C

D

R

S

T

V

W

Z

Sumiboron / Sumidia
Inserts

SUMIBORON / SUMIDIA Indexable Inserts

VB-- Type 5° pos. Inserts

35° Diamond Type 5° Relief With Insert Hole


Coated / Uncoated

Dimensions (mm)				
VB--	L	IC	S	D ₁
1102--	11,0	6,35	2,38	2,8
1103--			3,18	
1604--	16,6	9,525	4,76	4,4





- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

VBGW

● G-Class SumiBoron (CBN, One-Use Type)

Shape	ISO Cat. No.	RE	Coated		Uncoated																					
			CBN													PCD	Sumidia									
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BN800	NCB100	DA90	DA150	DA1000	NPD10
 Standard - Normal cut geometry	VBGW 110202 NC VBGW 110204 NC VBGW 110208 NC	0,2 0,4 0,8	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	VBGW 110202 NU VBGW 110204 NU VBGW 110208 NU	0,2 0,4 0,8							●	●	●															
	VBGW 160402 NU VBGW 160404 NU VBGW 160408 NU	0,2 0,4 0,8							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

 Standard - Normal cut geometry with 2 CBN cutting edges	VBGW 110204 NC2 VBGW 160404 NC2 VBGW 160408 NC2 VBGW 160412 NC2	0,4 0,4 0,8 1,2	□	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	 LE - Type Low cutting force	VBGW 160402 LE-NC2 VBGW 160404 LE-NC2 VBGW 160408 LE-NC2	0,2 0,4 0,8	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		 LT - Type Sharp cutting edge	VBGW 110302 LT-NC2 VBGW 110304 LT-NC2 VBGW 160402 LT-NC2 VBGW 160404 LT-NC2 VBGW 160408 LT-NC2	0,2 0,4 0,2 0,4 0,8	○	●	○	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
			 LS - Type Low cutting force with 2 CBN cutting edges	VBGW 160404 LS-NC2 VBGW 160408 LS-NC2	0,4 0,8	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
 HS - Type Strong cutting edge with 2 CBN cutting edges	VBGW 160404 HS-NC2 VBGW 160408 HS-NC2			0,4 0,8	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	 Standard - Normal cut geometry with 2 CBN cutting edges	VBGW 160404 NU2 VBGW 160408 NU2	0,4 0,8							●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

35° Diamond Type 7° Relief
With Insert Hole

Coated / Uncoated

Dimensions (mm)				
VC--	L	IC	S	D ₁
0802--	8,3	4,76	2,38	2,3
1103--	11,0	6,35	3,18	2,8
1604--	16,6	9,525	4,76	4,4

- H Hardened Steel
- K Cast Iron
- N Non-Ferrous Metal
- S Exotic Alloy
- PM Sintered Component
- Carbide/Hard Brittle Material

VCMT / VCGW

● M-Class SumiDia (PCD, NF Type)

Shape	ISO Cat. No.	RE	H		K		H		K		S		N														
			Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated															
			CBN																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
 	VCMT 110301 NF VCMT 110302 NF VCMT 110304 NF	0,1 0,2 0,4	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	○	○	○
	VCMT 160404 NF VCMT 160408 NF VCMT 160412 NF	0,4 0,8 1,2	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	○	○	○
	VCMT 110302 N-LD NF VCMT 110304 N-LD NF	0,2 0,4	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	○	○	○
 	VCMT 160404 N-LD NF VCMT 160408 N-LD NF VCMT 160412 N-LD NF	0,4 0,8 1,2	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	○	○	○	
	VCMT 110302 N-GD NF VCMT 110304 N-GD NF	0,2 0,4	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	○	○	○	
	VCMT 160404 N-GD NF VCMT 160408 N-GD NF VCMT 160412 N-GD NF	0,4 0,8 1,2	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	○	○	○	

● M-Class SumiDia (PCD, Binderless)

Shape	ISO Cat. No.	RE	H		K		H		K		S		N	
			Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated				
 	VCMW 080201 RH VCMW 080202 RH VCMW 080204 RH	0,1 0,2 0,4	■	■	■	■	■	■	■	■	■	■	○	○
	VCMW 110302 RH VCMW 110304 RH	0,2 0,4	■	■	■	■	■	■	■	■	■	■	○	○
	VCMW 160402 RH VCMW 160404 RH VCMW 160408 RH VCMW 160412 RH	0,2 0,4 0,8 1,2	■	■	■	■	■	■	■	■	■	■	○	○

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	H		K		H		K		S		N	
			Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated				
 	VCGW 080202 NC2 VCGW 080204 NC2	0,2 0,4	○	○	○	○	○	○	○	○	○	○	○	
			○	○	○	○	○	○	○	○	○	○	○	

● = Euro stock
 ○ = Stock item in Japan

▲ = To be replaced by new item
 □ = Delivery on request

L4, L5 Edge Specification of SUMIBORON Inserts

C
D
R
S
T
V
W
Z

SumiBoron / SumiDia Inserts

SUMIBORON / SUMIDIA Indexable Inserts

VN_A, VNGB neg. Type Inserts

35° Diamond Type 0° Relief
With Insert Hole








Coated / Uncoated

Dimensions (mm)				
VN_	L	IC	S	D ₁
1604--	16,6	9,525	4,76	3,81

H Hardened Steel
K Cast Iron
N Non-Ferrous Metal
S Exotic Alloy
PM Sintered Component
■ Carbide/Hard Brittle Material

VNGA / VNGB

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Material																	
			Coated		Uncoated								Uncoated		Uncoated		Uncoated			
			H	K	H	K	S	N	PCB	PCD	PCB	PCD	PCB	PCD	PCB	PCD	PCB	PCD		
CBN		K		PM		PCB		PCD		PCB		PCD		PCB		PCD				
 with 2 CBN cutting edges VNGA 160404 NU2 VNGA 160408 NU2		0,4																		
		0,8				●	●													
 with 2 CBN cutting edges VNGA 160404 NC2 VNGA 160408 NC2		0,4																		
		0,8		●		●														
 with 4 CBN cutting edges VNGA 160402 NC4 VNGA 160404 NC4 VNGA 160408 NC4		0,2	○	○																
		0,4																		
		0,8		●																
 with 2 CBN cutting edges LT - Type Sharp cutting edge VNGA 160402 LT-NC2 VNGA 160404 LT-NC2 VNGA 160408 LT-NC2 VNGA 160412 LT-NC2		0,2		○																
		0,4				●														
		0,8				●														
		1,2				○														
 with 4 CBN cutting edges ES - Type Crater wear stability VNGA 160404 ES-NC4 VNGA 160408 ES-NC4 VNGA 160412 ES-NC4		0,4																		
		0,8		●																
		1,2																		
 with 4 CBN cutting edges Break Master - FV, - LV VNGG 160404 N-FV NC4 VNGG 160408 N-FV NC4		0,4	○	○																
		0,8		○		●	●													
 with 4 CBN cutting edges CBN with chipbreaker VNGG 160404 N-LV NC4 VNGG 160408 N-LV NC4		0,4	●	○																
		0,8		○		●	●													

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

35° Diamond Type 0° Relief
With Insert Hole


Uncoated

Dimensions (mm)				
VN_	L	IC	S	D ₁
1604--	16,6	9,525	4,76	3,81


- H Hardened Steel
- K Cast Iron
- N Non-Ferrous Metal
- S Exotic Alloy
- PM Sintered Component
- Carbide/Hard Brittle Material

VNGM / VNMA


● M-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	H		K		H		K		S		N	
			Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated				
 CBN with chipbreaker with 2 CBN cutting edges	VNGM 160404 N-LV NU2 VNGM 160408 N-LV NU2	0,4												
		0,8												


● M-Class SumiBoron (CBN, Regrindable Type)

 with 2 CBN cutting edges	VNMA 160404 VNMA 160408	0,4											
		0,8											

● M-Class SumiBoron (CBN, One-Use Type)


 with 2 CBN cutting edges	VNMA 160404 NU VNMA 160408 NU	0,4											
		0,8											
	0,8	VNMA 160408 NS											

● M-Class SumiDia (PCD, Binderless)

 with 2 CBN cutting edges	VNMA 160408 RH VNMA 160412 RH	0,8											
		1,2											

VNMX

● M-Class SumiDia (PCD, Regrindable Type)

Shape	ISO Cat. No.	RE	H		K		H		K		S		N	
			Coated	Uncoated	Coated	Uncoated	Coated	Uncoated	Coated	Uncoated				
 with 2 CBN cutting edges	VNMX 160404 NF VNMX 160408 NF	0,4												
		0,8												

● = Euro stock ▲ = To be replaced by new item
 ○ = Stock item in Japan □ = Delivery on request

 L4, L5 Edge Specification of SUMIBORON Inserts

- C
- D
- R
- S
- T
- V
- W
- Z

SumiBoron / SumiDia Inserts

SUMIBORON / SUMIDIA Indexable Inserts

WN-- neg. Type and ZN-- Special Inserts

80° Trigon Type

0° Relief
With Insert Hole





Coated

Dimensions (mm)				
WN--	L	IC	S	D ₁
0804--	8,69	12,7	4,76	5,16

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

WNGA

● G-Class SumiBoron (CBN, One-Use Multi-Corner Type)

Shape	ISO Cat. No.	RE	Material																								
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	NCB100	DA90	DA150	DA1000	NPD10	
 WNGA 080408 LT-NC3 0,8			○																								
	 WNGA 080404 NC6 WNGA 080408 NC6 WNGA 080412 NC 6 with 6 CBN cutting edges	0,4	○	●			●																				
		0,8	○	●			●																				
		1,2	○	●			●																				
 WNGA 080408 NC-WG6 0,8			●	●		○	○																				
	 WNGA 080408 NC-WH6 (Wiper Type) 0,8		●	●		○	○																				

80° Special Type

7° Relief
With Insert Hole



Coated / Uncoated

Dimensions (mm)				
ZN--	L	IC	S	D ₁
0401--	-	4,76	1,59	2,3

- H** Hardened Steel
- K** Cast Iron
- N** Non-Ferrous Metal
- S** Exotic Alloy
- PM** Sintered Component
- Carbide/Hard Brittle Material

ZNEX

● G-Class SumiBoron (CBN, One-Use Type)

Shape	ISO Cat. No.	RE	Material																						
			BNC2010	BNC2020	BNC100	BNC160	BNC200	BNC300	BNC500	BN1000	BN2000	BNX10	BNX20	BNX25	BN250	BN300	BN350	BN700	BN7000	BN7500	BNS800	DA150	DA1000		
 ZNEX 040102 NC ZNEX 040104 NC 0,2 0,4			●	▲	▲	▲																			
			●	▲	▲	▲																			
 ZNEX 040102 LE-NC ZNEX 040104 LE-NC 0,2 0,4			○																						
			○																						
ZNEX 040102 LT-NC ZNEX 040104 LT-NC 0,2 0,4			○																						
			○																						
ZNEX 040102 NU ZNEX 040104 NU 0,2 0,4								●	●		●			▲			○								
								●	●		●			▲			○								

● = Euro stock
○ = Stock item in Japan

▲ = To be replaced by new item
□ = Delivery on request







 L4, L5 Edge Specification of SUMIBORON Inserts

SUMIDIA Binderless Indexable Inserts

SUMIDIA Binderless PCD - Insert Grade NPD10

Negative Inserts













Application: Hard brittle material

	Shape	ISO Cat. No.	Dimensions (mm)					NPD10
			Inscribed Circle (IC)	Thick-ness	Hole Size	Nose Radius	Cutting Edge Length	
 55° Diamond Type		DNMA 150408 RH 150412 RH	12,70	4,76	5,16	0,8	1,8	○
						1,2	1,8	○
 Square Type		SNMA 120408 RH 120412 RH	12,70	4,76	5,16	0,8	1,7	○
						1,2	1,7	○
 35° Diamond Type		VNMA 160408 RH 160412 RH	9,525	4,76	3,81	0,8	1,8	○
						1,2	1,5	○

Note: Clearance angle of cutting edge tip can show deviation due to the production process.

Positive Inserts

Application: Hard brittle material

	Inscribed Circle (IC)	Thick-ness	Hole Size	Nose Radius	Cutting Edge Length	NPD10					
							Rake Angle	Shape	ISO Cat. No.		
 80° Diamond Type	3,50	1,40	1,9	0,2	1,3	○					
						7°		CCMW 03X102 RH 03X104 RH	0,4	1,3	○
								CCMW 04X102 RH 04X104 RH	0,2	1,7	○
						7°		CCMW 060202 RH 060204 RH	0,2	1,7	○
								CCMW 09T302 RH 09T304 RH 09T308 RH	0,4	1,7	○
						7°		DCMW 070202 RH 070204 RH	0,2	2,1	○
DCMW 11T302 RH 11T304 RH 11T308 RH	0,4	2,0	○								
 55° Diamond Type	6,35	2,38	2,8	0,2	2,1	○					
						7°		DCMW 11T302 RH 11T304 RH 11T308 RH	0,2	2,1	○
								DCMW 11T302 RH 11T304 RH 11T308 RH	0,4	1,9	○
						7°		TPMW 080202 RH 080204 RH	0,2	1,7	○
								TPMW 080202 RH 080204 RH	0,4	1,7	○
						7°		TPMW 110302 RH 110304 RH 110308 RH	0,2	1,5	○
TPMW 110302 RH 110304 RH 110308 RH	0,4	1,3	○								
 35° Diamond Type	4,76	2,38	2,3	0,2	2,2	○					
						7°		TPMW 160402 RH 160404 RH 160408 RH	0,2	2,2	○
								TPMW 160402 RH 160404 RH 160408 RH	0,4	2,0	○
						7°		VCMW 080201 RH 080202 RH 080204 RH	0,2	2,2	○
								VCMW 080201 RH 080202 RH 080204 RH	0,4	1,5	○
						7°		VCMW 110302 RH 110304 RH	0,2	2,1	○
VCMW 110302 RH 110304 RH	0,4	1,7	○								
7°		VCMW 160402 RH 160404 RH 160408 RH 160412 RH	0,2	2,1	○						
		VCMW 160402 RH 160404 RH 160408 RH 160412 RH	0,4	1,7	○						

Note: Clearance angle of cutting edge tip can show deviation due to the production process.

C

D

R

S

T

V

W

Z

Sumidia Inserts



BSME

M36-38

Very small boring bar - brazed type

- Solid carbide shank boring bar with brazed CBN tip and inner coolant supply.
- For tiny hole diameter boring in hardened steel.
- Min. boring dia. is \varnothing 2,5 mm.



SEXC

M36-39

CBN boring tool for small diameter boring

- Solid carbide shank boring bar with indexable CBN insert and inner coolant supply.
- For small hole diameter boring in hardened steel.
- Min. boring dia. is \varnothing 4,0 mm.



BNBB

M40

Small hole boring tools

- CBN cutting edge is brazed on to a solid carbide shank.
- Small hole boring for hardened steels.
- Min. boring dia. is \varnothing 3,5 mm.



BNZ

M41

Small hole boring bars

- Solid carbide boring bars with economical CBN insert.
- Small hole boring for hardened steels.
- Min. boring dia. is \varnothing 7,0 mm.



BNB

M41

Small hole boring bars

- Solid carbide boring bars with economical CBN and PCD insert.
- Min. boring dia. is \varnothing 10,0 mm.



GWB / PSC

M42-43

CBN Grooving System for Hardened Steels

- Tangential Inserts – Double clamp holder
- Groove Widths from 1,5 – 6,0mm
- New CBN grade for interrupted grooving
- ISO-PSC polygon modular grooving system



BNGG

M44

Threading holders

- CBN cutting edge for hardened steel
- Adjustable threading after regrinding.



DABB

M45

Small hole boring tools

- PCD cutting edge for finishing of small non-ferrous parts
- Min. boring dia. is \varnothing 3,0 mm.
- DABB-C for boring
DABB-N for profiling and corner grooving



ANX M46-51

High speed cutter for Non-ferrous Metal

- Achieves feeds of over $v_f = 30.000$ mm/min
- 6 different edge preparations
- Simple screw-fastening structure enables fine adjustments to be made easily
- Precise applications of coolant to the machining point
- Milling cutter range with diameter from $\varnothing 32-160$ mm



RF M52

High speed face mill for Aluminium

- Finishing and roughing aluminium alloys and non-ferrous materials
- High precision and highspeed machining $v_c = 5000$ m/min
- Aluminium alloy body
Run-out less than $10 \mu\text{m}$
- Easy assembling



SRF M53

High speed face mill for Aluminium

- Small diameter cutter for small machines
- High speed roughing and finishing with SumiDia DA2200
- High speed capability of $\text{rpm} = 20.000$
- Economical PCD insert NF type



FMU M54-55

"BN Finish Mill" for finishing grey cast iron

- High speed machining $v_c = 1500$ m/min
- Excellent surface roughness $R_z = 3,2$
- Run-out less than $10 \mu\text{m}$
- Easy assembling



BNES M56

"Helical Master" SUMIBORON Endmill

- Spiral CBN brazed cutting edge for super finishing hardened steel (HRC 50 – 60)
- Dry machining
- Stable cutting
- High accuracy
- Excellent swarf evacuation



BNBP M57

"Mould Finish Master" SUMIBORON Micro Ball Nose Endmills

- High precision machining of hardened steels < HRC 70 with long tool life
- Super tough grade SUMIBORON BN350 prevents chipping of the cutting edge
- R accuracy : $\pm 0,005$ mm



NPDRS / NPDB(S) M58-59

"Mould Finish Master" SUMIDIA Binderless Endmills

- NPDRS - radius endmills
- NPDB(S) - ball nose endmills
- For finishing of carbide and brittle materials
- High precision machining and long tool life



DAL / DDL / DML M60-61

High precision SUMIDIA Drills

- PCD cutting edge is brazed on to a solid carbide shank.
- From general to high precision drilling of Aluminium alloys
- DML type is suitable for chamfering and stepped drilling


BSME/SEXC Series

■ Features





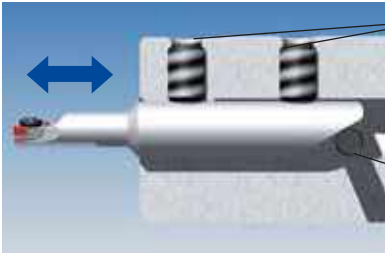
- New ultra small boring bar with CBN cutting edge
- Internal coolant
- Easy setting and handling
- High accuracy
- Carbide body for high rigidity
- One sleeve for different diameters




■ Basic System

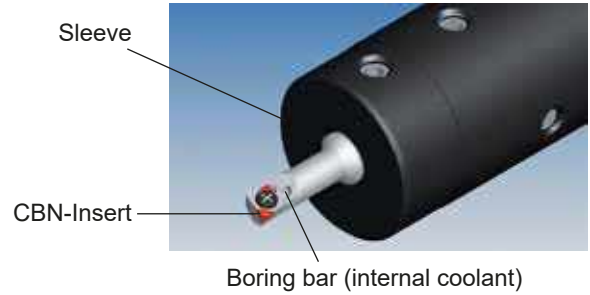

■ 2 Types of CBN Small Hole Boring Bar System

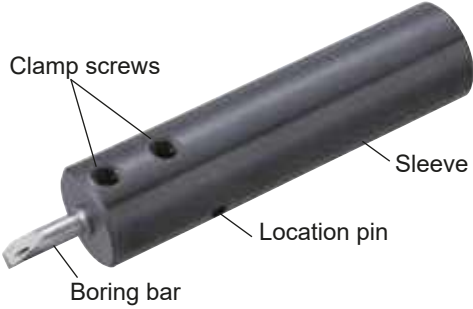BSME - CBN Brazed Cutting Edge Type	SEXC - Indexable CBN Insert Type
Min. bore diameter: $\varnothing 2,5 - 5,0$ mm	Min. bore diameter: $\varnothing 4,0 - 6,0$ mm
<p>Unique cutting edge shape with high quality and sharpness</p>  <p>Internal coolant hole (standard)</p>	<p>2 corner inserts</p>  <p>Internal coolant hole (standard)</p>
 <p>Clamp screws</p> <p>Sleeve</p> <p>Location pin</p> <p>Boring bar</p>	 <p>Clamp screws</p> <p>Sleeve</p> <p>Location pin</p> <p>Boring bar</p>
<p>Excellent repeatability of boring bar (deviation within 0,020 mm)</p>  <p>Clamp screws</p> <p>Location pin for controlled cutting edge position</p>	


■ Application Range

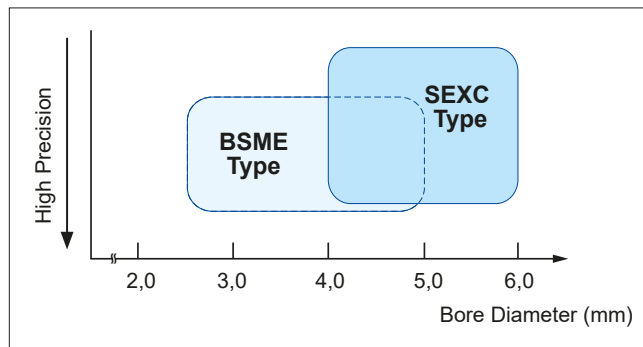

■ Recommended Cutting Conditions




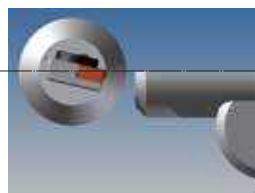
Spindle Speed (n)	$>2000 \text{ min}^{-1}$	Low speed may cause chattering and chipping on the cutting edge.
Depth of Cut (a_p)	0,01 – 0,15 mm	Excessive depth of cut may cause larger tool deflection resulting in deterioration of bore accuracy.
Feed Rate (f)	0,01 – 0,1 mm/rev	-

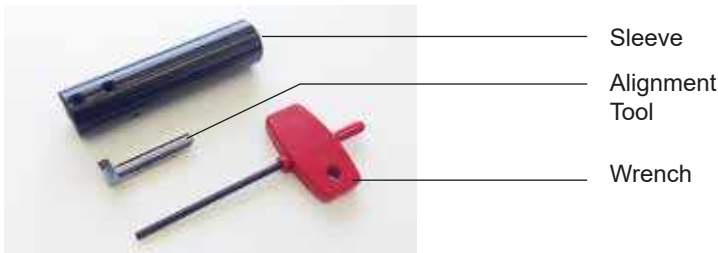Accessories







Sleeve
Alignment Tool
Wrench

Mounting Instruction

<p>1. Insert alignment tool into the sleeve until you connect with the pin inside. Gently lock the screws to hold.</p>	
<p>2. Locate the sleeve into your tool-holding system. Gently lock the screws to hold.</p>	
<p>3. Clock the flat of the alignment tool into a straight position.</p> 	<p>After adjustment, equipped boring bar has automatically cutting peak height of zero on the center of tool.</p> 
<p>4. Use pre setting machine to set the diameter of the boring bar.</p>	

Application Example

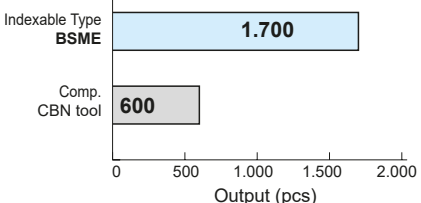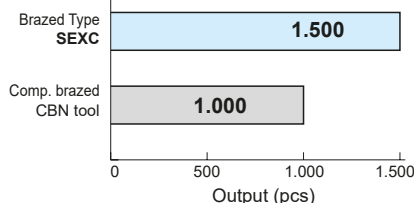BSME Hardened Alloy Steel Valve Component	SEXC Bearing Steel Small Automotive Component												
<p>The BSME type provides stable machining. Tool life is over 2 times longer than competitor's CBN tool.</p>   <table border="1"> <caption>Output Comparison for BSME</caption> <tr> <th>Tool Type</th> <th>Output (pcs)</th> </tr> <tr> <td>Indexable Type BSME</td> <td>1.700</td> </tr> <tr> <td>Comp. CBN tool</td> <td>600</td> </tr> </table>	Tool Type	Output (pcs)	Indexable Type BSME	1.700	Comp. CBN tool	600	<p>The SEXC type provides drastically reduced tool costs. Tool life is 1,5 times longer than competitor's brazed CBN tool.</p>   <table border="1"> <caption>Output Comparison for SEXC</caption> <tr> <th>Tool Type</th> <th>Output (pcs)</th> </tr> <tr> <td>Brazed Type SEXC</td> <td>1.500</td> </tr> <tr> <td>Comp. brazed CBN tool</td> <td>1.000</td> </tr> </table>	Tool Type	Output (pcs)	Brazed Type SEXC	1.500	Comp. brazed CBN tool	1.000
Tool Type	Output (pcs)												
Indexable Type BSME	1.700												
Comp. CBN tool	600												
Tool Type	Output (pcs)												
Brazed Type SEXC	1.500												
Comp. brazed CBN tool	1.000												
<p>Work Material: Hardened alloy steel valve component (automotive component) Tool: BSME R50020D2S6 Grade: BN2000 Cutting Conditions: $v_c = 135$ m/min $f = 0,02$ mm/rev $a_p = 0,10$ mm Dry</p>	<p>Work Material: Bearing steel small automotive component (60 HRC) Holder: E06D2 SEXC R/L03-04P Insert: ECXA 030X02LF (BN2000) Cutting Conditions: $v_c = 50$ m/min (4.000 rpm) $f = 0,02$ mm/rev $a_p = 0,02$ mm Wet</p>												

BSME Series

BSME-Type with Internal Coolant




Fig. 1


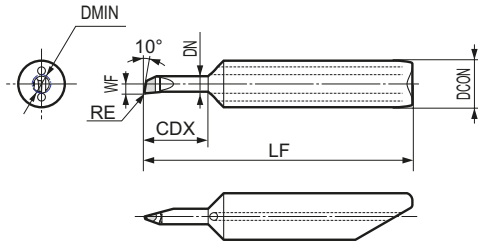


Fig. 2

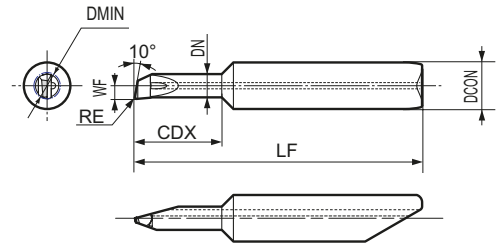

Sharp edge (no honing)

■ Boring Bar

Description	Grade		Dimensions (mm)							Fig.	Applicable Sleeve
	BN2000		DMIN	DN	WF	CDX	LF	DCON	RE		
	R	L									
BSME R/L 25020D2S6	●	●	2,5	2,0	1,20	5,3	32,0	6,0	0,2	1	HBSM6020
BSME R/L 25020D3S6	●	●				7,8	34,5				
BSME R/L 25020D4S6	□	□				10,3	37,0				
BSME R/L 30020D2S6	●	●	6,3	32,8							
BSME R/L 30020D3S6	●	●	3,0	2,5	1,45	9,3	35,8				
BSME R/L 30020D4S6	□	□	12,3	38,8							
BSME R/L 35020D2S6	●	●	3,5	3,0	1,70	7,3	33,5				
BSME R/L 35020D3S6	●	●				10,8	37,0				
BSME R/L 35020D4S6	□	□				14,3	40,5				
BSME R/L 40020D2S6	●	●	4,0	3,5	1,95	8,3	33,9				
BSME R/L 40020D3S6	●	●				12,3	37,9				
BSME R/L 40020D4S6	□	□				16,3	41,9				
BSME R/L 45020D2S6	●	●	4,5	4,0	2,20	9,3	35,0				
BSME R/L 45020D3S6	●	●				13,8	39,5				
BSME R/L 45020D4S6	□	□				18,3	44,0				
BSME R/L 50020D2S6	●	●	5,0	4,5	2,45	10,3	35,8				
BSME R/L 50020D3S6	●	●				15,3	40,8				
BSME R/L 50020D4S6	□	□				20,3	45,8				

■ Adapter Sleeve and Parts

Description	Stock	Dimensions (mm)		Sleeve Screw	Wrench
		DCB	LF		
HBSM6020	●	6,0	80	BT0506	TH025

■ Alignment Tool

Description	Stock
AFBSM60	●

■ Identification Details

B S M

Sumitomo CBN Product Special Mini

E

Solid Carbide Bar with Inner Coolant

R/L

R: Right Hand
L: Left Hand

3 5 0

Minimum Bore Diameter (ø 3,5 mm)

2 0

Nose Radius of Edge (ø 0,20 mm)

D 3

L/D - Ratio of Working Length

S 6



Shank Diameter

● = Euro stock
□ = Delivery on request


Recommended Tightening Torque (N·m)

SEXC Series

SEXC-Type with Internal Coolant

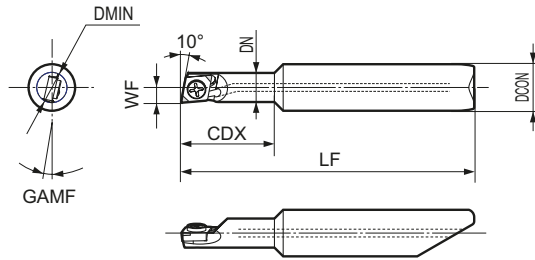

Spare Parts



Boring Bar

Description	Stock		Dimensions (mm)							Applicable Sleeve	Insert Screw	N·m	Wrench
	R	L	DMIN	DN	WF	CDX	LF	DCON	GAMF				
E06D2 SEXC R/L 03-04P	●	●	4,0	3,75	1,95	8	33,75	6,0	13°	HBSM6020	MIB1,6-2,0	0,2	SDBSM
E06D3 SEXC R/L 03-04P	●	●				12	37,75						
E06D2 SEXC R/L 03-05P	●	●	5,0	4,75	2,45	10	35,25	12°					
E06D3 SEXC R/L 03-05P	●	●				15	40,25						
E06D2 SEXC R/L 03-06P	●	●	6,0	5,75	2,95	12	36,75	11°	MIB1,6-3,0				
E06D3 SEXC R/L 03-06P	●	●				18	42,75						

Adapter Sleeve and Parts

Description	Stock	Dimensions (mm)		Sleeve Screw	Wrench
		DCB	LF		
HBSM6020	●	6,0	80	BT0506	TH025

Alignment Tool

Description	Stock
AFBSM60	●

CBN Insert

Description	Grade		Nose Radius RE (mm)	Cutting Edge Preparation
	BN2000	BN7000		
ECXA030X02 LE NU2	●		0,2	sharp + hone
ECXA030X02 LF NU2	●	●	0,2	sharp

Notes:

Applicable wrench SDBSM is recommended when fastening the insert screw. Please check insert screw occasionally and replace it in time.


Identification Details

E	06	D2	S	E	X	C	R/L	03	-	04	P
Carbide Bar with Coolant Hole	Shank Diameter (ø 6 mm)	L/D Ratio of Working Length	Insert Clamp System S = Screw Type	Insert Shape E = Diamond 75°	Approach Angle of Main Cutting Edge	Insert Relief Angle C = 7°	R: Right Hand L: Left Hand	Insert Size (ø IC)		Minimum Bore Diameter (ø 4,0 mm)	Standard Content includes Wrench

SUMIBORON Small Hole Boring Tools BNBB Type

For Hardened Steel


BNBB type small hole boring tools for hardened work pieces up to diameter 3,5 mm



■ „Sumiboron“ Brazed Boring Tools for Small Hole Boring

	Cat. No.	Stock	Dimensions (mm)					Applicable holder	Grade of brazed cutting edge
			DMIN	DCON	LF	H	RE		
	BNBB 03 R	▲	3,5	3	60	2,4	0,2	HBB 316	SUMIBORON (CBN) BN250
	BNBB 04 R	▲	4,5	4	60	3,4	0,2	HBB 416	
	BNBB 05 R	▲	5,5	5	80	4,4	0,2	HBB 516	
	BNBB 06 R	▲	6,5	6	80	5,4	0,2	HBB 616	
	BNBB 08 R	▲	8,5	8	100	7,4	0,2	HBB 816	

■ Holder

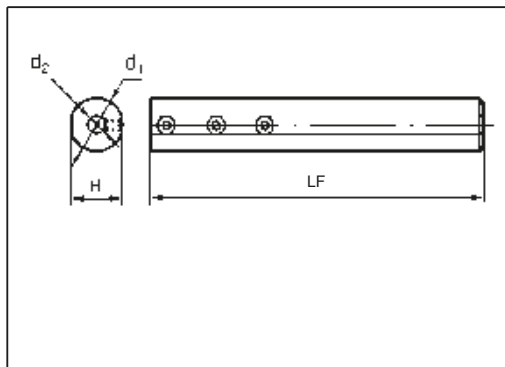

Cat. No.	Stock	Dimensions (mm)			
		d ₁	LF	d ₂	H
HBB 316	●	16	100	3	15
HBB 416	●			4	
HBB 516	●			5	
HBB 616	●			6	
HBB 816	●			8	


■ Spare Parts

Screw	Wrench
BT 0404	TH 020

■ Recommended Cutting Conditions


Work Material	SUMIBORON BN250		Notes
Hardened steels (H _R C45-68)	Cutting speed (v _c)	30-150 m/min	Low speed may cause chattering in cutting process and chipping occurrence on the cutting edge.
	Feed rate (f)	0,03-0,1 mm/rev	-
	Depth of cut (a _p)	0,03-0,2 mm	Excessive depth of cut may cause larger deformation of tool, resulting in deterioration of bore accuracy.

■ Precaution On Use




- Adjust overhang to achieve absolute minimum.
- For use of a small diameter brazed boring tool, select high speed and small feed rate, as much as possible.

BNZ type



BNB type



Boring Bars for Small Hole Boring

	Cat. No.	Stock	Dimensions (mm)					Applicable insert	
			DMIN	DCON	LF	H	GAMF		
BNZ (Carbide shank) 	BNZ 606 R	●	7	6	80	5,5	-14°	ZNEX 040100	 ZNEX (CBN)
	BNZ 608 R	●	9	8	100	7,5	-12°		
	BNZ 610 R	●	11	10	125	9,5	-10°		
	BNZ 612 R	●	13	12	130	11	-8°		
Holder "HBB616" for BNZ606 (ø d = 6 mm) 									
BNB (Carbide shank) 	BNB 508 R/L	● ●	10	8	140	7	-9°	TBGN 060100	 TBGN (CBN)
	BNB 510 R/L	○ ○	12	10	140	9	-8°		
	BNB 512 R/L	● ●	14	12	160	11	-6°		
	BNB 516 R/L	● ●	18	16	180	14	-5°		
	BNB 520 R/L	○ ○	22	20	180	18	-4°		

Spare Parts for BNZ

Holder	Screw	Wrench
BNZ 606 R	BFTX 0204 N 0,5 (Nm)	TRX 06
BNZ 608 R		
BNZ 610 R		



Spare Parts for BNB

Holder	Clamp	Clamp bolt	Nut	Wrench
BNB 508 R/L	BNBC	BH 0306	BNBW-2	TH 020
BNB 512 R/L	BNBC	FBUP-3-A0-9	BNBW-4	TH 020
BNB 516 R/L	BNBC	BH 0310	BNBW-4	TH 020
BNB 520 R/L	BNBC	BH 0310	BNBW-7	TH 020

Recommended Cutting Conditions


Cutting speed	80–120 m/min
Feed rate	0,03–0,1 mm/rev
Depth of cut	0,03–0,2 mm

Holders Performance Area

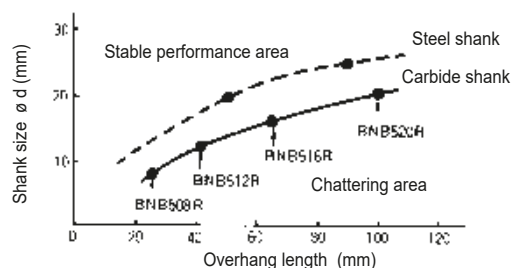

Work material: Alloy steel (H_RC 60)
 Cutting conditions: v_c = 100 m/min
 f = 0,1 mm/rev
 a_p = 0,2 mm

SUMIBORON Grooving Tool Holder GWB / PSC Type

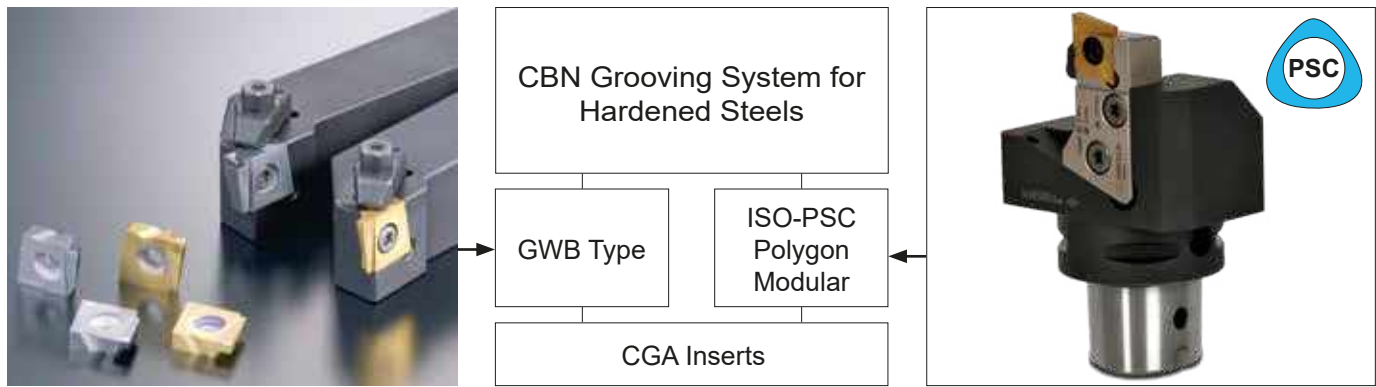

Features

Tangential insert

80 degree tangentially mounted insert improves rigidity



Coated CBN grade BNC30G

Tough new coated CBN grade for interrupted hard grooving



Double clamping system

The double clamping system increases stability so even axial feeds are possible.



Wide insert range 1,5–6,0 mm

Wide range of width's and grades for continuous and interrupted cut grooving operations

Grades

Grade	Application	Features
BN250	Continuous grooving	Uncoated CBN grade for continuous cut grooving applications
BNC30G	Interrupted grooving	Tough new CBN coated grade developed for interrupted cut grooving applications

Grooving Tool Holder GWB Type

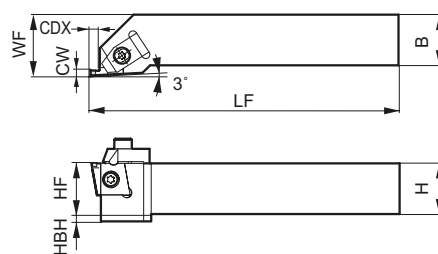

Spare Parts

Clamp finger	Clamp screw	Insert screw	Spring	Wrench
TF 72 (Right handed)	BX 0520T	BFTX 0511N	GSP 06	TRX 20
TF 73 (Left handed)				

Holders


Cat. No.	Stock		Dimensions (mm)								Appl. Insert No.	Clamp finger	Clamp screw	Insert screw	Spring	Wrench
	R	L	H	B	LF	WF	HF	HBH	CW (*)	CDX						
GWB R/L 2020-45	□	□	20	20	151 (150)	25	20	5	1,5≤cw≤4,5	3,5 – 5,0	①	TF 72 (Right handed)	BX 0520T	BFTX 0511N	GSP 06	TRX 20
GWB R/L 2525-45	●	●	25	25	151 (150)	30	25	–								
GWB R/L 2525-60	●	●	25	25	151	30	25	–	4,5≤cw≤6,0	5,0	②	TF 73 (Left handed)				

Right handed tool holders are applicable with right handed inserts.

Remark: Inserts are not included.

SUMIBORON Grooving Tool Holder GWB / PSC Type

ISO-PSC Polygon Modular CGA Grooving System

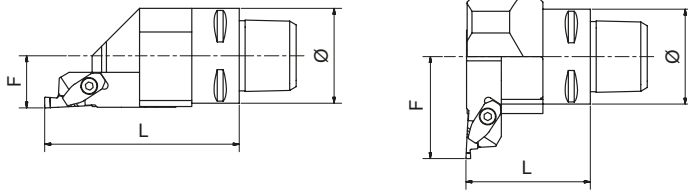

■ Holders

Cat. No.	R	L	Ø (mm)	F (mm)	L (mm)	7,5 (Nm)	
						Cap Screw	Wrench
PSC 40GM00 R/L	●	●	40	22	82,0	BFTX0619N	LT25
PSC 50GM00 R/L	●	●	50	27			
PSC 40GM90 R/L	●	●	40	43	52,5		
PSC 50GM90 R/L	●	●	50	48	55,0		

■ Cassette

Cat. No.	R	L	Grooving Width (mm)	Grooving Depth (mm)	Inserts	5,0 (Nm)		Spring	Clamp Finger	3,0 (Nm)	
						Insert Screw	Wrench			Cap Screw	Wrench
GWBCM R/L 45	●	●	1,5-2,0	3,5	CGA1504□□□	BFTX0511N	TRX20		SCP4A		LH030
			2,5-3,0	4,0							
GWBCM R/L 60	●	●	3,5-6,0	5,0	CGA1506□□□						

■ CGA Inserts

	Cat. No.	Stock				Dimensions (mm)				Insert No.	Applicable Holder	
		BN250		BNC30G		CW	CDX	IC	S			
		R	L	R	L							
	CGA R/L 1504 150	▲	▲	●	●	1,5	3,5	15,875	4,76	GWB R/L 2020-45 GWB R/L 2525-45 GWBCM R/L-45		
	R/L 1504 200	▲	▲	●	●	2,0						
	R/L 1504 250	▲	▲	●	●	2,5						
	R/L 1504 300	▲	▲	●	●	3,0	4,0					
	R/L 1504 350	▲	▲	●	●	3,5						
	R/L 1504 400	▲	▲	●	●	4,0						
	R/L 1504 450	▲	▲	●	●	4,5	5,0					
	CGA R/L 1506 500	▲	▲	●	●	5,0					6,35	GWB R/L 2525-60 GWBCM R/L-60
	R/L 1506 550	▲	▲	●	●	5,5						
	R/L 1506 600	▲	▲	●	●	6,0						

Special widths available on request

■ Recommended Cutting Conditions


Material	Hardened steel
Cutting speed (m/min)	60 — 80 — 120 — 150
Feed rate (mm/rev)	0,03 — 0,04 — 0,08 — 0,1
Grade	BN250, BNC30G

Coolant:
Dry / wet (for continuous cut)
Dry only (for interrupted cut)

Remarks:
To avoid thermal cracking of the cutting edge when interrupted cutting please ensure workpiece remains dry.

SUMIBORON Threading Tool Holder BNGG Type

For Hardened Steel

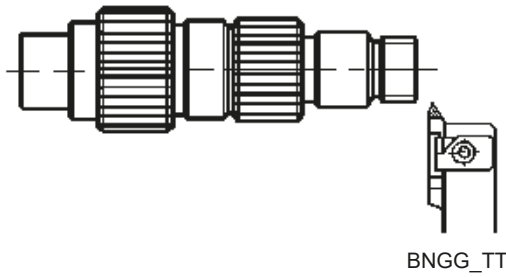

„Sumiboron“ Holders

	Cat. No.	Stock		Dimensions (mm)			Applicable Insert
		R	L	WF	CDX	LF	
	BNGG R/L 2525-TT	▲	□	28,5	5	150	BNTT 1020 R/L BNTT 1530 R/L

Inserts

	Cat. No.	Stock				Dimensions (mm)				Applicable Holder
		BN250		BNX20		Pitch	RE	LF	S	
		R	L	R	L					
	BNTT 1020 R/L	▲	▲	▲	□	1,0–2,0	0,14	25	6,0	BNGG R/L 2525 - TT
	BNTT 1530 R/L	▲	▲	▲	□	1,5–3,0	0,2	25	6,0	

• Inserts also suitable for existing BNG2525R type holders

Spare Parts


Holder	Support	Clamp	Adjust screw	Spring	Screw	Wrench	
BNGG R/L 2525 - TT	BNGS R/L TT	BNGC R/L	FMJ	GSP 6	BX 0615 LH 050 (for clamp)	LH 030 (for support)	
						ø1,8x45	

Recommended Cutting Conditions



Threading	
Cutting speed (v _c)	80–120 m/min
Feed rate (f)	Max. pitch: 3,0 mm



● = Euro stock
□ = Delivery on request

▲ = To be replaced by new item

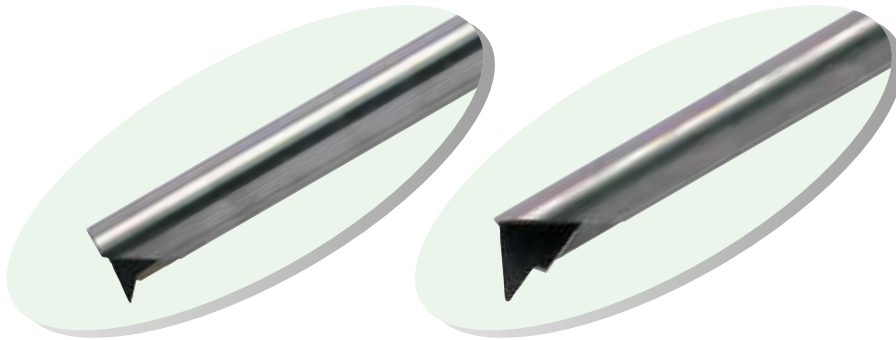

■ „Sumidia“ Brazed Boring Tools for Small Hole Boring




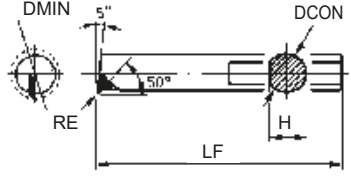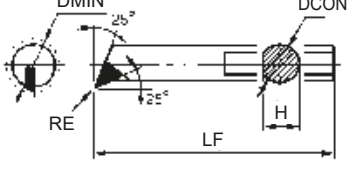DABB (Solid carbide shank)	Cat. No.	Stock	Dimensions (mm)					Applicable Holder
		DA2200	DMIN	DCON	LF	H	RE	
For small boring 	DABB 025 CR	▲	3,0	2,5	60	2,2	0,1	HBB 2516
	DABB 035 CR	▲	4,0	3,5	60	3,2	0,1	HBB 3516
	DABB 045 CR	▲	5,0	4,5	80	4,1	0,1	HBB 4516
	DABB 060 CR	▲	7,0	6,0	80	5,2	0,1	HBB 616
For profiling and corner grooving 	DABB 025 NR	▲	3,0	2,5	60	2,2	0,1	HBB 2516
	DABB 035 NR	▲	4,0	3,5	60	3,2	0,1	HBB 3516
	DABB 045 NR	▲	5,0	4,5	80	4,1	0,1	HBB 4516
	DABB 060 NR	▲	7,0	6,0	80	5,2	0,1	HBB 616

■ Recommended Cutting Conditions



Spindle revolution	Feed rate	Depth of cut	Coolant
> 2000 rpm	0,03 – 0,1 mm/rev	0,03 – 0,2 mm	Wet

■ Holder

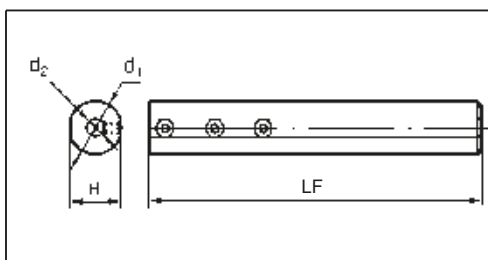

Cat. No.	Stock	Dimensions (mm)			
		d ₁	LF	d ₂	H
HBB 2516	●	16	100	2,5	15
HBB 3516	●			3,5	
HBB 4516	●			4,5	
HBB 616	●			6,0	

■ Spare Parts

Screw	Wrench
 BT 0404	 TH 020



■ Features

Drastically Reduced Runout Adjustment Time
Simple screw-fastening structure enables fine adjustments to be made easily.

Blade Through Coolant

Secures a supply of coolant to the cutting edge and breaks chips thoroughly.

Lightweight Aluminum Alloy Body

Utilizing aluminum alloy to achieve a total weight of less than 1,3 kg for a Ø 125 mm cutter with 22 teeth.

■ Product Range

Type	Cat. No.	Body Material	Diameter Range (mm) / No of Teeth							
			Ø32	Ø40	Ø50	Ø63	Ø80	Ø100	Ø125	Ø160
Shell	ANXA 16000RS	Aluminum Alloy					10, 14	12, 18	14, 22	20, 28
	ANXA 16000R (Inch)	Aluminum Alloy					10, 14	12, 18	14, 22	20, 28
	ANXS 16000RS	Steel		6	6, 9	8, 12	10, 14	12, 18	14, 22	
	ANXS 16000R (Inch)	Steel				8, 12	10, 14	12, 18	14, 22	
Shank	ANXS 16000E	Steel	4	6						

[Inch] Inch Bore


■ Blade Selection Guide

Work Material	N					
Type	L	G	GX	H	—	W
Cutting Edge Shape						
Features	Low Cutting Force	Standard	Long Edge	High Strength		
Applications	Finishing / Light Cutting	General Purpose	Roughing		Corner Radius	Wiper
Edge Length*	6,0 mm	6,0 mm	9,0 mm	6,0 mm		





*Edge length
GX type = 9,0 mm

■ Edge Selection Guide

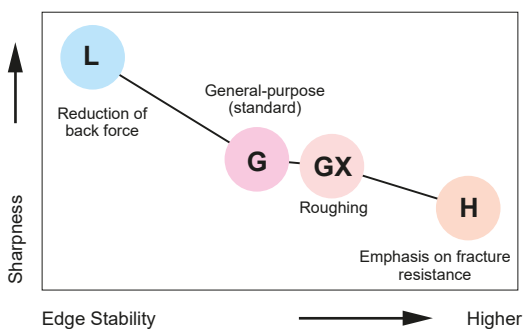

● Reduces Running Costs by Drastically Increasing Blade, Insert Regrinding Allowance (to 1,0 mm)

Assuming 0,2 mm of regrinding each time, an edge can be used up to 6 times. (Peripheral edge cannot be reground.)

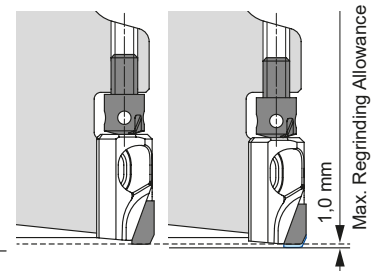

If you wish to use reground blades you shall use sets of blades with matching size of the same level in order to keep the balance.

■ Performances


● High-Speed / High-Efficiency Cutting

Realizes ultra-high efficiency machining with $v_f = 30.000$ mm/min





Comparison: Cutter Diameter \varnothing 100 mm

	Spindle Speed min ⁻¹	Number of Teeth	Feed Rate v_f (mm/min)
ANX Series	18.000	18	32.400
Competitor	9.500	12	11.400

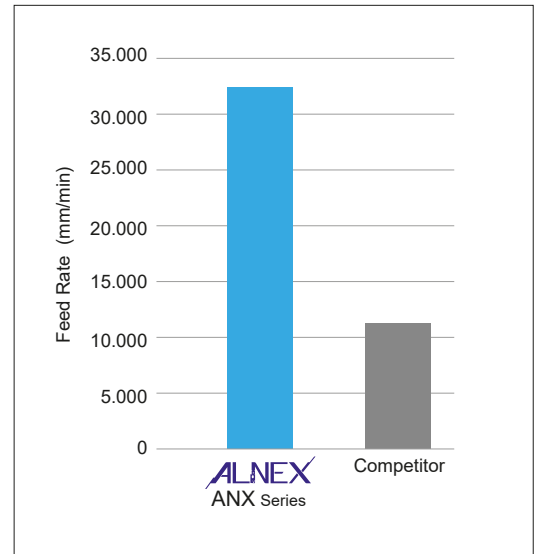

● Drastically Reduces Runout Adjustment Time

- Simple screw-fastening structure
- Enables fine adjustments to be made easily
- High-rigidity body

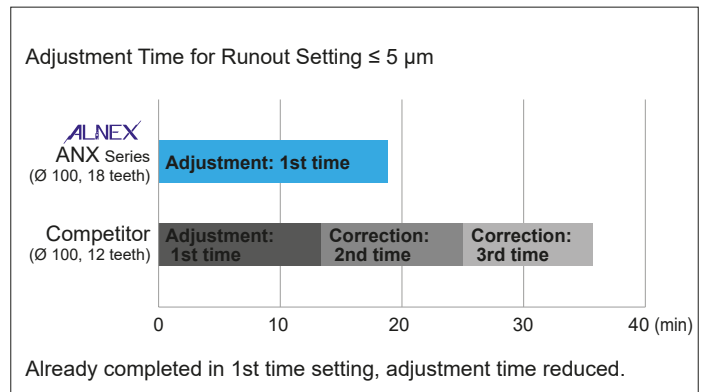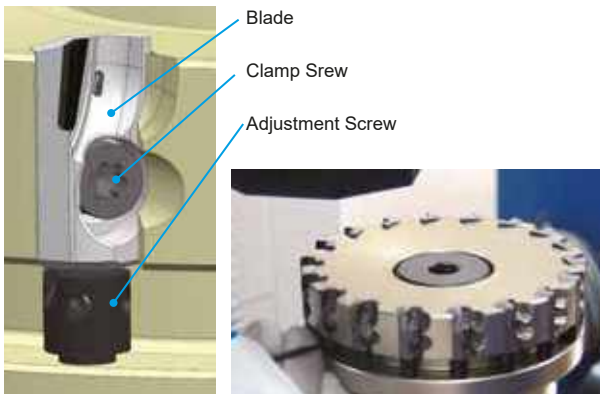

● Chip Control



Blade-Through Coolant Chip Breaking





Work Material: G-AlSi12Cu
Cutting Conditions: $v_c = 2500$ m/min, $f_z = 0,05$ mm/t, $a_p = 0,5$ mm, wet

Alnex ANXS 16000 R(S)



Rake Angle	Radial	+5°	3 mm	90°
	Axial	+5°		



Body - ANXS (Steel)

Dimensions (mm)

Cat. No.	Stock	DC	DCX	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2	No. of Teeth	Weight (kg)	Fig.	
Metric	ANXS 16040RS06	○	38	40	38,5	40	16	8,4	5,6	26	14	9	6	0,3	1
	16050RS06	○	48	50	48,5	40	22	10,4	6,3	26	18	11	6	0,4	1
	16050RS09	○	48	50	48,5	40	22	10,4	6,3	26	18	11	9	0,5	1
	16063RS08	○	61	63	50	40	22	10,4	6,3	26	18	11	8	0,7	1
	16063RS12	○	61	63	50	40	22	10,4	6,3	26	18	11	12	0,7	1
	16080RS10	○	78	80	50	50	27	12,4	7	34	35	14	10	1,2	1
	16080RS14	○	78	80	50	50	27	12,4	7	34	35	14	14	1,2	1
	16100RS12	○	98	100	80	50	32	14,4	8	32	46	-	12	2,0	2
	16100RS18	○	98	100	80	50	32	14,4	8	32	46	-	18	2,0	2
	16125RS14	○	123	125	80	63	40	16,4	9	35	52	-	14	3,9	2
16125RS22	○	123	125	80	63	40	16,4	9	35	52	-	22	3,9	2	
Inch	ANXS 16063R08	○	61	63	50	50	25,4	9,5	6	31	20	14	8	0,9	1
	16063R12	○	61	63	50	50	25,4	9,5	6	31	20	14	12	0,9	1
	16080R10	○	78	80	50	50	25,4	9,5	6	34	35	14	10	1,2	1
	16080R14	○	78	80	50	50	25,4	9,5	6	34	35	14	14	1,2	1
	16100R12	○	98	100	80	50	31,75	12,7	8	36	42	-	12	2,0	2
	16100R18	○	98	100	80	50	31,75	12,7	8	36	42	-	18	2,0	2
	16125R14	○	123	125	80	63	38,1	15,9	10	42,5	52	-	14	3,9	2
	16125R22	○	123	125	80	63	38,1	15,9	10	42,5	52	-	22	3,9	2

Blades are sold separately. If using a blade for corner radius machining (ANB1604R), DC = DCX.

Identification Details

ANX S 16 100 R S 18

Cutter Series	Steel Body	Blade Size	Cutter Diameter	Feed Direction	Metric	Number of Teeth
---------------	------------	------------	-----------------	----------------	--------	-----------------

Blades



Recommended Cutting Conditions



Spare Parts

Applicable Cutters	Clamp Screw		Adjustment Screw	Wrench	Adjustment Wrench	Centre Bolt	Assembly Wrench
ANXS 16040RS06	BXA0310IP	2,0	HFJ	TRXW10IP	ANT	BXH0825-D13	HFVT
16050RS__						BXH1030-D16	
16063RS__						BXH1235-D33	
16080RS__						BXH1635-D40	
16100RS__						BXH2036-D50	
16125RS__						BXH1235-D18	
16063R__						BXH1235-D33	
16080R__						BXH1635-D40	
16100R__						BXH2036-D50	
16125R__							

Sold separately.


Max. Allowable Spindle Speed

Cat. No.	n max (min ⁻¹)
ANXS 16040RS06	25.000
16050RS06	25.000
16050RS09	25.000
16063RS08	22.000
16063RS12	22.000
16080RS10	20.000
16080RS14	20.000
16100RS12	18.000
16100RS18	18.000
16125RS14	16.000
16125RS22	16.000
ANXS 16063R08	22.000
16063R12	22.000
16080R10	20.000
16080R14	20.000
16100R12	18.000
16100R18	18.000
16125R14	16.000
16125R22	16.000

ANXA 16000 R(S)



Rake Angle	Radial	+5°	3 mm	90°
	Axial	+5°		



Body - ANXA (Aluminum Alloy)

Dimensions (mm)

Cat. No.		Stock	DC	DCX	DCSFMS	Lf	DCB	KWW	KDP	CDBP	D1	D2	No. of Teeth	Weight (kg)
Metric	ANXA 16080RS10	○	78	80	50	50	27	12,4	7	34	35	14	10	0,5
	16080RS14	○	78	80	50	50	27	12,4	7	34	35	14	14	0,5
	16100RS12	○	98	100	50	50	27	12,4	7	34	35	14	12	0,8
	16100RS18	○	98	100	50	50	27	12,4	7	34	35	14	18	0,9
	16125RS14	○	123	125	50	50	27	12,4	7	34	35	14	14	1,2
	16125RS22	○	123	125	50	50	27	12,4	7	34	35	14	22	1,3
	16160RS20	○	158	160	80	63	40	16,4	9	35	52	29	20	2,6
16160RS28	○	158	160	80	63	40	16,4	9	35	52	29	28	2,6	
Inch	ANXA 16080R10	○	78	80	50	50	25,4	9,5	6	34	35	14	10	0,5
	16080R14	○	78	80	50	50	25,4	9,5	6	34	35	14	14	0,5
	16100R12	○	98	100	50	50	25,4	9,5	6	34	35	14	12	0,9
	16100R18	○	98	100	50	50	25,4	9,5	6	34	35	14	18	0,9
	16125R14	○	123	125	50	50	25,4	9,5	6	34	35	14	14	1,2
	16125R22	○	123	125	50	50	25,4	9,5	6	34	35	14	22	1,3
	16160R20	○	158	160	80	63	38,1	15,9	10	42,5	55	30	20	2,4
16160R28	○	158	160	80	63	38,1	15,9	10	42,5	55	30	28	2,6	

Blades are sold separately. If using a blade for corner radius machining (ANB1604R), DC = DCX.

Identification Details

ANX	A	16	100	R	S	18
Cutter Series	Aluminum Alloy Body	Blade Size	Cutter Diameter	Feed Direction	Metric	Number of Teeth

Blades



Recommended Cutting Conditions



Max. Allowable Spindle Speed

Cat. No.	n max (min ⁻¹)
ANXA 16080RS10	20.000
16080RS14	20.000
16100RS12	18.000
16100RS18	18.000
16125RS14	16.000
16125RS22	16.000
16160RS20	14.000
16160RS28	14.000
ANXA 16080R10	20.000
16080R14	20.000
16100R12	18.000
16100R18	18.000
16125R14	16.000
16125R22	16.000
16160R20	14.000
16160R28	14.000

Spare Parts


Applicable Cutters	Clamp Screw		Adjustment Screw	Wrench	Adjustment Wrench	Centre Bolt	Assembly Wrench
ANXA 16080RS_	BXA0310IP	2,0	HFJ	TRXW10IP	ANT	BXH1235-D33	HFVT
16100RS_						BXH2036-D50	
16125RS_						BXH1235-D33	
16160RS_						BXH2036-D50	
16080R_							
16100R_							
16125R_							
16160R_							

Sold separately.

Alnex ANXS 16000 E



Rake Angle	Radial	-2 - 0°	3 mm	90°
	Axial	+5°		

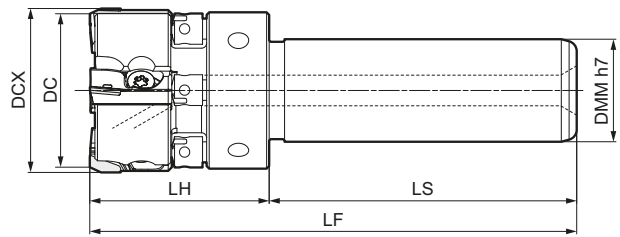

Body - ANXS (Steel)

Dimensions (mm)

Cat. No.	Stock	DC	DCX	DMM	LH	LS	LF	No. of Teeth	Weight (kg)
ANXS 16032E04	○	30	32	20	35	60	95	4	0,3
16040E06	○	38	40	20	40	60	100	6	0,5

Blades are sold separately. If using a blade for corner radius machining (ANB1604R), DC = DCX.

Identification Details

ANX S 16 032 E 04

Cutter Series	Steel Body	Blade Size	Cutter Diameter	Round Shank	Number of Teeth
---------------	------------	------------	-----------------	-------------	-----------------

Spare Parts

Sold separately.


Applicable Cutters	Clamp Screw		Adjustment Screw	Wrench	Adjustment Wrench	Assembly Wrench
	ANXS 16032E04 16040E06	BXA0310IP	2,0	HFJ	TRXW10IP	ANT

Max. Allowable Spindle Speed

Cat. No.	n max (min ⁻¹)
ANXS 16032E04	10.000
16040E06	10.000

Blades

Application	SUMIDIA				
High Speed / Light Cut	N				
General Purpose	N				
Roughing	N				
Cat. No.	DA1000	Cutting Edge Length	Wiper Edge Shape	Applications	Fig.
ANB 1600R-L	○	6,0	Linear	Low Cutting Force	1
1600R-G	○	6,0	Arc-Shaped	General Purpose	1
1600R-H	○	6,0	Arc-Shaped	Strong Edge	1
1600R-GX	○	9,0	Arc-Shaped	Long Edge	2
1604R	○	6,0	Linear	Corner Radius	3
1600R-W	○	-	Arc-Shaped	Wiper	4

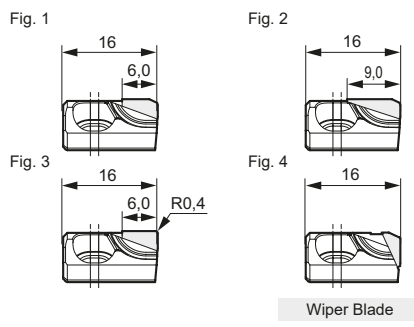

Recommended Cutting Conditions

Si content ≤ 12,6 % Min. - Optimum - Max.

ISO	Work Material	Hardness	Cutting Speed v _c (m/min)	Feed Rate f _z (mm/t)	Grade
N	Aluminum Alloy	-	2.000-2.500-3.000	0,05-0,13-0,20	DA1000

Si content ≥ 12,6 % Min. - Optimum - Max.


ISO	Work Material	Hardness	Cutting Speed v _c (m/min)	Feed Rate f _z (mm/t)	Grade
N	Aluminum Alloy	-	400-600-800	0,05-0,13-0,20	DA1000

The above recommended cutting conditions are meant as a guide. Actual conditions will depend on the individual machine rigidity, work clamp rigidity, depth of cut and other factors.

■ ALNEX Series Usage Manual


● Adjustment of the Blades, Runout Alignment

- ① Before inserting the blade, make sure that the seat and screws are free of debris by cleaning those areas.
- ② Insert the blade into its seat.
- ③ While holding the blade against the seat, install the clamping bolt using the provided wrench, pre-tightening the bolt (recommended pre-torque is 1 N·m).
- ④ Using the provided wrench for the height adjustment screw, set the height to your predetermined value.
- ⑤ Fully tighten the clamp bolt (recommended torque is 2 N·m).
- ⑥ Use 1 blade as a datum point and adjust all blade heights to match.
- ⑦ After tightening, verify that there is no gap between the seat and blade.

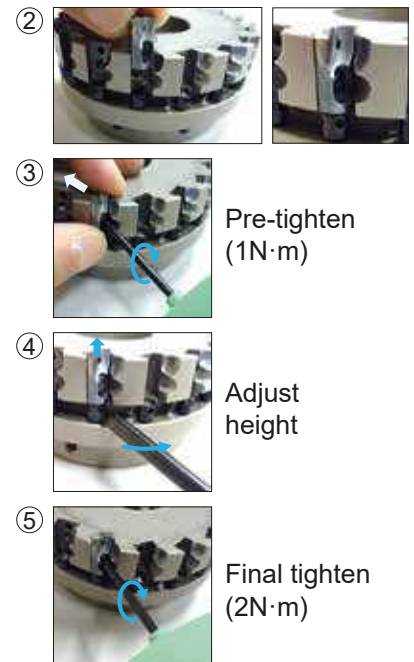

● Balance Adjustments

The cutter comes pre-balanced to a G 6,3 specification. Under normal circumstances, it is not necessary to adjust the balance of the cutter.

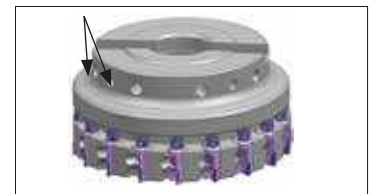

● Clamp Bolts for Arbor

Work Material	Dim.			Max. Torque	Applicable Cutters	
	M	L	D			
BXH0825-D13	8	25	13	15	ANXS16040RS_ _	
BXH1030-D16	10	30	16	25	ANXS16040RS_ _ , ANXS16063RS_ _	
BXH1235-D18	12	35	18	40	ANXS16063R_ _	
BXH1235-D33	12	35	33	50	ANXS16080R(S)_ _ , ANXA16080/100/125R(S)_ _	
BXH1635-D40	16	35	40	100	ANXS16100R(S)_ _	
BXH2036-D50	20	36	50	200	ANXS16125R(S)_ _ , ANXA16160R(S)_ _	

● Other Precautions

- Please use only Sumitomo genuine parts.
- Please regularly replace clamp bolts.
- If you wish to reduce the # of effective blades in use, to maintain balance and protect the body, please use dummy blades (set height well below effective blades).
- Please do not operate after releasing the interlock or opening the cover.
- Please avoid use and consult with Sumitomo if you mistakenly crash the body.
- As the blades are very sharp, it is very easy to get hurt when touching the blades with your hands directly, so please wear gloves when taking the blade out of the case to set into the cutter or when setting the cutter into machine tool.

SUMIDIA Face Mill RF Type

High Speed Finishing of Aluminium Alloy



Fig. 1





Fig. 2



Body


Cat. No.	Stock	Dimensions (mm)								Number of teeth	max. depth of cut	Weight (Kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	KWW	KDP	CBDP				
RF 4080 RS	●	80	82	60	50	27	12,4	7,0	29	6	3,0	0,7	1
RF 4100 RS	●	100	102	75	50	32	14,4	8,5	29	6		1,0	1
4125 RS	●	125	127	75	63	40	16,4	9,5	29	8		1,6	1
4160 RS	□	160	162	100	63	40	16,4	9,5	29	10		2,6	2

Remark: PCD blades and inserts are not included.

Insert for Roughing and Finishing

Application	Carbide	SUMIDIA		
High Speed / Light cut	N	N	N	
General Purpose	N	N	N	
Roughing	N	N	N	
Cat. No.	H1	DA1000	DA2200	Fig.
SDET 1204 ZDFR	●			1
SNEW 1204 ADFR-NF		●	▲	2
SNEW 1204 ADFR-W-NF		○	▲	3

Structure

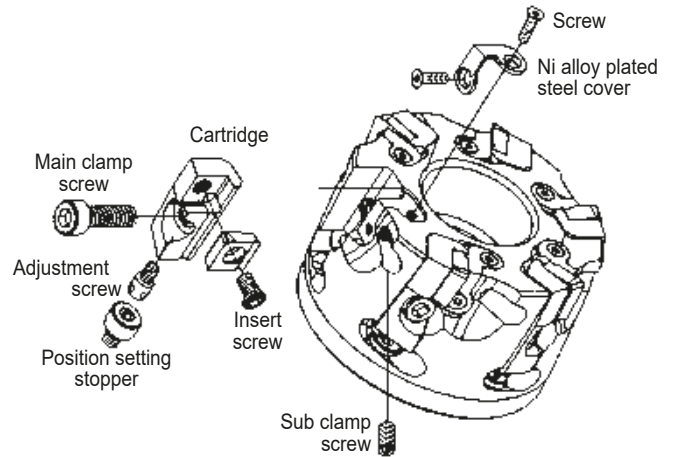

"Sumidia" Blade

PCD grade DA2200	Cat. No.	Stock
Standard type	RFB	▲
Wiper type	RFBW	▲

Cartridge

Shape	Cat. No.	Stock
For carbide insert	RFR	●
For Sumidia insert	RFF	●

Cutting Insert Selection

For easy assembling:

PCD blade RFB
PCD blade RFB (wiper type)

For finishing:

Cartridge RFF
PCD insert SNEW 1204 ADFR-NF (standard type)
SNEW 1204 ADFR-W-NF (wiper type)
PCD grade: DA2200

For roughing:

Cartridge RFR
Uncoated carbide insert
SDET 1204 ZDFR, grade: H1

Dummy Blade

	Cat. No.	Stock
	RFD	□

Spare Parts

RFC	RFS	BX0620	BTD0510	FBUP2-A0-8	RFJ	BFTX0509N	TH050 TH015, TH025	TTX20

Setting Gauge



Dial-gauge is not included.

● = Euro stock
○ = Japan stock

□ = Delivery on request
▲ = To be replaced by new item

SUMIDIA Face Mill SRF Type

High Speed Finishing of Aluminium Alloy



Fig. 1





Fig. 2



Body

Cat. No.	Stock	Dimensions (mm)		No. of teeth	Fig.	Weight (Kg)
		DC	DCSFMS			
SRF 30 R-ST	○	30	-	3	1	0,34
SRF 40 R-ST	○	40	-	4	1	0,50
SRF 50 RS	□	50	46,5	5	2	0,59
SRF 63 RS	□	63	45,0	6	2	0,67

Inserts are sold separately.

Insert

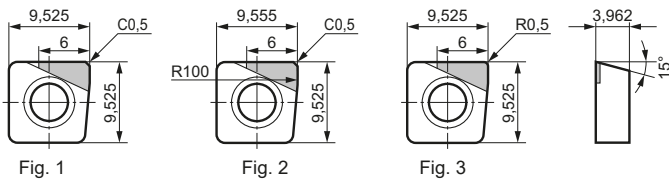


Fig. 1

Fig. 2

Fig. 3

Application	SUMIDIA
High Speed / Light cut	N
General Purpose	N
Roughing	N


Cat. No.	DA1000	Cutting Edge	Fig.
SNEW 09T3 ADTR-NF	○	Standard	1
09T3 ADTR-U-NF	○	Wiper	2
09T3 ADTR-R-NF	○	Nose Radius	3

- Standard inserts and Wiper inserts can be used on the same cutter body.
- Standard inserts with nose radius should be used where vibration is present. As such, Wiper-inserts will not be applicable.
- Inserts can be regrind 3 times (up to minimum IC diameter 9,225 mm).
- When using reground inserts, it is advisable to reconfirm insert height and cutting diameter with a tool pre-setter.
- Do not mix new and reground inserts, or even inserts with different regrind amount on the same cutter.

Recommended Cutting Conditions for RF and SRF Type Cutters

Work Material	Process	Grade	Cutting Speed (m/min)		Feed Rate (mm/tooth)	Depth of Cut (mm)		
			RF Type	SRF Type		RF Type	SRF Type	
Aluminium Alloy	Si < 13 %	Finishing	DA1000 (PCD)	2.000-5.000	- 4.000	0,05-0,2	- 3,0	- 5,0
		Roughing	H1 (Carbide)	1.000-2.500	-			
	Si ≥ 13 %	Finishing	DA1000 (PCD)	400-800	- 800			
		Roughing	H1 (Carbide)	200-400	-			

Spare Parts

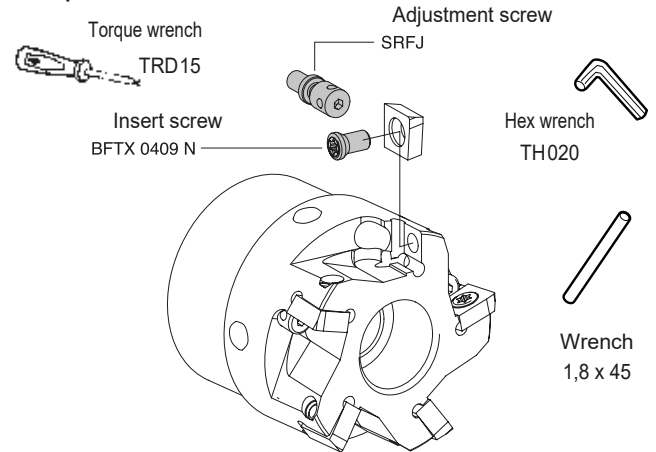

Maximum D.O.C. Guide (SRF50RS, 5 teeth)

The contains guidelines on the maximum D.O.C., determined from internal tests. "O" mark indicates the possible application range. Actual cutting conditions should be set, based on actual machine and work characteristics.

Feed	Feed Speed, v_f (mm/min)		
	2.500	4.000	5.000
	Feed Rate, f_t (mm/tooth)		
D.O.C. (mm)	0,05	0,08	0,10
0,5	○	○	○
1,0	○	○	○
1,5	○	○	○
2,0	○	○	○
2,5	○	○	○
3,0	○	○	○
3,5	○	○	-
4,0	○	-	-
4,5	○	-	-
5,0	○	-	-

Cutting Conditions

Cutter: SRF 50 RS
 Insert: SNEW 09T3 ADFR-NF (DA1000)
 n : 10.000 rpm
 Width: 35 mm at D.O.C. indicated above



SUMIBORON "BN Finish Mill" FMU Type

High Speed Finishing of Grey Cast Iron



■ Features

- High speed machining $v_c = 1.500 \text{ m/min}$
- Excellent surface roughness $R_z = 3,2$ ($R_a = 1,0$)
- Safety structure for the centrifugal force under high speed cutting conditions
- Run-out is less than $10 \mu\text{m}$
- Easy assembling method using the setting gauge
- Running cost is reduced because of economical insert

■ Application

GG25 – GG30 (HB200 – 250) grey cast iron with pearlite matrix, and ferrite matrix (HB130 – 160)
Application examples: engine block, cylinder block, etc

■ Specifications

FMU Type: $\varnothing 80\text{--}\varnothing 315 \text{ mm}$
Insert: SNEW1203ADTR/L
Low cutting force type: SNEW1203ADTR/L-S


■ Recommended Cutting Conditions

Speed: $v_c = 800\text{--}2000 \text{ m/min}$
Feed: $f_t = 0,1\text{--}0,3 \text{ mm/tooth}$
Depth: $a_p = 0,5 \text{ mm or less}$
Dry cutting




■ Performance

● Tool Life Diagram

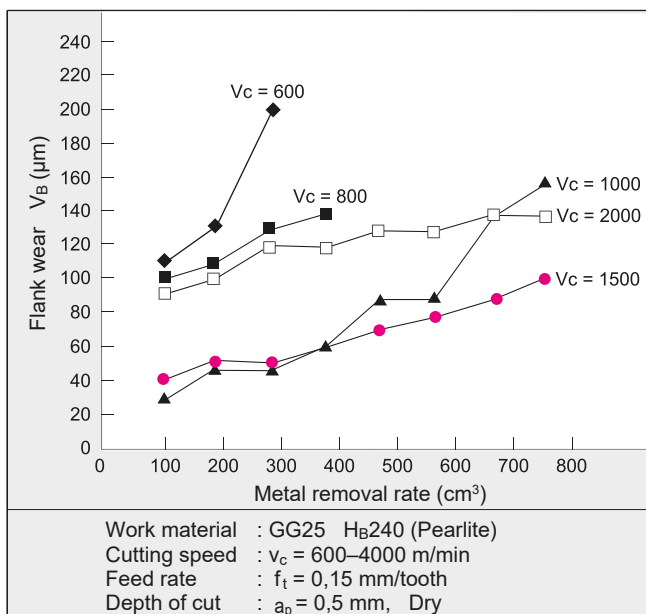

● Estimated Tool Life

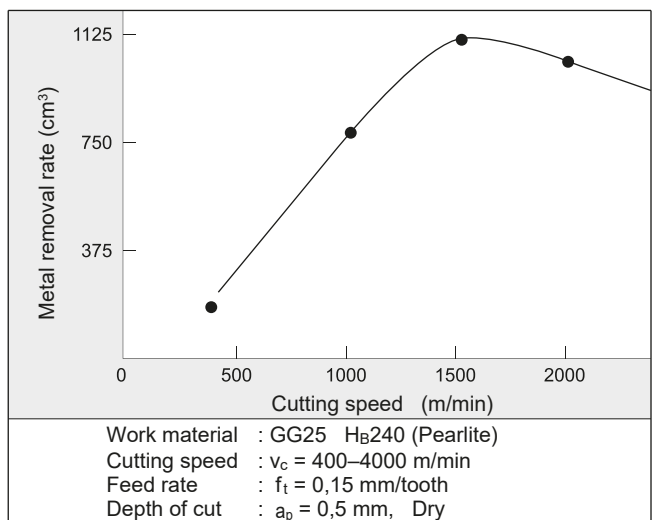


- Milling of ductile cast iron and alloy steel casting do not produce the best results.
- Dry cutting is recommended. Wet cutting will result in chipping of cutting edges in the early stages due to thermal cracking.

SUMIBORON "BN Finish Mill" FMU Type


Specifications

Approach angle: 90°
Axial rake angle: + 8°
Radial rake angle: + 2°



Max. depth of cut: 0,5 mm

Structure

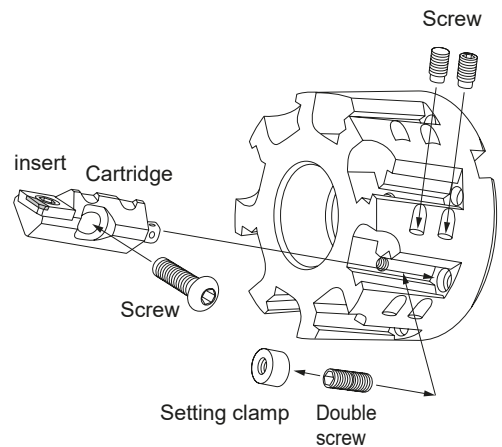

Body

Fig. 1




Fig. 2




Fig. 3




Fig. 4





Fig. 5



Cat. No.	Stock	Dimensions (mm)									No. of Teeth	Max. Depth of Cut	Weight (Kg)	Fig.
		DC	DCX	DCSFMS	LF	DCB	KWW	KDP	CBDP					
FMU 4080 RS	●	80	82,8	60	63	27	12,4	7,0	25	6	0,5	1,6	1	
FMU 4100 RS	●	100	102,8	76	63	32	14,4	8,5	29	8		2,4	2	
4125 RS	□	125	127,8	75	63	40	16,4	9,5	29	10		3,4	2	
4160 RS	□	160	162,8	100	63	40	16,4	9,5	29	12		5,6	3	
FMU 4200 RS	□	200	202,8	130	63	60	25,7	14,0	38	16		9,2	4	
4250 RS	□	250	252,8	130	63	60	25,7	14,0	38	20	14,3	4		
FMU 4315 RS		315	317,8	240	80	60	25,7	14,0	40	24	27,8	5		

Inserts

Fig. 1





Fig. 2



Application	CBN		Figure
High Speed / Light cut	K	K	
General Purpose	K	K	
Roughing			
Cat. No.	BN700	BN7000	
SNEW 1203 ADT R	▲	○	1
1203 ADT R-S	▲	○	2

Cartridge

Cartridge	Insert Screw	Adjustment Screw	O-ring	Insert Wrench	Pin
FMUU	BFTX0509N	FMUJ	P3	TRX20	1,8 x 45

Spare Parts


Screw	Screw	Setting clamp	Double screw	Wrench	Wrench	Wrench
BH0620	BTD0609	FMUE	WB5-10	TH040	LH030	LH025

Gauge



SUMIBORON "Helical Master" BNES Type

Spiral CBN Endmill for Hardened Steel

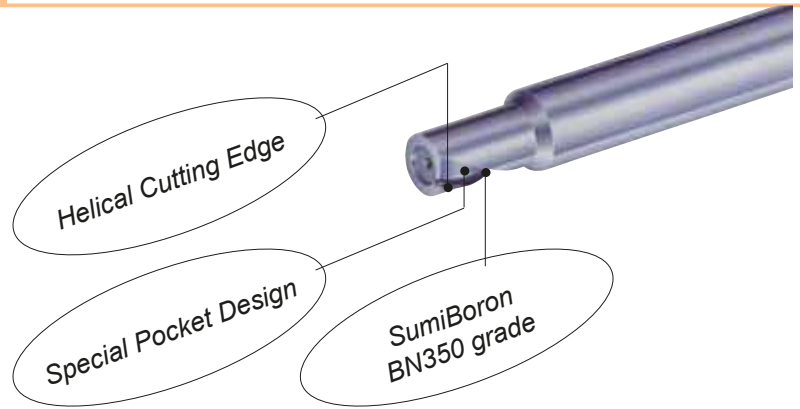

Endmills BNES Type with 1 Spiral Flute

DC ^{0-0,1} RE0,2 APMX LU LF	Cat. No.	Stock	Dimensions (mm)				
		BN350	DC	DMM	APMX	LU	LF
	BNES 1060	○	6,0	10	7,0	11	60
	BNES 1080	○	8,0	10	10,0	14	70
	BNES 1100	○	10,0	12	12,0	17	75
	BNES 1120	○	12,0	12	14,0	20	80
	BNES 1140	○	14,0	16	16,0	21,5	80

Helix angle : 15°
right-hand cut, right-hand helix

Recommended Cutting Conditions


Cutting speed: v_c (m/min), Spindle revolutions: n (rpm), Feed per tooth: f_t (mm/tooth), Feed speed: v_f (mm/min)

Tooling example	DC	Hardened steel (HRC 50–57)			Hardened steel (HRC 58–65)		
		$v_c = 100-170$ m/min			$v_c = 80-150$ m/min		
<p>Depth of cut : $a_p \leq DC$</p>	$\phi 6-8$	$a_e \leq 0,1$ mm	$n = 4000-9000$	V_f (mm/min) = 240–540	$a_e \leq 0,08$ mm	$n = 3200-8000$	V_f (mm/min) = 150–370
	$\phi 10-12$	$a_e \leq 0,15$ mm	$n = 2700-5400$	V_f (mm/min) = 180–360	$a_e \leq 0,12$ mm	$n = 2100-4800$	V_f (mm/min) = 120–270
	$\phi 14-16$	$a_e \leq 0,2$ mm	$n = 2000-3800$	V_f (mm/min) = 140–260	$a_e \leq 0,15$ mm	$n = 1600-3400$	V_f (mm/min) = 110–230

Recommendation: Dry cutting (Air coolant)
Down-cut milling
Minimise the overhang
Use a rigid machine

Performance

● Long Tool Life and High Efficiency

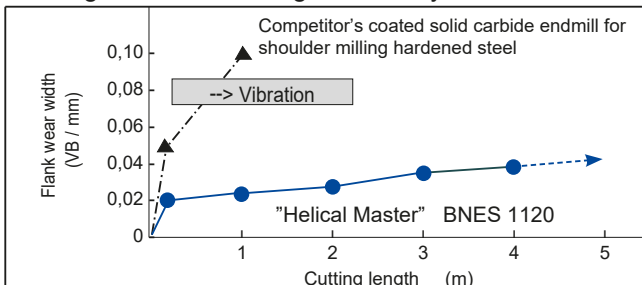


Work material: X155CrVMo12-1
Hardness: HRC 60


Cutting data:
 $v_c = 100$ m/min (Helical Master)
 $v_c = 40$ m/min (Competitor's coated solid carbide endmill)
 $v_f = 186$ mm/min

Down-cut milling
Dry cutting

● Excellent Surface Roughness

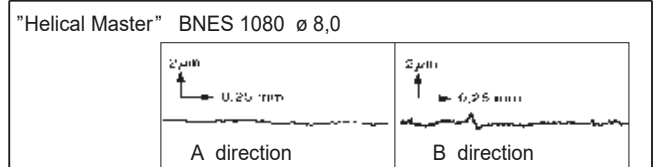



Conventional straight flute CBN endmill, ø 8,0

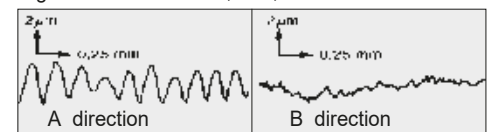

Work material: 15Cr3
Hardness: HRC 55–58
Cutting data: $v_c = 130$ m/min
 $v_f = 310$ mm/min

Down-cut milling
Dry cutting



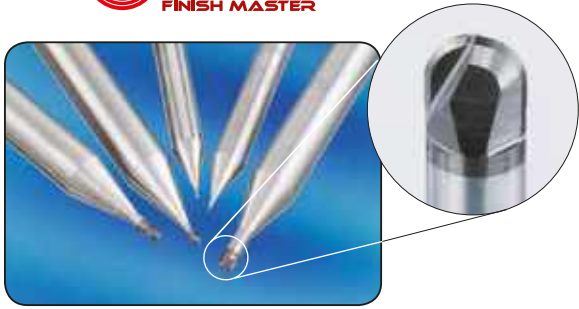



■ Characteristics / Application

- High precision machining of hardened steels < HRC 70 with long tool life
- Super tough grade SUMIBORON BN350 prevents chipping of the cutting edge
- R accuracy : ±0,005 mm

■ Endmills

<p>✳ Endmill Identification</p> <p>BNBP 2 R020-012 4</p> <p>MOULD FINISH MASTER</p> <p>Shank Diam.</p> <p>Neck length (LU)</p> <p>Number of teeth</p> <p>Radius of ball nose</p>	Cat. No.	Stock	Dimensions (mm)							
		BN350	RE	DC	LF	DN	DMM	APMX	LU	
4,0 mm (Shank Diam.)	BNBP 2 R020-012 4	●	0,2	0,4	50	0,37	4	0,3	1,2	
	BNBP 2 R030-015 4	●	0,3	0,6	50	0,57	4	0,4	1,5	
	BNBP 2 R050-025 4	●	0,5	1,0	50	0,97	4	0,6	2,5	
	BNBP 2 R075-040 4	●	0,75	1,5	50	1,47	4	0,9	4,0	
	BNBP 2 R100-055 4	●	1,0	2,0	50	1,97	4	1,4	5,5	
6,0 mm (Shank Diam.)	BNBP 2 R020-012 6	●	0,2	0,4	50	0,37	6	0,3	1,2	
	BNBP 2 R030-015 6	●	0,3	0,6	50	0,57	6	0,4	1,5	
	BNBP 2 R050-025 6	●	0,5	1,0	50	0,97	6	0,6	2,5	
	BNBP 2 R075-040 6	●	0,75	1,5	50	1,47	6	0,9	4,0	
	BNBP 2 R100-055 6	●	1,0	2,0	50	1,97	6	1,4	5,5	

■ Performance

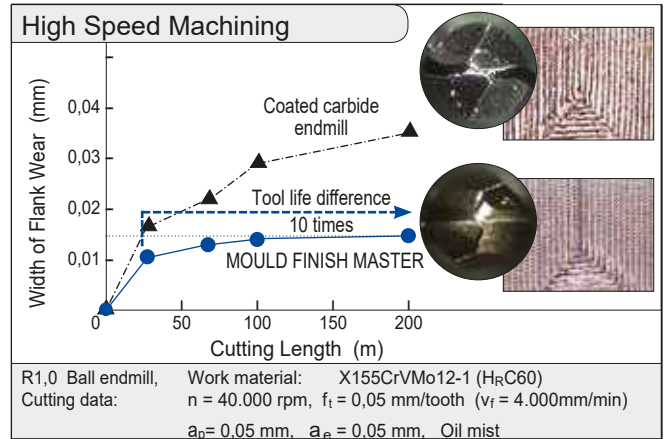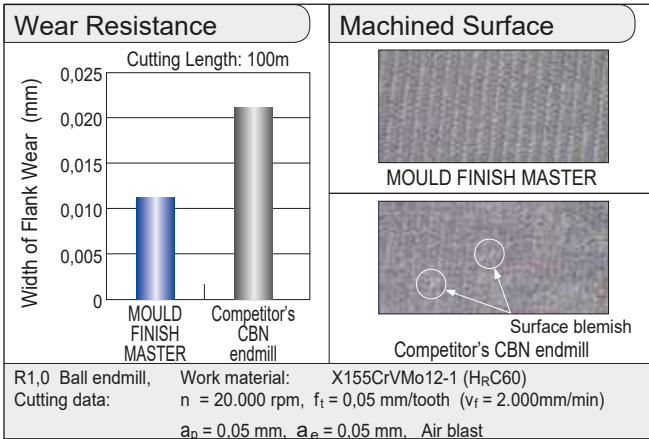

Excellent surface finish compared with competitor's CBN and coated carbide endmills

■ Recommended Cutting Conditions

Spindle revolutions: N (rpm), Feed rate per tooth: f_t (mm/tooth), Depth of cut: a_p (mm), Wide of cut: a_e (mm)

Material Cutting data	Pre-hardened steel, Die steel (- HRC52)				Die steel (- HRC62)				High speed tool steel (- HRC70)			
	n (rpm)	f _t (mm/tooth)	d _{oc} (mm)	W _{oc} (mm)	n (rpm)	f _t (mm/tooth)	d _{oc} (mm)	W _{oc} (mm)	n (rpm)	f _t (mm/tooth)	d _{oc} (mm)	W _{oc} (mm)
R 0,2	20.000-50.000	0,02	0,03	0,03	20.000-50.000	0,02	0,01	0,02	20.000-50.000	0,015	0,01	0,02
R 0,3	20.000-50.000	0,02	0,03	0,03	20.000-50.000	0,02	0,01	0,02	20.000-50.000	0,015	0,01	0,02
R 0,5	20.000-50.000	0,03	0,05	0,05	20.000-50.000	0,03	0,03	0,04	20.000-50.000	0,02	0,02	0,03
R 0,75	20.000-50.000	0,04	0,08	0,1	20.000-50.000	0,04	0,05	0,05	20.000-50.000	0,03	0,02	0,05
R 1,0	20.000-50.000	0,05	0,1	0,1	17.000-50.000	0,05	0,05	0,05	17.000-50.000	0,03	0,03	0,05

■ Important Notes


- (1) For stable machining, a more rigid machine is recommended.
- (2) Air blast or oil mist coolant is recommended.
- (3) Shorten overhang as much as possible.



SUMIDIA "MOULD Finish Master" NPDRS Type



SUMIDIA Binderless Radius Endmill NPDRS Type

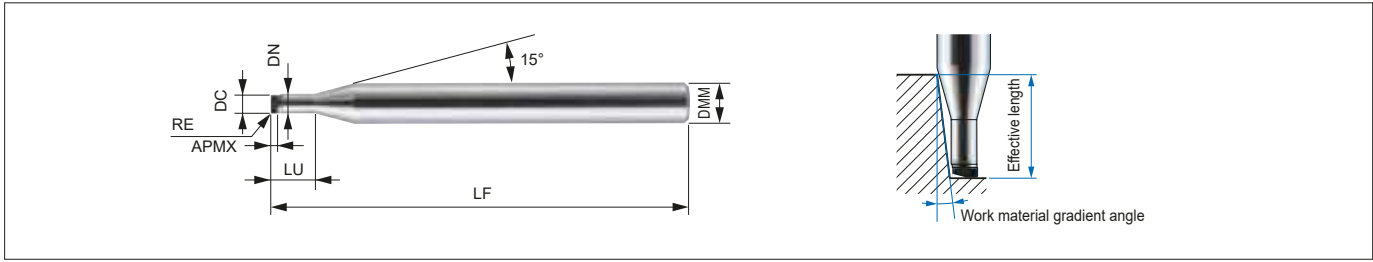

NPDRS Type Body (for Standard Finishing)

Cat. No.	Stock	Dimensions (mm)							Real effective length with respect to work material gradient angle					
		NPD10	DC	RE	APMX	LU	LF	DN	DMM	0,5°	1°	1,5°	2°	3°
NPDRS 1020 R002-006	○		0,2	0,02	0,10	0,6	40	0,175	4	0,61	0,62	0,63	0,64	0,66
1020 R005-006	○		0,2	0,05	0,10	0,6	40	0,175	4	0,61	0,62	0,63	0,64	0,66
1030 R002-010	○		0,3	0,02	0,15	1,0	40	0,27	4	1,01	1,03	1,04	1,06	1,09
1030 R005-010	○		0,3	0,05	0,15	1,0	40	0,27	4	1,01	1,03	1,04	1,06	1,09
1050 R005-015	○		0,5	0,05	0,25	1,5	40	0,47	4	1,61	1,66	1,72	1,78	1,92
NPDRS 1050 R010-015	○		0,5	0,10	0,25	1,5	40	0,47	4	1,61	1,66	1,71	1,77	1,91
1100 R005-030	○		1,0	0,05	0,55	3,0	40	0,95	4	3,40	3,52	3,65	3,78	4,08
1100 R010-030	○		1,0	0,10	0,55	3,0	40	0,95	4	3,40	3,52	3,64	3,77	4,07
1100 R020-030	○		1,0	0,20	0,55	3,0	40	0,95	4	3,40	3,51	3,63	3,76	4,05
1200 R005-040	○		2,0	0,05	0,55	4,0	40	1,95	4	4,44	4,59	4,75	4,93	5,33
NPDRS 1200 R010-040	○		2,0	0,10	0,55	4,0	40	1,95	4	4,43	4,59	4,75	4,92	5,31
1200 R020-040	○		2,0	0,20	0,55	4,0	40	1,95	4	4,43	4,58	4,74	4,91	5,29

Identification Details

NPDR	S	1	020	R002	- 006
Series Code	For standard finishing	No. of flutes	Cutting diameter	Corner radius	Length below neck

Cutting Diameter and Nose Radius Combinations

DC	RE 0,02	RE 0,05	RE 0,1	RE 0,2
0,2	○	○		
0,3	○	○		
0,5		○	○	
1,0		○	○	○
2,0		○	○	○

Recommended Cutting Conditions

- Use a machine with high rigidity for stable cutting.
- Non-water soluble coolant recommended. Supply as a mist or external coolant. Take fire prevention precautions to avoid fire hazards caused by sparks igniting during machining or tool breakage.
- Shorten overhang as much as possible.
- Adjust cutting conditions as necessary as machine rigidity and other conditions may vary.
- Depth of cut shown in the table of conditions are maximum depths. Adjust the actual depth of cut to the desired machined surface finish.


Work Material		Carbide				
RE (mm)	LU	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	a _p (mm)	a _e (mm)	
0,2	0,10	40.000	100	0,001	0,001	
0,3	0,15	40.000	150	0,002	0,001	
0,5	0,25	40.000	200	0,003	0,001	
1,0	0,55	40.000	400	0,005	0,003	
2,0	0,55	40.000	600	0,010	0,005	



○ = Japan stock



SUMIDIA Binderless Ballnose Endmill NPDBS Type / NPDB Type

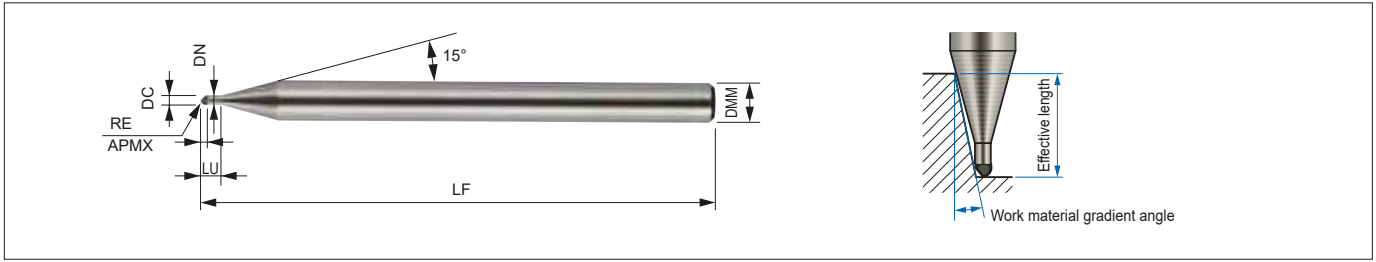

NPDBS Type Body (for Standard Finishing)

Cat. No.	Stock NPD10	Dimensions (mm)							Real effective length with respect to work material gradient angle				
		RE	DC	APMX	LF	LU	DN	DMM	0,5°	1°	1,5°	2°	3°
NPDBS 1010-004	○	0,1	0,2	0,1	0,4	40	0,18	4	0,44	0,45	0,46	0,47	0,49
1020-008	○	0,2	0,4	0,2	0,8	40	0,38	4	0,83	0,84	0,85	0,86	0,89
1030-010	○	0,3	0,6	0,3	1,0	40	0,58	4	1,05	1,08	1,10	1,13	1,20
1050-020	○	0,5	1,0	0,5	2,0	40	0,95	4	2,08	2,13	2,19	2,24	2,38
1100-030	○	1,0	2,0	1,0	3,0	40	1,95	4	3,13	3,20	3,27	3,35	3,53

NPDB Type Body (for Precision Finishing)

Cat. No.	Stock NPD10	Dimensions (mm)							Real effective length with respect to work material gradient angle				
		RE	DC	APMX	LF	LU	DN	DMM	0,5°	1°	1,5°	2°	3°
NPDB 1010-004	○	0,1	0,2	0,1	0,4	40	0,18	4	0,44	0,45	0,46	0,47	0,49
1020-008	○	0,2	0,4	0,2	0,8	40	0,38	4	0,83	0,84	0,85	0,86	0,89
1030-010	○	0,3	0,6	0,3	1,0	40	0,58	4	1,05	1,08	1,10	1,13	1,20
1050-020	○	0,5	1,0	0,5	2,0	40	0,95	4	2,08	2,13	2,19	2,24	2,38
1100-030	○	1,0	2,0	1,0	3,0	40	1,95	4	3,13	3,20	3,27	3,35	3,53

Identification Details

NPDB (S) 1 030 - 010

Series Code For standard finishing No. of flutes Ballnose radius Length below neck

Recommended Cutting Conditions

- Use a machine with high rigidity for stable cutting.
- Non-water soluble coolant recommended. Supply as a mist or external coolant.
Take fire prevention precautions to avoid fire hazards caused by sparks igniting during machining or tool breakage.
- Shorten overhang as much as possible.
- Adjust cutting conditions as necessary as machine rigidity and other conditions may vary.
- Depth of cut shown in the table of conditions are maximum depths. Adjust the actual depth of cut to the desired machined surface finish.

● Flat Surface Finishing

Work Material		Carbide			
RE (mm)	LU	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	a _p (mm)	a _e (mm)
0,1	0,4	40.000	100	0,001	0,001
0,2	0,8	40.000	150	0,001	0,001
0,3	1,0	40.000	200	0,001	0,001
0,5	2,0	40.000	400	0,001	0,003
1,0	3,0	40.000	600	0,001	0,005

● Copy Finishing

Work Material		Carbide			
RE (mm)	LU	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	a _p (mm)	a _e (mm)
0,1	0,4	40.000	100	0,001	0,001
0,2	0,8	40.000	150	0,002	0,001
0,3	1,0	40.000	200	0,003	0,001
0,5	2,0	40.000	400	0,005	0,003
1,0	3,0	40.000	600	0,010	0,005



SUMIDIA Drills


DAL/DDL/DML Type



From general to High Precision Drilling of Aluminum Alloys!


- High precision DAL type is able to produce holes of IT Class of 7 – 8.
- General DDL type is able to produce holes of IT class of 11 – 12, mainly for drilling of pre-tap holes.
- DML type is DDL type with a chamfer edge, incorporating 2 processes in one operation.

■ DAL Type

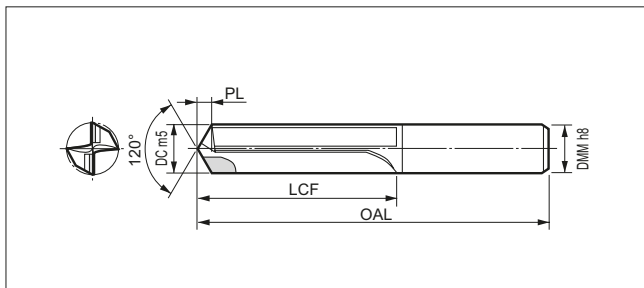

Cat. No.	DA2200	DC (DMM)	LCF	OAL	PL
DAL 0500H – 0600H		$\emptyset 5 \leq DC \leq \emptyset 6$	31,6	84,6	1,6
0601H – 0700H		$\emptyset 6 < DC \leq \emptyset 7$	36,9	91,9	1,9
0701H – 0800H		$\emptyset 7 < DC \leq \emptyset 8$	37,2	92,2	2,2
0801H – 0900H		$\emptyset 8 < DC \leq \emptyset 9$	42,5	102,5	2,5
0901H – 1000H		$\emptyset 9 < DC \leq \emptyset 10$	42,8	102,8	2,8
1001H – 1100H		$\emptyset 10 < DC \leq \emptyset 11$	53,1	113,1	3,1
1101H – 1200H		$\emptyset 11 < DC \leq \emptyset 12$	53,4	113,4	3,4

■ DDL Type

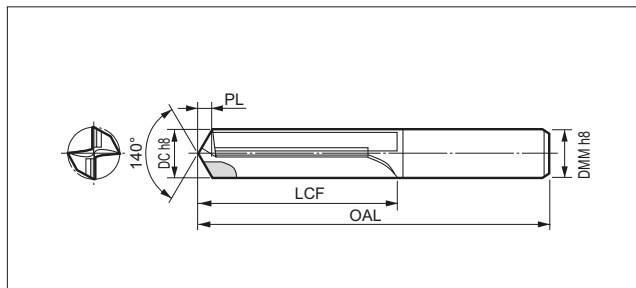

Cat. No.	DA2200	DC (DMM)	LCF	OAL	PL
DDL 050V – 060V		$\emptyset 5 \leq DC \leq \emptyset 6$	31,5	81,0	1,0
061V – 070V		$\emptyset 6 < DC \leq \emptyset 7$	36,2	91,2	1,2
071V – 080V		$\emptyset 7 < DC \leq \emptyset 8$	36,4	91,4	1,4
081V – 090V		$\emptyset 8 < DC \leq \emptyset 9$	41,6	101,6	1,6
091V – 100V		$\emptyset 9 < DC \leq \emptyset 10$	41,7	101,7	1,7
101V – 110V		$\emptyset 10 < DC \leq \emptyset 11$	51,9	111,9	1,9
111V – 120V		$\emptyset 11 < DC \leq \emptyset 12$	52,1	112,1	2,1

■ Recommended Conditions

DC (mm)	Cutting Speed (m/min)	Feed Rate (mm/rev)	Drilling Length L/D	Oil
<8	80–250	0,05–0,2	Below 3 x D	Water soluble
$\geq 8 \leq 12$		0,1–0,3		

■ Important Notes


- Select a high rigidity machine and high precision tool holder.
- Enough coolant to drilled hole.

■ Application Examples (DAL Type)


Work Shape	Work	Conditions	Results
	A390 High silicon Aluminum	$V_c=100\text{m/min}$ $f=0,1\text{mm/rev}$	<ul style="list-style-type: none"> • Holes by carbide drill was out of specifications after 2.000 holes/reg. • SumiDia drill could drill up to 30.000 holes/reg. • 15 times tool life that of carbide drills.
	A390 High silicon Aluminum (pre-cast hole of $\emptyset 10$)	$V_c=120\text{m/min}$ $f=0,12\text{mm/rev}$	<ul style="list-style-type: none"> • Average 40,000 holes/reg • Surface roughness $R_y = 1\mu\text{m}$
	ADC10 Aluminum Die Cast	$V_c=90\text{m/min}$ $f=0,08\text{mm/rev}$	<ul style="list-style-type: none"> • More than 50.000 holes and still running

■ Application Examples (DDL Type)

Work Shape	Work	Conditions	Results
	ADC12 Aluminum Die Cast M8 Pre-tap holes	$V_c=214\text{m/min}$ $f=0,14\text{mm/rev}$	<ul style="list-style-type: none"> • Regrind after 100.000 holes
	ADC12 Aluminum Die Cast	$V_c=200\text{m/min}$ $f=0,17\text{mm/rev}$	<ul style="list-style-type: none"> • Regrind after 74.000 holes (2.000m) (Preset tool change)
	AC2A Aluminum Casting	$V_c=234\text{m/min}$ $f=0,28\text{mm/rev}$	<ul style="list-style-type: none"> • Regrind after 80.000 holes (Preset tool change)

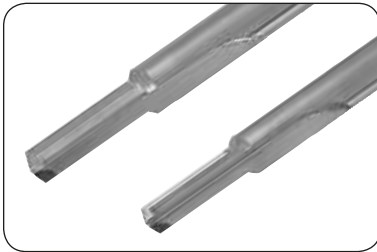

■ DML Type

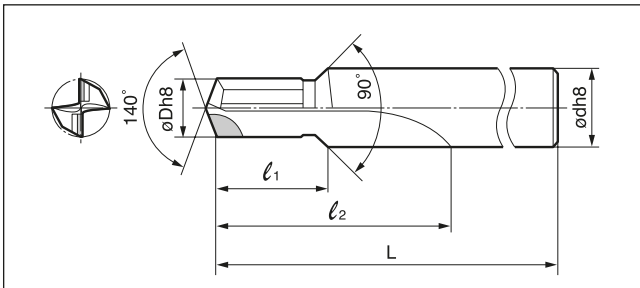


Applicable Tap Size	Cat. No.	Stock	øD	ød	L	l ₁	l ₂
		DA2200					
M6	DML 050V		5	8	90	18	36
M8	DML 068V		6,8	10	104	24	48
M10	DML 085V		8,5	12	122	30	60
M12	DML 103V		10,3	14	136	36	72

■ Application Examples (DML Type)

Work Shape	Work	Conditions	Results
	AC4C-T6 Aluminum Casting M6 Pre-tap holes	Vc=100m/min f=0,1mm/rev m/c=6 spindles	<ul style="list-style-type: none"> Regrind after 150.000 holes Tool life for carbide drill is 500 holes. 30 times tool life that of carbide drills
	AC2C-T2 Aluminum Casting M8 Pre-tap holes	Vc=210m/min f=0,15mm/rev	<ul style="list-style-type: none"> 100.000 holes/reg (2.000m) and still running. Drilling and chamfering in the same process
	AC4C-T6 Aluminum Casting M10 Pre-tap holes	Vc=250m/min f=0,2mm/rev	<ul style="list-style-type: none"> 80.000 holes/reg (1,840m) and still running. Drilling and chamfering in the same process

■ DML Type Possible Profiles

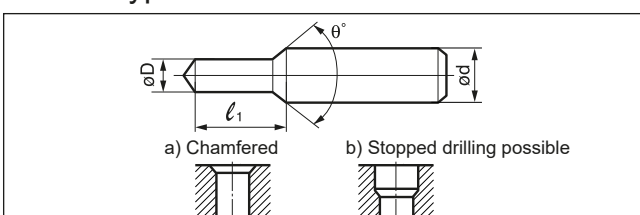


- (1) Tolerance for dimension L is more than 0,2mm.
- (2) θ° is less than 180° .

Technical Guidance References



N1–N24

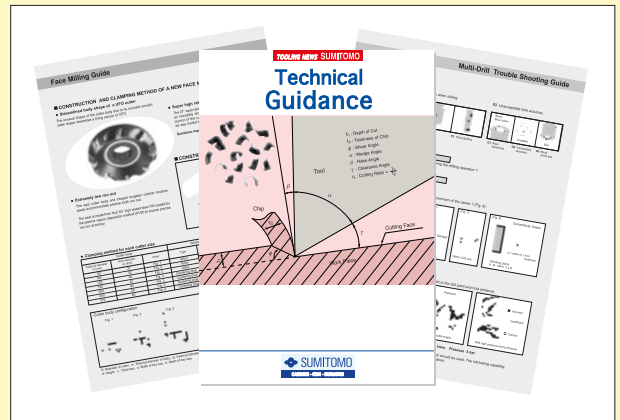

Basics of Turning	N 2
Tool Failures and Remedies	N 3 - 4
Chip Control.....	N 5
Basics of Milling	N 6 - 8
Tool Failures and Remedies.....	N 9
Basics of Endmilling	N10-11
Tool Failures and Remedies.....	N12
Basics of Drilling	N13-15
Tool Failures and Remedies.....	N16
SUMIBORON for	
Hardened Steel Machining	N17
Cast Iron Machining	N18
Hard-to cut Materials Machining	N19
Tool Failure and Remedies	N20
References	
Steel and Non-Ferrous Metal Symbols Chart	N21
Hardness Scale Comparison Chart.....	N22
Finished Surface Roughness	N23

Technical Guidance

Basics of Turning

Calculating Power Requirement

$$P_c = \frac{d_{oc} \cdot f \cdot v_c \cdot K_c}{60 \times 10^3 \times \eta}$$


$$H = \frac{P_c}{0,75}$$

P_c : Net power requirement (KW)
 v_c : Cutting speed (m/min)
 f : Feed rate (mm/rev)
 d_{oc} : Depth of cut (mm)
 η : Machine efficiency (0,70 ~ 0,85)
 K_c : Specific cutting force (N/mm²)
 H : Required horsepower (HP)

Rough value of specific cutting force (K_c)

General steel :	2.500 ~ 3.000 N/mm ²
Cast iron :	1.500 N/mm ²
Aluminum :	800 N/mm ²

Cutting Force

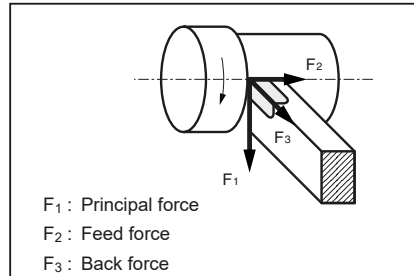


Calculating cutting force

$$P = K_c \cdot q$$


$$= \frac{K_c \times d_{oc} \times f}{1000}$$

P : Cutting force (N)
 K_c : Specific cutting force (N/mm²)
 q : Chip area (mm²)
 d_{oc} : Depth of cut (mm)
 f : Feed rate (mm/rev)

Cutting Speed and Cutting Force

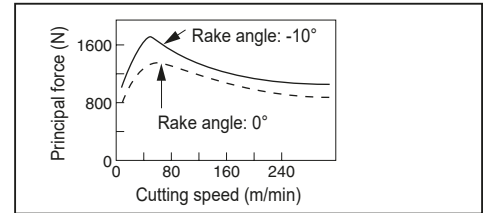

Rake Angle and Cutting Force

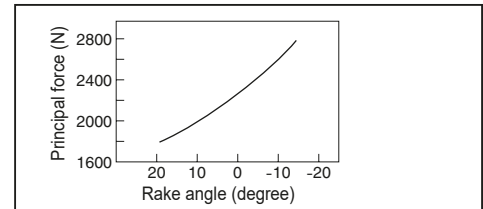

Calculating Cutting Speed

Calculating rotational speed from cutting speed

$$n = \frac{1000 \cdot v_c}{\pi \cdot D}$$

n : Spindle speed (min⁻¹)
 v_c : Cutting speed (m/min)
 D : Diameter of workpiece (mm)
 $\pi \approx 3,14$


(Eg.) $v_c = 150$ m/min, $D = 100$ mm

$$n = \frac{1000 \times 150}{3,14 \times 100} = 478 \text{ (min}^{-1}\text{)}$$

Calculating cutting speed from rotational speed


$$v_c = \frac{\pi \cdot D \cdot n}{1.000}$$

Refer to the above table



n : Spindle speed (min⁻¹)
 v_c : Cutting speed (m/min)
 f : Feed rate (mm/rev)
 d_{oc} : Depth of cut (mm)
 D_m : Diameter of workpiece (mm)

Feed Rate and Specific Cutting Force (For carbon steel)

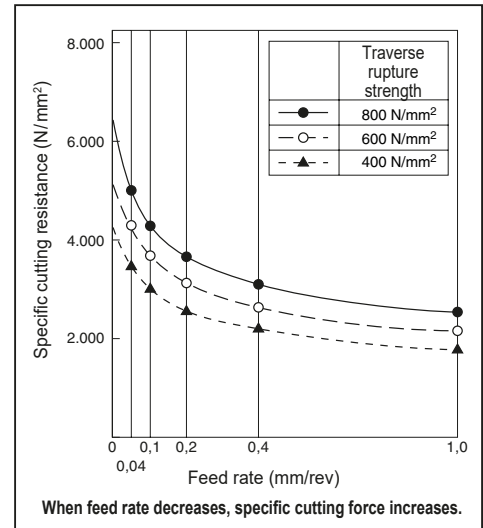

Roughness

Theoretical Surface Finish

$$R_z = \frac{f^2}{8 \times r}$$

R_z : Surface finish (mm)
 f : Feed rate (mm/rev)
 r : Nose radius (mm)


Actual surface roughness

Steel :
 Theoretical surface finish x 1,5 ~ 3
 Cast iron :
 Theoretical surface finish x 3 ~ 5

Ways to Improve Surface Finish

- Use an insert with a larger nose radius.
- Optimize the cutting speed and feed rate so that built-up edge does not occur.
- Select an appropriate insert grade.
- Use wiper insert.

Nose Radius and Cutting Force

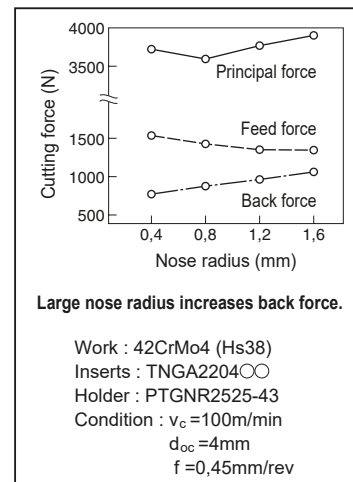

Forms of Tool Failures

	Cat.	No.	Name of Failure	Cause of Failure
	Resulting from Mechanical causes	1~5	Flank Wear	Due to the scratching effect of hard grains contained in the work material.
		6	Chipping	Fine breakages caused by high cutting loads or chattering.
		7	Fracture	Due to the impact of an excessive mechanical force acting on the cutting edge.
	Resulting from Chemical reactions	8	Crater Wear	Swafft chips removing tool material as it flow over the top face at high temperatures.
		9	Plastic Deformation	Cutting edge is depressed due to softening at high temperatures.
		10	Thermal Crack	Fatigue from rapid, repeated heating and cooling cycles during machining.
		11	Built-up Edge	Work material is pressure welded on the top face of the cutting edge.

Tool Wear

Forms of Tool Wear

Bad chip control
Cutting edge fracture

Creater wear K_T

Burs occur

Side flank wear V_{N1}

Flank wear V_B

Higher cutting force

Poor surface finish

Face flank wear V_{N2}


Edge wear V_c

Poor machining accuracy
Burs occur

	Flank wear	Crater wear
<p>Wear is rapid initially, then it proceeds more gradually in proportion with cutting time until a certain limit, beyond which it increases rapidly again.</p>	<p>Crater wear is more progressive with no sudden breakdown pattern.</p>	

Tool Life (V-T)

Measure the relative tool lives of the specified wear, over a range of cutting speeds, then plot the tool life along the X-axis and the cutting speed along the Y-axis on a double logarithm graph.

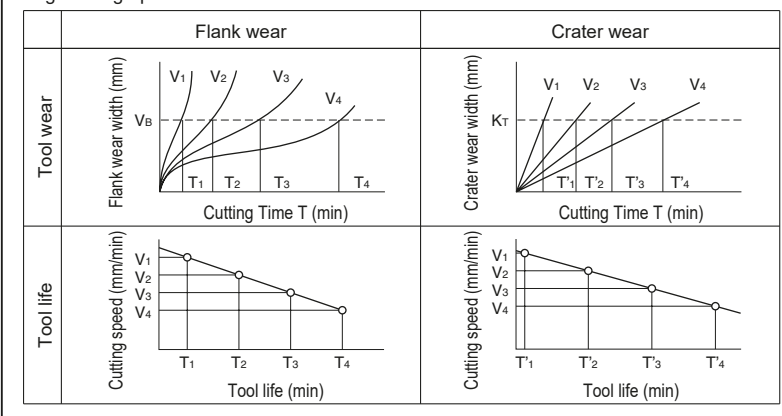

Technical Guidance

Tool Failure and Remedies

■ Trouble Shooting Guide for Turning

	Damage	Cause	Countermeasures
Tool Edge Failure	<p>Excessive flank wear</p> 	<ul style="list-style-type: none"> - Grade lacks wear resistance. - Cutting speed is too fast. - Feed rate is far too slow. 	<ul style="list-style-type: none"> - Select a wear resistant grade. P30 ⇨ P20 ⇨ P10 K20 ⇨ K10 ⇨ K01 - Use an insert with a larger rake angle. - Decrease the cutting speed. - Increase feed rates.
	<p>Excessive crater wear</p> 	<ul style="list-style-type: none"> - Grade lacks crater wear resistance. - Rake angle is too small. - Cutting speed is too fast. - Feed rate and depth of cut are too large. 	<ul style="list-style-type: none"> - Select a more crater-resistant grade. - Use an insert with a larger rake angle. - Select an appropriate chipbreaker. - Decrease the cutting speed. - Decrease the D.O.C. and feed rate.
	<p>Cutting edge chipping</p> 	<ul style="list-style-type: none"> - Grade lacks toughness. - Insert falls off due to chip build-up. - Cutting edge lacks toughness. - Feed rate and depth of cut are too large. 	<ul style="list-style-type: none"> - Change to tougher grades. P10 ⇨ P20 ⇨ P30 K01 ⇨ K10 ⇨ K20 - Increase amount of honing on cutting edge. - Reduce rake angle. - Reduce feed rates and depth of cut.
	<p>Cutting edge fracture</p> 	<ul style="list-style-type: none"> - Grades lacks toughness. - Cutting edge lacks toughness. - Holder lacks toughness. - Feed rate is too fast. - Depth of cut is too large. 	<ul style="list-style-type: none"> - Change to tougher grades. P10 ⇨ P20 ⇨ P30 K01 ⇨ K10 ⇨ K20 - Select a chipbreaker with a strong cutting edge. - Select a holder with a larger approach angle. - Select a holder with a larger shank size. - Decrease the D.O.C. and feed rate.
	<p>Build-up edge</p> 	<ul style="list-style-type: none"> - Inappropriate grade selection. - Dull cutting edge. - Cutting speed is too slow. - Feed rate is too slow. 	<ul style="list-style-type: none"> - Select a grade with less affinity to the work material. Coated carbide or cermet grades. - Select a grade with a smooth coating. - Use an insert with a larger rake angle. - Reduce amount of honing. - Increase cutting speeds. - Increase feed rates.
	<p>Plastic deformation</p> 	<ul style="list-style-type: none"> - Grade lacks thermal resistance. - Cutting speed is too fast. - Feed rate is too fast. - Depth of cut is too large. - Not enough cutting fluid. 	<ul style="list-style-type: none"> - Select a more crater-wear-resistant grade. - Use an insert with a larger rake angle. - Decrease the cutting speed. - Reduce feed rates and depth of cut. - Supply a sufficient amount of coolant.
	<p>Notch wear</p> 	<ul style="list-style-type: none"> - Grade lacks wear resistance. - Rake angle is too small. - Cutting speed is too fast. 	<ul style="list-style-type: none"> - Select a wear resistant grade. P30 ⇨ P20 ⇨ P10 K20 ⇨ K10 ⇨ K01 - Use an insert with a larger rake angle. - Alter depth of cut to shift the notch location.

■ Type of Chip Generation

	a	b	c	d
Shape				
Condition	Continuous chips with good surface finish.	Chip is sheared and separated by the shear angle.	Chips appear to be torn from the surface.	Chips crack before reaching the cutting point.
Application	Steel, Stainless steel	Steel, Stainless steel (Low speed)	Steel, Cast iron (Very low speed, very small feedrate)	Cast iron, Carbon
Influence factor	Easy ← Work deformation → Difficult Large ← Rake angle → Small Small ← D.O.C. → Large Fast ← Cutting speed → Slow			

■ Type of Chip Control


Feed rate	A	B	C	D	E
Large feed rate					
Small feed rate					
NC lathe (For automation)	×	×	○	○	△
General lathe (For safety)	×	○	○	○ ~ △	×

Good : C type, D type

Poor {
 A type : Twines around the tool or workpiece, damages the machined surface and affects safety.
 B type : Bulky, causes problems in the automatic chip conveyor and chipping occurs easily.
 E type : Causes spraying of chips, poor machined surface due to chattering, chipping, large cutting force and high temperatures.


■ Factor of Improvement Chip Control

① Increase feed rate

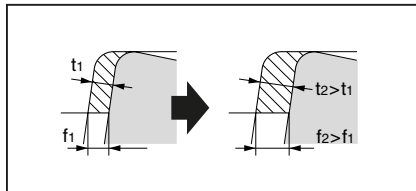


When feedrate increase, chips become thick and chip control improves.

② Decrease side cutting edge

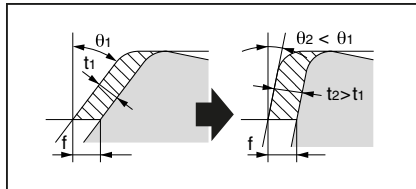




Even if feed rate is the same, smaller side cutting edge angle makes chips thick and chip control improves.

③ Decrease nose radius

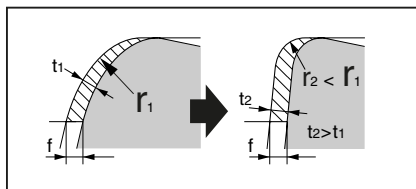

Even if depth of cut is the same, smaller nose radius makes chip thick and chip control improves.


* Cutting resistance increases in proportion with the width of the contact surface. Therefore, with a larger nose radius, cutting resistance and back force increases, chattering may also occur. However, with the same feedrate, a smaller nose radius would produce a poorer surface finish.

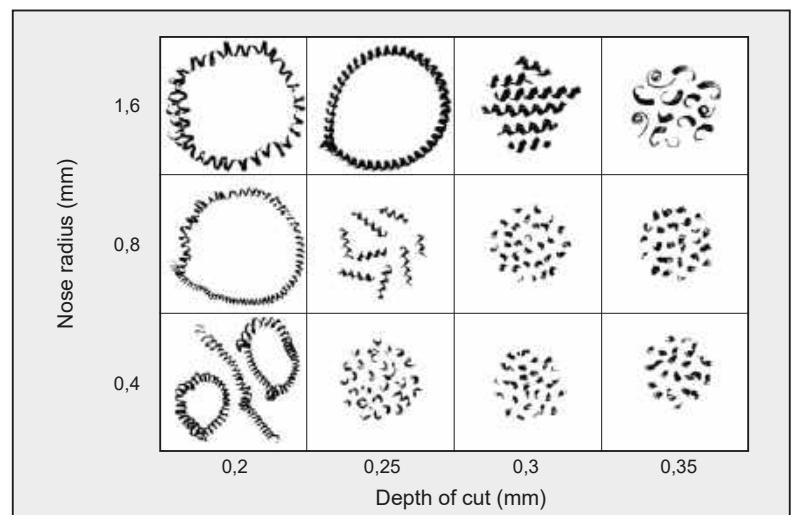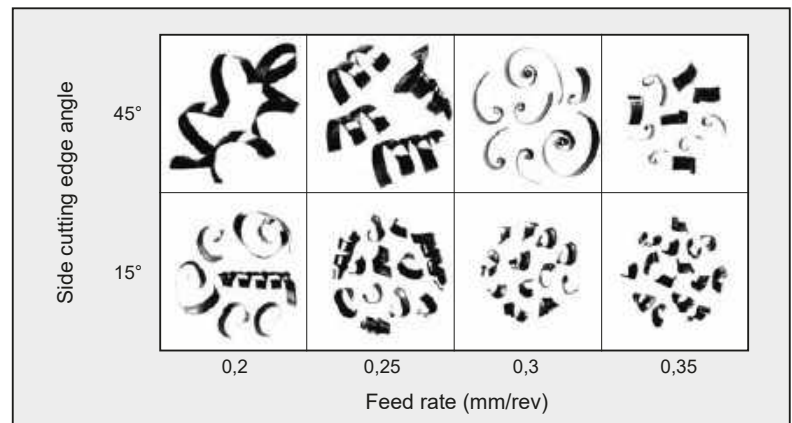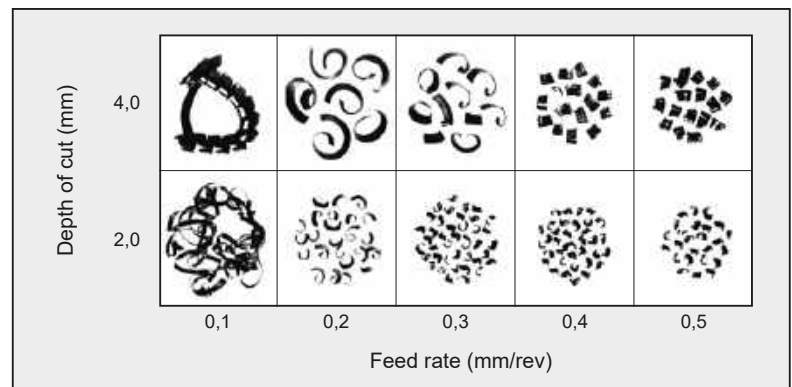

Technical Guidance

Basics of Milling

Parts of a Milling Cutter

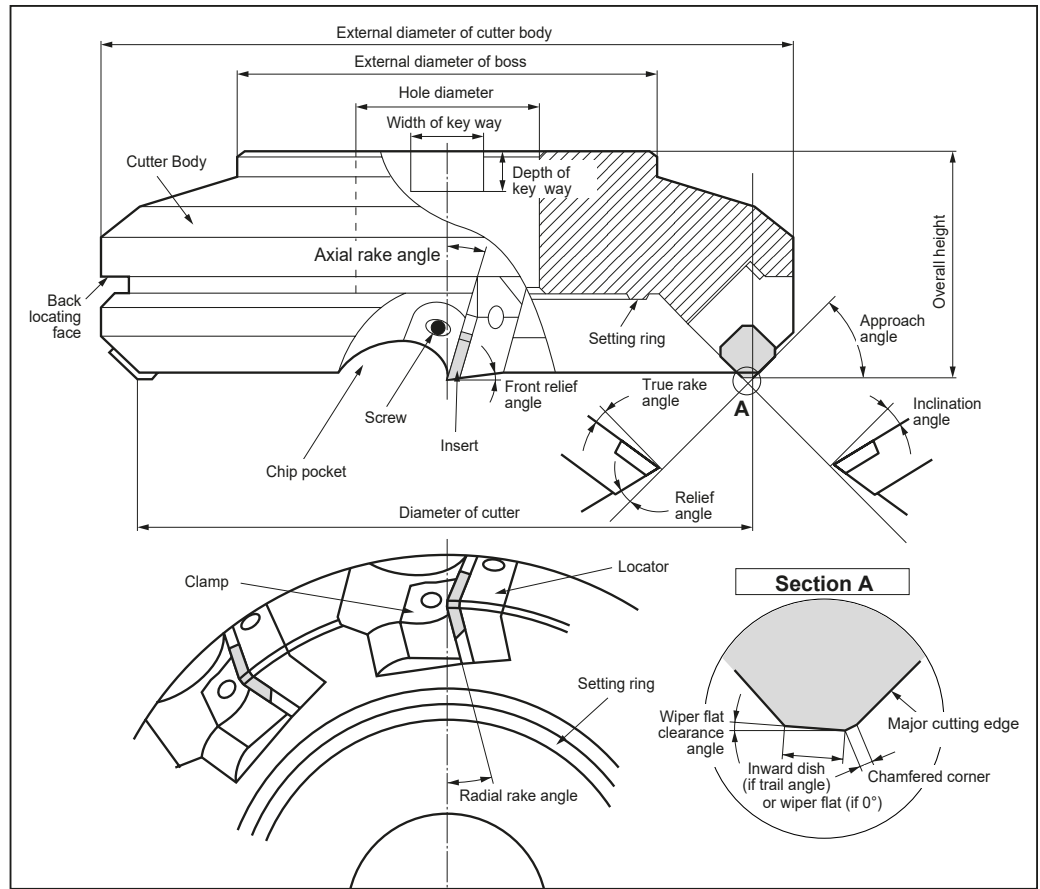

Power Requirement

Calculating cutting force

$$P_c = \frac{d_{oc} \cdot w_{oc} \cdot v_f \cdot K_c}{60 \times 10^6 \times \eta} \text{ (kW)}$$

Horsepower

$$H = \frac{P_c}{0,75}$$

Chip removal amount

$$Q = \frac{d_{oc} \times w_{oc} \times v_f}{1.000} \text{ (cm}^3\text{/min)}$$

P_c : Net power requirement (kW)

H : Horsepower requirement (HP)

Q : Chip removal amount (cm³/min)

w_{oc} : Cutting width (mm)

v_f : Feed speed (mm/min)

d_{oc} : Depth of cut (mm)


η : Machine efficiency (0,70 ~ 0,85)

K_c : Specific cutting force (N/mm²)

Eg. rough value

Steel : 2.500 ~ 3.000
Cast iron : 1.500

Relation between feed rate, work material, specific cutting force

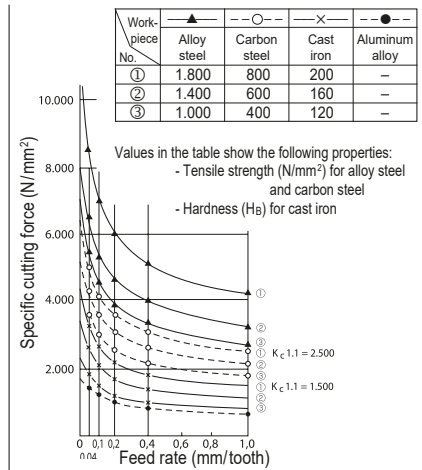

Calculating cutting speed

$$v_c = \frac{\pi \times D \times n}{1.000}$$

v_c : Cutting speed (m/min)

$\pi \approx 3,14$

D : Cutter diameter (mm)

n : Rotation speed (rpm)

v_f : Feed speed (mm/min)


f_t : Feed rate (mm/tooth)

Z : Number of teeth

Calculating feed rate

$$v_f = f_t \times z \times n$$


$$f_t = \frac{v_f}{z \times n}$$




Functions of the Various Cutting Angles

	Description	Code	Functions	Influences
①	Axial rake angle	γ_y	Controls chip removal direction, effects adhesion of the chips and thrust force etc.	Rake angles can vary from positive to negative (large to small) with typical combinations of positive and negative, positive and positive or negative and negative configurations.
②	Radial rake angle	γ_x		
③	Approach angle	κ	Controls chip thickness and chip removal direction	The effect of the small approach angle is to reduce the chip thickness and cutting force.
④	True rake angle (Effective rake angle)	γ	Controls cutting performance and ability to retain a cutting edge	<ul style="list-style-type: none"> - With a positive (large) angle, cutting ability and adhesion resistance are improved but the strength of the cutting edge is weakened. - With negative (small) angle, the strength of the cutting edge is improved but chips will tend to adhere more easily.
⑤	Inclination angle	λ	Controls chip removal direction	- With a positive (large) angle, the chip removal is satisfactory with less cutting resistance but the strength of the corner is weaker.
⑥	Wiper flat clearance angle	α_f	Controls surface finish	A smaller clearance angle will produce a better surface finish.
⑦	Clearance angle	α	Controls edge strength, tool life and chattering, etc	

True Rake Angle Chart

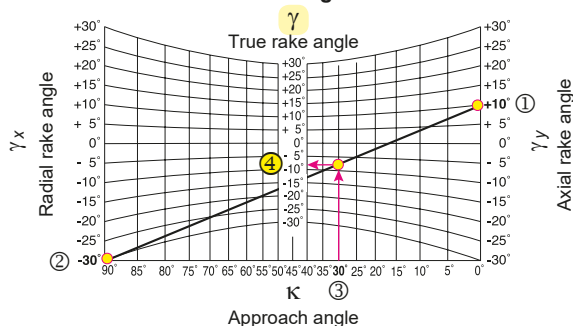

Inclination Angle Chart

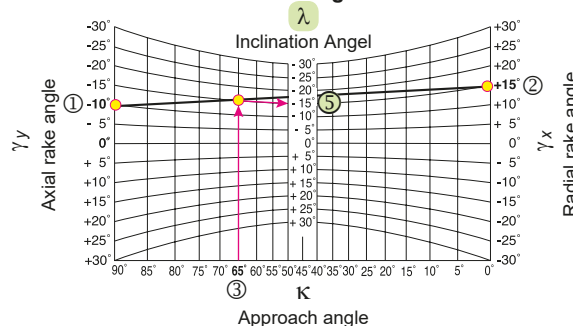

Example in using the above chart:	Solution:
① γ_y : Axial rake angle = +10°	True rake angle
② γ_x : Radial rake angle = -30°	④ $\gamma = -8^\circ$
③ κ : Approach angle = 30°	

Formula : $\tan \gamma = \tan \gamma_x \cdot \sin \kappa + \tan \gamma_y \cdot \cos \kappa$

Example in using the above chart :	Solution:
① γ_y : Axial rake angle = -10°	Inclination angle
② γ_x : Radial rake angle = +10°	⑤ $\lambda = -15^\circ$
③ κ : Approach angle = 65°	

Formula : $\tan \lambda = \tan \gamma_y \cdot \sin \kappa - \tan \gamma_x \cdot \cos \kappa$


Rake Angle Combination

	Negative - Positive Type	Double Positive Type	Double Negative Type
The effects of the various angle configurations with relation to chip formation and chip removal.			
Advantage	Excellent chip removal and good cutting action	Good cutting action	Double-sided inserts can be use and higher cutting edge strength
Disadvantage	Only single-sided inserts can be use	Lower cutting edge strength and only single-sided inserts can be use	Dull cutting action
Application	For Steel, Cast iron, Stainless steel, Alloy steel	For general milling of steel For low rigidly work piece	For light milling of cast iron and steel
Typical cutter	WGX, WGC, UFO	DPG	DNX, DGC, DNF
Chips (Eg.) Workpiece: 37Cr4 $v_c = 130$ m/min $f_t = 0.23$ mm/tooth $d_{oc} = 3$ mm			


Technical Guidance

Basics of Milling

Relation Between Engage Angle and Tool Life

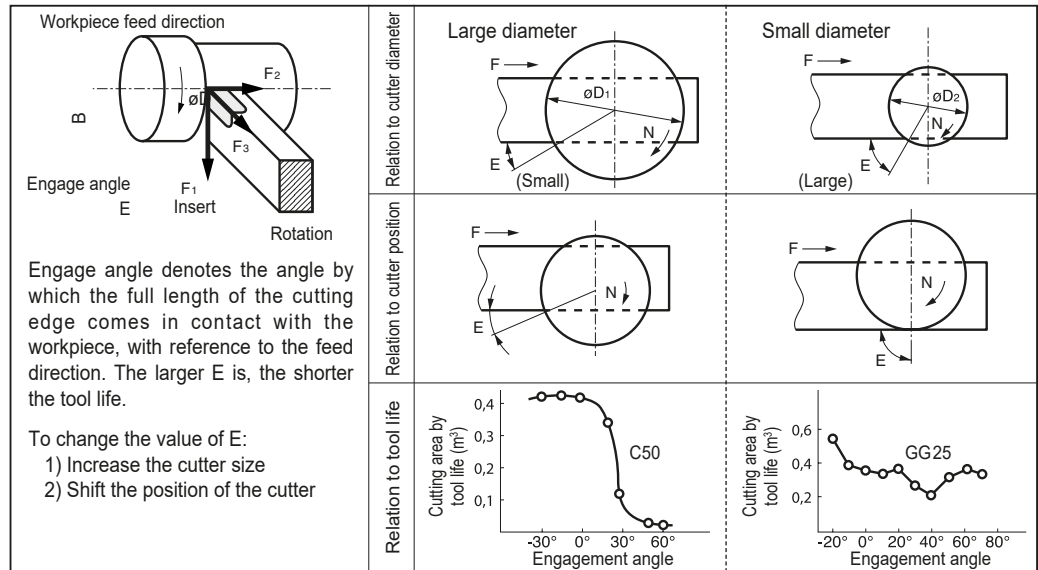

Relation between the number of simultaneously engaged cutting edges and cutting force:

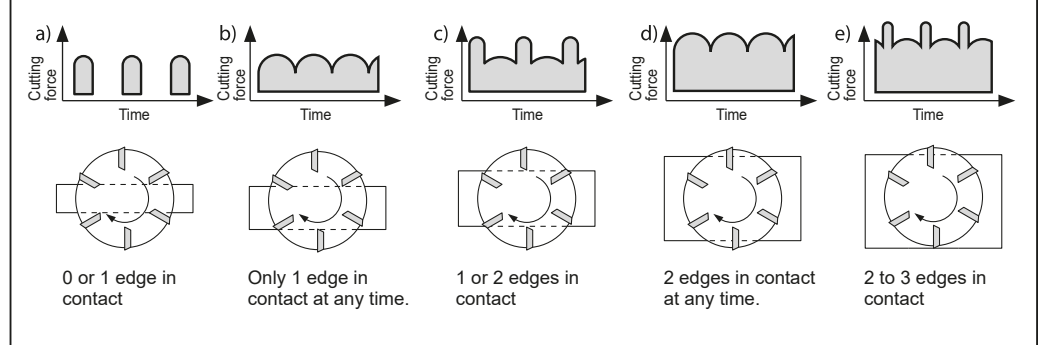


To Improve Surface Roughness

① Milling inserts with wiper flat


When all the cutting edges have wiper flats, a few teeth are intentionally elevated to play the role of a wiper insert.

- Insert equipped with straight wiper flat (Face angle: Approx $15^\circ - 1^\circ$)
- Insert equipped with curved wiper flat (Eg. curvature R500)


● Surface roughness without wiper flat




● Surface roughness with straight wiper flat



h : Projected value of wiper insert
 Steels: 0,05 mm
 Al: 0,03 mm




f : Feed rate per revolution



H_c : Surface roughness with only normal teeth
 H_w : Surface roughness with wiper insert

● Influence of different face angles on surface finish

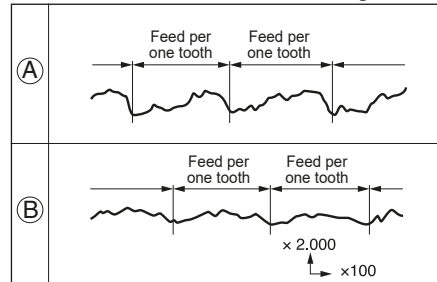

- Workpiece: 34CrMo4
 - Cutter: DPG 5160 R (Single tooth)

- $v_c = 154$ m/min
 $f_t = 0,234$ mm/tooth
 $d_{oc} = 2$ mm


- Face angle
 (A): 28°
 (B): 6°

② Integral wiper insert system

A system to protrude one or two inserts (wiper insert) with a smooth curved edge just a little beyond the other teeth to wipe the milled surface.

- (Applies to WGC, RF types etc.)





● Effects of having wiper insert (example)

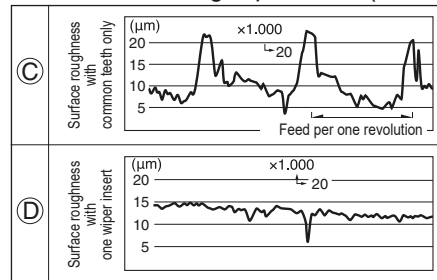

- Workpiece: GG25
 - Cutter: DPG 4100 R
 - Insert: SPKN 1203
 - Axial run-out: 0,015 mm
 - Radial run-out: 0,04 mm

- $v_c = 105$ m/min
 $f_t = 0,29$ mm/tooth (1,45 mm/rev)
 (C): Only normal teeth
 (D): with 1 wiper insert


■ Trouble Shooting Guide for Milling

Trouble		Basic Remedies		Remedy Examples															
Cutting Edge Failure	Excessive Flank Wear 	Tool Material	- Select a more wear resistant grade. Carbide P30 ⇨ P20 ⇨ P30 K20 ⇨ K10 ⇨ { Coated Cermet	- Recommended insert grades <table border="1" data-bbox="924 383 1477 506"> <thead> <tr> <th></th> <th>Steel</th> <th>Cast Iron</th> <th>Non-Ferrous Alloy</th> </tr> </thead> <tbody> <tr> <td>Finishing</td> <td>T250A (Cermet)</td> <td>ACK200 (Coated Carbide) BN700 (SUMIBORON)</td> <td>DA1000 (SUMIDIA)</td> </tr> <tr> <td>Roughing</td> <td>ACP100 (Coated Carbide)</td> <td>ACK200 (Coated Carbide)</td> <td>DL1000 (Coated Carbide)</td> </tr> </tbody> </table>					Steel	Cast Iron	Non-Ferrous Alloy	Finishing	T250A (Cermet)	ACK200 (Coated Carbide) BN700 (SUMIBORON)	DA1000 (SUMIDIA)	Roughing	ACP100 (Coated Carbide)	ACK200 (Coated Carbide)	DL1000 (Coated Carbide)
		Steel	Cast Iron					Non-Ferrous Alloy											
	Finishing	T250A (Cermet)	ACK200 (Coated Carbide) BN700 (SUMIBORON)	DA1000 (SUMIDIA)															
	Roughing	ACP100 (Coated Carbide)	ACK200 (Coated Carbide)	DL1000 (Coated Carbide)															
Cutting Conditions	- Reduce cutting speeds. - Increase feedrate.																		
Excessive Crater Wear 	Tool Material	- Select a crater resistant grade.	- Recommended insert grades <table border="1" data-bbox="924 573 1477 696"> <thead> <tr> <th></th> <th>Steel</th> <th>Cast Iron</th> <th>Non-Ferrous Alloy</th> </tr> </thead> <tbody> <tr> <td>Finishing</td> <td>T250A (Cermet)</td> <td>ACK200 (Coated Carbide)</td> <td>DA1000 (SUMIDIA)</td> </tr> <tr> <td>Roughing</td> <td>ACP100 (Coated Carbide)</td> <td>ACK200 (Coated Carbide)</td> <td>DL1000 (Coated Carbide)</td> </tr> </tbody> </table>					Steel	Cast Iron	Non-Ferrous Alloy	Finishing	T250A (Cermet)	ACK200 (Coated Carbide)	DA1000 (SUMIDIA)	Roughing	ACP100 (Coated Carbide)	ACK200 (Coated Carbide)	DL1000 (Coated Carbide)	
	Steel	Cast Iron					Non-Ferrous Alloy												
Finishing	T250A (Cermet)	ACK200 (Coated Carbide)	DA1000 (SUMIDIA)																
Roughing	ACP100 (Coated Carbide)	ACK200 (Coated Carbide)	DL1000 (Coated Carbide)																
Cutting Conditions	- Reduce cutting speeds. - Reduce depth-of-cut and feed rate.																		
Cutting Edge Chipping 	Tool Material	- Select tougher grade. P10 ⇨ P20 ⇨ P30 K01 ⇨ K10 ⇨ K20	- Recommended insert grades <table border="1" data-bbox="924 763 1477 887"> <thead> <tr> <th></th> <th>Steel</th> <th>Cast Iron</th> </tr> </thead> <tbody> <tr> <td>Finishing</td> <td>ACP200 (Coated Carbide)</td> <td>ACK200 (Coated Carbide)</td> </tr> <tr> <td>Roughing</td> <td>ACP300 (Coated Carbide)</td> <td>ACK300 (Coated Carbide)</td> </tr> </tbody> </table>					Steel	Cast Iron	Finishing	ACP200 (Coated Carbide)	ACK200 (Coated Carbide)	Roughing	ACP300 (Coated Carbide)	ACK300 (Coated Carbide)				
	Steel	Cast Iron																	
Finishing	ACP200 (Coated Carbide)	ACK200 (Coated Carbide)																	
Roughing	ACP300 (Coated Carbide)	ACK300 (Coated Carbide)																	
Cutting Conditions	- Reduce feed rates.																		
Tool Design	- Select a negative-positive cutter configuration with a large approach angle. - Reinforce the cutting edge (Honing). - Select a strong edge insert (G → H).	- Recommended cutter: WaveMill WGX type - Cutting conditions: Refer to recommended conditions listed in the general catalogue																	
Partial Fracture of Cutting Edges 	Tool Material	- If it is due to excessive low speeds or very low feed rates, select an adhesion resistant grade. - If it is due to thermal cracking, select a thermal impact resistant grade.	- Recommended insert grades <table border="1" data-bbox="924 1028 1477 1111"> <thead> <tr> <th></th> <th>Steel</th> <th>Cast Iron</th> </tr> </thead> <tbody> <tr> <td>Roughing</td> <td>ACP300 (Coated Carbide)</td> <td>ACK300 (Coated Carbide)</td> </tr> </tbody> </table>					Steel	Cast Iron	Roughing	ACP300 (Coated Carbide)	ACK300 (Coated Carbide)							
	Steel	Cast Iron																	
Roughing	ACP300 (Coated Carbide)	ACK300 (Coated Carbide)																	
Cutting Conditions	- Select appropriate conditions with regards to the particular application.	- Recommended cutter: WaveMill WGX type - Insert thickness: 3,18 → 4,76mm - Insert type: Standard → Strong edge type - Cutting conditions: Refer to recommended conditions listed in the general catalogue																	
Tool Design	- Select a negative-positive (or negative) cutter configuration with a large approach angle. - Reinforce the cutting edge (Honing). - Select a strong edge insert (G → H). - Increase insert size - (Thickness in particular).																		
Others	Unsatisfactory Machined Surface Finish	Tool Material	- Select an adhesion resistant grade. Carbide → Cermet	- Recommended insert grades <table border="1" data-bbox="924 1413 1477 1597"> <thead> <tr> <th></th> <th>Steel</th> <th>Cast Iron</th> <th>Non-Ferrous Alloy</th> </tr> </thead> <tbody> <tr> <td>Roughing</td> <td>Cutter Insert WGX type* ACP200 (Coated Carbide)</td> <td>DGC type* ACK200 (Coated Carbide)</td> <td>FF type* H1 (Carbide) DL1000 (Coated Carbide)</td> </tr> <tr> <td>Finishing</td> <td>Cutter Insert WGC type T250A (Cermet)</td> <td>FMU type BN700 (SUMIBORON)</td> <td>RF type DA1000 (SUMIDIA)</td> </tr> </tbody> </table>					Steel	Cast Iron	Non-Ferrous Alloy	Roughing	Cutter Insert WGX type* ACP200 (Coated Carbide)	DGC type* ACK200 (Coated Carbide)	FF type* H1 (Carbide) DL1000 (Coated Carbide)	Finishing	Cutter Insert WGC type T250A (Cermet)	FMU type BN700 (SUMIBORON)	RF type DA1000 (SUMIDIA)
		Steel	Cast Iron					Non-Ferrous Alloy											
	Roughing	Cutter Insert WGX type* ACP200 (Coated Carbide)	DGC type* ACK200 (Coated Carbide)	FF type* H1 (Carbide) DL1000 (Coated Carbide)															
	Finishing	Cutter Insert WGC type T250A (Cermet)	FMU type BN700 (SUMIBORON)	RF type DA1000 (SUMIDIA)															
	Cutting Conditions	- Increase cutting speeds.	* marked cutters can be fitted with wiper inserts.																
Tool Design	- Improve axial run-out of cutting edges. (Use a cutter with less run-out) (Attach correct inserts) - Use wiper inserts. - Use special purpose cutters designed for finishing.																		
Chattering	Cutting Conditions	- Reduce feed rates.	- Recommended cutters: For steel: WaveMill WGX type For cast iron: DNX type For Non-ferrous alloy: High speed cutter for aluminium RF type																
Tool Design	- Select a high rake cutter with sharp cutting edges - Use an irregular pitched cutter. - Improve workpiece and cutter clamp rigidity.																		
Others	Unsatisfactory Chip Control	Tool Design	- Select cutter with good chip removal features. - Reduce number of teeth. - Enlarge chip pocket.	- Recommended cutter: WaveMill WGX type															
Edge Chipping on Workpiece	Tool Design	- Select a large approach angle. - Select a sharp cutting edge insert (G → L). - Reduce feed rates.	- Recommended cutter: WaveMill WGX type																
Cutting Conditions	- Reduce feed rates.																		
Burr on Workpiece	Tool Design	- Select a cutter with sharp cutting edges.	- Recommended cutter: WaveMill WGX type + FG breaker DGC type + FG breaker																
Cutting Conditions	- Increase feed rates.																		

Technical Guidance

Basics of Endmilling

Parts of an Endmill

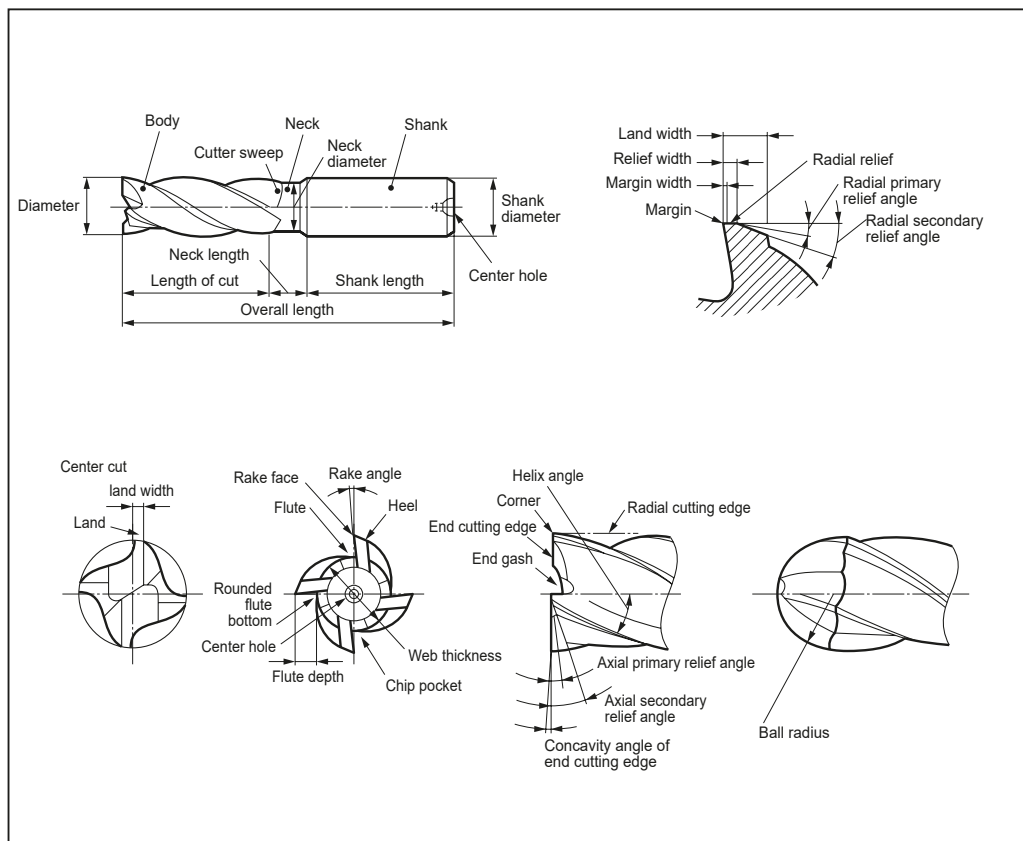

Calculating Cutting Conditions

● Cutting speed

$$v_c = \frac{\pi \cdot D \cdot n}{1.000} \quad n = \frac{1.000 \cdot v_c}{\pi \cdot D}$$

● Feed rate

$$v_f = f \times n$$

$$v_f = f_t \times z \times n \quad f_t = \frac{v_f}{z \times n}$$

● Depth of cut (D.O.C)


d_{oc} : Axial D.O.C. (depth)
 w_{oc} : Radial D.O.C. (width)

● Notch width (D_1)

$$D_1 = 2 \times \sqrt{2 \times R \times d_{oc} - d_{oc}^2}$$

● Cutting speed and feedrate are calculated using the same formula as square endmill.

Side milling



v_c : Cutting speed (m/min)

$\pi \approx 3,14$

D : Endmill diameter (mm)

n : Rotational speed (min^{-1})


v_f : Feed speed (mm/min)

f_r : Feed rate per revolution (mm/rev)

f_t : Feed rate per tooth (mm/tooth)



z : Number of teeth

Slotting

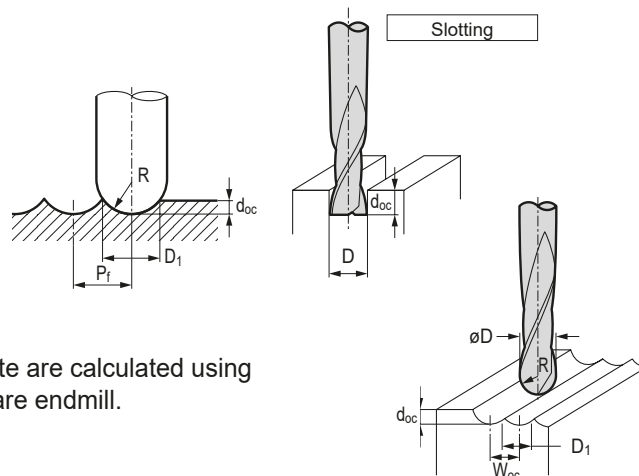


(Ball Endmill)

Up-cut and Down-cut

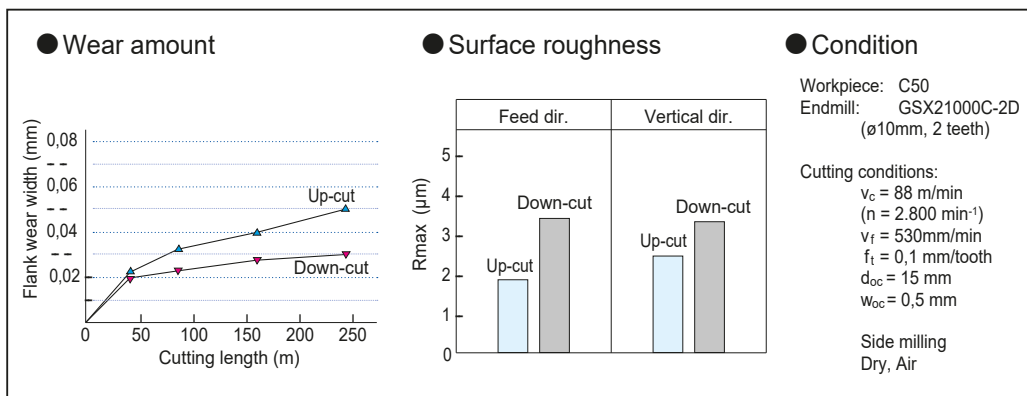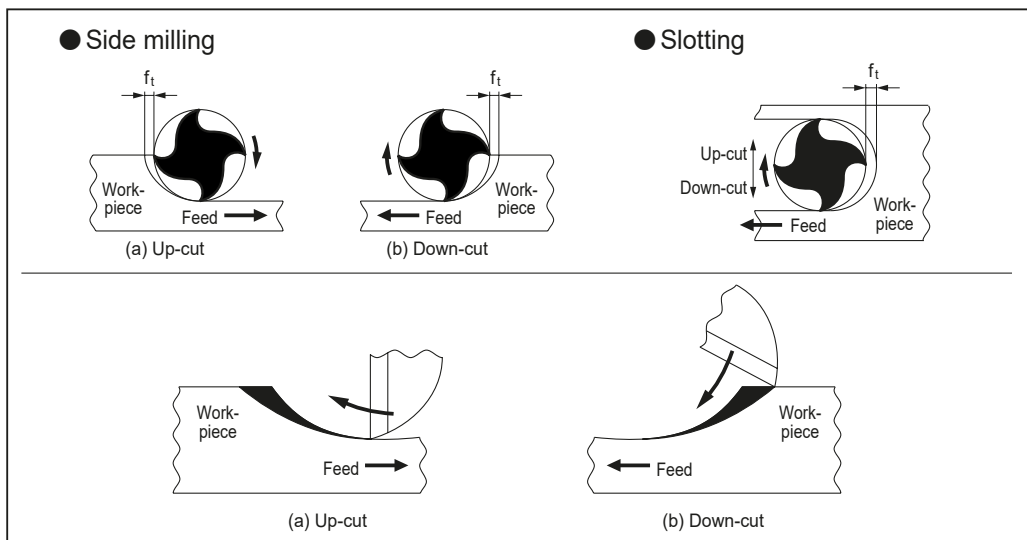

Relation Between Cutting Condition and Deflection

Endmill			Side milling				Slotting			
			Feed rate		Feed rate		Feed rate		Feed rate	
Cat. No.	Number of teeth	Helix angle	0,16 mm/rev		0,11 mm/rev		0,05 mm/rev		0,03 mm/rev	
			Style		Style		Style		Style	
			Up-cut	Down-cut	Up-cut	Down-cut	Up-cut	Down-cut	Up-cut	Down-cut
SSM 2080	2	30°								
SSM 4080	4	30°								




Technical Guidance

Tool Failure and Remedies


■ Trouble Shooting Guide for Endmilling

Failure		Cause		Remedies
Cutting Edge Failure	Excessive Wear	Cutting Conditions Tool Shape Tool Material	<ul style="list-style-type: none"> - Cutting speed is too fast - Feed rate is too fast - The flank relief angle ist too small - Insufficient wear resistance 	<ul style="list-style-type: none"> - Decrease cutting speed and feed rate. - Change to an appropriate flank relief angle. - Select a substrate with more wear resistance - Use a coated tool
	Chipping	Cutting Conditions Machine Area	<ul style="list-style-type: none"> - Feed rate ist too fast - Cutting depth is too deep - Tool overhang ist too long - Work clamps are weak - Tool is not firmly attached 	<ul style="list-style-type: none"> - Decrease cutting speed. - Reduce depth of cut - Adjust tool overhang for correct length - Clamp the work piece firmly - Make sure the tool is seated in the chuck properly
	Tool Fracture	Cutting Conditions	<ul style="list-style-type: none"> - Feed rate ist too fast - Cutting depth is too deep - Tool overhang ist too long - Cutting edge is too long 	<ul style="list-style-type: none"> - Decrease cutting speed. - Reduce depth of cut - Reduce tool overhang as much as possible - Select a tool with a shorter cutting edge
Others	Shoulder Deflection	Cutting Conditions Tool Shape	<ul style="list-style-type: none"> - Feed rate is too fast - Cutting depth is too deep - Tool overhang is too long - Cutting on the down-cut - Helix angle is large 	<ul style="list-style-type: none"> - Decrease cutting speed. - Reduce depth of cut - Adjust tool overhang for correct length - Change directions to up-cut - Use a tool with a smaller helix angle
	Unsatisfactory Machined Surface Finish	Cutting Conditions	<ul style="list-style-type: none"> - Feed rate is too fast - Packing of chips 	<ul style="list-style-type: none"> - Decrease cutting speed. - Use air blow - Use an insert with a larger relief pocket.
	Chattering	Cutting Conditions Tool Shape Machine Area	<ul style="list-style-type: none"> - Cutting speed is too fast - Cutting on the up-cut - Tool overhang is too long - Rake angle is large - Work clamps are weak - Tool is not firmly attached 	<ul style="list-style-type: none"> - Decrease cutting speed. - Change directions to down-cut - Adjust tool overhang for correct length - Use a tool with an appropriate rake angle - Clamp the work piece firmly - Make sure the tool is seated in the chuck properly
	Packing of Chip	Cutting Conditions Tool Shape	<ul style="list-style-type: none"> - Feed rate is too fast - Cutting depth is too deep - Too many teeth - Packing of chips 	<ul style="list-style-type: none"> - Decrease cutting speed. - Reduce depth of cut - Reduce number of teeth - Use air blow

Parts of a Drill

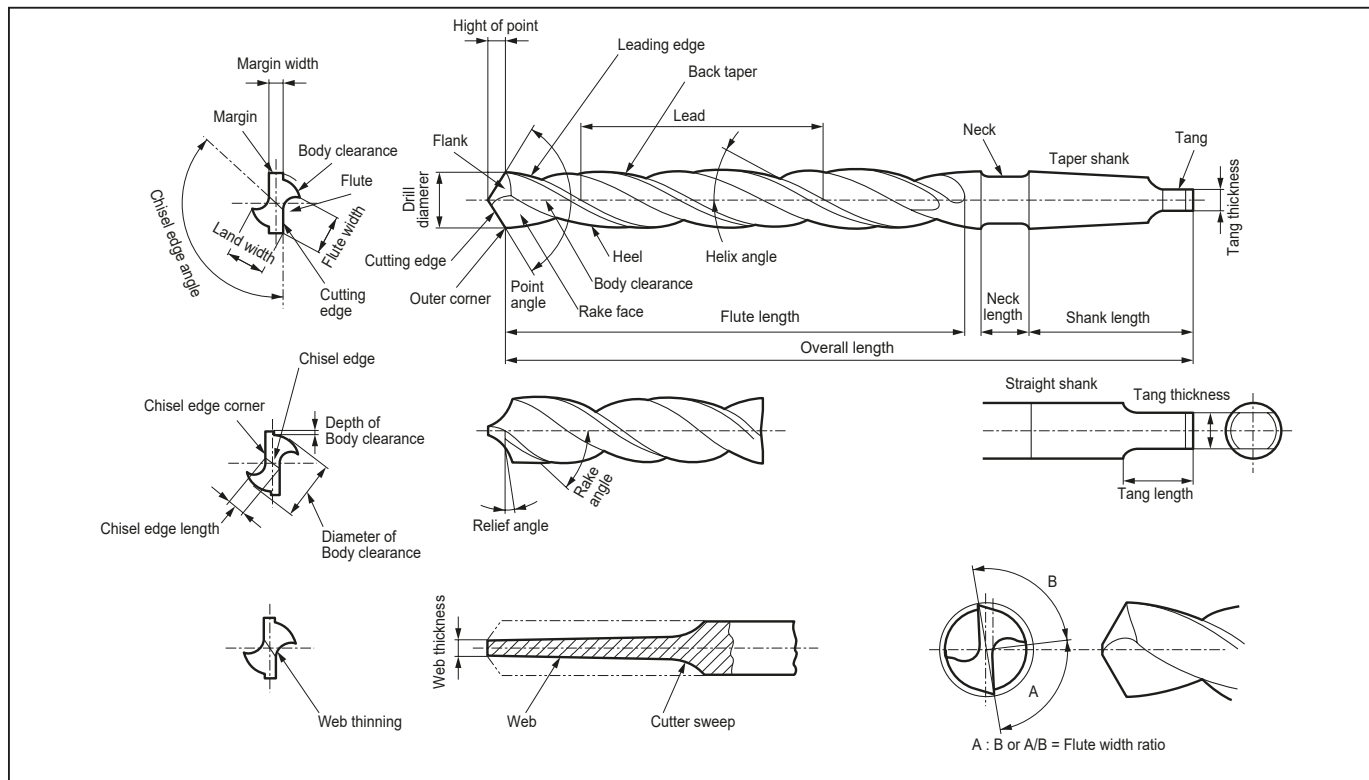


Point Angle and Force

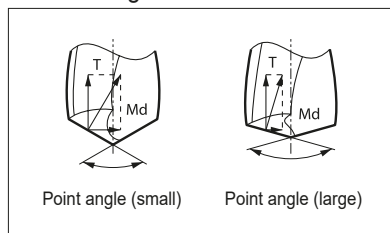


When point angle is large, thrust becomes large but torque becomes small.


Min. Requirement Relief Angle

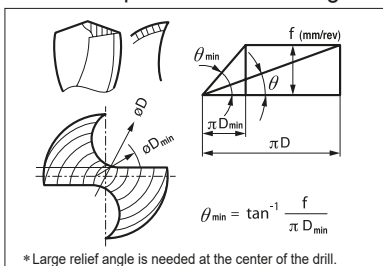

Width of Edge Treatment and Cutting Force

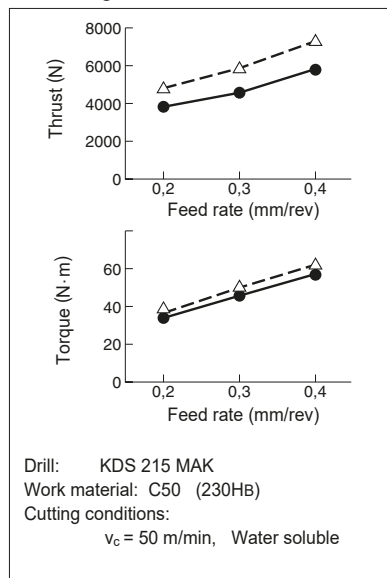


Point Angle and Burr

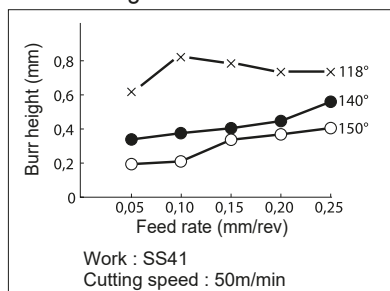


When point angle is large, burr height becomes low.

Web Thickness and Thrust

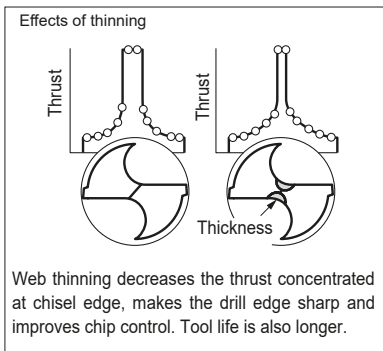


Decrease Chisel Width by Thinning

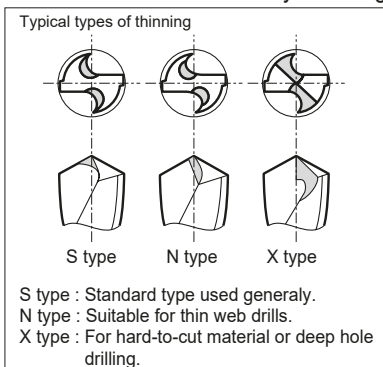

Technical Guidance

Basics of Drilling

Reference of Power Requirement and Thrust

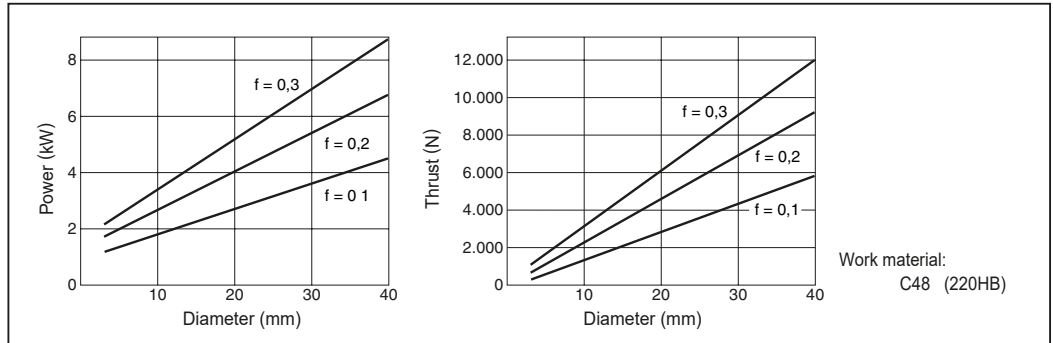

Cutting Condition Selection

- Control cutting force for low rigid machine

The following table shows the relation between edge treatment width and cutting force. If a problem caused by cutting force occurs, reduce either the feedrate or the edge treatment width.

Condition		Edge treatment width			
		0,15mm		0,05mm	
V_c (m/min)	f (mm/rev)	Torque (N•m)	Thrust (N)	Torque (N•m)	Thrust (N)
40	0,38	12,8	2820	12,0	2520
50	0,30	10,8	2520	9,4	1920
60	0,25	9,2	2320	7,6	1640
60	0,15	6,4	1640	5,2	1.100

Drill : $\phi 10$
Work material:
C50 (230HB)

- High speed machining recommendation

When there is surplus capacity with enough machine power and rigidity drilling at normal recommended cutting conditions, we recommend higher drilling speeds.

Wear example

$V_c=60\text{m/min}$

$V_c=120\text{m/min}$

Work material: C50 (230HB)
 Cutting data: $f = 0,3$ mm/rev
 $d_{oc} = 50\text{mm}$
 Tool life: 600 holes (Cutting length : 30m)

Explanation of Margins (Difference between single and double margins)


● Single Margin (2 guides: circled parts)

● Shape used on most drills


● D Double Margin (4 guides: circled parts)

● 4-point guiding reduces hole bending and undulation for improved stability and accuracy during deep hole drilling.


Run-out Accuracy

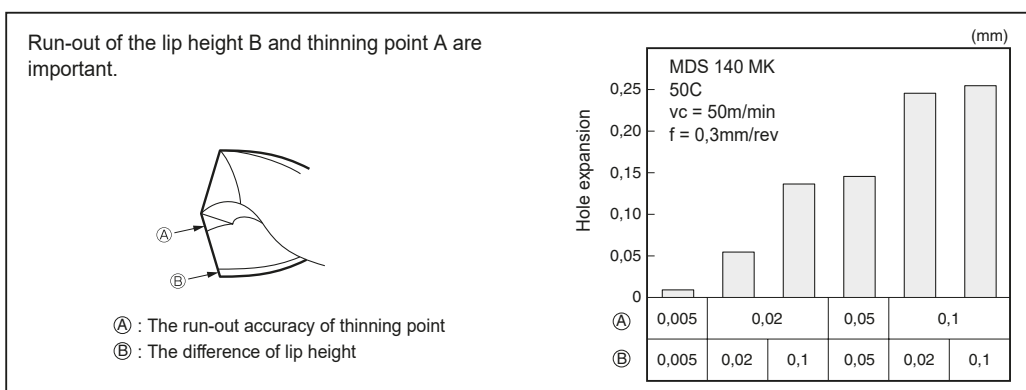


Peripheral Run-out Accuracy when Tool Rotates

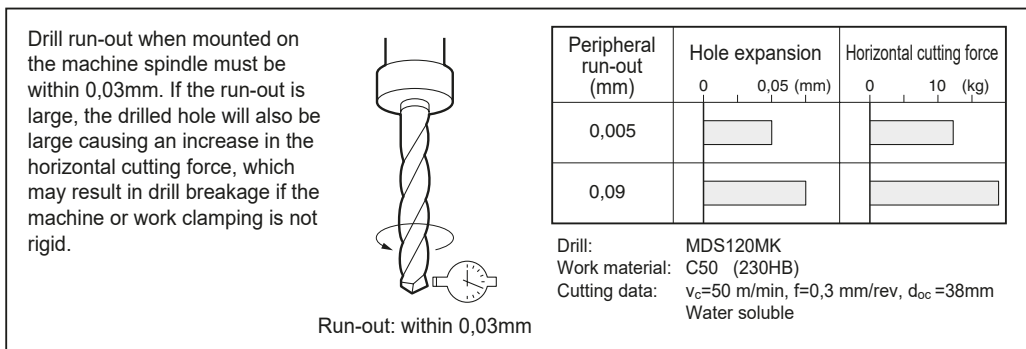

Peripheral Run-out Accuracy when Workpiece Rotates

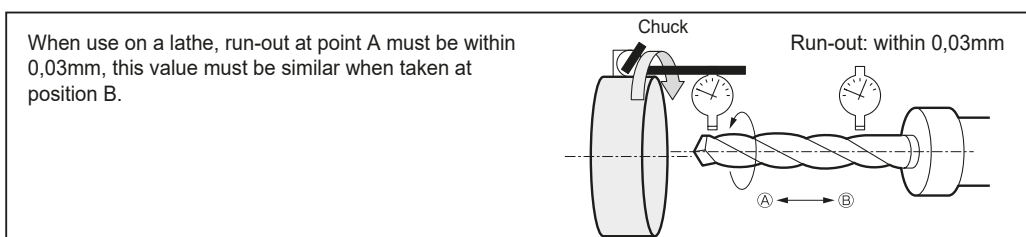


Influence of Workpiece Surface

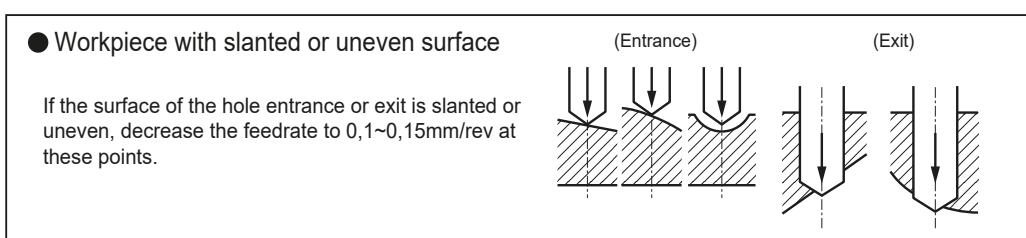


How to Use Long Drill

● Problem

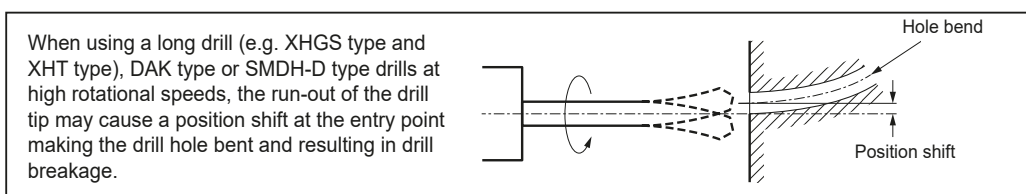

● Remedies

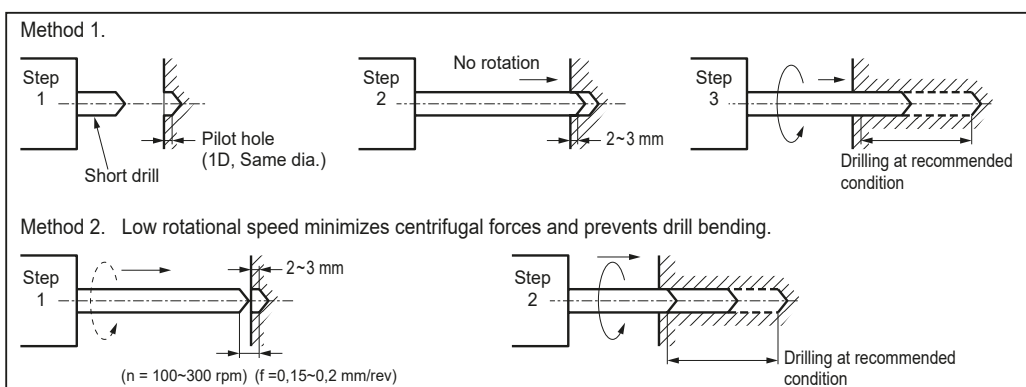


Technical Guidance

Tool Failure and Remedies


■ Trouble Shooting Guide for Drilling

Failure		Basic Remedies		Remedies Examples
Drill Failure	Excessive Wear on Cutting Edge	Cutting Conditions Cutting Fluid	- Use higher cutting speeds. - Increase feed rates. - Reduce pressure if using internal coolant. - Use cutting fluid with more lubricity.	- $V_c=80\sim 100\text{m/min}$ - Refer to recommended cutting conditions listed in the general catalogue. - Below 1,5MPa.
	Chisel Point Chipping	Tool Design Cutting Conditions Others	- Increase size of chisel width. - Increase amount of honing on cutting edge. - Reduce depth-of cut. - Reduce feed rate at entry point. - Improve workpiece clamping rigidity.	- $f = 0,05\sim 0,1 \text{ mm/rev}$
	Chipping on Peripheral Cutting Edge	Tool Design Cutting Conditions Cutting Fluid Others	- Increase amount of honing on cutting edge. - Reduce the amount of front flank angle. - Reduce cutting speeds. - Increase feed rates. - Use cutting fluid with more lubricity. - Improve workpiece clamp rigidity.	- Refer to recommended cutting conditions listed in the general catalogue.
	Margin Wear	Tool Design Cutting Conditions Cutting Fluid Others	- Increase amount of back taper. - Reduce margin width. - Reduce cutting speeds. - Increase feed rates. - Use cutting fluid with more lubricity. - Schedule for earlier regrind.	- Refer to recommended cutting conditions listed in the general catalogue.
	Drill Breakage	Tool Design Cutting Conditions Cutting Fluid Others	- Increase amount of back taper. - Reduce margin width. - Reduce cutting speeds. - Use cutting fluid with more lubricity. - Improve workpiece clamp rigidity.	- Refer to recommended cutting conditions listed in the general catalogue.
Unsatisfactory Hole Accuracy	Oversized Holes	Tool Design Cutting Conditions Cutting Fluid Others	- Improve overall drill rigidity. (large web, small flute). - Reduce drill point angle. - Reduce feed rate at entry phase. - Reduce cutting speeds. - Improve workpiece clamp rigidity. - Improve drill clamp precision. - Improve drill clamp rigidity.	- $130^\circ\sim 120^\circ$ - $f = 0,05\sim 0,1 \text{ mm/rev}$ - Refer to recommended cutting conditions listed in the general catalogue. - Drill run-out below 0,02mm
	Poor Surface Finish	Tool Design Cutting Conditions Cutting Fluid	- Increase amount of back taper. - Increase cutting speeds. - Use cutting fluid with more lubricity.	- Refer to recommended cutting conditions listed in the general catalogue.
	Holes are Not Straight	Tool Design Cutting Conditions Others	- Reduce amount of edge honing. - Reduce feedrates. - Improve workpiece clamp rigidity. - Improve drill clamp precision. - Improve drill clamp rigidity.	- Refer to recommended cutting conditions listed in the general catalogue. - Drill run-out below 0,02mm
Unsatisfactory Chip Control	Packing of Chips	Cutting Conditions Cutting Fluid	- Increase cutting speeds. - Increase feed rates. - Reduce pressure if using internal coolant.	- Refer to recommended cutting conditions listed in the general catalogue. - Below 1,5MPa.
	Long Stringy Chips	Tool Design Cutting Conditions Cutting Fluid	- Reduce amount of edge honing. - Increase feed rates. - Reduce pressure if using internal coolant.	- Refer to recommended cutting conditions listed in the general catalogue. - Below 1,5MPa.


Application Map of the Various Tool Materials

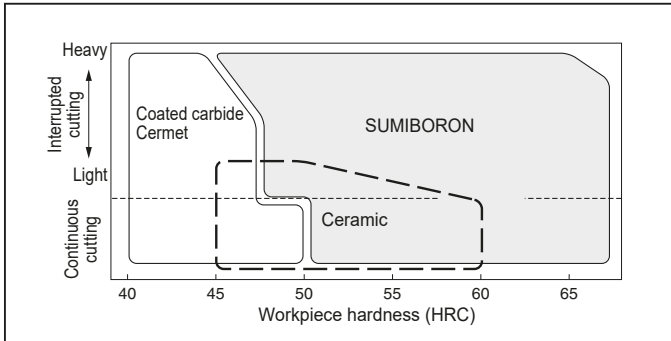


Work Materials and Cutting Speed Recommendations

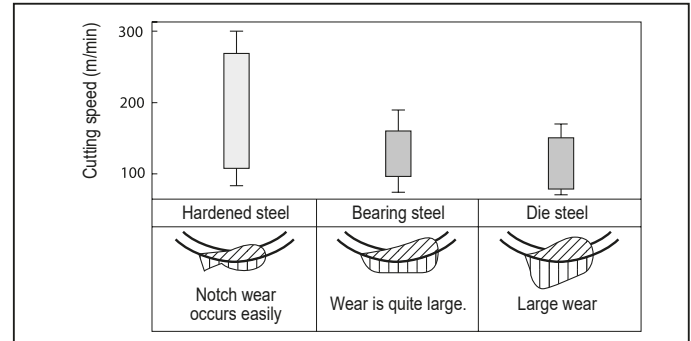


Influence of Coolant on Tool Life

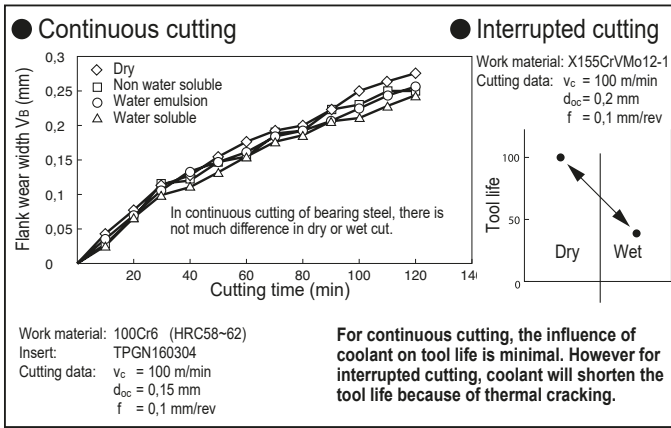


Relation Workpiece Hardness and Cutting Forces

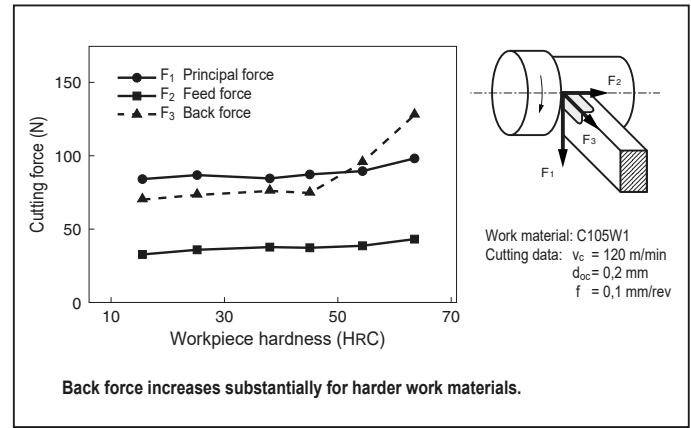


Relation between Flank Wear and Cutting Force

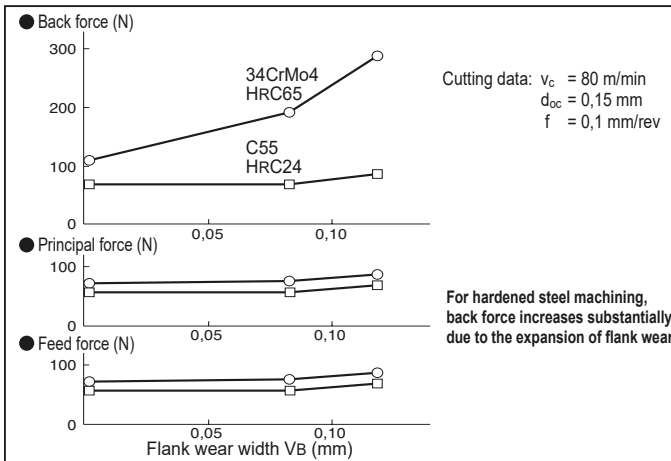


Workpiece Hardness on Cutting Force and Accuracy

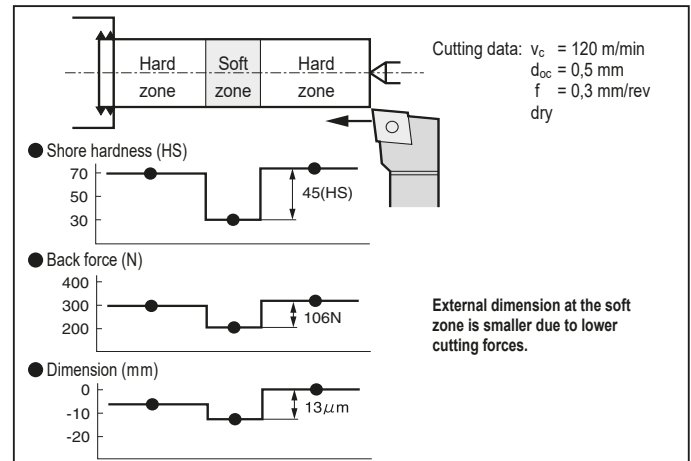


Relation Cutting Speed and Surface Roughness

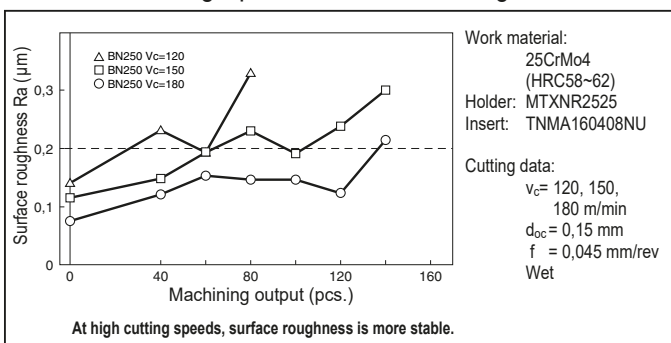


Improvement of Surface Roughness by Altering the Feedrate

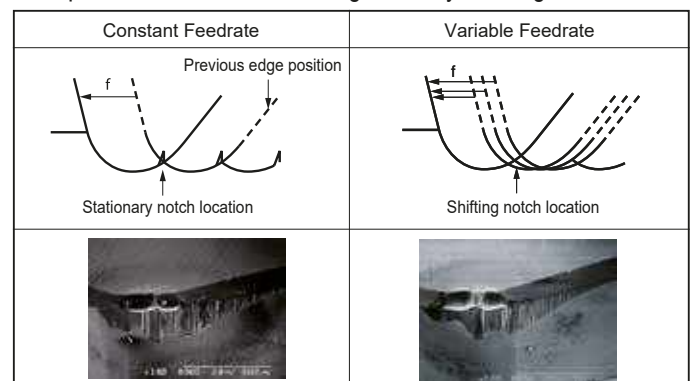


Advantages of Using SUMIBORON for Cast Iron Machining

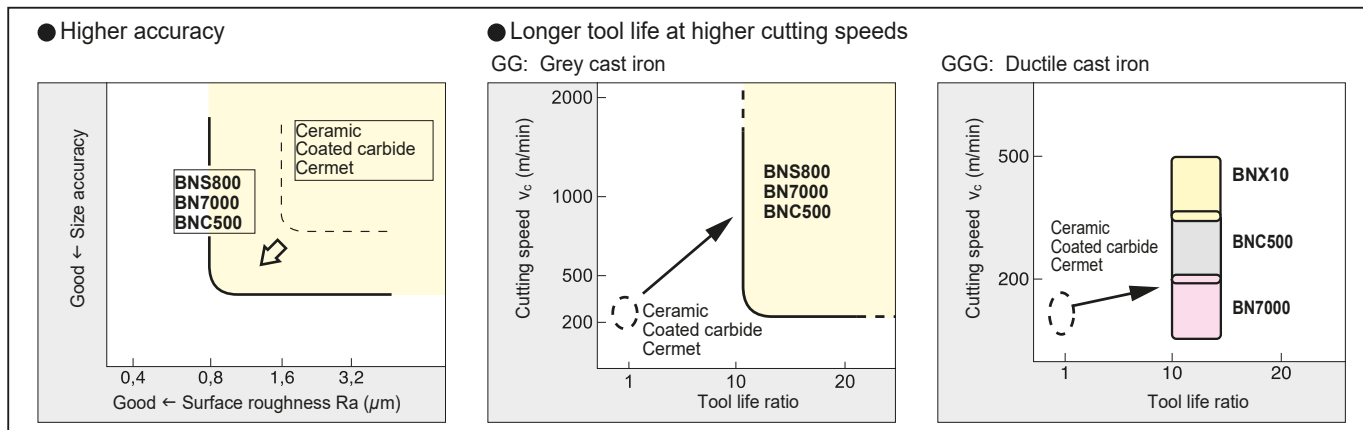


Turning

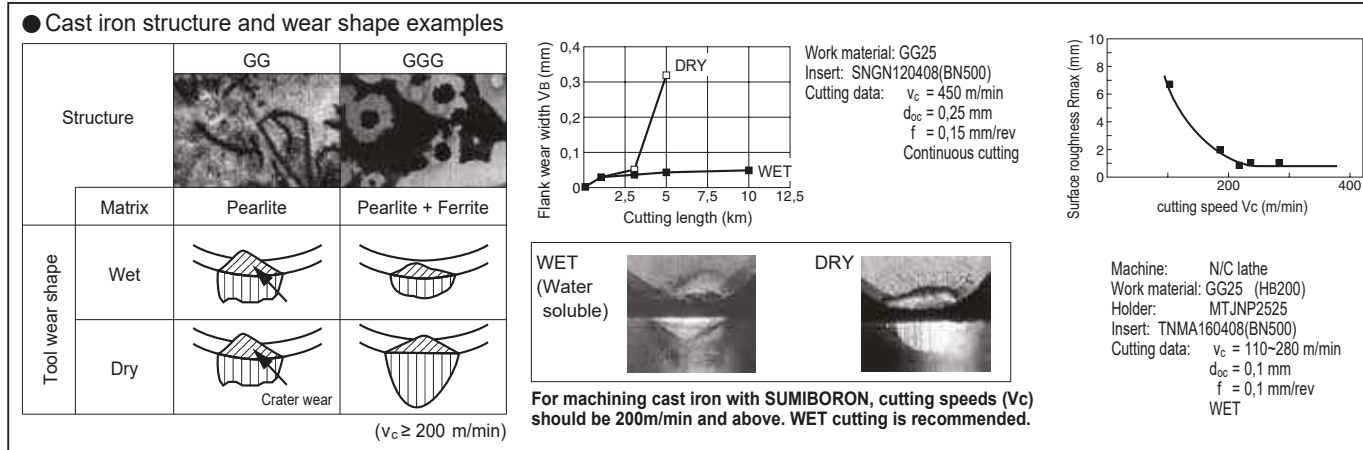

Milling

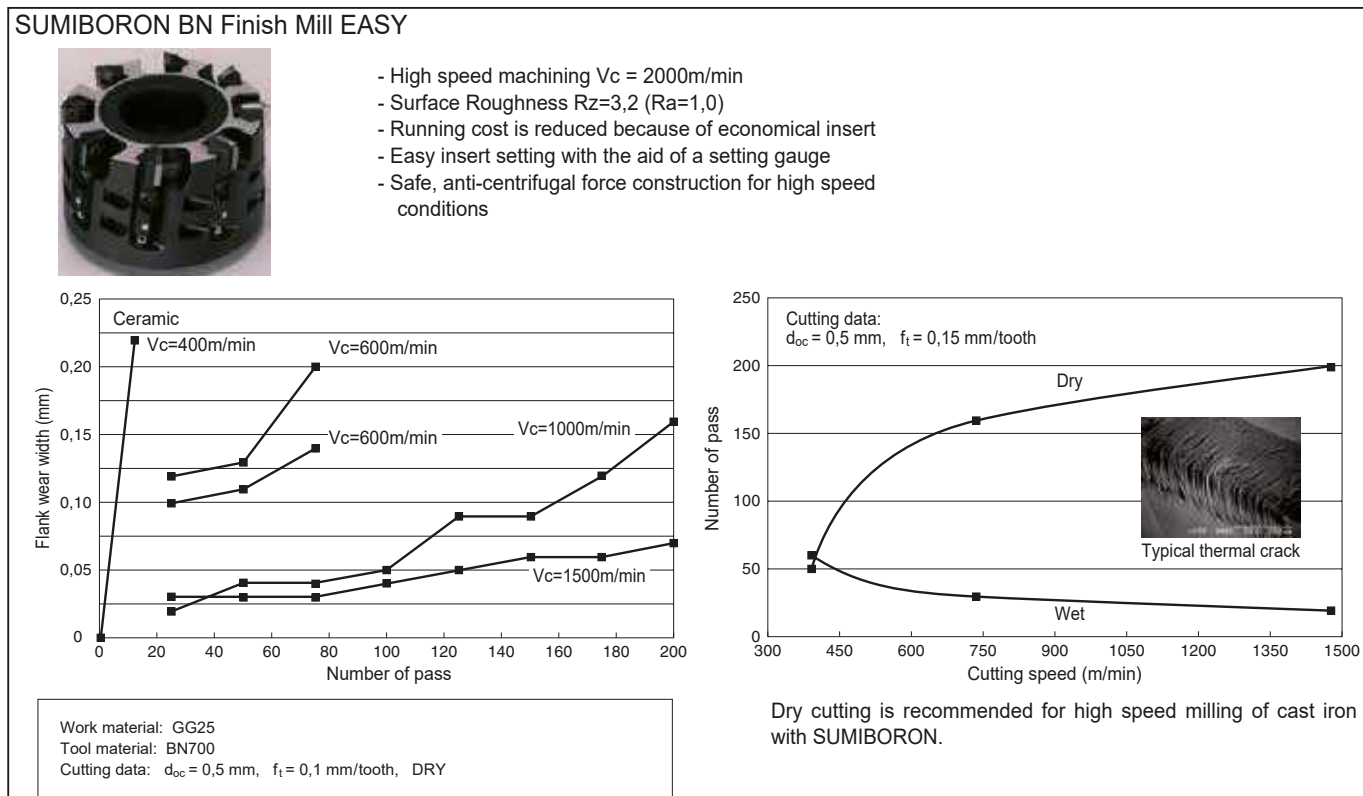


■ Powder Metal

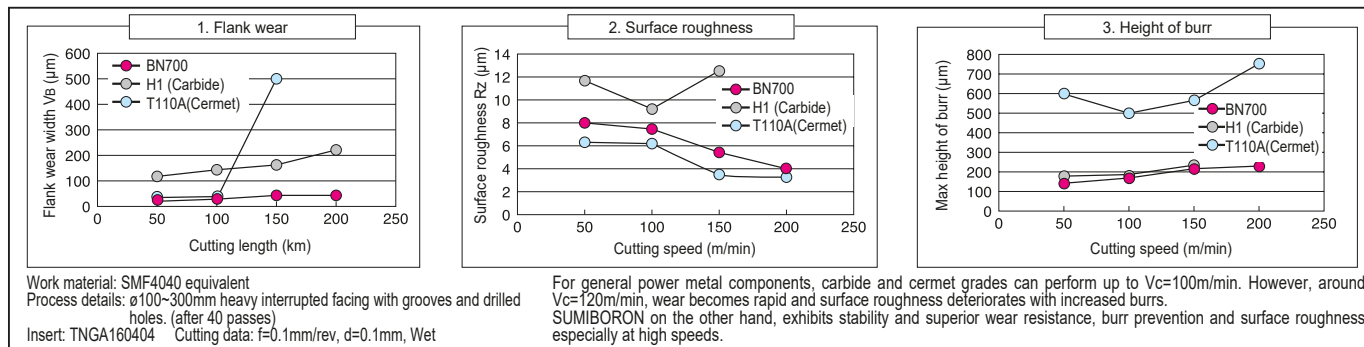


■ Heat Resistant Alloy


● Ni based alloy

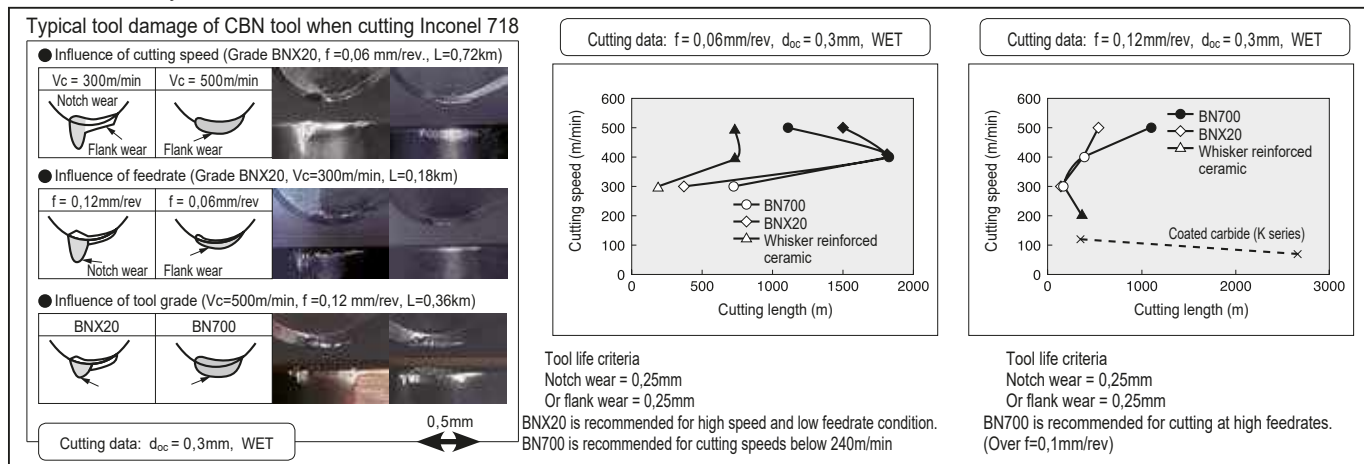



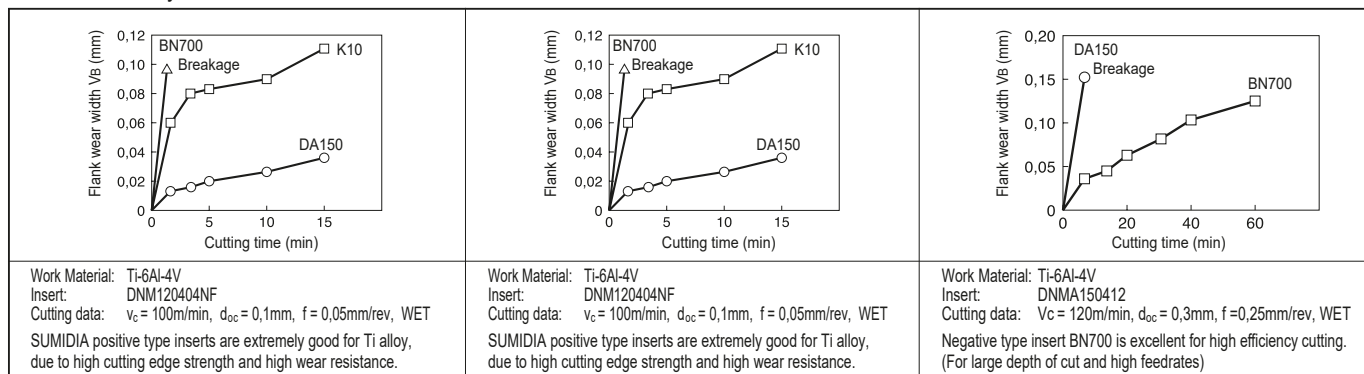



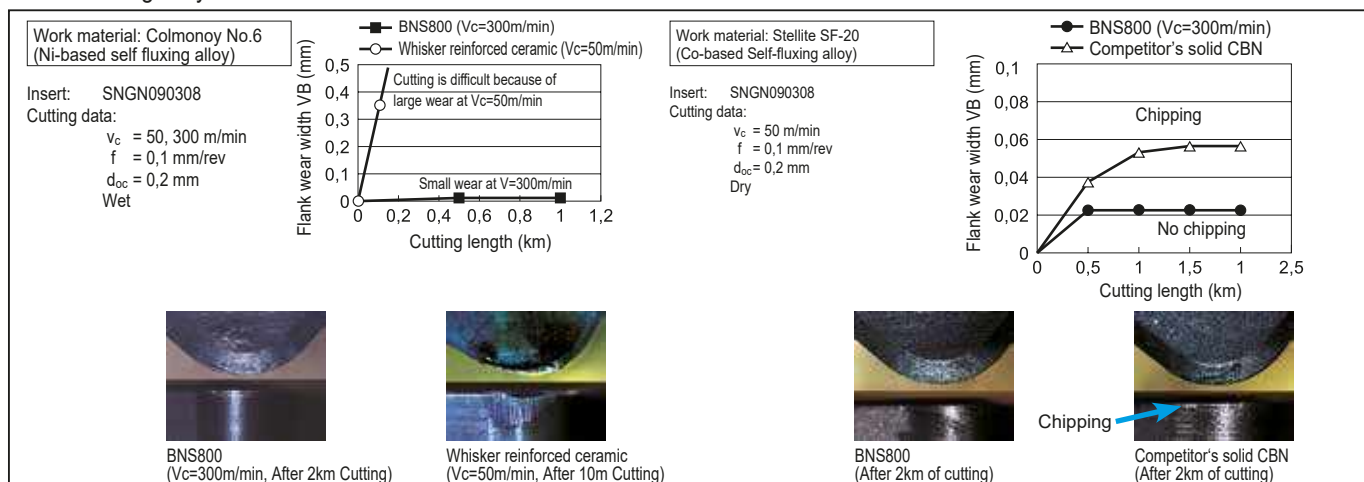

● Ti based alloy



● Hard facing alloys



		Damage	Remedies
Cutting Edge Failure		<p>Large flank wear</p> 	<p>Tool material</p> <p>Tool design</p> <p>Cutting condition</p> <ul style="list-style-type: none"> ☞ Select a more wear resistant grade. ☞ Reduce the cutting force. ☞ Reduce the NL width and angle. ☞ Positive inserts preferred ☞ Check the cutting speed. ☞ Reduce the cutting speed to less than 200m/min. ☞ Higher feed rate reduces the overall tool-to-work contact time.
		<p>Large crater wear</p> 	<p>Tool material</p> <p>Tool design</p> <p>Cutting condition</p> <ul style="list-style-type: none"> ☞ Crater wear resistant grades are recommended. Continuous ~ Light interrupted cutting = BNC2010 Light ~ Medium interrupted cutting = BNX20 Medium ~ Heavy interrupted cutting = BNX25 ☞ Determine the cutting edge geometry after inspecting the used inserts closely. ☞ Sharpen the cutting edge to prevent crater wear. ☞ Strengthen the cutting edge to prevent crater breakage. ☞ Check the cutting speed. ☞ Reduce the cutting speed to less than 200m/min. ☞ Higher feed rates are recommended.
		<p>Breakage at bottom of crater</p> 	
		<p>Flaking</p> 	<p>Tool material</p> <p>Tool design</p> <p>Cutting condition</p> <ul style="list-style-type: none"> ☞ Flaking is caused by high back forces and back force is related to flank wear. ☞ Select a more wear resistant grade. ☞ A sharper cutting edge helps prevent flaking. ☞ Reduce the NL angle and width ☞ Positive inserts preferred ☞ Reduce flank wear with lower speed and higher feed rates. ☞ Reducing tool-to-work contact time effectively reduces flank wear.
		<p>Chipping at notch position</p> 	<p>Cutting condition</p> <ul style="list-style-type: none"> ☞ If surface finish is affected, consider using the "Variable Feed rate" method to improve finishing. ☞ For other cases, use remedies similar to that for normal wear.
		<p>Chipping at notch position</p> 	<p>Tool material</p> <p>Tool design</p> <p>Cutting condition</p> <ul style="list-style-type: none"> ☞ Caused by impact shocks to the cutting edge. Chattering may also be a contributing factor. ☞ Select a tougher grade. ☞ Strengthen the cutting edge. ☞ Large NL angle, Honing. ☞ Higher feed rates are recommended to lessen the number of impacts.
		<p>Chipping at nose position</p> 	<p>Tool material</p> <p>Tool design</p> <p>Cutting condition</p> <ul style="list-style-type: none"> ☞ Caused by impact shocks to the cutting edge. Chattering may also be a contributing factor. ☞ Select a tougher grade. ☞ Strengthen the cutting edge. ☞ Large NL angle, Honing. ☞ Higher feedrates are recommended to lessen the number of impacts.
		<p>Thermal crack</p> 	<p>Cutting condition</p> <p>Tool design</p> <p>Tool material</p> <ul style="list-style-type: none"> ☞ Thermal shocks generate vertical crack lines across the cutting edge. Completely dry condition is recommended. ☞ If dry condition machining is already observed, then reduction of cutting temperatures and cutting force is necessary. ☞ Decrease cutting speed, feedrate, depth of cut. ☞ Sharpen cutting edge. ☞ Select more thermal conductivity grade.

■ Steel and Non-Ferrous Metal Symbols Chart

● Carbon Steels

JIS	AISI	DIN
S10C	1010	C10
S15C	1015	C15
S20C	1020	C22
S25C	1025	C25
S30C	1030	C30
S35C	1035	C35
S40C	1040	C40
S45C	1045	C45
S50C	1049	C50
S55C	1055	C55

● Ni-Cr-Mo Steels

JIS	AISI	DIN
SNCM220	8620	21NiCrMo2
SNCM240	8640	—
SNCM415	—	—
SNCM420	4320	—
SNCM439	4340	40NiCrMo6
SNCM447	—	34NiCrMo6

● Cr Steels

JIS	AISI	DIN
SCr415	—	15CrMo5
SCr420	5120	20Cr4
SCr430	5130	34Cr4
SCr435	5132	37Cr4
SCr440	5140	41Cr4
SCr445	5147	—

● Cr-Mo Steels

JIS	AISI	DIN
SCM415	—	15CrMo5
SCM420	—	20CrMo5
SCM430	4131	25CrMo4
SCM435	4137	34CrMo4
SCM440	4140	42CrMo4
SCM445	4145	—

● Mn Steels and Mn-Cr Steels for Structural Use

JIS	AISI	DIN
SMn420	1522	—
SMn433	1534	—
SMn438	1541	—
SMn443	1541	—
SMnC420	—	—
SMnC443	—	—

● Cr-Mo Steels

JIS	AISI	DIN
SK1	—	—
SK2	W1-11 1/2	—
SK3	W1-10	C105W1
SK4	W1-9	—
SK5	W1-8	C80W1
SK6	—	C80W1
SK7	—	C70W2

● High Speed Steels

JIS	AISI	DIN
SKH2	T1	—
SKH3	T4	S18-1-2-5
SKH10	T15	S12-1-4-5
SKH51	M2	S6-5-2
SKH52	M3-1	—
SKH53	M3-2	S6-5-3
SKH54	M4	—
SKH56	M36	—

● Alloy Tool Steels

JIS	AISI	DIN
SKS11	F2	—
SKS51	L6	—
SKS43	W2-9 1/2	—
SKD1	D3	X210Cr12
SKD11	D2	X155CrVMo12-1
SKD61	—	X40CrVMo5-1

● Grey Cast Iron

JIS	AISI	DIN
FC100	No 20B	GG-10
FC150	No 25B	GG-15
FC200	No 30B	GG-20
FC250	No 35B	GG-25
FC300	No 45B	GG-30
FC350	No 50B	GG-35

● Nodular Cast Iron

JIS	AISI	DIN
FCD400	60-40-18	GGG-40
FCD450	—	GGG-40.3
FCD500	80-55-06	GGG-50
FCD600	—	GGG-60
FCD700	100-70-03	GGG-70

● Ferritic Stainless Steels

JIS	AISI	DIN
SUS405	405	X10CrAl13
SUS429	429	—
SUS430	430	X6Cr17
SUS430F	430F	X7CrMo18
SUS434	434	X6CrMo17 1

● Martensitic Stainless Steels

JIS	AISI	DIN
SUS403	403	—
SUS410	410	X10Cr13
SUS416	416	—
SUS420JI	420	X20Cr13
SUS420F	420F	—
SUS431	431	X20CrNi17 2
SUS440A	440A	—
SUS440B	440B	—
SUS440C	440C	—

● Austenitic Stainless Steels

JIS	AISI	DIN
SUS201	201	—
SUS202	202	—
SUS301	301	X12CrNi17 7
SUS302	302	—
SUS302B	302B	—
SUS303	303	X10CrNiS18 9
SUS303Se	303Se	—
SUS304	304	X5CrNiS18 10
SUS304L	304L	X2CrNi19 11
SUS304NI	304N	—
SUS305	305	X5CrNi18 12
SUS308	308	—
SUS309S	309S	—
SUS310S	310S	—
SUS316	316	X5CrMo17 12 2
SUS316L	316L	X2CrNiMo17 13 2
SUS316N	316N	—
SUS317	317	—
SUS317L	317L	X2CrNiMo18 16 4
SUS321	321	X6CrNiTi18 10
SUS347	347	X6CrNiNb18 10
SUS384	384	—

● Heat Resisting Steels

JIS	AISI	DIN
SUH31	—	—
SUH35	—	—
SUH36	—	X53CrMnNi21 9
SUH37	—	—
SUH38	—	—
SUH309	309	—
SUH310	310	CrNi2520
SUH330	N08330	—

● Ferritic Heat Resisting Steels

JIS	AISI	DIN
SUH21	—	CrAl1205
SUH409	409	X6CrTi12
SUH446	446	—

● Martensitic Heat Resisting Steels

JIS	AISI	DIN
SUH1	—	X45CrSi9 3
SUH3	—	—
SUH4	—	—
SUH11	—	—
SUH600	—	—

References

■ Hardness Scale Comparison Chart

● Approx. metric value and Brinell hardness of steel

Brinell Hardness 10mm Ball 3.000kgf (HB)	Rockwell Hardness				Vickers Hardness 50kgf (HV)	Shore Hardness (HS)	Traverse Rupture Strength (N/mm ²)
	„A“ Scale Diamond, brale 60kgf (HRA)	„B“ Scale 100kgf 1/10" Ball (HRB)	„C“ Scale Diamond, brale 150kgf (HRC)	„D“ Scale Diamond, brale 100kgf (HRD)			
—	85,6	—	68,0	76,9	940	97	—
—	85,3	—	67,5	76,5	920	96	—
—	85,0	—	67,0	76,1	900	95	—
767	84,7	—	66,4	75,7	880	93	—
757	84,4	—	65,9	75,3	860	92	—
745	84,1	—	65,3	74,8	840	91	—
733	83,8	—	64,7	74,3	820	90	—
722	83,4	—	64,0	73,8	800	88	—
712	—	—	—	—	—	—	—
710	83,0	—	63,3	73,3	780	87	—
698	82,6	—	62,5	72,6	760	86	—
684	82,2	—	61,8	72,1	740	—	—
682	82,2	—	61,7	72,0	737	84	—
670	81,8	—	61,0	71,5	720	83	—
656	81,3	—	60,1	70,8	700	—	—
653	81,2	—	60,0	70,7	697	81	—
647	81,1	—	59,7	70,5	690	—	—
638	80,8	—	59,2	70,1	680	80	—
630	80,6	—	58,8	69,8	670	—	—
627	80,5	—	58,7	69,8	667	79	—
601	79,8	—	57,3	68,7	640	77	—
578	79,1	—	56,0	67,7	615	75	—
555	78,4	—	54,7	66,7	591	73	2055
534	77,8	—	53,5	65,8	569	71	1985
514	76,9	—	52,1	64,7	547	70	1890
495	76,3	—	51,0	63,8	528	68	1820
477	75,6	—	49,6	62,7	508	66	1730
461	74,9	—	48,5	61,7	491	65	1670
444	74,2	—	47,1	60,8	472	63	1585
429	73,4	—	45,7	59,7	455	61	1510
415	72,8	—	44,5	58,8	440	59	1460
401	72,0	—	43,1	57,8	425	58	1390
388	71,4	—	41,8	56,8	410	56	1330
375	70,6	—	40,4	55,7	396	54	1270
363	70,0	—	39,1	54,6	383	52	1220
352	69,3	(110,0)	37,9	53,8	372	51	1180
341	68,7	(109,0)	36,6	52,8	360	50	1130
331	68,1	(108,5)	35,5	51,9	350	48	1095

Brinell Hardness 10mm Ball 3.000kgf (HB)	Rockwell Hardness				Vickers Hardness 50kgf (HV)	Shore Hardness (HS)	Traverse Rupture Strength (N/mm ²)
	„A“ Scale Diamond, brale 60kgf (HRA)	„B“ Scale 100kgf 1/10" Ball (HRB)	„C“ Scale Diamond, brale 150kgf (HRC)	„D“ Scale Diamond, brale 100kgf (HRD)			
321	67,5	(108,0)	34,3	50,1	339	47	1060
311	66,9	(107,5)	33,1	50,0	328	46	1025
302	66,3	(107,0)	32,1	49,3	319	45	1005
293	65,7	(106,0)	30,9	48,3	309	43	970
285	65,3	(105,5)	29,9	47,6	301	—	950
277	64,6	(104,5)	28,8	46,7	292	41	925
269	64,1	(104,0)	27,6	45,9	284	40	895
262	63,6	(103,0)	26,6	45,0	276	39	875
255	63,0	(102,0)	25,4	44,2	269	38	850
248	62,6	(101,0)	24,2	43,2	261	37	825
241	61,8	100,0	22,8	42,0	253	36	800
235	61,4	99,0	21,7	41,4	247	35	785
229	60,8	98,2	20,5	40,5	241	34	765
223	—	97,3	(18,8)	—	234	—	—
217	—	96,4	(17,5)	—	228	33	725
212	—	95,5	(16,0)	—	222	—	705
207	—	94,6	(15,2)	—	218	32	690
201	—	93,8	(13,8)	—	212	31	675
197	—	92,8	(12,7)	—	207	30	655
192	—	91,9	(11,5)	—	202	29	640
187	—	90,7	(10,0)	—	196	—	620
183	—	90,0	(9,0)	—	192	28	615
179	—	89,0	(8,0)	—	188	27	600
174	—	87,8	(6,4)	—	182	—	585
170	—	86,8	(5,4)	—	178	26	570
167	—	86,0	(4,4)	—	175	—	560
163	—	85,0	(3,3)	—	171	25	545
156	—	82,9	(0,9)	—	163	—	525
149	—	80,8	—	—	156	23	505
143	—	78,7	—	—	150	22	490
137	—	76,4	—	—	143	21	460
131	—	74,0	—	—	137	—	450
126	—	72,0	—	—	132	20	435
121	—	69,8	—	—	127	19	415
116	—	67,6	—	—	122	18	400
111	—	65,7	—	—	117	15	385

- 1) Figures within the () are not commonly used
- 2) Rockwell A, C and D scales utilise a diamond brale
- 3) 1 N/mm² = 1 MPa

■ Finished Surface Roughness

● Types of Surface Roughness Measurements

Types	Symbol	Method of Determination	Descriptive Figure
Maximum Height	* 1) Ry	This is the value (expressed in μm) measured from the deepest valley to the highest peak of the reference line, ℓ , extracted from the profile. (Disregard unusually high peaks and deep valleys as they are considered as flaws.)	
Ten-point Mean Roughness	* 2) Rz	From the profile, extract a portion to be the reference line, ℓ . Select the 5 highest peak and 5 deepest valleys. Measure the distance between the two lines and express it in μm . (1 μm = 0,001mm)	
Calculated Roughness	Ra	This method is to obtain a center line between the peaks and valleys within the reference line, ℓ . Fold along the center line to superimpose the valleys against the peaks. (Shaded portions with dashed outline on the right figure). Take the total shaded area and divided it by ℓ in μm .	

Designated values of the above types of surface roughness, standard reference length values and the triangular symbol classifications are shown on the table on the right.

- * 1) Ry : According to new JIS B 0601:2001 (Old symbol: Rz)
 * 2) Rz : According to new JIS B 0601:2001 (Old symbol: Rz_{JIS})

Designated values for * 1) Ry	Designated values for * 2) Rz	Designated values for Ra	Standard reference length values, ℓ (mm)	Triangular Symbols
(0,05S) 0,1S 0,2S 0,4S	(0,05Z) 0,1Z 0,2Z 0,4Z	(0,013a) 0,025a 0,05a 0,10a	—	
0,8S	0,8Z	0,20a	0,25	
1,6S 3,2S 6,3S	1,6Z 3,2Z 6,3Z	0,4a 0,8a 1,6a	0,8	
12,5S (18S) 25S	12,5Z (18Z) 25Z	3,2a 6,3a	2,5	
(35S) 50S (70S) 100S	(35Z) 50Z (70Z) 100Z	12,5a 25a	—	
(140S) 200S (280S) 400S (560S)	(140Z) 200Z (280Z) 400Z (560Z)	(50a) (100a)	—	—

Remarks: The designated values in the brackets do not apply unless otherwise stated.

Spare Parts

P1–P8

P




Screw	P2-P4
Lever Pin, Shim, Nut.....	P4-P6
Shim Pin, Eccentric Pin	P7
Wrench	P8


SPARE PARTS


Screw


Screw

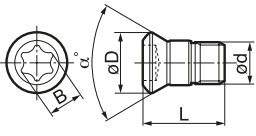High Precision Screw	Cat. No.	Stock	Dimensions (mm)						α°	$\left(\frac{\text{Nm}}{\text{mm}}\right)$
			d	Pitch	L	D	B			
	BFTG0408F	●	M4	0,5	7,5	5,7	T15	61	3,4	
	BTTG0409F	●	M4	0,5	8,4	6,15	T15	61	3,4	
	BFTG0513F	●	M5	0,5	13	6,8	T20	61	5,0	
	BFTG0617F	●	M6	0,75	16,5	8	T25	61	7,5	
	BFTG0621F	○	M6	0,75	21	9,5	T25	61	7,5	
	BFTG0825F	●	M8	0,75	24,5	12	T25	61	7,5	


Torx Flat Head Screw	Cat. No.	Stock	Dimensions (mm)						α°	$\left(\frac{\text{Nm}}{\text{mm}}\right)$
			d	Pitch	L	D	B			
	BFTX02506		M							
	BFTX02508	●	M2,5	0,45	7,5	3,45	T8	60	-	
	BFTX0309		M3	0,5	8,8	4,2	T10	60	-	
	BFTX03508	●	M3,5	0,6	8	5,1	T10	52	2,0	
	BFTX03584	●	M3,5	0,6	7,4	5,2	T15	60	3,0	
	BFTX03588	●	M3,5	0,6	8,8	5,2	T15	60	3,4	
	BFTX0408	●	M4	0,7	8	5,5	T15	60	-	
	BFTX0414	●	M4	0,7	14,5	5,5	T15	60	3,0	
	BFTX0515		M5	0,8	15	7	T20	60	-	
	BFTX0613		M6	1,0	13	9	T25	60	-	
	BFTX0615		M6	1,0	15	9	T25	60	-	
	BFTX0617		M6	1,0	17	9	T25	60	-	

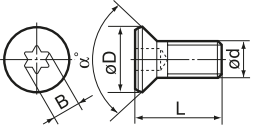
Torx Flat Head Screw	Cat. No.	Stock	Dimensions (mm)						α°	$\left(\frac{\text{Nm}}{\text{mm}}\right)$
			d	Pitch	L	D	B			
	BFTX0203A	●	M2	0,4	3	2,7	T6	90	0,5	
	BFTX0204A	●	M2	0,4	4,3	2,7	T6	90	0,5	
	BFTX0305A	●	M3	0,5	5,3	4,3	T10	90	-	
	BFTX0306A	●	M3	0,5	5,8	4,3	T10	90	2,0	
	BFTX0307A	●	M3	0,5	6,8	4,3	T10	90	2,0	
	BFTX0407A	●	M4	0,7	7,3	5,6	T15	90	3,4	
	BFTX0410A	●	M4	0,7	10,3	5,6	T15	90	3,4	
	BFTX0509A	●	M5	0,8	9,3	6,9	T20	90	5,0	

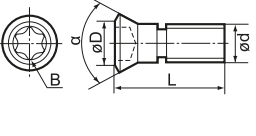
Torx Flat Head Screw	Cat. No.	Stock	Dimensions (mm)						α°	$\left(\frac{\text{Nm}}{\text{mm}}\right)$
			d	Pitch	L	D	B			
	BFTX01604N	●	M1,6	0,35	4,2	2,4	T6	60	0,2	
	BFTX0203N	●	M2	0,4	3	2,7	T6	60	0,5	
	BFTX0204N	●	M2	0,4	4,3	2,7	T6	60	0,5	
	BFTX02205N	●	M2,5	0,45	4,5	3	T6	60	0,5	
	BFTX02505N	●	M2,5	0,45	4,5	3,45	T8	60	1,1	
	BFTX02506N	●	M2,5	0,45	5,5	3,45	T8	60	1,5	
	BFTX02508NV	●	M2,5	0,45	7,5	3,5	T8	60	1,5	
	BFTX0306N	□	M3	0,5	5,8	4,2	T10	60	2,0	
	BFTX0307N	●	M3	0,5	6,5	4,2	T10	60	2,0	
	BFTX0309N	●	M3	0,5	9	4,2	T10	60	3,0	
	BFTX0312N	●	M3	0,5	12	5,4	T10	60	-	
	BFTX03509N	●	M3,5	0,6	8,5	4,9	T10	60	-	
	BFTX0406N	●	M4	0,7	6	5,6	T15	60	-	
	BFTX0407N	●	M4	0,7	7	5,6	T15	60	3,0	
	BFTX0409N	●	M4	0,7	9	5,6	T15	60	3,4	
	BFTX0412N	●	M4	0,7	12	5,5	T15	60	3,0	
	BFTX0509N	●	M5	0,8	9	7	T20	60	5,0	
	BFTX0511N	●	M5	0,8	11,5	7	T20	60	5,0	
	BFTX0513N	●	M5	0,8	13	7	T20	60	5,0	
	BFTX0515N	●	M5	0,8	15	7	T20	60	-	
	BFTX0615N	●	M6	1,0	15	9	T25	60	5,0	
	BFTX0619N	●	M6	1,0	19	9	T25	60	5,0	

Torx Flat Head Screw	Cat. No.	Stock	Dimensions (mm)						α°	$\left(\frac{\text{Nm}}{\text{mm}}\right)$
			d	Pitch	L	D	B			
	BFTX0410T8L	●	M4	0,7	9,6	5,6	T8	60	1,1	
	BFTX0410T8R	●	M4	0,7	9,6	5,6	T8	60	1,1	

Screw

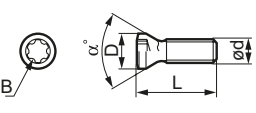Torx Plus Flat Head Screw	Cat. No.	Stock	Dimensions (mm)						α°	$\left(\frac{\text{Nm}}{\text{mm}}\right)$
			d	Pitch	L	D	B			
	BFTX01804IP	●	M1,8	0,35	3,7	2,45	6IP	60	0,5	
	BFTX02505IP	●	M2,5	0,45	4,5	3,45	8IP	60	-	
	BFTX02506IP	●	M2,5	0,45	5,5	3,45	8IP	60	-	
	BFTX0305IP	●	M3	0,5	5,3	3,8	8IP	60	2,0	
	BFTX0306IP	●	M3	0,5	6	3,8	8IP	60	2,0	
	BFTX0307IP		M3	0,5	7	4,3	10IP	55	2,0	
	BFTX0308IP	○	M3	0,5	8	3,8	8IP	60	-	
	BFTX03510IP	○	M3,5	0,6	11,5	5,3	15IP	60	3,0	
	BFTX03584IP	●	M3,5	0,6	7,4	5,1	15IP	60	-	
	BFTX03510IP08	●	M3,5	0,6	10	5,3	8IP	60	-	
	BFTX03510IP15	●	M3,5	0,6	10	5,3	15IP	60	-	
	BFTX0407IP	●	M4	0,7	8,0	5,6	15IP	60	3,0	
	BFTX0409IP	●	M4	0,7	9,0	5,6	15IP	60	3,0	
	BFTX0412IP	●	M4	0,7	12	5,5	15IP	60	3,0	
	BFTX0418IP	●	M4	0,7	18	5,5	15IP	60	-	
	BFTX04513IP20	●	M4,5	0,75	13,1	6,8	20IP	60	-	
	BFTX0511IP	●	M5	0,8	11,5	7	20IP	60	-	
	BFTX0513IP	●	M5	0,8	13	7	20IP	60	-	
	BFTX0615IP	●	M6	1,0	15	9	25IP	60	-	

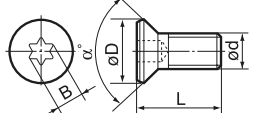Torx Flat Head Screw	Cat. No.	Stock	Dimensions (mm)						α°	$\left(\frac{\text{Nm}}{\text{mm}}\right)$
			d	Pitch	L	D	B			
	BFTX03510SD		M3,5	0,6	10	5,3	T10	60	2,0	
	BFTX03517SD		M3,5	0,6	17	5,3	T10	60	2,0	
	BFTX0618SD	□	M5	0,8	17	7,2	T20	60	5,0	
	BFTX0618SD	□	M6	1,0	18	7,2	T25	60	7,5	

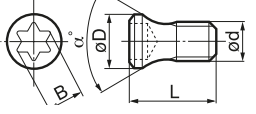Torx Flat Head Screw	Cat. No.	Stock	Dimensions (mm)						α°	$\left(\frac{\text{Nm}}{\text{mm}}\right)$
			d	Pitch	L	D	B			
	BFTY02205	●	M2,2	0,45	5,0	3,05	T7	60	-	
	BFTY02206	●	M2,2	0,45	5,6	3,05	T7	60	1,0	

Button Head Cap Screw	Cat. No.	Stock	Dimensions (mm)						$\left(\frac{\text{Nm}}{\text{mm}}\right)$
			d	Pitch	L	ℓ	D	B	
	BH0304		M3	0,5	4	Full	5,5	2	-
	BH0306	●	M3	0,5	6	Full	5,5	2	-
	BH0308 (FBUP3-A0-9)	●	M3	0,5	8	Full	5,5	2	1,0
Hexagonal Hole Type	BH0310	●	M3	0,5	10	Full	5,5	2	-
	BH03504		M3,5	0,6	4	Full	7	2	-
	BH0408		M4	0,7	8	Full	6	2,5	-
	BH0415	○	M4	0,7	15	Full	7,5	2,5	-
	BH0510		M5	0,8	10	Full	9,5	3	-
	BH0516	●	M5	0,8	16	14,4	9,5	3	-
	BH0616	●	M6	1,0	16	14	10,5	4	-
	BH0620	●	M6	1,0	20	Full	10,5	4	-
T Type with Torx Hole	BH0824R		M8	1,25	24	20	12	4	-
	BH0824L		M8	1,25	24	20	12	4	-
	BH0825	○	M8	1,25	25	22,5	14	5	-
	BH0830R		M8	1,25	30	26	12	4	-
	BH0830L		M8	1,25	30	26	12	4	-
	BH0832		M8	1,25	32	29,5	14	5	-
	BH1030R		M10	1,5	30	26	14	5	-
	BH1030L		M10	1,5	30	26	14	5	-
	BH1036R		M10	1,5	36	32	14	5	-
	BH1036L		M10	1,5	36	32	14	5	-

SPARE PARTS Screw

■ Screw

Phillip Head Cap Screw

Cat. No.	Stock	Dimensions (mm)						
		d	Pitch	L	ℓ	D	B	
BHA0525	●	M5	0,8	25,5	9,5	8,5	3	4,0
BHA0625	●	M6	1,0	30	11,3	10,5	4	4,5
BHA0834		M8	1,25	34,2	12,7	12,0	5	-
BHE0407		M4	0,7	9,5	2	5,7	2,5	1,8
BHE0510	○	M5	0,8	13	3	7,7	3	2,7

Button Head Screw

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	D	B	α°
BHF0203L		M2	0,4	4	3	1,5	90
BHF0203B		M2	0,4	5,5	3,5	1,5	90
BHF0306R		M3	0,5	6,3	4,2	2	90
BHF0308R		M3	0,5	8	4,2	2	90
BHF0623	○	M6	1,0	23	12	4	90

Set Screw

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	D	B	α°
BT0306		M3	0,5	6	-	1,5	-
BT0310		M3	0,5	10	-	1,5	-
BT0404	●	M4	0,7	4	-	2	-
BT0506	●	M5	0,8	6	-	2,5	-
BT0510		M5	0,8	10	-	2,5	-
BT0610		M6	1,0	10	-	3	-
BT0612		M6	1,0	12	-	3	-
BT0620		M6	1,0	20	-	3	-
BT06035T		M6	1,0	3,5	-	T15	-

Set Screw

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	ℓ	D	B
BTD0408		M4	0,7	8	2	2,8	2
BTD0410		M4	0,7	10	2	2,8	2
BTD0412		M4	0,7	12	2	2,8	2
BTD0508		M5	0,8	8	3	3,5	2,5
BTD05F09		M5	0,5	9	2	4	T15
BTD0510	□	M5	0,8	10	3	3,5	2,5
BTD0518		M5	0,8	18	4	3,5	2,5
BTD0609	○	M6	1,0	9	2	4	3
BTD0615		M6	1,0	15	5	4	3
BTD0618		M6	1,0	18	5	4	3
BTD0620		M6	1,0	20	5	4	3
BTD0812		M8	1,25	12	2	5	4
BTD0818		M8	1,25	18	6	5	4
BTD0820		M8	1,25	20	6	5	4
BTD0825		M8	1,25	25	8,5	5	4
BTD0615T		M6	1,0	15	5	4,3	T20

Set Screw

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	B	α°	
BTT0407	●	M4	0,5	7	2,6	2	60
BTT0411	●	M4	0,5	11	2,6	2	60
BTT0511		M5	0,8	11	5	2	20
BTT0615		M6	1,0	15	6	2,5	20

Special Hollow Screw

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	ℓ	D	B
BW0507F	●	M5	0,5	7	1,2	6,3	3,5
BW0609F		M6	0,75	9	1,5	7,7	4
BW0508F-SD		M5	0,5	8	1,2	6,3	3,5
BW0810F-SD	□	M8	0,75	10	1,8	10	5
BW0912F-SD		M9	0,75	12	-	-	-

■ Screw

Cap Screw

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	ℓ	D	B
BX0304		M3	0,5	4	Full	5,5	2,5
BX0308		M3	0,5	8	Full	5,5	2,5
BX0315		M3	0,5	15	Full	5,5	2,5
BX0320		M3	0,5	20	Full	5,5	2,5
BX0408		M4	0,7	8	Full	7	3
BX0410		M4	0,7	10	Full	7	3
BX0414	●	M4	0,7	14	Full	7	3
BX0425		M4	0,7	25	20	7	3
BX0508	○	M5	0,8	8	Full	8,5	4
BX0510	○	M5	0,8	10	Full	8,5	4
BX0512	●	M5	0,8	12	Full	8,5	4
BX0515	●	M5	0,8	15	Full	8,5	4
BX0520	●	M5	0,8	20	Full	8,5	4
BX0520T	●	M5	0,8	20	16	8,5	T20
BX0615	○	M6	1,0	15	Full	10	5
BX0620	○	M6	1,0	20	Full	10	5
BX0622	●	M6	1,0	22	18	10	5
BX0625		M6	1,0	25	18	10	5
BX0820		M8	1,25	20	Full	13	6

Cap Screw (Torx Plus)

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	ℓ	D	B
BXD02208IP	●	M2,2	0,45	7,5	5,7	3,5	8IP
BXD02509IP	●	M2,5	0,45	9	7	4,1	10IP
BXD03011IP	●	M3	0,5	10,5	8	4,9	15IP
BXD03512IP	●	M3,5	0,6	11,5	8,8	5,5	15IP
BXD04014IP	●	M4	0,7	12,5	9,5	6	20IP
BXD04515IP	●	M4,5	0,75	14,3	10,8	6,8	25IP

Cap Screw (Torx Plus)

Cat. No.	Stock	Dimensions (mm)							
		d	Pitch	L	ℓ	D	H	B	R
BXA0310IP	○	M3	0,5	7,5	Full	5,3	2,4	10IP	2,0

Cap Screw with Oil Hole

Cat. No.	Stock	Dimensions (mm)						
		d	Pitch	L	ℓ	D	B	
BXH0825-D13	○	M8	1,25	25	Full	13	8	6
BXH1030-D16	○	M10	1,5	30	Full	16	10	8
BXH1235-D18	○	M12	1,75	35	Full	18	12	10

Cap Screw with Oil Hole

Cat. No.	Stock	Dimensions (mm)							
		d	Pitch	L	ℓ	D	H1	H2	B
BXH1235-D33	○	M12	1,75	35	Full	33	10	2	10
BXH1635-D40	○	M16	2,0	35	30	40	10	-	14
BXH2036-D50	○	M20	2,5	36	29	50	14	4	17

Cap Screw

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	ℓ	D	B
EBHX0512	○	M5	0,8	12	10,5	8	4

Flat Head Screw

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	ℓ	B	α°
FBUP2-A0-8	□	M3	0,5	10	5,5	2	82
FBUP3-A0-8		M3,5	0,6	12	7	2	82
FBUP4-A0-8		M5	0,8	15	9,3	3	82

Button Head Cap Screw

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	ℓ	D	B
FBUP3-A0-9	●	M3	0,5	8	Full	5,5	2

SPARE PARTS

Screw, Lever Pin

■ Screw

Axial adjustment Screw	Cat. No.	Stock	Dimensions (mm)						Nm
			d	Pitch	L	ℓ	D	B	
	FMJ	●	M4	0,5	15	5	6	3	-
	FMUJ	●	M4	0,7	17	10,5	6	1	-
	RFJ	●	M4	0,7	12	6	6	2	-
	SRFJ	●	M4	0,7	17	10,5	6	2	-
	KGBS1111	●	M5	0,5	8	1,2	6	3,5	-
	KGBS1221	□	M6	0,75	9	1,5	7,5	4,5	-
	KSS1111	●	3,5	0,6	11	5,2	T15	55	3,5
	KSS1221	□	4,5	0,75	12	6,6	T15,3	55	4,5
	LCS2B	●	M3	0,5	10	3,05	3,6	2	-
	LCS3	●	M6	1,0	17	10	6	2,5	-
	LCS3B-SD	●	M5	0,8	9,5	4,2	5	2	-
	LCS3DB-SD	●	M5	0,8	12	6	5	2	-
	LCS3S	●	M6	1,0	15	10	6	2,5	-
	LCS3TB-SD	●	M6	1,0	16,7	9,6	6	2,5	-
	LCS3TE	●	M6	1,0	15,5	8,5	6	2,5	-
	LCS4	●	M8	1,0	21	10	8	3	-
	LCS4B-SD	●	M6	1,0	13,4	9	6	2,5	-
	LCS41BS-SD	●	M8	1,0	17	9,3	8	3	-
	LCS42BS-SD	●	M8	1,0	20,7	9,8	8	3	-
	LCS4CA	●	M8	1,0	17,5	10	8	3	-
	LCS5	●	M8	1,0	25	12	8	3	-
	LCS5B-SD	□	M8	1,0	20,5	12,3	8	3	-
	LCS5DB-SD	□	M8	1,0	21,1	11,4	8	3	-
	LCS6	○	M10	1,0	27,2	14,4	9,8	4	-
	LCS6B-SD	●	M10	1,0	27,2	14,4	10	4	-
	LCS10	●	M5	0,8	14,5	8,5	5	2	-
	LCS12	●	M6	1,0	17	9,6	6	2,5	-
	LCS16	○	M6	1,0	21	13,6	6	2,5	-
	LCS20	●	M8	1,0	23,5	13,2	8	3	-
	LCS25	●	M10	1,0	30	17,4	10	4	-
	LCS32	●	M12	1,0	36	19,3	12	5	-
	MIB1.6-2	□	M1,6	0,35	2,0	-	2,4	-	0,2
	MIB1.6-2.5	●	M1,6	0,35	2,5	-	2,4	-	0,2
	MIB1.6-3	●	M1,6	0,35	3,0	-	2,4	-	0,2

■ Double Screw

Double Screw	Cat. No.	Stock	Dimensions (mm)						Nm
			d	Pitch	L	ℓ	D	B	
	WB4-8	●	M4	0,7	7,5	3	3,0	2	-
	WB5-10	●	M5	0,8	10	4	3,8	2,5	-
	WB5-12	○	M5	0,8	12	5	3,8	2,5	-
	WB6-13	○	M6	1,0	13	5	4,5	3	-
	WB6-16	●	M6	1,0	16	6	4,5	3	-
	WB6-20	□	M6	1,0	20	8,5	4,5	3	-
	WB6-30	●	M6	1,0	30	12	4,5	3	-
	WB8-20	●	M8	1,25	20	8,5	6,2	4	-
	WB8-24	●	M8	1,25	24	8,5	6,2	4	-
	WB8-30	●	M8	1,25	30	11,5	6,2	4	-
	WB8F-30	□	M8	1,0	30	11,5	6,2	4	-
	WB6-16T	□	M6	1,0	16	6	4,5	T20	-
	WB6-20T	○	M6	1,0	20	8,5	4,5	T20	-
	WB6-20TL	○	M6	1,0	20	8,5	4,5	T20	-
	WB7-15T	●	M7	1,0	15	5,5	5	T25	-
	WB7F-15T	○	M7	0,75	15	8,5	5,5	T25	-
	WB7F-20TL	○	M7	0,75	20	8,5	5,5	T25	-
	WB8-22T	●	M8	1,25	22	8,5	6,2	T27	-
	WB8-22TL	●	M8	1,25	22	8,5	6,2	T27	-
	WB8-30T	●	M8	1,25	30	11,5	6,2	T27	-
	WB8-30TL	●	M8	1,25	30	11,5	6,2	T27	-
	WB8R-16T	○	M8	1,25	14	5,5	6,2	T27	-
	LCL3	●	3,7	12	10	3,6			
	LCL3-SD	●	3,7	12	10	3,55			
	LCL3C-SD	□	3,1	7,8	9,9	3,1			
	LCL3D-SD	●	3,7	11,5	12	3,55			
	LCL3DB-SD	●	3,1	9,4	11,5	3,1			
	LCL3S	●	3,7	10,6	10	3,6			
	LCL3T-SD	□	2,6	6,3	7,2	2,15			
	LCL4	●	4,7	14	14,55	4,7			
	LCL4-SD	●	4,65	13,2	13,35	4,7			
	LCL4C-SD	●	4,65	10	13,35	4,7			
	LCL4D-SD	●	4,65	14,8	16	4,7			
	LCL4T-SD	●	4,65	13,2	13,35	4,7			
	LCL5	●	6	17	17,1	6			
	LCL5-SD	●	6	17,3	16,65	6			
	LCL5C-SD	□	7,5	18,1	20,5	7,5			
	LCL6-SD	●	7,5	21	20,5	7,5			
	LCL8	●	8,6	25,4	25,4	8,6			
	LCL06	●	2,5	6,28	7,0	2			
	LCL09	●	3,5	9,3	10,75	3			
	LCL10	●	3,4	11,8	10,8	3			
	LCL12	●	3,7	13,4	12,9	3,5			
	LCL16	○	4,6	17,6	18,4	4,4			
	LCL20	□	6	18,9	20,4	5,6			
	LCL32	□	8,5	26,8	29,8	8			

■ Lever Pin

SPARE PARTS Shim

Shim

Cat. No.	Stock	Dimensions (mm)				
		A	T	d ₁	d ₂	
CNS09T3	●	8,525	2,38	5,4	6,4	

Cat. No.	Stock	Dimensions (mm)				
		A	T	d ₁	d ₂	
CNS1204	●	12,57	4,76	4,4	6,0	
CNS1606	○	15,75	4,76	5,5	7,5	
CNS1906	●	18,70	6,35	5,5	7,5	
CNS2509	□	25,27	6,35	6,6	9,5	
CNS1203B	●	12,57	3,18	3,4	4,5	
CNS1204B	●	12,57	4,76	4,4	6,0	

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
DCS11T3	●	8,5	2,38	5,3	6,4

Cat. No.	Stock	Dimensions (mm)				
		A	T	d ₁	d ₂	θ°
DGCS13R	●	13,7	3,9	6,8	8,8	5

Cat. No.	Stock	Dimensions (mm)				
		A	T	d ₁	d ₂	
DNS1504	●	12,57	6,35	4,4	6,0	
DNS1506	●	12,57	4,76	4,4	6,0	
DNS1104B	○	9,45	4,73	3,4	4,5	
DNS1504B	○	12,57	6,35	4,4	6,0	
DNS1506B	○	12,57	4,76	4,4	6,0	

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
HE060011E	●				

Cat. No.	Stock	Dimensions (mm)		
		A	T	d
LST317SD	●	9,5	2,7	5,2
LST42SD	●	12,65	3,18	6,9

Cat. No.	Stock	Dimensions (mm)		
		A	T	d
LSS32SD	●	9,48	3,18	5
LSS42SD	●	12,65	3,18	6,9
LSS53SD	□	15,85	4,76	7,9
LSS63SD	●	19	4,76	10

Cat. No.	Stock	Dimensions (mm)		
		A	T	d
LSC32SD	●	9,48	3,18	5
LSC42SD	●	12,65	3,18	6,9
LSC53SD	●	15,85	4,76	7,9
LSC63SD	□	19	4,76	10

Cat. No.	Stock	Dimensions (mm)		
		A	T	d
LSD32SD	●	8,5	3,18	5
LSD42SD	●	12,65	3,18	6,9

Shim

Cat. No.	Stock	Dimensions (mm)			
		A	T	d	
LSR817	□	8,4	2,7	5,2	
LSR10	●	8,4	3,18	4,7	
LSR12	●	10	3,18	4,7	
LSR16	●	13,5	4,76	6,3	
LSR20	●	17,2	4,76	7,9	
LSR25	●	22	6,35	9,5	

Cat. No.	Stock	Dimensions (mm)			
		A	T ₁	T ₂	d ₂
LSTE31-0	●	9,5	2,7	2,7	5,2
LSTE31-1	●	9,5	2,67	2,91	5,2
LSTE31-2	●	9,5	2,64	3,11	5,2

Cat. No.	Stock	Dimensions (mm)			
		A	T	d	θ°
SCND433	□	12,65	4,76	3,4	80
SCN0903	□	9,5	3,18	3,4	

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
SCS1204	□	11,5	3,18	6,4	7,9

Cat. No.	Stock	Dimensions (mm)				
		A	T	d ₁	d ₂	
SNS1204	●	12,57	4,76	4,4	6,0	
SNS1506	○	15,75	4,76	5,5	7,5	
SNS1906	●	18,92	6,35	5,5	7,5	
SNS2507	○	25,27	7,93	6,6	9,5	
SNS2509	●	25,27	6,35	6,6	9,5	

Cat. No.	Stock	Dimensions (mm)				
		A	T	d ₁	d ₂	θ°
SVW322		9,5	3,18	4,7	6,5	35
SFW433		12,65	4,76	6,2	8,0	50
SDW323	●	9,5	3,18	4,7	6,5	55
SDW423	●	12,65	3,18	6,2	8,0	55
SDW433	○	12,65	3,18	6,2	8,0	80
SCW423	●	12,65	3,18	6,2	8,0	80
SCW433	○	12,65	3,18	6,2	8,0	80
SCW635	○	19	4,76	9	11,5	80

Cat. No.	Stock	Dimensions (mm)			
		D			
SRND32Z	○	9,5			
SRND42	○	12,7			

Cat. No.	Stock	Dimensions (mm)		
		A	T	d
SSND423	○	12,5	3,18	3,4
SSN0903	□			

SPARE PARTS

Shim, Nut

Shim

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
SSW423	□	12,65	3,18	6,2	8
SSW433	○	12,65	4,76	6,2	8
SSW635	○	19	4,76	9	11,5

Cat. No.	Stock	Dimensions (mm)				θ°
		A	T	d		
STPD322	●	8,4	3,18	3,4		6
STPD422	○	11,0	3,18	3,4		6

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
STW323	●	9,5	3,18	4,7	6,5
STW434	●	12,65	4,76	6,2	8
STW333	○				

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
SWW433	●	12,65	5,15	6,2	8
LSW317	●				

Cat. No.	Stock	Dimensions (mm)				θ°
		A	T	d ₁	d ₂	
TCS16T3	□	8,8	2,38	5,3	6,3	7

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
TNS1604	●	9,45	4,76	3,4	4,5
TNS1603B	○	9,45	3,18	3,4	4,5
TNS1604B	○	9,45	4,76	3,4	4,5

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
TRW5505	●	10,5	4,76	3,4	4,5

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
VCS1604	●	8,25	3,18	5,3	6,4

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
VNS1604	●	9,45	4,76	3,4	4,5

Shim

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
WFXS4R	●	10,17	3,0	5,5	7,5

Cat. No.	Stock	Dimensions (mm)				θ°
		A	T	d ₁	d ₂	
WGCS13R	●	10,7	3,0	5,5	7,5	5

Cat. No.	Stock	Dimensions (mm)			
		A	T	d ₁	d ₂
WNS0604	●	9,52	3,18	3,5	4,5
WNS0804	●	12,57	4,76	4,4	6,3
WNS0603B	□	9,27	3,18	3,4	4,5
WNS0803B	○	12,57	3,18	3,4	4,5
WNS0804B	○	12,57	4,76	4,4	6,0

Seat

Cat. No.	Stock	Dimensions (mm)		
		d	L	H
PWSS4R	▲	4,6	15	8

Ring

Cat. No.	Stock	Dimensions (mm)			
		A	B	T	d
ER03	○	7	2,6	0,6	3
ER04	●	9	3,5	0,6	4
ER05	●	11	4,3	0,6	5

Nut

Cat. No.	Stock	Dimensions (mm)			
		L			
BNBW-2	●	3			
BNBW-4	○	4			
BNBW-7	□	7			

Cat. No.	Stock	Dimensions (mm)			
		d	L	D	B
CPM32N	●	M4	7,5	7	3
CPM43N	●	M5	8,5	7	3
CPM43S	○	M5	6	7	3

Cat. No.	Stock	Dimensions (mm)			
		d	Pitch	L	D
CPV33N	●	M4	0,5	6,0	6,0

SPARE PARTS

Shim Pin, Eccentric Pin

Shim Pin

Cat. No.	Stock	Dimensions (mm)						
		d	Pitch	L	D	d ₁	B	
HE060011P	●	M6	0,75	14,5	7,8	5,0	2,5	

Cat. No.	Stock	Dimensions (mm)		
		d	D	L
LP04	●	0,4	1,1	4,7
LP06	●	0,4	1,1	6,0
LP07	●	0,4	1,1	7,7

Cat. No.	Stock	Dimensions (mm)		
		d	H	L
LSP3		5	3,5	5,5
LSP3SD	●	5	3,5	5,5
LSP4		6,7	4	7
LSP4SD	●	6,7	4	7
LSP5SD	●	7,7	4,5	8,5
LSP6SD	●	9,85	5,9	11,1
LSP8		13,05	10	12
LSP10	●	5	3,3	6,5
LSP16	○	6,6	4,5	9
LSP20	●	8,2	5,5	9
LSP25		9,8	6,5	11
LSP32		13	10	12

Cat. No.	Stock	Dimensions (mm)						
		d	Pitch	L	D	D ₁	d ₁	
MP317		M4	0,7	15,5	6	4	3,7	
MP320	●	M4	0,7	19,5	6	4	3,7	
MP416	●	M5	0,8	14	7,5	6	5	
MP420	●	M5	0,8	20	7,5	6	5	
MP432	○	M5	0,8	32	7,5	6	5	
MP531								
MP534								

Cat. No.	Stock	Dimensions (mm)				
		d	L	D	θ°	
SPP308	○	3,2	8	4,8	120	

Cat. No.	Stock	Dimensions (mm)		
		L	D	
SPP3	○	14	3,2	

Cat. No.	Stock	Dimensions (mm)					
		d ₁	d ₂	L	D	ℓ ₁	ℓ ₂
VP20	●	M3,5	M4	12,0	5,0	≥4,5	≥4,5
VP25	●	M3,5	M4	17,0	5,0	≥4,5	≥4,5
VP32	●	M3,5	M4	24,0	5,0	≥4,5	≥4,5

Cat. No.	Stock	Dimensions (mm)					
		d	Pitch	L	ℓ	D ₁	D ₂
VP32B	●	M3,5	0,6	8,0	1,4	5,0	6,5
VP40B	●	M3,5	0,6	11,5	1,4	5,0	6,5

Eccentric Pin

Cat. No.	Stock	Dimensions (mm)					
		d	D ₁	D ₂	L	ℓ	B
CPB34	●	3,4	4,1	5,5	14	5	2,5
CPB35	○	3,4	4,1	5,5	17	5	2,5
CPB42	●	4,5	5,5	7	14	5	3
CPB43	●	4,5	5,5	7	19	5	3
CPB43S	●	4,5	5,5	7	16	5	3
CPB44T	□	4,5	5,5	7	22	5	3
CPB45T	○	4,5	5,5	7	27	5	3
CPB64	○	6,8	8,2	10,5	24	6,6	4

Cat. No.	Stock	Dimensions (mm)					
		d	D ₁	D ₂	L	ℓ	B
CPU304C	○	3,3	5,5	-	10	3,5	3

Cat. No.	Stock	Dimensions (mm)					
		d	D	L	ℓ	D ₁	D ₂
HPS1015	○	32	99,4				For 10IP, 15IP
HPL2025	○	35,5	110,3				For 20IP, 25IP

Wrench


Cat. No.	Stock	Dimensions (mm)				
		B	d	C	b ₁	b ₂
TRXW10IP	○	10IP	2,6	40	75	40


Cat. No.	Stock	Dimensions (mm)				
		B	d	L	ℓ	Remarks
TRB10IP	○	10IP	4			
TRB15IP	○	15IP	4			
TRB20IP	○	20IP	4,55			
TRB25IP	○	25IP				

SPARE PARTS


Wrench

Wrench


Socket Wrench	Cat. No.	Stock	Dimensions (mm)			
			d ₁	d ₂	L	H
	ANT	○	5	2	100	4,5

Hex Wrench (Hexagonal)	Cat. No.	Stock	Dimensions (mm)			
			B	L	ℓ	
	LH020	●	2	50	16	
	LH025	●	2,5	56	18	
	LH030	●	3	63	20	
	LH035	●	3,5	68	22	
	LH040	●	4	70	25	
	LH050	○	5	80	28	
	LH060	○	6	90	32	


	Cat. No.	Stock	Dimensions (mm)			
	LH035K	●				
	LH045K	□				


Torx Wrench	Cat. No.	Stock	Dimensions (mm)			
			B	d	L	ℓ
	LT0806		T8	2,3	45,0	6,0
	LT20	○	T20	3,9	57,2	19,1
	LT25	□	T25	4,4	60,3	20,2
	LT27	●	T27	4,96	63,5	21,5
	LT1510	○	T15	3,26	62	10

	Cat. No.	Stock	Dimensions (mm)			
	LT15K	●				


Torx Plus Wrench	Cat. No.	Stock	Dimensions (mm)			
			B	d	L	ℓ
	LT20IP		T20	4,0	57	18,5
	LT25IP		T25	4,5	60	19,5


	Cat. No.	Stock	Dimensions (mm)			
	SDBSM	●				


Hex Wrench (Hexagonal)	Cat. No.	Stock	Dimensions (mm)		
			B	b ₁	C
	TH015	○	1,5	35	30
	TH020	●	2	35	39
	TH025	○	2,5	35	39


Hex Wrench (Hexagonal)	Cat. No.	Stock	Dimensions (mm)		
			B	b ₁	C
	TH030	●	3	48	28
	TH040	●	4	48	37
	TH050	○	5	48	45


Wrench


Hex Wrench (Hexagonal)	Cat. No.	Stock	Dimensions (mm)		
			B	C	b ₁
	HD040	○	4	75	111


Torx Wrench	Cat. No.	Stock	Dimensions (mm)			
			B	d	C	B ₁
	TRD07	●	T7	2,0	45	70
	TRD08	●	T8	2,3	55	70
	TRD15	○	T15	3,3	70	100
	TRD20	●	T20	3,9	100	90
	TRD25	●	T25	5,3	80	110


Torx Plus Wrench	Cat. No.	Stock	Dimensions (mm)		
			B	C	b ₁
	TRDR06IP05	●			
	TRDR08IP	●	8IP	60	104
	TRDR10IP	●	10IP	80	111
	TRDR15IP	●	15IP	80	111
	TRDR20IP	●	20IP	100	118
	TRDR25IP	●	25IP	100	118


Torx Wrench	Cat. No.	Stock	Dimensions (mm)			
			B	C	b ₁	b ₂
	TRX06	●	T6	35,5	15	15
	TRX08	●	T8	38,5	19	19
	TRX10	●	T10	42,1	22	22
	TRX15	●	T15	46	22	27
	TRX20	●	T20	49	22	30

Torx Plus Wrench	Cat. No.	Stock	Dimensions (mm)			
			B	C	b ₁	b ₂
	TRX06IP	●	6IP	34	15	15

Hex Wrench (Hexagonal)	Cat. No.	Stock	Dimensions (mm)			
			B	C	b ₁	b ₂
	TSW040	○	4	60	20	40

Torx Wrench	Cat. No.	Stock	Dimensions (mm)		
			B	d	
	TT25	●	T25	4,4	
	TT27	●	T27	5,0	

Torx Plus Wrench	Cat. No.	Stock	Dimensions (mm)			
			B	d	C	b ₁
	TTR15IP	●	15IP	4,0	80	25,5

Torx Wrench	Cat. No.	Stock	Dimensions (mm)		
			B	d	
	TTX15W	●	T15	4,0	
	TTX20	●	T20	3,9	

Index

P

P9–P21

Index

A - C

A		
1.8x45	G67, G69, M44, M53, M55	Spare parts
AECT*****PEFRA	G58, G59, H40	Indexable insert
AFBSM**	M38, M39	Spare parts
ANB****R	G64, H61, M50	SUMIDIA blades
ANB****R-G	G64, H61, M50	SUMIDIA blades
ANB****R-H	G64, H61, M50	SUMIDIA blades
ANB****R-L	G64, H61, M50	SUMIDIA blades
ANB****R-W	G64, H61, M50	SUMIDIA blades
ANB****R-GX	G64, H61, M50	SUMIDIA blades
ANT	P3	Spare parts
ANXA****R**	G63, M49	Cutter
ANXA****RS**	G63, M49	Cutter
ANXS****E**	H61, M50	Indexable endmill
ANXS****R**	G62, M48	Cutter
ANXS****RS**	G62, M48	Cutter
AOET****PEER-F	G39, G47, H21, H29, H31	Indexable insert
AOET****PEER-P**	G39, G47, H21, H29, H31	Indexable insert
AOET****PEER-S	G39, G47, H21, H29, H31	Indexable insert
AOET**T3**PEER-F	G39, G47, H21, H25, H27	Indexable insert
AOET**T3**PEER-P**	G39, G47, H21, H25, H27	Indexable insert
AOET**T3**PEER-S	G39, G47, H21, H25, H27	Indexable insert
AOMT****PEER-G	G39, G47, H21, H29, H31	Indexable insert
AOMT****PEER-H	G39, G47, H21, H29, H31	Indexable insert
AOMT****PEER-L	G39, G47, H21, H29, H31	Indexable insert
AOMT**T3**PEER-G	G39, G47, H21, H25, H27	Indexable insert
AOMT**T3**PEER-H	G39, G47, H21, H25, H27	Indexable insert
AOMT**T3**PEER-L	G39, G47, H21, H25, H27	Indexable insert
APET****PDER-F	H43	Indexable insert
APET****PDRF-S	H43	Indexable insert
APMT****PDER	H43	Indexable insert
APMT****PDER-H	H43	Indexable insert
ASM****	J34	Solid endmill
ASM****DL	J28	Solid endmill
ASM****DL-R**	J28	Solid endmill
AXET****PEFR-S	G48, G49, H35, H36, H45, H51	Indexable insert
AXMT****PDER-G	G48, H34	Indexable insert
AXMT****PDER-H	G48, H34	Indexable insert
AXMT****PDER-L	G48, H34	Indexable insert
AXMT****PDRF-S	G48, H34	Indexable insert
AXMT****PEER-E	G48, G49, H35, H36, H45, H51	Indexable insert
AXMT****PEER-EH	G48, G49, H35, H36, H45, H51	Indexable insert
AXMT****PEER-G	G48, G49, H35, H36, H45, H51	Indexable insert
AXMT****PEER-H	G48, G49, H35, H36, H45, H51	Indexable insert
AXMT****PEER-L	G48, G49, H36, H51	Indexable insert

B		
B***-SCLC R/L ****-**	E14	Boring bar
B***-SDQC R/L ****-**	E17	Boring bar
B***-SDUC R/L ****-**	E16	Boring bar
B***-STUP R/L ****-**	E20	Boring bar
BCS**	F46, F47	Spare parts
BFTG****F	P2	Spare parts
BFTX****	P2	Spare parts
BFTX****	P2	Spare parts
BFTX****A	P2	Spare parts
BFTX****IP	P2	Spare parts
BFTX****IP	P2	Spare parts

BFTX****IP**	P2	Spare parts
BFTX****N	P2	Spare parts
BFTX****N	P2	Spare parts
BFTX****NV	P2	Spare parts
BFTX****SD	P2	Spare parts
BFTX****SD	P2	Spare parts
BFTX****T8 R/L	P2	Spare parts
BFTY****	P2	Spare parts
BH****	P2	Spare parts
BH****	P2	Spare parts
BH**** R/L	P2	Spare parts
BHA****	P3	Spare parts
BHF****	P3	Spare parts
BNB*** R/L	M41	Boring bar
BNBB**R	M40	Boring bar
BNBC	M41	Spare parts
BNBP 2R*** ** *	J41, M57	SUMIBORON endmill
BNBW* [*]	P6	Spare parts
BNES****	J40, M56	SUMIBORON endmill
BNGC R/L	M44	Spare parts
BNGG R/L ****-TT	M44	Tool holder
BNGS R/L TT	M44	Spare parts
BNTT**** R/L	M41	SUMIBORON insert
BNZ****R	M41	Boring bar
BSME R/L ****D*S6	M38	Boring bar
BT****	P3	Spare parts
BT****E	F22, F26	Spare parts
BT****T	P3	Spare parts
BTD****	P3	Spare parts
BTR****	D30	Indexable insert
BTT****	P3	Spare parts
BW****F	P3	Spare parts
BW****F-SD	P3	Spare parts
BWS**	F46, F48	Spare parts
BX****	P3	Spare parts
BX****T	P3	Spare parts
BXA****IP	P3	Spare parts
BXH****D**	P3	Spare parts
BXBR****R	E24	Boring bar
BXBR****R-NB	E24	Boring bar
BXD****IP	P3	Spare parts

C		
C***-SCLP R/L **	E15	Boring bar
C***-SSKP R/L **	E18	Boring bar
C***-STUB R/L **	E20	Boring bar
C***-STUP R/L **	E20	Boring bar
C***-SWUB R/L **	E23	Boring bar
CBC*	D25	Spare parts
CBC****	D25	Spare parts
CBD4 R/L	D25	Spare parts
CBS**	D25	Spare parts
CCET****LFY/RFY	C61	Indexable insert
CCET**T***LFY/RFY	C61	Indexable insert
CCET**X***LFY/RFY	C61	Indexable insert
CCET**X***LFY/RFY	C61	Indexable insert
CCGT**X***LFY/RFY	C63	Indexable insert
CCGT****LFX/RFX	C62	Indexable insert

CCGT*****LFX/RFX	C62	Indexable insert	CNGA*****LE-NC2	M9	SUMIBORON insert
CCGT**T***LFX/RFX	C62	Indexable insert	CNGA*****LF-NU2	M10	SUMIBORON insert
CCGT**T***LFX/RFX	C62	Indexable insert	CNGA*****LS-NC2	M9	SUMIBORON insert
CCGT**X***LFYS/RFYS	C62	Indexable insert	CNGA*****LT-NC2	M9	SUMIBORON insert
CCGT**X***LFYS/RFYS	C62	Indexable insert	CNGA*****NC-4	M9	SUMIBORON insert
CCGT*****M NFC	C62	Indexable insert	CNGA*****NC-W4	M9	SUMIBORON insert
CCGT*****M NSC	C63	Indexable insert	CNGA*****NC-WG4	M9	SUMIBORON insert
CCGT*****M NSI	C63	Indexable insert	CNGA*****NC-WH4	M9	SUMIBORON insert
CCGT*****NAG	C63	Indexable insert	CNGA*****NS-2	M10	SUMIBORON insert
CCGT*****NFV NC2	M4	SUMIBORON insert	CNGA*****NU-2	M10	SUMIBORON insert
CCGT*****NFV NU2	M6	SUMIBORON insert	CNGA*****NU-W2	M10	SUMIBORON insert
CCGT*****NLV NC2	M4	SUMIBORON insert	CNGA*****NU-WG2	M10	SUMIBORON insert
CCGT*****NLV NU2	M6	SUMIBORON insert	CNGA*****NU-WH2	M10	SUMIBORON insert
CCGT*****NSC	C63	Indexable insert	CNGG*****NEF	C26	Indexable insert
CCGW**T***	M7	SUMIBORON insert	CNGG*****NFV NC4	M9	SUMIBORON insert
CCGW*****HS-NC2	M4	SUMIBORON insert	CNGG*****NLV NC4	M9	SUMIBORON insert
CCGW*****HS-NU2	M6	SUMIBORON insert	CNGG*****NSV NC4	M9	SUMIBORON insert
CCGW*****LE-NC2	M4	SUMIBORON insert	CNGG*****NGH	C26	Indexable insert
CCGW*****LF-NU2	M6	SUMIBORON insert	CNGG*****NSU	C26	Indexable insert
CCGW*****LS-NC2	M4	SUMIBORON insert	CNGM*****NLV NU2	M10	SUMIBORON insert
CCGW*****LT-NC2	M4	SUMIBORON insert	CNGX*****	M11	SUMIBORON insert
CCGW*****NC-2	M4	SUMIBORON insert	CNGX*****	M11	SUMIBORON insert
CCGW*****NC-W2	M4	SUMIBORON insert	CNMA*****	C26	Indexable insert
CCGW*****NC-WG2	M4	SUMIBORON insert	CNMA*****	M11	SUMIBORON insert
CCGW*****NC-WH2	M4	SUMIBORON insert	CNMA*****NS	M11	SUMIBORON insert
CCGW*****NS	M7	SUMIBORON insert	CNMA*****NU	M11	SUMIBORON insert
CCGW*****NU	M7	SUMIBORON insert	CNMA*****NU-W	M11	SUMIBORON insert
CCGW*****NU-2	M6	SUMIBORON insert	CNMG*****NEF	C18	Indexable insert
CCGW*****NU-WG2	M6	SUMIBORON insert	CNMG*****NEG	C20	Indexable insert
CCGW*****NU-WH2	M6	SUMIBORON insert	CNMG*****NEM	C21	Indexable insert
CCH***	G53, H9, H10	Spare parts	CNMG*****NEX	C20	Indexable insert
CCLN R/L ****_***	D25	Tool holder	CNMG*****NFA	C18	Indexable insert
CCM 6B L/R	F40	Spare parts	CNMG*****NFB	C18	Indexable insert
CCM 8 LONG	D25, D26	Spare parts	CNMG*****NFE	C18	Indexable insert
CCM 8 UL	D25, F40	Spare parts	CNMG*****NFL	C18	Indexable insert
CCM 8 UR	F40	Spare parts	CNMG*****NGE	C20	Indexable insert
CCMT*****	M8	SUMIDIA insert	CNMG*****NGU	C19	Indexable insert
CCMT*****L/R-DM NU	M8	SUMIDIA insert	CNMG*****NGU-W	C19	Indexable insert
CCMT*****NF	M8	SUMIDIA insert	CNMG*****NGZ	C23	Indexable insert
CCMT*****NFB	C64	Indexable insert	CNMG*****NLU	C18	Indexable insert
CCMT*****NFP	C64	Indexable insert	CNMG*****NLU-W	C18	Indexable insert
CCMT*****NGD NF	M8	SUMIDIA insert	CNMG*****NME	C21	Indexable insert
CCMT*****NLD NF	M8	SUMIDIA insert	CNMG*****NMU	C21	Indexable insert
CCMT*****NLB	C64	Indexable insert	CNMG*****NMX	C22	Indexable insert
CCMT*****NLU	C64	Indexable insert	CNMG*****NSE	C19	Indexable insert
CCMT*****NLU-W	C64	Indexable insert	CNMG*****NSE-W	C19	Indexable insert
CCMT*****NMU	C65	Indexable insert	CNMG*****NSU	C19	Indexable insert
CCMT*****NSC	C65	Indexable insert	CNMG*****NSX	C19	Indexable insert
CCMT*****NSK	C65	Indexable insert	CNMG*****NUG	C20	Indexable insert
CCMT*****NSU	C64	Indexable insert	CNMG*****NUP	C21	Indexable insert
CCMT**T***NUS	C65	Indexable insert	CNMG*****NUX	C22	Indexable insert
CCMW*****	C65	Indexable insert	CNMG*****NUZ	C23	Indexable insert
CCMW*****RH	M33	SUMIDIA insert	CNMM*****NHF	C24	Indexable insert
CCMW**T***	C65	Indexable insert	CNMM*****NHG	C24	Indexable insert
CCS**T*	P5	Spare parts	CNMM*****NHP	C24	Indexable insert
CGA R/L **** **	M43	SUMIBORON insert	CNMM*****NHU	C25	Indexable insert
CNGA*****	C26	Indexable insert	CNMM*****NHW	C25	Indexable insert
CNGA*****ES-NC4	M9	SUMIBORON insert	CNMM*****NMH	C24	Indexable insert
CNGA*****HS-NC2	M9	SUMIBORON insert	CNMM*****NMP	C24	Indexable insert
CNGA*****HS-NU2	M10	SUMIBORON insert	CNMQ*****N	G52	Indexable insert

Index

C - D

CNMU*****NG	G52	Indexable insert
CNMU*****NH	G52	Indexable insert
CNMX*****NF	M11	SUMIDIA insert
CNMX*****L/R	C26	Indexable insert
CNP****RS	G52	Cutter
CNPF****RS	G52	Cutter
CNS****	P5	Spare parts
CNS****B	P5	Spare parts
CPB**	P7	Spare parts
CPB**S	P7	Spare parts
CPB**T	P7	Spare parts
CPGT*****NSD	C66	Indexable insert
CPGW*****NC2	M5	SUMIBORON insert
CPM**N	P6	Spare parts
CPM**S	P6	Spare parts
CPMH*****NUS	C67	Indexable insert
CPMT*****NFB	C66	Indexable insert
CPMT*****NLB	C66	Indexable insert
CPMT*****NLU	C66	Indexable insert
CPMT*****NLU-W	C66	Indexable insert
CPMT*****NMU	C67	Indexable insert
CPMT*****NSU	C67	Indexable insert
CPMT*****NUS	C67	Indexable insert
CPMW*****NF	M5	SUMIDIA insert
CPU***C	P7	Spare parts
CPV**N	P6	Spare parts
CR**	P6	Spare parts
CRDN N****_***	D26	Tool holder
CRSN R/L ****_***	D26	Tool holder
CSBN R/L ****_***	D25	Tool holder
CSKN R/L ****_***	D25	Tool holder
CTL*****N/L/R	F44	Indexable insert
CTR*****N/L/R NB	F44	Indexable insert
CTR*****N/L/R	F44	Indexable insert

D

D***-DCLC R/L ****_**	E8	Boring bar
D***-DDUN R/L ****_**	E9	Boring bar
D***-DTFN R/L ****_**	E12	Boring bar
D***-DWLN R/L ****_**	E13	Boring bar
D***-SCLC R/L ****_**	E14	Boring bar
D***-SDQC R/L ****_**	E17	Boring bar
D***-SDUC R/L ****_**	E16	Boring bar
D***-STUP R/L ****_**	E20	Boring bar
D***-SVUB R/L ****_**	E21	Boring bar
D***-SVZB R/L ****_**	E21	Boring bar
DABB***C-R	M45	SUMIDIA-Bohrstange
DABB***N-R	M45	SUMIDIA-Bohrstange
DAL****H	M60	SUMIDIA-Bohrer
DC R/L-*	D25	Spare parts
DCGT*****LFX/RFX	C68	Indexable insert
DCGT*****LFX/RFX	C68	Indexable insert
DCGT*****LFY/RFY	C69	Indexable insert
DCGT*****LFY/RFY	C69	Indexable insert
DCGT*****LFYS/RFYS	C68	Indexable insert
DCGT*****LFYS/RFYS	C68	Indexable insert
DCGT*****LSD/RSD	C69	Indexable insert
DCGT*****M NFC	C68	Indexable insert

DCGT*****M NSC	C70	Indexable insert
DCGT*****M NSI	C70	Indexable insert
DCGT*****NAG	C69	Indexable insert
DCGT*****N-FV NC2	M12	SUMIBORON insert
DCGT*****N-FV NU2	M13	SUMIBORON insert
DCGT*****N-LV NC2	M12	SUMIBORON insert
DCGT*****N-LV NU2	M13	SUMIBORON insert
DCGT*****NSC	C70	Indexable insert
DCGW*****	C70	Indexable insert
DCGW*****HS-NC2	M12	SUMIBORON insert
DCGW*****HS-NU2	M13	SUMIBORON insert
DCGW*****LE-NC2	M12	SUMIBORON insert
DCGW*****LF-NU2	M13	SUMIBORON insert
DCGW*****LS-NC2	M12	SUMIBORON insert
DCGW*****LT-NC2	M12	SUMIBORON insert
DCGW*****NC-2	M12	SUMIBORON insert
DCGW*****NC-WG2	M12	SUMIBORON insert
DCGW*****NC-WH2	M12	SUMIBORON insert
DCGW*****NS	M13	SUMIBORON insert
DCGW*****NU	M13	SUMIBORON insert
DCGW*****NU-2	M13	SUMIBORON insert
DCGW*****NU-WG2	M13	SUMIBORON insert
DCGW*****NU-WH2	M13	SUMIBORON insert
DCLN R/L ****_***	D12	Tool holder
DCMT*****	M14	SUMIDIA insert
DCMT*****L/R-DM NU	M14	SUMIDIA insert
DCMT*****NF	M14	SUMIDIA insert
DCMT*****NFB	C71	Indexable insert
DCMT*****NFP	C71	Indexable insert
DCMT*****NGD NF	M14	SUMIDIA insert
DCMT*****NLD NF	M14	SUMIDIA insert
DCMT*****NLB	C71	Indexable insert
DCMT*****NLU	C71	Indexable insert
DCMT*****NMU	C71	Indexable insert
DCMT*****NSK	C71	Indexable insert
DCMT*****NSU	C71	Indexable insert
DCMW*****	C71	Indexable insert
DCMW*****RH	M33	SUMIDIA insert
DCMX**T***NLUW	C71	Indexable insert
DCS**T*	P5	Spare parts
DDHN R/L ****_***	D13	Tool holder
DDUN R/L ****_***	D13	Tool holder
DDL***V	M60	SUMIDIA drill
DDNN N ****_***	D13	Tool holder
DFC*****E	H14, H15	Indexable endmill
DFC*****E**	H15	Indexable endmill
DFCM*****E	H14, H15	Indexable endmill
DFCM*****E**	H15	Indexable endmill
DFC*****RS	G26, H14	Cutter
DFCF*****RS	G26, H14	Cutter
DFCM*****RS	G26, H14	Cutter
DGC*****EW	H6	Indexable endmill
DGC*****RS	G8	Cutter
DGCF*****RS	G8	Cutter
DGCM*****RS	G8	Cutter
DGCS**R	P5	Spare parts
DML***V	M61	SUMIDIA drill
DNGA*****	C34	Indexable insert
DNGA*****ES-NC2	M15	SUMIBORON insert
DNGA*****HS-NC2	M15	SUMIBORON insert

DNGA*****HS-NC4	M15	SUMIBORON insert
DNGA*****LE-NC2	M15	SUMIBORON insert
DNGA*****LS-NC2	M15	SUMIBORON insert
DNGA*****LT-NC2	M15	SUMIBORON insert
DNGA*****NC-2	M15	SUMIBORON insert
DNGA*****NC-4	M15	SUMIBORON insert
DNGA*****NC-WG4	M15	SUMIBORON insert
DNGA*****NC-WH4	M15	SUMIBORON insert
DNGA*****NU-2	M17	SUMIBORON insert
DNGA*****NU-WG2	M17	SUMIBORON insert
DNGA*****NU-WH2	M17	SUMIBORON insert
DNGG*****LUM/RUM	C34	Indexable insert
DNGG*****NEF	C34	Indexable insert
DNGG*****NFV NC4	M16	SUMIBORON insert
DNGG*****NLV NC4	M16	SUMIBORON insert
DNGG*****NGH	C34	Indexable insert
DNGG*****NSU	C34	Indexable insert
DNGG*****N-SV NC4	M16	SUMIBORON insert
DNGM*****N-LV NU2	M17	SUMIBORON insert
DNMA*****	C33	Indexable insert
DNMA*****	M18	SUMIBORON insert
DNMA*****NS	M18	SUMIBORON insert
DNMA*****NU	M18	SUMIBORON insert
DNMA*****RH	M18, M33	SUMIDIA insert
DNMG*****LHM/RHM	C31	Indexable insert
DNMG*****LUM/RUM	C30	Indexable insert
DNMG*****NEF	C28	Indexable insert
DNMG*****NEG	C29	Indexable insert
DNMG*****NEM	C30	Indexable insert
DNMG*****NEX	C29	Indexable insert
DNMG*****NFA	C27	Indexable insert
DNMG*****NFB	C27	Indexable insert
DNMG*****NFE	C27	Indexable insert
DNMG*****NFL	C27	Indexable insert
DNMG*****NGE	C29	Indexable insert
DNMG*****NGU	C28	Indexable insert
DNMG*****NGZ	C31	Indexable insert
DNMG*****NLU	C27	Indexable insert
DNMG*****NME	C30	Indexable insert
DNMG*****NMU	C30	Indexable insert
DNMG*****NMX	C31	Indexable insert
DNMG*****NSE	C28	Indexable insert
DNMG*****NSU	C28	Indexable insert
DNMG*****NSX	C28	Indexable insert
DNMG*****NUG	C29	Indexable insert
DNMG*****NUP	C30	Indexable insert
DNMG*****NUX	C31	Indexable insert
DNMG*****NUZ	C31	Indexable insert
DNMM*****NHG	C32	Indexable insert
DNMM*****NHP	C32	Indexable insert
DNMM*****NMP	C32	Indexable insert
DNMX*****L/R	C33	Indexable insert
DNMX*****NSE-W	C33	Indexable insert
DNS****	P5	Spare parts
DNS****B	P5	Spare parts
DNX**** RS	G16	Cutter
DNXF**** RS	G16	Cutter
DNXK**R	G16	Spare parts
DSBN R/L ****_***	D14	Tool holder
DSDN N ****_***	D14	Tool holder

DSLX*	D27	Spare parts
DSP*	D25	Spare parts
DTFN R/L ****_***	D15	Tool holder
DTGN R/L ****_***	D15	Tool holder
DTJN R/L ****_***	D15	Tool holder
DTR**C R/L ****_***	D11	Tool holder
DTR**Q R/L ****_***	D11	Tool holder
DVJN R/L ****_***	D16	Tool holder
DVQN R/L ****_***	D16	Tool holder
DWVN N ****_***	D16	Tool holder
DWLN R/L ****_***	D17	Tool holder

E

ECXA***X**LE NU*	M39	SUMIBORON insert
ECXA***X**LF NU*	M39	SUMIBORON insert
E**D*SEXCR/L**_**P	M39	Boring bar
EHBX****	P3	Spare parts
EHHM****ZX	J29	Solid endmill
ELSM****	J39	Solid endmill
ER**	P6	Spare parts

F

FBUP*-A*-*	P3	Spare parts
FMJ	P4	Spare parts
FMU****R-S	G69, M55	Cutter
FMUE	G69, M55	Spare parts
FMUJ	P4	Spare parts
FMUU	G69, M55	Spare parts

G

GCG N**** GA	F17, F19, F21, F23, F25, F27, Indexable insert	F29, F33, F34, F37, F39
GCM N**** GF	F17, F19, F21, F23, F25, F27, Indexable insert	F29, F33, F34, F37, F39
GCM N**** GF	F17, F21, F25, F37	Indexable insert
GCM N**** GG	F17, F19, F21, F23, F25, F27, Indexable insert	F29, F33, F34, F37, F39
GCM N**** GL	F17, F19, F21, F23, F25, F27, Indexable insert	F29, F33, F34, F37, F39
GCM N**** MG	F17, F19, F21, F23, F25, F27, Indexable insert	F29, F33, F34, F37, F39
GCM N**** ML	F17, F19, F21, F23, F25, F27, Indexable insert	F29, F33, F34, F37, F39
GCM N**** RG	F17, F19, F21, F23, F25, F27, Indexable insert	F37
GCM N**** RN	F17, F19, F21, F23, F25, F27, Indexable insert	F31, F33, F34, F37, F39
GCM R/L**** CF**	F17, F19, F21, F23, F25, F27, Indexable insert	F37
GCM R/L**** CG**	F17, F19, F21, F23, F25, F27, Indexable insert	F37
GNDCF R/L ***_***	F38	Cassette
GNDCM R/L ***	F36	Cassette
GNDM R/L ****_JX***	F16	Tool holder

Index

G - L

GNDM R/L ****JX****	F16	Tool holder
GNDM R/L ****JX*****	F16	Tool holder
GNDM R/L ****K****	F20	Tool holder
GNDM R/L ****K****	F20	Tool holder
GNDM R/L ****K****	F20	Tool holder
GNDM R/L ****M****	F20	Tool holder
GNDM R/L ****M****	F20	Tool holder
GNDM R/L ****M****	F20	Tool holder
GNDM R/L ****P****	F20	Tool holder
GNDM R/L ****X***JE	F22, F26	Tool holder
GNDMS R/L****K****	F20	Tool holder
GNDMS R/L****M****	F20	Tool holder
GNDL R/L ****JX****	F16	Tool holder
GNDL R/L ****JX****	F16	Tool holder
GNDL R/L ****JX****	F16	Tool holder
GNDL R/L ****K****	F24	Tool holder
GNDL R/L ****K****	F24	Tool holder
GNDL R/L ****K****	F24	Tool holder
GNDL R/L ****M****	F24	Tool holder
GNDL R/L ****M****	F24	Tool holder
GNDL R/L ****M****	F24	Tool holder
GNDL R/L ****P****	F24	Tool holder
GNDLS R/L ****K****	F24	Tool holder
GNDLS R/L ****M****	F24	Tool holder
GNDF R/L ****K****_****	F32	Tool holder
GNDF R/L ****M****_****	F32	Tool holder
GNDFS R/L ****M****_****	F34	Tool holder
GNDFS R/L ****P****_****	F34	Tool holder
GNDI R/L ****T****	F28	Tool holder
GNDIS R/L ****T****	F30	Tool holder
GNDN R/L ****K****_****	F31	Tool holder
GNDN R/L ****M****_****	F31	Tool holder
GND S R/L ****K****	F18	Tool holder
GND S R/L ****M****	F18	Tool holder
GSP*	M44	Spare parts
GSP**	D27, M42	Spare parts
GSH****SF	J26	Solid endmill
GSRE****SF	J25	Solid endmill
GSX****C-****D	J7, J12, J15	Solid endmill
GSX****C-*D	J9, J10, J11, J13, J17, J18, J19	Solid endmill
GSX****S-*D	J8, J16	Solid endmill
GSXB****	J32	Solid endmill
GSXSLT****C-****D	J14	Solid endmill
GSXVL ****_****D	J20	Solid endmill
GSXVL ****S-R**_****D	J21	Solid endmill
GSXVL ****-R**_****D	J21	Solid endmill
GSXVL ****S****D	J20	Solid endmill
GWB R/L ****_****	M42	Tool holder
GWC R/L ****_****	F40	Tool holder
GWCCM R/L **	F41	Cassette
GWCI R/L ****	F41	Tool holder
GWCS R/L ****_****	F40	Tool holder
GXM N**** S ML	F30	Indexable insert
GXM N**** S GF	F30	Indexable insert
GXM N**** S GF	F30	Indexable insert

H

HBB***	M40, M45	Tool holder
HBB****	M45	Tool holder
HBSM****	M38, M39	Boring bar
HD***	P8	Spare parts
HE*****E	P5	Spare parts
HE*****P	P7	Spare parts
HE*****W	E13	Spare parts
HFJ	G62, G63, H61, M48	Spare parts
HFVT	G62, G63, H61, M48	Spare parts
HPS****N*	P7	Spare parts

J

J-G1/8-G1/8-**E	F22, F26	Parts
J-G1/8-G1/8F-**E	F22, F26	Parts
J-HOSE-G1/8-G1/8***-E	F22, F26	Parts

K

KDS***DAK	K48, K49	Multi-drill
KDS***FA	K50	Multi-drill
KDS***LAK	K46, K47	Multi-drill
KDS***MAK	K44, K45	Multi-drill
KGBS****	P4	Spare parts
KSS****	P4	Spare parts

L

LCL*	P4	Spare parts
LCL**	P4	Spare parts
LCL*C-SD	P4	Spare parts
LCL*D-SD	P4	Spare parts
LCL*DB-SD	P4	Spare parts
LCL*S	P4	Spare parts
LCL*-SD	P4	Spare parts
LCL*T-SD	P4	Spare parts
LCS*	P4	Spare parts
LCS**	P4	Spare parts
LCS**BS-SD	P4	Spare parts
LCS*B-SD	P4	Spare parts
LCS*CA	P4	Spare parts
LCS*DB-SD	P4	Spare parts
LCS*TB-SD	P4	Spare parts
LCS*TE	P4	Spare parts
LH***	P8	Spare parts
LH***K	P8	Spare parts
LHHM****ZX	J29	Solid endmill
LNEX*****PNER-G	G33, G34, G35, H18, H19	Indexable insert
LNEX*****PNER-H	G33, G35, H18, H19	Indexable insert
LNEX*****PNER-L	G33, G34, G35, H18, H19	Indexable insert
LNMX*****PNSN-G	G51	Indexable insert
LNMX*****PNSN-H	G51	Indexable insert
LNMX*****PNSR-L	G37	Indexable insert
LNMX*****PNSR-G	G37	Indexable insert
LNMX*****PNSR-R	G37	Indexable insert
LP**	P7	Spare parts

LSC**SD	P5	Spare parts
LSD**SD	P5	Spare parts
LSM****	J38	Solid endmill
LSP*D	D34	Spare parts
LSP*	P7	Spare parts
LSP**	P7	Spare parts
LSP*SD	P7	Spare parts
LSR**	P5	Spare parts
LSR***	P5	Spare parts
LSS**SD	P5	Spare parts
LST**SD	P5	Spare parts
LST***SD	P5	Spare parts
LSTE**_*	P5	Spare parts
LSW***	P6	Spare parts
LT**	P8	Spare parts
LT**_*	P8	Spare parts
LT**IP	P8	Spare parts
LT**K	P8	Spare parts
LTER****	F54	Tool holder

M

MA**M**L***C	H5	Tool holder
MA**M**L***S	H5	Tool holder
MDF****S2D	K26	Multi-drill
MDF****L2D	K27	Multi-drill
MDF****H3D	K29, K30	Multi-drill
MDF****H5D	K29, K30	Multi-drill
MDS***MKHAK	K23	Multi-drill
MDS****SDC*	K41	Multi-drill
MDS***SKHAK	K22	Multi-drill
MDSS****	K40	Multi-drill
MDUS****_*C	K40	Multi-drill
MDW****GS*	K20, K21	Multi-drill
MDW****NHGS	K36, K37	Multi-drill
MDW****PHT	K34, K35	Multi-drill
MDW***XHG-S**HAK	K34	Multi-drill
MDW***XHT-A**HAK	K35	Multi-drill
MIB*_*	P4	Spare parts
MLDH****L**	K39	Multi-drill
MLDH****P	K39	Multi-drill
MMW**	D23	Spare parts
MP***	P7	Spare parts
MSX*****EM	H9	Indexable endmill
MSX*****ES	H9	Indexable endmill
MSX*****EW	H9	Indexable endmill
MSX*****M**Z*	H10	Indexable endmill
MSX*****RS	G53	Cutter
MTJN R/L ****_*	D23	Tool holder
MTJN R/L V-**	D23	Tool holder
MTXN R/L ****_*	D23	Tool holder
MWLN R/L ****_*	D24	Tool holder
MWW**	D24	Spare parts

N

NPDB****_*	J43, M59	SUMIDIA endmill
NPDBS****_*	J43, M59	SUMIDIA endmill
NPDRS****R****	J42, M58	SUMIDIA endmill

O

ONEU****ANER L	G9, H6	Indexable insert
ONEU****ANER G	G9, H6	Indexable insert
ONMU****ANER L	G9, H6	Indexable insert
ONMU****ANER G	G9, H6	Indexable insert

P

P*	G69, M55	Spare parts
PCBN R/L ****_*	D18	Tool holder
PCLC R/L ****_*	D31	Tool holder
PCLN R/L ****_*	D18	Tool holder
PCT***D*S**	K71	Multi-drill
PDJC R/L ****_*	D32	Tool holder
PDJN R/L ****_*	D19	Tool holder
PDL***D*S**	K71	Multi-drill
PRDC N****_*	D34	Tool holder
PRGC R/L ****_*	D34	Tool holder
PSBN R/L ****_*	D20	Tool holder
PSC**DCLN R/L *****-12	D41	Polygon tool holder
PSC**DDJN R/L *****-15	D41	Polygon tool holder
PSC**DDHN R/L *****-15	D41	Polygon tool holder
PSC**DSBN R/L *****-12	D41	Polygon tool holder
PSC**DTJN R/L *****-16	D42	Polygon tool holder
PSC**DWLN R/L *****-0*	D42	Polygon tool holder
PSC**GM** R/L *****	F36, F38, M43	Polygon modular tool holder
PSC**SCLC R/L *****-09	D43	Polygon tool holder
PSC**SDJC R/L *****-11	D43	Polygon tool holder
PSC**SDHC R/L *****-11	D43	Polygon tool holder
PSC**SSBC R/L *****-12	D43	Polygon tool holder
PSC**STJC R/L *****-16	D44	Polygon tool holder
PSC**SVJB R/L *****-16	D44	Polygon tool holder
PSC**SVVB R/L *****-16	D44	Polygon tool holder
PSC**SVHB R/L *****-16	D44	Polygon tool holder
PSC**SVJC R/L *****-16	D45	Polygon tool holder
PSC**SVVC R/L *****-16	D45	Polygon tool holder
PSC**SVHC R/L *****-16	D45	Polygon tool holder
PSDN N ****_*	D20	Tool holder
PSKN R/L ****_*	D21	Tool holder
PSSN R/L ****_*	D21	Tool holder
PTFN R/L ****_*	D22	Tool holder
PTGN R/L ****_*	D22	Tool holder
PTTN R/L ****_*	D22	Tool holder
PWC**** R/L-S	G50	Cutter
PWCF**** R/L-S	G50	Cutter
PWLN R/L ****_*	D24	Tool holder
PWS**** RS	G37	Cutter
PWSF**** RS	G37	Cutter
PWSS*R	P6	Spare parts

Index

Q - S

Q

QPET*****PPFR-S	G18, H52, H53	Indexable insert
QPMT*****PPEN	G18, H52, H53	Indexable insert
QPMT*****PPEN-CP	G18	Indexable insert
QPMT*****PPEN-H	G18, H52, H53	Indexable insert

R

RCMT****M0 NRH	C72	Indexable insert
RCMT****M0 NRX	C72	Indexable insert
RCMX****M0 NRP	C72	Indexable insert
RDET**T*M0EN-G	G23, H54, H55	Indexable insert
RDET**T*M0EN-H	G23, H54, H55	Indexable insert
RDET***M0EN-G	G23, H54, H55	Indexable insert
RDET***M0EN-H	G23, H54, H55	Indexable insert
RF-SET	G66, M52, M55	Spare parts
RF****RS	G66, M52	Cutter
RFB	G66, M52	SUMIDIA insert
RFBW	G66, M52	SUMIDIA insert
RFC	G66, M52	Spare parts
RFD	G66, M52	Spare parts
RFF	G66, M52	Spare parts
RFJ	P4	Spare parts
RFR	G66, M52	Spare parts
RFS	G66, M52	Spare parts
RNGN*****	G66, M52	SUMIBORON insert
RNGN*****B	G66, M52	SUMIBORON insert
RSX****ES	G20, H54	Indexable endmill
RSXF****ES	G20, H54	Indexable endmill
RSX****M	G20, H54	Indexable endmill
RSXF****M	G20, H54	Indexable endmill
RSX****RS	G20, G22	Cutter
RSXF****RS	G20, G22	Cutter

S

S***-DTR**C-R/L-**	E11	Boring bar
S***-MWLN R/L **	E13	Boring bar
S***-PCLN R/L **	E8	Boring bar
S***-PDUN R/L **	E9	Boring bar
S***-PSKN R/L **	E10	Boring bar
S***-PTFN R/L **	E12	Boring bar
S***-SCLC R/L **	E14	Boring bar
S***-SCLP R/L **	E15	Boring bar
S***-SDQC R/L **	E17	Boring bar
S***-SDUC R/L **	E16	Boring bar
S***-SSKP R/L **	E18	Boring bar
S***-STFC R/L **	E19	Boring bar
S***-STUB R/L **_**	E20	Boring bar
S***-STUP R/L **	E20	Boring bar
S***-STUP R/L **_**	E20	Boring bar
S***-SVQB R/L **	E22	Boring bar
S***-SVUB R/L **	E22	Boring bar
S***-SVZB R/L **	E23	Boring bar
S***-SWUB R/L **	D11, E11	Boring bar
S-SP*-**	G33, G35, H18, H19	Spare parts
S-UF*S R/L	G14	Spare parts
SBN**_**	F46, F48	Tool holder

SBU**_**	F46, F48	Tool holder
SCAC R/L ****_**	D31	Tool holder
SCGT**T***LFX/RFX	C73	Indexable insert
SCGT*****M NSC	C73	Indexable insert
SCGW*****NU	M19	SUMIBORON insert
SCLC R/L ****_**	D31	Tool holder
SCMT*****NFB	C74	Indexable insert
SCMT*****NFP	C74	Indexable insert
SCMT*****NLB	C74	Indexable insert
SCMT*****NLU	C74	Indexable insert
SCMT*****NMU	C74	Indexable insert
SCMT*****NSK	C74	Indexable insert
SCMT*****NSU	C74	Indexable insert
SCMW*****	C74	Indexable insert
SCN****	P5	Spare parts
SCND****	P5	Spare parts
SCP-*	D12, D13, D14, D15, D16, D17, D41, D42, E8, E9, E12, E13	Spare parts
SCP*A	F41	Spare parts
SCS****	P5	Spare parts
SCT R/L ****	F44	Tool holder
SCW***	P5	Spare parts
SDAC R/L ****_**	D33	Tool holder
SDBSM	M39	Spare parts
SDET****ZDFR	G66, M52	Indexable insert
SDHC R/L ****_**	D32	Tool holder
SDJC R/L ****_**	D32	Tool holder
SDM****U*HAK	K15, K16, K17	Multi-drill
SDNC N ****_**	D33	Tool holder
SDP****U*HAK	K8, K9, K10	Multi-drill
SDW***	P5	Spare parts
SECW****AGTN-N-NF	G13	Indexable insert
SEET****AGFN-L	G13	Indexable insert
SEET****AGFR-L	G11, H7	Indexable insert
SEET****AGSN-G	G13	Indexable insert
SEET****AGSN-N	G13	Indexable insert
SEET****AGSR-L	G11, H7	Indexable insert
SEET****AGSR-G	G11, H7	Indexable insert
SEMT****AGSN-G	G13	Indexable insert
SEMT****AGSN-H	G13	Indexable insert
SEMT****AGSN-L	G13	Indexable insert
SEMT****AGSR-L	G11, H7	Indexable insert
SEMT****AGSR-G	G11, H7	Indexable insert
SEMT****AGSR-H	G11, H7	Indexable insert
SEMT****AGSR-FG	G11, H7	Indexable insert
SFKN****AZFN	G15	Indexable insert
SFKN****AZTN	G15	Indexable insert
SFKR****AZTN	G15	Indexable insert
SFW***	P5	Spare parts
SL-*	F46, F48, F49	Spare parts
SMD	K55, K62	Multi-drill
SMDH****S/M/L/D*	K52, K56, K59	Multi-drill
SMDT****MFS	K57	Indexable insert
SMDT****MTL	K59	Indexable insert
SMDT****D MEL	K54	Indexable insert
SMDT****D MTL	K53	Indexable insert
SNB****DL	J33	Solid endmill
SNEU****ANER-FG	G9, H6	Indexable insert
SNEU****ANER-FL	G9, H6	Indexable insert
SNEU****ANER-G	G9, H6	Indexable insert

SNEU****ANER-L	G9, H6	Indexable insert
SNEW****ADFR-NF	G66, M52	SUMIDIA insert
SNEW****ADFR-W-NF	G66, M52	SUMIDIA insert
SNEW****ADTR-NF	G67, M53	SUMIDIA insert
SNEW****ADTR-R-NF	G67, M53	SUMIDIA insert
SNEW****ADTR-U-NF	G67, M53	SUMIDIA insert
SNEW****ADT L/R	G69, M55	SUMIBORON insert
SNEW****ADT L/R-S	G69, M55	SUMIBORON insert
SNGA*****	C42	Indexable insert
SNGA*****HS-NC2	M19	SUMIBORON insert
SNGA*****HS-NC4	M19	SUMIBORON insert
SNGA*****NC-4	M19	SUMIBORON insert
SNGG*****LST/RST	C42	Indexable insert
SNGG*****LUM/RUM	C42	Indexable insert
SNGN*****	C43	Indexable insert
SNGN*****	M19	SUMIBORON insert
SNGX*****	M19	SUMIBORON insert
SNMA*****	C42	Indexable insert
SNMA*****NS	M20	SUMIBORON insert
SNMA*****NU	M20	SUMIBORON insert
SNMA*****RH	M20, M33	SUMIDIA insert
SNMG*****LUM/RUM	C37	Indexable insert
SNMG*****LHM/RHM	C39	Indexable insert
SNMG*****NEF	C36	Indexable insert
SNMG*****NEG	C37	Indexable insert
SNMG*****NEM	C38	Indexable insert
SNMG*****NEX	C37	Indexable insert
SNMG*****NFB	C35	Indexable insert
SNMG*****NFE	C35	Indexable insert
SNMG*****NFL	C35	Indexable insert
SNMG*****NGE	C36	Indexable insert
SNMG*****NGU	C36	Indexable insert
SNMG*****NGZ	C39	Indexable insert
SNMG*****NLU	C35	Indexable insert
SNMG*****NME	C38	Indexable insert
SNMG*****NMU	C38	Indexable insert
SNMG*****NMX	C39	Indexable insert
SNMG*****NSE	C35	Indexable insert
SNMG*****NSJ	C36	Indexable insert
SNMG*****NSU	C35	Indexable insert
SNMG*****NSX	C36	Indexable insert
SNMG*****NUG	C37	Indexable insert
SNMG*****NUP	C37	Indexable insert
SNMG*****NUX	C38	Indexable insert
SNMG*****NUZ	C39	Indexable insert
SNMN*****	C43	Indexable insert
SNMM*****NHF	C41	Indexable insert
SNMM*****NHG	C40	Indexable insert
SNMM*****NHGS	C40	Indexable insert
SNMM*****NHP	C40	Indexable insert
SNMM*****NHU	C41	Indexable insert
SNMM*****NHW	C41	Indexable insert
SNMM*****NMH	C40	Indexable insert
SNMM*****NMP	C40	Indexable insert
SNMT****ZNEN-G	G17	Indexable insert
SNMT****ZNEN-H	G17	Indexable insert
SNMT****ZNEN-SH	G17	Indexable insert
SNMU****ANER FG	G9, H6	Indexable insert
SNMU****ANER FL	G9, H6	Indexable insert
SNMU****ANER G	G9, H6	Indexable insert
SNMU****ANER H	G9, H6	Indexable insert
SNMU****ANER L	G9, H6	Indexable insert
SNS****	P5	Spare parts
SOET*****PDFR-S	G28, G31, G57, H13, H17, H57, H58	Indexable insert
SOET*****PZER-G	G28, G30, G56, H13, H16, H57, H58	Indexable insert
SOET*****PZFR-S	G28, G30, G56, H13, H16, H57, H58	Indexable insert
SOMT*****PDER-L	G28, G31, G57, H13, H17, H57, H58	Indexable insert
SOMT*****PDER-G	G28, G31, G57, H13, H17, H57, H58	Indexable insert
SOMT*****PDER-H	G28, G31, G57, H13, H17, H57, H58	Indexable insert
SOMT*****PZER-L	G28, G30, G56, H13, H16, H57, H58	Indexable insert
SOMT*****PZER-G	G28, G30, G56, H13, H16, H57, H58	Indexable insert
SOMT*****PZER-H	G28, G30, G56, H13, H16, H57, H58	Indexable insert
SPGN*****	C77	Indexable insert
SPGT*****LSD/RSD	C76	Indexable insert
SPGW*****	C76	Indexable insert
SPGW*****T	C76	Indexable insert
SPMA*****	H47	Indexable insert
SPMA*****T	H47	Indexable insert
SPMN*****	C35	Indexable insert
SPMR*****NFK	C35	Indexable insert
SPMR*****NSF	C36	Indexable insert
SPMR*****NUJ	C36	Indexable insert
SPMT*****	C39	Indexable insert
SPMT*****NFB	C35	Indexable insert
SPMT*****NFK	C38	Indexable insert
SPMT*****NLB	C38	Indexable insert
SPMT*****NLU	C39	Indexable insert
SPMT*****NSF	C35	Indexable insert
SPMT*****NUS	C75	Indexable insert
SPP*	P7	Spare parts
SPP**	P7	Spare parts
SRDC N ****_***	D35	Tool holder
SRF**R-ST	G67, M53	Cutter
SRF**RS	G67, M53	Cutter
SRFJ	P4	Spare parts
SRND**	P5	Spare parts
SRNS***SD	D35	Spare parts
SRSC R/L ****_***	D35	Tool holder
SSBC R/L ****_***	D36	Tool holder
SSEH****R**	J35	Solid endmill
SSEH****W-R**	J24	Solid endmill
SSEH****WS-R**	J24	Solid endmill
SSEHVL ****-R**	J35	Solid endmill
SSEHVL ****W-R**	J23	Solid endmill
SSEHVL ****WS-R**	J23	Solid endmill
SSM****	J36, J37	Solid endmill
SSN****	P5	Spare parts
SSND***	P5	Spare parts
SSUP*****ZX	J31	Solid endmill
SSUP*****ZX-R**	J31	Solid endmill
SSW***	P6	Spare parts

Index

S - T

STAC R/L ****_***	D37	Tool holder
STER****	F54	Tool holder
STFH*_*	F46	Tool holder
STFS R/L ****_*	F46	Tool holder
STGC R/L ****_***	D37	Tool holder
STIR***	F55	Tool holder
STPD***	P6	Spare parts
STW***	P6	Spare parts
SUF*S R/L	G14	Spare parts
SVJB R/L ****_***	D38	Tool holder
SVLC R/L ****_***	D39	Tool holder
SVP**	D38, E21, E22	Spare parts
SVPB R/L ****_***	D38	Tool holder
SVPC R/L ****_***	D39	Tool holder
SVVB N ****_***	D38	Tool holder
SVW***	P5	Spare parts
SWW	P6	Spare parts

T

TBGN*****	C86	Indexable insert
TBGN*****B	M20	SUMIBORON insert
TBGN*****NF	M20	SUMIDIA insert
TBGR*****LW	C86	Indexable insert
TBGT*****LFW/RFX	C78	Indexable insert
TBGT*****LFX/RFX	C78	Indexable insert
TBGT*****LFY/RFY	C78	Indexable insert
TBGT*****LW/RW	C78	Indexable insert
TBGW*****	C78	Indexable insert
TBGW*****NF	M20	SUMIDIA insert
TCGT*****LFX/RFX	C79	Indexable insert
TCGT*****LFY/RFY	C79	Indexable insert
TCGT*****M NSC	C79	Indexable insert
TCGT*****M NSI	C79	Indexable insert
TCGT*****NAG	C79	Indexable insert
TCGW*****NC	M21	SUMIBORON insert
TCGW*****NC-3	M21	SUMIBORON insert
TCGW*****NU	M21	SUMIBORON insert
TCMT*****NF	M21	SUMIDIA insert
TCMT*****NFB	C80	Indexable insert
TCMT*****NFP	C80	Indexable insert
TCMT*****NLB	C80	Indexable insert
TCMT*****NLU	C80	Indexable insert
TCMT*****NSK	C80	Indexable insert
TCMT*****NSU	C80	Indexable insert
TCMW*****	C80	Indexable insert
TCS**T*	P6	Spare parts
TEGN*****	C87	Indexable insert
TGA R/L ****BF	F41	Indexable insert
TGA R/L ****(E)	F42	Indexable insert
TGA R/L ****R	F43	Indexable insert
TGA R/L *T**	F43	Indexable insert
TF**	M42	Spare parts
TH***	P8	Spare parts
TME****R	F53, F54	Indexable insert
TME***R	F53, F54	Indexable insert
TMI****R	F53, F55	Indexable insert
TMI***R	F53, F55	Indexable insert
TNGA*****	C52	Indexable insert

TNGA*****HS-NC3	M22	SUMIBORON insert
TNGA*****HS-NC6	M22	SUMIBORON insert
TNGA*****LE-NC3	M22	SUMIBORON insert
TNGA*****LS-NC3	M22	SUMIBORON insert
TNGA*****LT-NC3	M22	SUMIBORON insert
TNGA*****LF-NU3	M23	SUMIBORON insert
TNGA*****NC6	M22	SUMIBORON insert
TNGA*****NU3	M23	SUMIBORON insert
TNGG*****LFT/RFT	C51	Indexable insert
TNGG*****LFY/RFY	C51	Indexable insert
TNGG*****LFX/RFX	C51	Indexable insert
TNGG*****LST/RST	C51	Indexable insert
TNGG*****LUM/RUM	C52	Indexable insert
TNGG*****N-FV NC6	M22	SUMIBORON insert
TNGG*****N-LV NC6	M22	SUMIBORON insert
TNGG*****NGH	C52	Indexable insert
TNGG*****NSU	C51	Indexable insert
TNGG*****N-SV NC6	M22	SUMIBORON insert
TNGM*****N-LV NU3	M23	SUMIBORON insert
TNMA*****	C50	Indexable insert
TNMA*****	M24	SUMIBORON insert
TNMA*****NU	M24	SUMIBORON insert
TNMG*****LHM/RHM	C48	Indexable insert
TNMG*****LUM/RUM	C46	Indexable insert
TNMG*****NEF	C44	Indexable insert
TNMG*****NEG	C46	Indexable insert
TNMG*****NEM	C47	Indexable insert
TNMG*****NEX	C46	Indexable insert
TNMG*****NFA	C44	Indexable insert
TNMG*****NFB	C44	Indexable insert
TNMG*****NFE	C44	Indexable insert
TNMG*****NFL	C44	Indexable insert
TNMG*****NGE	C45	Indexable insert
TNMG*****NGU	C45	Indexable insert
TNMG*****NGZ	C48	Indexable insert
TNMG*****NLU	C44	Indexable insert
TNMG*****NME	C47	Indexable insert
TNMG*****NMU	C47	Indexable insert
TNMG*****NMX	C47	Indexable insert
TNMG*****NSE	C45	Indexable insert
TNMG*****NSU	C44	Indexable insert
TNMG*****NSX	C45	Indexable insert
TNMG*****NUG	C46	Indexable insert
TNMG*****NUP	C46	Indexable insert
TNMG*****NUX	C47	Indexable insert
TNMG*****NUZ	C48	Indexable insert
TNMM*****NHG	C49	Indexable insert
TNMM*****NHP	C49	Indexable insert
TNMM*****NMP	C49	Indexable insert
TNMM*****	C49	Indexable insert
TNS****	P6	Spare parts
TNS***B	P6	Spare parts
TPGN*****	C86	Indexable insert
TPGN*****NF	M24	SUMIDIA insert
TPGN*****NU	M24	SUMIBORON insert
TPGR*****LW/RW	C86	Indexable insert
TPGT*****LFW/RFW	C81	Indexable insert
TPGT*****LFX/RFX	C81	Indexable insert
TPGT*****LFY/RFY	C82	Indexable insert
TPGT*****LSD/RSD	C83	Indexable insert

Index

T - V

TPGX****L/R-SDW	C83	Indexable insert
TPGT****LW/RW	C83	Indexable insert
TPGT****M NFC	C81	Indexable insert
TPGT****N-FV NC3	M25	SUMIBORON insert
TPGT****N-FV NU3	M26	SUMIBORON insert
TPGW*****	C82	Indexable insert
TPGW*****	M26	SUMIBORON insert
TPGW*****LE-NC3	M25	SUMIBORON insert
TPGW*****LS-NC3	M25	SUMIBORON insert
TPGW*****LT-NC3	M25	SUMIBORON insert
TPGW*****NC	M25	SUMIBORON insert
TPGW*****NC3	M25	SUMIBORON insert
TPGW*****NF	M26	SUMIDIA insert
TPGW*****NU	M26	SUMIBORON insert
TPMH*****NSF	C85	Indexable insert
TPMN*****	C87	Indexable insert
TPMR*****NFK	C87	Indexable insert
TPMR*****NSF	C87	Indexable insert
TPMR*****NUJ	C87	Indexable insert
TPMT*****L-DM NU	M27	SUMIDIA insert
TPMT*****NFB	C84	Indexable insert
TPMT*****NFK	C84	Indexable insert
TPMT*****N-GD NF	M27	SUMIDIA insert
TPMT*****N-LD NF	M27	SUMIDIA insert
TPMT*****NLB	C84	Indexable insert
TPMT*****NLU	C84	Indexable insert
TPMT*****NMU	C85	Indexable insert
TPMT*****NSF	C85	Indexable insert
TPMT*****NSU	C85	Indexable insert
TPMW*****RH	M27, M33	SUMIDIA insert
TRB**IP	P7	Spare parts
TRCP*	D11, E11	Spare parts
TRD**	P8	Spare parts
TRDR**IP	P8	Spare parts
TRM*****_FL	C50, D11, E11	Indexable insert
TRM*****_GU	C50, D11, E11	Indexable insert
TRM*****_LU	C50, D11, E11	Indexable insert
TRM*****_SU	C50, D11, E11	Indexable insert
TRW****	P6	Spare parts
TRX**	P8	Spare parts
TRX**IP	P8	Spare parts
TRX**IP**	D35	Spare parts
TRXW**IP	P7	Spare parts
TSX****E	G32, H18, H19	Indexable endmill
TSXF****E	G32, H18, H19	Indexable endmill
TSXM****E	G32, H18, H19	Indexable endmill
TSX****RS	G32, G34, G35, H18	Cutter
TSXF****RS	G32, G34, H18	Cutter
TSXM****RS	G32, G35, H18	Cutter
TSW***	P8	Spare parts
TT**	P8	Spare parts
TTR**IP	P8	Spare parts
TTX**	P8	Spare parts
TTX**W	G50, G52	Spare parts
TWE****R	F26	Insert

U

UF*K R/L	G14	Spare parts
UF*S R/L	G14	Spare parts
UFKW R/L	G14	Spare parts
UFO*** R/L-S	G14	Cutter
UFOF*** R/L-S	G15	Cutter
UFTW R/L	G14	Spare parts
UW****R	G15	Indexable insert

V

VBGT*****LFX/RFX	C89	Indexable insert
VBGT*****LFY/RFY	C89	Indexable insert
VBGT*****LFYS/RFYS	C89	Indexable insert
VBGT*****M NSI	C89	Indexable insert
VBGW*****HS-NC2	M28	SUMIBORON insert
VBGW*****LE-NC2	M28	SUMIBORON insert
VBGW*****LS-NC2	M28	SUMIBORON insert
VBGW*****LT-NC2	M28	SUMIBORON insert
VBGW*****NC	M28	SUMIBORON insert
VBGW*****NC2	M28	SUMIBORON insert
VBGW*****NU	M28	SUMIBORON insert
VBGW*****NU2	M28	SUMIBORON insert
VBMT*****NFB	C88	Indexable insert
VBMT*****NFP	C88	Indexable insert
VBMT*****NLB	C88	Indexable insert
VBMT*****NLU	C88	Indexable insert
VBMT*****NMU	C88	Indexable insert
VBMT*****NSK	C88	Indexable insert
VBMT*****NSU	C88	Indexable insert
VBMW*****	C88	Indexable insert
VCGT*****LFX/RFX	C90	Indexable insert
VCGT*****LFY/RFY	C90	Indexable insert
VCGT*****M NFC	C90	Indexable insert
VCGT*****M NSI	C90	Indexable insert
VCGT*****NAG	C90	Indexable insert
VCGW*****NC2	M29	SUMIBORON insert
VCMT*****NF	M29	SUMIDIA insert
VCMT*****NFB	C91	Indexable insert
VCMT*****NLD NF	M29	SUMIDIA insert
VCMT*****NGD NF	M29	SUMIDIA insert
VCMT*****NLB	C91	Indexable insert
VCMT*****NLU	C91	Indexable insert
VCMT*****NSK	C91	Indexable insert
VCMT*****NSU	C91	Indexable insert
VCMW*****RH	M29, M33	SUMIDIA insert
VCS****	P6	Spare parts
VNGA*****ES-NC4	M30	SUMIBORON insert
VNGA*****LT-NC2	M30	SUMIBORON insert
VNGA*****NC2	M30	SUMIBORON insert
VNGA*****NC4	M30	SUMIBORON insert
VNGA*****NU2	M30	SUMIBORON insert
VNGG*****NEF	C55	Indexable insert
VNGG*****NFV NC2	M30	SUMIBORON insert
VNGG*****NLV NC2	M30	SUMIBORON insert
VNGG*****NSU	C55	Indexable insert
VNGM*****NLV NU2	M31	SUMIBORON insert
VNMA*****	C53	Indexable insert
VNMA*****	M31	SUMIBORON insert

Index

V - W

VNMA****NU	M31	SUMIBORON insert
VNMA****NS	M31	SUMIBORON insert
VNMA****RH	M31, M33	SUMIDIA insert
VNMG****NEF	C53	Indexable insert
VNMG****NEG	C54	Indexable insert
VNMG****NEX	C54	Indexable insert
VNMG****NFA	C53	Indexable insert
VNMG****NFB	C53	Indexable insert
VNMG****NFE	C53	Indexable insert
VNMG****NFL	C53	Indexable insert
VNMG****NGE	C54	Indexable insert
VNMG****NGU	C54	Indexable insert
VNMG****NGZ	C55	Indexable insert
VNMG****NLU	C53	Indexable insert
VNMG****NSE	C54	Indexable insert
VNMG****NSU	C54	Indexable insert
VNMG****NSX	C54	Indexable insert
VNMG****NUG	C54	Indexable insert
VNMG****NUP	C55	Indexable insert
VNMG****NUX	C55	Indexable insert
VNMG****NUZ	C55	Indexable insert
VNMX****NF	M31	SUMIDIA insert
VNS****	P6	Spare parts
VP**	P7	Spare parts
VP**B	P7	Spare parts

W

WAS*****	K66	Eccentric sleeve
WAX****E**	H40, H41	Indexable endmill
WAX****EL**	H40, H41	Indexable endmill
WAX****RS	G58, G59	Cutter
WB*.**	P4	Spare parts
WB*.**T	P4	Spare parts
WB*F**T	P4	Spare parts
WB*.**TL	P4	Spare parts
WB*F**TL	P4	Spare parts
WB*R**T	P4	Spare parts
WBG****LFW/RFW	C92	Indexable insert
WBG****LFX/RFX	C92	Indexable insert
WBG****LFY/RFY	C92	Indexable insert
WBG****LW/RW	C92	Indexable insert
WBM****L	H51	Indexable endmill
WBM****M	H51	Indexable endmill
WBM****MM**N	H51	Indexable endmill
WBM****S	H51	Indexable endmill
WBM****LL	H49	Indexable endmill
WBM****LLW	H49	Indexable endmill
WBM****M	H49	Indexable endmill
WBM****MW	H49	Indexable endmill
WBM****S	H49	Indexable endmill
WCFH**.*	F48, F49	Tool holder
WCFN/R/L*	F47, F50	Indexable insert
WCFN/R/L*A	F47, F50	Indexable insert
WCFN/R/L*B	F47, F50	Indexable insert
WCFN/R/L*T	F47, F50	Indexable insert
WCFN/R/L*GF	F47, F50	Indexable insert
WCFN/R/L*GG	F47, F50	Indexable insert
WCFN/R/L**.*	F49	Tool holder

WDMT****ZDTR	G53, H9, H10	Indexable insert
WDMT****ZDTR-H	G53, H9, H10	Indexable insert
WDX***D2S**	K61	Multi-drill
WDX***D3S**	K62	Multi-drill
WDX***D4S**	K63	Multi-drill
WDX***D5S**	K64	Multi-drill
WDXT****-G	K61, K62, K63, K64, K71	Indexable insert
WDXT****-H	K61, K62, K63, K64, K71	Indexable insert
WDXT****-L	K61, K62, K63, K64, K71	Indexable insert
WEX****E	H34, H35, H36	Indexable endmill
WEX****E**	H36	Indexable endmill
WEX****EL	H34, H35, H36	Indexable endmill
WEX****EL**	H34, H35	Indexable endmill
WEX****EL**Z*	H35	Indexable endmill
WEX****EW	H35, H36	Indexable endmill
WEX****F	G48	Cutter
WEX****M**Z*	H35, H36	Indexable endmill
WEZ****E**	H24, H28	Indexable endmill
WEZ****E****	H24, H26, H28	Indexable endmill
WEZ****EL**	H26, H28, H30	Indexable endmill
WEZ****R**	G44, G46	Cutter
WEZ****RS**	G44, G46	Cutter
WFX****E	G28, H16, H17	Indexable endmill
WFX****R	G28	Cutter
WFX****E**	H16	Indexable endmill
WFXF****E	G28, H17	Indexable endmill
WFXM****E	G28, H16	Indexable endmill
WFX****M	G28	Indexable endmill
WFX****M**Z*	H16, H58	Indexable endmill
WFX****RS	G28, G30, G31	Cutter
WFXC****E	G28, H56, H57	Indexable endmill
WFXC****M	G28, H58	Indexable endmill
WFXF****R	G28	Cutter
WFXF****RS	G28, G30, G31	Cutter
WFXH****M	G28, H12	Indexable endmill
WFXH****M**Z*	H13	Indexable endmill
WFXH****RS	G28, G56, G57	Cutter
WFXH****RSZ6	G56	Cutter
WFXM****R	G28	Cutter
WFXM****RS	G28, G30	Cutter
WFXS**R	P6	Spare parts
WGC****RS	G12	Cutter
WGCF****RS	G12	Cutter
WGCM****RS	G12	Cutter
WGCS**R	P6	Spare parts
WXG****EW	H7	Indexable endmill
WXG****RS	G10	Cutter
WXGF****RS	G10	Cutter
WXGM****RS	G10	Cutter
WMM****E	H43	Indexable endmill
WMM****EL	H43	Indexable endmill
WMM****ELW	H43	Indexable endmill
WMM****EW	H43	Indexable endmill
WMMH****ELW	H31	Indexable endmill
WMMH****EW	H31	Indexable endmill
WNGA****LT-NC3	M32	SUMIBORON insert
WNGA****NC6	M32	SUMIBORON insert
WNGA****NC-WG6	M32	SUMIBORON insert
WNGA****NC-WH6	M32	SUMIBORON insert
WNGG****NSU	C60	Indexable insert

WNMA*****	C60	Indexable insert
WNMG*****NEF	C57	Indexable insert
WNMG*****NEG	C58	Indexable insert
WNMG*****NEM	C58	Indexable insert
WNMG*****NEX	C58	Indexable insert
WNMG*****NFA	C56	Indexable insert
WNMG*****NFB	C56	Indexable insert
WNMG*****NFE	C56	Indexable insert
WNMG*****NFL	C56	Indexable insert
WNMG*****NGE	C58	Indexable insert
WNMG*****NGU	C57	Indexable insert
WNMG*****NGU-W	C57	Indexable insert
WNMG*****NGZ	C59	Indexable insert
WNMG*****NLU	C56	Indexable insert
WNMG*****NLU-W	C56	Indexable insert
WNMG*****NME	C59	Indexable insert
WNMG*****NMU	C59	Indexable insert
WNMG*****NMX	C59	Indexable insert
WNMG*****NSE	C57	Indexable insert
WNMG*****NSE-W	C57	Indexable insert
WNMG*****NSU	C57	Indexable insert
WNMG*****NSX	C57	Indexable insert
WNMG*****NUG	C58	Indexable insert
WNMG*****NUP	C58	Indexable insert
WNMG*****NUX	C59	Indexable insert
WNMG*****NUZ	C59	Indexable insert
WNMM*****NHG	C60	Indexable insert
WNMM*****NMP	C60	Indexable insert
WNS****	P6	Spare parts
WNS****B	P6	Spare parts
WPMT*****NLB	C93	Indexable insert
WRCX*****EL	H52	Indexable endmill
WRCX*****EM	H52	Indexable endmill
WRCX*****ES	H52	Indexable endmill
WRCX*****M**Z*	H53	Indexable endmill
WRCX*****RS	G19	Cutter
WRCXF*****RS	G19	Cutter
WRCX*****RS	G19	Cutter
WRX****RH **E**	H45, H46	Indexable endmill
WRX****RH **F**	G49	Cutter
WRX****RH **W**	H45, H46	Indexable endmill

X

XCLN R/L ****_***	D27	Tool holder
XEEW****AGER-W	G13	Indexable insert
XEEW****AGER-WR	G11, H7	Indexable insert
XEEW****AGFR-W-NF	G13	Indexable insert
XNEU****ANEN-W	G9, H6	Indexable insert
XNMU****PNER-G	G25, G27, H14, H15	Indexable insert
XNMU****PNER-H	G25, G27, H14, H15	Indexable insert
XNMU****PNER-L	G25, G27, H14, H15	Indexable insert
XOEW*****PDTR-W	G31, H17	Indexable insert
XOEW*****PZTR-W	G30, H14	Indexable insert
XP**-E	F22, F26	Spare parts
XSBN R/L ****_***	D27	Tool holder

Z

ZNEX*****LE-NC	M32	SUMIBORON insert
ZNEX*****LT-NC	M32	SUMIBORON insert
ZNEX*****NC	M32	SUMIBORON insert
ZNEX*****NU	M32	SUMIBORON insert
ZNMT*****	H49	Indexable insert
ZNMT*****-C	H49	Indexable insert
ZNMT*****-N	H49	Indexable insert
ZNMT*****-S	H49	Indexable insert
ZPGU*****	H41	Indexable insert

SAFETY INSTRUCTIONS

Target Products	Hazards	Measures
General precautions for cutting tools	The tools have sharp cutting edges. There is a risk of injury if held directly with bare hands.	Always wear protective equipment, such as protective tools when removing the tool from the case or mounting it onto a machine.
	Improper use or incorrect use conditions may cause the tool to break or scatter, and could cause injury.	Always use protective equipment such as safety covers and protective eyewear. Always use within the scope of the recommended conditions. Refer to the instruction manual, catalogue and other relevant documents.
	The tool could break and fly off if the cutting force increases suddenly because of impact loads or excessive wear and could cause injury.	Always use protective equipment such as safety covers and protective eyewear. Replace the tool at an early stage.
	Very hot chips could scatter or elongated chips could be discharged, and cause injury or burns.	Always use protective equipment such as safety covers and protective eyewear. When removing the chips, always stop the machine, wear protective gloves, and use tools such as nippers or clippers.
	The tool and work materials will become very hot during turning. There is a risk of burn if these are touched directly with bare hands immediately after machining.	Always wear protective equipment such as protective gloves.
	There is a risk of igniting or fires from the sparks generated during turning, or the heat generated from broken pieces and chips.	Do not use in an area where there is a risk of fires or explosions. Always provide fire prevention measures when using water-insoluble turning oil solution.
	When using at a high rotation speed, if the balance including the machine tool holder is poor, the deflection or vibration could cause tool damage and injury.	Always use protective equipment such as safety covers and protective eyewear. Always carry out trial operation, and confirm that there is no deflection, vibration or abnormal noise.
General precautions for cutting edge indexable tools	There is a risk of injury if you touch the burrs formed on the workpiece with bare hands.	Do not touch with bare hands.
	If insert or parts are not properly clamped, they could come off or fly off during turning and cause injury.	Clean the mounting surface and fixing parts free of foreign matter, before mounting the insert. When mounting, use the enclosed spanner and confirm that the insert and parts are securely clamped. Never use parts other than the designated inserts or parts.
	If the parts are tightened excessively with an auxiliary tool such as a pipe, the insert or part could break and come off or fly off.	Do not use auxiliary tools such as pipes. Use the enclosed spanner.
Various cutters and other tools used with rotation	Using the tool with high-speed rotation is extremely dangerous as the parts or inserts could fly off with the centrifugal force. Pay special attention to safety when handling.	Always use within the scope of the recommended conditions. Refer to the instruction manual, catalog and other relevant documents.
	The cutters have very sharp cutting edges. Touching these with bare hands could result in injury.	Always wear protective equipment such as protective gloves.
Drills	Tools could sway or vibrate if the eccentric rotation or balance is poor. There is a risk of injury if they break or fly off.	Keep the rotation speed within the scope of the recommended conditions. Periodically adjust the accuracy and balance of the rotating sections so that eccentric rotation or deflection do not occur because of bearing wear, etc.
	When machining a through hole while rotating the workpiece, a disc-shaped uncut section may fly off at the point of penetration. This disc is sharp and very dangerous.	Always use protective equipment such as safety covers and protective eyewear. Also take measures such as attaching a cover to the chuck section.
Brazing tool	The very small drill has a pointed end, and is very sharp. It could stab or break when directly touched with a finger, and be difficult to remove. The end could fly off if it breaks.	Take special care to safety when handling. Always wear protective gloves and protective eyewear, etc.
	There is a risk of injury if the insert comes off or breaks, etc.	Confirm that the insert is properly brazed before using. Do not use in conditions that could become very hot.
Others	Repeated brazing is dangerous as the insert could break during use.	Do not use an insert that has been repeatedly brazed as the strength will have dropped.
	Using this product for a purpose other than the designated application can break the machine or tool and is very dangerous.	Observe the designated usage.

Finally, this brochure describes the basic safety information. For further information, refer to the instruction manual, catalog and other relevant documents for each tool, or contact Sumitomo Electric Hardmetal. Sumitomo Electric Hardmetal will not be held liable for any damage and injuries resulting from changes to the specifications, including alterations and modifications, made without consent from Sumitomo Electric Hardmetal.

Tool Engineering Services

In order to provide a higher level of support and satisfaction for our customers, Sumitomo Electric Industries has created the Tool Engineering Service system.

We have created several Tool Engineering Centers around the world as bases for this support. The Tool Engineering Centers provide a wide range of support to assist user manufacturing activities, with services including training (at the Center), test cuts, technical consulting, line diagnostics (at the user's site) and tooling proposals.



Tool Engineering Center Locations

Japan

- ▶ Itami Tool Engineering Center (I-TEC)
- ▶ Yokohama Tool Engineering Center (Y-TEC)
- ▶ Hokkaido Igetalloy Tool Engineering Center (H-TEC)
- ▶ Tokai Tool Engineering Center (T-TEC)
- ▶ Kyushu Tool Engineering Center (K-TEC)

Overseas

- ▶ Germany / European Design & Engineering Center (E-DEC)
- ▶ Thailand / Thailand Tool Engineering Center (Ti-TEC)
- ▶ Shanghai / Shanghai Tool Engineering Center (S-TEC)
- ▶ U.S.A. / Americas Tool Engineering Center (A-TEC)
- ▶ Indonesia / Indonesia Tool Engineering Center (In-TEC)
- ▶ India Tool Engineering Center


1 Training

To make it easy for anyone to take part, the Centers offer training courses designed for a variety of different training objectives and participants.

*Contact your nearest SEI sales office for detailed training curricula.

2 Performance evaluation technology

To attain improvements in machining on sites, manufacturers must rely on more than just the subjective guidance provided by experience and instinct. Today's advanced measuring instruments can make machining phenomena observable, and clarify problems.

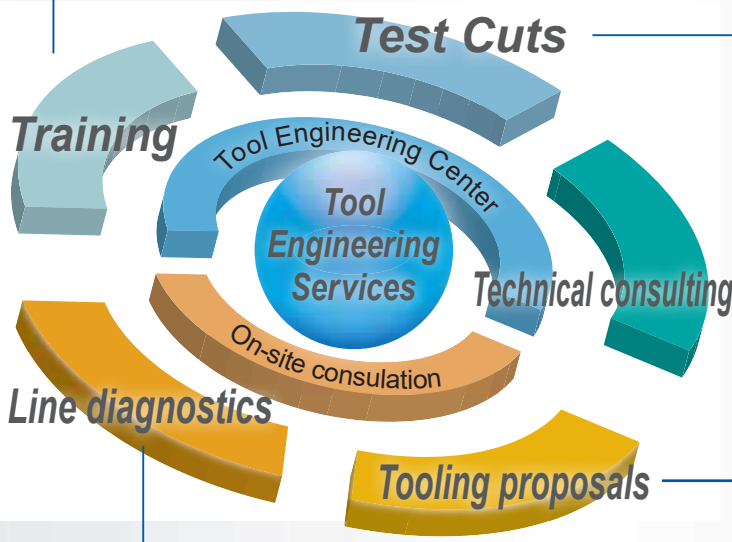

3 Test cuts and technical consulting

The Tool Engineering Centers can make test cuts on user workpieces, and work with users to create more detailed technical proposals. The Centers can also provide solutions to various machining problems, general line diagnostics for machining lines, and tooling support for new lines.

*Contact your nearest SEI sales office for more information.



SUMITOMO


CARBIDE - CBN - DIAMOND

SUMITOMO ELECTRIC

CUTTING TOOLS

WORLDWIDE LOCATIONS

We are strengthening its global position for high-quality products and services, while contributing technology to market needs around the world.

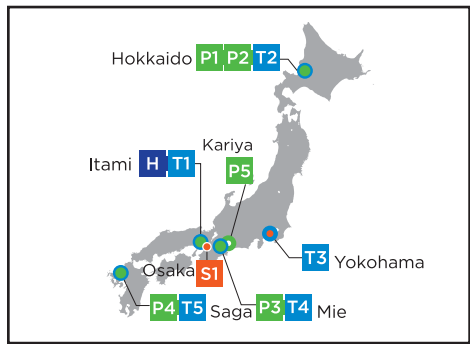

- Sales Network
- Production Network
- Tool Engineering Center



H Sumitomo Electric Industries Ltd. Hardmetal Div. Sumitomo Electric Hardmetal Corp.

Production Network



P1 Hokkaido Sumiden Precision Co., Ltd.



P2 Hokkaido Precision Tool Co., Ltd.



P3 Tokai Sumiden Precision Tool Co., Ltd.



P4 Kyushu Sumiden Seimitsu Ltd.



P5 Asdex Corporation



P6 Sumitomo Electric Hartmetallfabrik GmbH



P7 Sumitomo Electric Hartmetallfabrik GmbH, organizační složka.



P8 Sumitomo Electric Hardmetal Manufacturing (Changzhou) Co., Ltd.



P9 Sumitomo Electric Hardmetal Manufacturing (Thailand), Ltd.



P10 PT. Sumiden Hardmetal Manufacturing Indonesia



P11 Motherson Techno Tools Ltd.



P12 Sumitomo Electric Carbide Manufacturing, Inc. (WI)




P13 Sumitomo Electric Carbide Manufacturing, Inc. (OH)

HARDMETAL GROUP

CUTTING TOOLS EUROPEAN LOCATIONS



S2 Sumitomo Electric Hartmetall GmbH

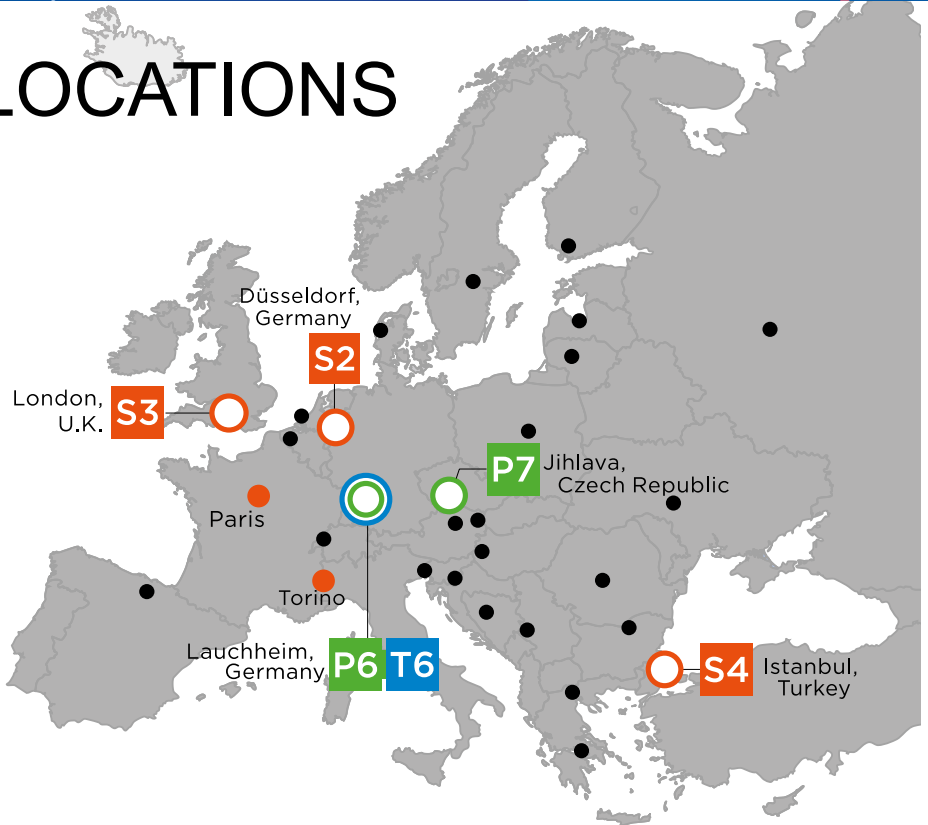

- T1** Itami Tool Engineering Center (I-Tec)
- T2** Hokkaido Tool Engineering Center (H-Tec)
- T3** Yokohama Tool Engineering Center (Y-Tec)
- T4** Tokai Tool Engineering Center (T-Tec)
- T5** Kyushu Tool Engineering Center (K-Tec)
- T6** European Design & Engineering Center (E-DEC)
- T7** Shanghai Tool Engineering Center (S-Tec)
- T8** Thai Tool Engineering Center (Ti-Tec)
- T9** Indonesia Tool Engineering Center (In-Tec)
- T10** Americas Tool Engineering Center (A-Tec)
- T11** India Tool Engineering Center

- Sales Network (●●)
- Production Network
- Tool Engineering Center

Sales Network



S1 Sumitomo Electric Tool Net, Inc.



S3 Sumitomo Electric Hardmetal Ltd.



S4 SumiSermetal Ticaret ve Sanayi Limited Şirketi



S5 Sumitomo Electric Hardmetal Trading (Shanghai) Co., Ltd.



S6 Superior Engineering Tool Trading (Shanghai) Co., Ltd.



S7 Sumitomo Electric Hardmetal Asia Pacific Pte Ltd.



S8 Sumitomo Electric Hardmetal (Thailand) Ltd.



S9 PT. Sumitomo Electric Hardmetal Indonesia



S10 SEI Carbide Australia Pty Ltd.



S11 Motherson Techno Tools Ltd.



S12 Sumitomo Electric Carbide, Inc.



S13 Sumicarbide Canada Inc.



S14 Sumitomo Electric Hardmetal de Mexico, S.A. de C.V.



S15 Sumitomo Electric Hardmetal do Brasil Ltda.



S16 Taiwan Hong-Yu Precision Tool Co., Ltd.



CARBIDE - CBN - DIAMOND

(Germany)

SUMITOMO ELECTRIC Hartmetall GmbH
Konrad-Zuse-Str. 9, 47877 Willich / Germany

Tel. +49 (0)2154-49920, FAX +49 (0)2154-4992161
Info@SumitomoTool.com
www.SumitomoTool.com



(UK and Ireland)

SUMITOMO ELECTRIC Hardmetal Ltd.
Summerleys Road, Princes Risborough
Buckinghamshire HP27 9PW, UK

Tel. +44 (0)1844 - 342081, FAX +44 (0)1844 - 342415
InfoUK@sumitomoTool.com
www.SumitomoTool.com



Distributed by :